



**UNIVERSITI PUTRA MALAYSIA**

**A STUDY OF IN-SITU L-CONNECTIONS FOR PRECAST CONCRETE  
SANDWICH PANEL BUILDING SYSTEM**

**PANG SIAW CHIN**

**FK 2002 84**

**A STUDY OF IN-SITU L-CONNECTIONS FOR PRECAST CONCRETE  
SANDWICH PANEL BUILDING SYSTEM**

**By**

**PANG SIAW CHIN**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,  
in Fulfilment of the Requirement for the Degree of Master of Science**

**May 2002**



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science.

**A STUDY OF IN-SITU L-CONNECTIONS FOR  
PRECAST CONCRETE SANDWICH PANEL BUILDING SYSTEM**

By

**PANG SIAW CHIN**

**May 2002**

**Chairman: Professor D. N. Trikha, Ph.D.**

**Faculty: Engineering**

A number of fifty four specimens have been tested in order to investigate the strength and behaviour of cast-in-situ right angle vertical connections between two precast concrete sandwich panels (PCSP) under pure moment and shearing force separately. Four types of connections have been chosen for study, namely connection types A, B C and D, defined by the length of the anchor steel bars in the connection area, being respectively 105mm, 190mm, 285mm and 289mm. Three different spacings of ASB in the connections, viz. 100mm, 200mm and 300mm have been attempted for each connection type.

For both pure moment and shearing force tests, the forces are increased gradually till the specimens fail. In the pure moment tests, the deformations of the specimens including the change of the included angle, the concrete surface strains and the strains in the anchor steel bar have been recorded, whereas for the shearing force tests, only the shear displacements of the specimens have been recorded.

Structural behaviour of the connections in flexure has been observed for each type of connection in regards to its strength, ductility and rigidity. Connection type D is found, amongst the four types studied, to have the highest strength and ductility.



For ultimate moment capacity, connection types B, C and D have at least 25%, 68% and 80% higher capacity than that for type A; whereas first crack moments for connection types B, C and D are respectively 53.2%, 72.6% and 84.1% higher than the first crack moment for type A. Moment versus change of the included angle curves show that connection type D exhibits the highest ductility compared to other connection types. All connection types show high degree of reserve deformability and degree of rigidity, which at least 2.55 and 0.95 respectively. Nevertheless, the failure crack patterns for all connection types in flexure are similar.

In the shear tests, all connection types except type A failed in excessive shear displacement. However, similar shear strengths have been observed for all the connection types. All connection types exhibit brittle behaviour under shearing force. However, connection type D shows higher rigidity than others, where its ultimate shear displacement being less than 1.0mm.

For all specimens tested either under moment or shearing force, construction joint between the precast concrete sandwich panel and the cast-in-situ connection was the critical zone, all the specimens failed due to excessive deformation in this zone.

Connection type D is recommended as a suitable vertical L-connection due to its outstanding strength and superior structural behaviour under the action of both moment and shearing force. The usual reinforced concrete theory gives good estimates of the ultimate moment capacities of the joint, but a coefficient 0.6 is suggested for design to ensure the serviceability requirement of the connection. Formulas recommended by ACI-83 and BS8110-85 give accurate estimates to the ultimate shear strength of connection type D, however, a coefficient 0.7 is suggested to satisfy the serviceability requirement.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**SATU PENGAJIAN BAGI IN-SITU KONKRIT L-PENYAMBUNGAN UNTUK SISTEM PERUMAHAN ‘PRECAST CONCRETE SANDWICH PANEL’**

By

**PANG SIAW CHIN**

**Mei 2002**

**Pengurus:** Professor D. N. Trikha, Ph.D.

**Fakulti:** Kejuruteraan

Sejumlah lima puluh empat specimen telah dikaji untuk menyiasat kekuatan dan sifat-sifat penyambungan tegak 90 darjah bagi dua keping “Precast Concrete Sandwich Panel” semasa dikenakan dengan daya momen dan daya ricih. Empat jenis penyambungan yang telah disiasat, dinamakan penyambungan jenis A, B, C dan D, dengan perbezaan panjang besi tetulang dalam penyambungan, 105mm, 190mm, 285mm dan 289mm masing-masing. Tiga jenis jarak besi tetulang dalam penyambungan 100mm, 200mm dan 300mm, untuk setiap jenis penyambungan telah disediakan.

Untuk kedua-dua jenis kajian, daya momen dan daya ricih ditambah secara perlahan sehingga specimen gagal. Bagi kajian daya momen, sifa-sifat specimen seperti perubahan sudut dalaman, terikan permukaan konkrit dan terikan besi tetulang telah dicatatkan. Manakala bagi kajian daya ricih, hanya perubahan ricih telah dicatatkan.

Sifat-sifat berlainan bagi setiap jenis penyambungan yang dikaji dengan daya momen telah diperhatikan termasuk ketuatan, kekukuhan dan keketatan. Penyambungan jenis D didapati mempunyai kekuatan dan kekukuhan yang paling



tinggi. Bagi daya momen muktamad, penyambungan jenis B, C dan D adalah 25%, 68% dan 80% lebih tinggi daripada jenis A; manakala bagi momen 'first crack', penyambungan jenis B, C dan D adalah 53.2%, 72.6% dan 84.1% lebih tinggi daripada jenis A. Graph daya momen lawan perubahan sudut dalaman menunjukkan penyambungan jenis D mempunyai kekukuhan yang lebih tinggi daripada penyambungan jenis lain. Semua jenis penyambungan menunjukkan kadar kebolehan perubahan bentuk dan kadar keteguran yang tinggi, iaitu lebih daripada 2.55 dan 0.95 masing-masing. Walaubagaimana pun, bentuk kegagalan bagi semua jenis penyambungan adalah sama.

Untuk ujian daya ricih, kecuali penyambungan jenis A, semua jenis penyambungan didapati gagal dengan perubahan ricih yang terlalu besar. Semua jenis penyambungan didapati bersifat "brittle". Kekuatan ricih untuk semua jenis penyambungan didapati sama, tetapi penyambungan jenis D didapati mempunyai keketatan yang paling tinggi, iaitu perubahan ricih muktamad kurang daripada 1.0mm.

Oleh sebab kekuatan momen dan ricih yang tinggi dan sifat-sifat yang baik, penyambungan jenis D adalah digalakkan penggunaan. Teori konkrit bertetulang besi telah dibukti memberi ramalan yang betul untuk kekuatan momen bagi semua jenis penyambungan, tetapi parameter 0.6 adalah didapati sesuai untuk didarah dengan kekuatan momen untuk memastikan penyambungan berfungsi dengan baik. Formula yang tercatat dalam ACI-83 dan BS8110-85 didapati pula memberi ramalan yang baik untuk kekuatan ricih. Walau bagaimanapun, untuk memastikan penyambungan jenis D berfungsi baik, parameter 0.7 adalah dinasihatkan didarah kepada kekuatan ricih yang diperolehi dengan kedua-dua formula itu.

## **ACKNOWLEDGEMENTS**

The strong and endless supports from my parents are the main sources of energy to me for completing my post-graduate study I can not find any word to express my gratitude to their sacrifices and contributions

I would like to thank the supervisory committees, who have given the excellent supervision like Professor D N Trikha, Associate Professor Abdul Aziz Abdul Samad, Professor Abdullah Abang Abdullah Ali and Associate Professor Mohd Saleh Jaafar

I would like to thank the technicians who have assisted me in my experimental work especially, En Razali, who works in the workshop of faculty

Finally, I would like to thank those, who have helped me directly or indirectly in my study

**PANG SIAW CHIN**



This thesis submitted to the Senate of Universiti Putra Malaysia has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the Supervisory Committee are as follow

DN Trikha, Ph D  
Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

Abdul Aziz Abdul Samad, Ph D  
Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

Abang Abdullah Abang Ali, Ir  
Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

Mohd Saleh Jaafar, Ph D  
Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

---

**AINI IDERIS, Ph D.**  
Professor/Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date





## TABLE OF CONTENTS

	<b>PAGE</b>
ABSTRACT	ii
ABSTRAK	iv
ACKNOWLEDGEMENTS	vi
APPROVAL SHEETS	vii
DECLARATION FORM	ix
TABLE OF CONTENTS	x
LIST OF TABLES	xii
LIST OF FIGURES	xiii
LIST OF NOTATIONS	xvii
<b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	
1.1 Introduction	1
1.2 An Overview	1
1.2.1 Precast Structure System	2
1.2.2 Precast Concrete Sandwich Panel	3
1.2.3 Important Aspects In Precast Construction Method	5
1.2.4 Types Of Connections In The Load-Bearing Wall Structure	6
1.2.5 Connection Methods For Precast Elements	7
1.2.6 Forces Acting On The Vertical L-Connection	8
1.3 Objective And Scope Of The Study	11
1.4 Out-Line Of Thesis	12
1.5 Concluding Remarks	13
<b>2 LITERATURE REVIEW</b>	
2.1 Introduction	14
2.2 Precast Concrete Sandwich Panel	14
2.3 Cast-in-situ Connection	19
2.4 Flexural Strength of Connection	20
2.4.1 Flexural Test Setup	22
2.4.2 Behaviour Of Connection In Flexure	28
2.4.3 Bond Strength Of The Reinforcing Steel Bar	30
2.4.4 Failure Modes Of The ASB Under Tensile Force	32
2.4.5 Hook Effect	32
2.4.6 Failure Patterns Of Cast-In-Situ Connection	35
2.5 Behavior Of Reinforced Concrete Section Under Shearing Force	36
2.5.1 Shear Strength Of Cast-In-Situ Connections	37
2.5.2 Failure Modes Of The Dowel Mechanism	41
2.6 Concluding Remarks	42
<b>3 METHODOLOGY</b>	
3.1 Introduction	43
3.2 Experimental Investigations	44
3.2.1 Choice Of Specimens For L-Connection Tests	45



3.2.2	Material Properties	51
3.2.3	Pure Moment Test	51
3.2.4	Shearing Force Test	59
3.3	Theoretical Study	63
3.3.1	Action Of Pure Moment	63
3.3.2	Shear Resistance Of A Connection	70
3.4	Concluding Remarks	73
4	Experimental Results	
4.1	Introduction	74
4.2	Composite Behaviour Of PCSP	74
4.3	Connections Under Pure Moment	77
4.3.1	Flexural Strength Of Connections	77
4.3.2	Ductility Of Connection Under Pure Moment	83
4.3.3	Rigidity Of Connections Under Pure Moment	87
4.3.4	Strains In Anchor Steel Bars	89
4.3.5	Critical Zones Under Pure Moment	97
4.3.6	Crack Initiations And Crack Patterns Under Pure Moment	98
4.4	Connections Under Pure Shearing Force	100
4.4.1	Shear Strength Of The Connections	100
4.4.2	Rigidity Of The Connections Under Shearing Force	105
4.4.3	Ductility Of The Connections Under Shearing Force	106
4.4.4	Crack Initiation And Pattern Of Specimens Under Shearing Force	109
4.4.5	Connection Type A Under Shearing Force	110
4.5	Concluding Remarks	112
5	Discussion Of Results	
5.1	Introduction	116
5.2	Comparison Of The Pure Moment Experimental Results	116
5.2.1	Behaviour Of The Ultimate Load State	117
5.2.2	Estimation Of Ultimate Bond Strength	118
5.2.3	Behaviour Of Connections Under Pure Moment	119
5.2.4	Failure Crack Patterns Of The Specimens Under Moment	120
5.3	Comparison Of Shearing Force Experimental Results	120
5.3.1	Estimation Of Shear Friction Theory	121
5.3.2	Ultimate Shear Strengths Of The Connections	122
5.3.3	Behaviour Of Connections Under Shearing Force	123
5.3.4	Failure Crack Pattern Of The Specimens Under Shearing Force	124
5.4	Concluding Remarks	125
6	Conclusion	
6.1	Introduction	126
6.2	Behaviour Of Connections Under Moment	127
6.3	Behaviour Of Connections Under Shearing Force	129
6.4	Recommended Vertical L-Connections	131
6.5	Suggestion For Future Research	132
	REFERENCES	133
	APPENDIX	136



## LIST OF TABLES

<b>Table</b>		<b>Page</b>
4 1	Ultimate Forces for Connection Type A in The Shearing Force Test	111



## LIST OF FIGURES

<b>Figures</b>	<b>Page</b>
1.1 Precast Structure Systems	3
1.2 Precast Concrete Sandwich Panels with Its Components	4
1.3 Plan of Typical Precast Load Bearing Wall Structure	7
1.4 Mechanical Connections in PCSP Construction	8
1.5 Forces Transferred To The Connection Between Load Bearing Wall Panels	10
2.1 Compositeness of PCSP	15
2.2 Types of Shear Connectors (PCI Committee Report, 1997)	16
2.3 Panel Load-Deflection Curve (Salmon et al, 1997)	18
2.4 Reinforced Concrete Joint Between Precast Walls (Bohdan, 1966)	20
2.5 $M_u^?/M_u$ For Load-Closing And Load Opening Corners (Mayfield et al, 1971)	21
2.6 Flexural Test Setup Used in Mayfield (1971)	23
2.7 Flexural Test Setup Used in Skettrup et al (1984)	24
2.8 Flexural Test Setup Used in Jackson (1995)	26
2.9 Flexural Test Setup Used in Hashim et al (1999)	27
2.10 Bending Moment versus Change in Included Angle	28
2.11 Rotation of Various Types of Connections at 80% $M_u$ (Mayfield et al, 1971)	29



2.12 Bond-Slip Curve For 16mm Diameter Steel Bar (Edwards and Yannopoulos, 1979)	31
2.13 Effect of Bend Angle on Stress-Slip Curves (Minor and Jirsa, 1975)	33
2.14 Comparison of Straight and Bent Bars (Minor and Jirsa, 1975)	34
2.15 Crack Pattern of Connection in Flexure (Mayfield, 1971)	35
2.16 Comparison of Uncracked and Crack Reinforced Concrete Section (Mottack et al, 1976)	36
2.17 Influence of Concrete Surface texture (Park and Paulay, 1975)	39
2.18 Influence of The Steel Ratio $\rho$ and the bar diameter (Park and Paulay, 1975)	40
3.1 Reinforcement Detail of A Typical Specimen	47
3.2 Plan View of The Reinforcement Details for The Panels	48
3.3 Reinforcement Detail of he Steel Truss Shear Connector	49
3.4 Reinforcement Details of The Cast-in-situ Connections	50
3.5 Test Setup for Pure Moment Test	53
3.6 The Forces Acting on The Specimen for The Pure Moment Test	54
3.7 Locations of The ESD30s, Dial Gages and Demec Gages	56
3.8 Locations of The ESG5s on The Middle Two-legged ASB	58
3.9 Test Setup for Shearing Force Test	60
3.10 The Forces Acting on The Specimen for Shearing Force Test	61
3.11 Deformation of Cast-in-situ Connection under Shearing Force	62



3.12	Locations of The LVDTs on The Specimen for The Shearing Force Test	62
3.13	Strain and Stress Diagrams for connection types A, B, C and D	69
3.14	Deformation and Deviation of Tensile Force in ASB of Construction Joint under Shearing Force	71
4.1	Moment versus Concrete Surface Strains	76
4.2	Ultimate Moment $M_u$ versus Steel Ratio $\rho$	79
4.3	First Crack Moment $M_{cr}$ versus Steel Ratio $\rho$	81
4.4	Degree of Reserve Strength versus Steel Ratio $\rho$	83
4.5	Moment versus Change of The Included Angle	85
4.6	Degree of Reserve Deformability $D_{rd}$ versus Steel ratio $\rho$	87
4.7	Rigidity at First Crack Moment $R_{cr}$ versus Steel Ratio $\rho$	88
4.8	Rigidity at Ultimate Stage $R_u$ versus Steel Ratio $\rho$	89
4.9	Variations of Strains in ASBs at Locations STO-1 and STI-1	91
4.10	Ultimate Tensile Strains $\epsilon_u$ versus Steel Ratio $\rho$	92
4.11	Tensile Strains $\epsilon_s$ Developed along The Length of ASB	95
4.12	Ultimate Bond Stresses $f_{bu}$ versus Steel Ratio $\rho$	97
4.13	Moment versus Concrete Surface strains for Specimen A100BM1	98
4.14	Crack Pattern of Specimen under Pure Moment	99
4.15	Ultimate Shear Strength $V_u$ versus Steel Ratio $\rho$	102
4.16	0.3mm Shear Strength $V_{0.3}$ versus Steel Ratio $\rho$	103
4.17	Degree of Shear Reserve Strength $D_{srs}$ versus Steel Ratio $\rho$	104
4.18	Ultimate Shear Displacement $d_u$ versus Steel Ratio $\rho$	105

4 19	Shear Force versus Shear Displacement	107
4 20	Degree of Reserve Shear Deformability $D_{rsd}$ versus Steel Ratio $\rho$	109
4 21	Crack Pattern due to Shearing Force	110
4 22	Shear Force versus Displacement for Connection Type A	112
5 1	Comparison of Ultimate Tensile Strains in ASB	
5 2	Estimation of Ultimate Bond Strength Values	117
5 3	Comparison of Moment versus Change of Included Angle Curves with Hashim et al (1999) Experimental Result	118
5 4	Comparison of Ultimate Shear Stress $v_u$ Codal And Experimental Values	119
5 5	$v_u$ versus $\rho f_y$ (modified from Mattock and Hawkins, 1972)	121
5 6	Comparison of Shear Stress-Slip Curves Between Author's And Park and Paulay (1975)'s Experimental Results	123
		124



## LIST OF NOTATIONS

ASB	Anchor steel bar
$D_{rs}$	Degree of reserve strength
$D_{rd}$	Degree of reserve deformability
$D_{srs}$	Degree of shear reserve strength
$D_{rsd}$	Degree of reserve shear deformability
$d_u$	Ultimate shear displacement
$f_{bu}$	Ultimate bond stress
$f_m$	Maximum tensile stress in ASB
$f_s$	Stress in ASB
$M'_u$	Computed Ultimate Moment
$M_u$	Ultimate moment
$M_{cr}$	First crack moment
PCSP	Precast concrete sandwich panel
$R_{cr}$	Rigidity at first crack moment
$R_u$	Rigidity at ultimate stage
$V_u$	Ultimate shear force
$V_{0.3}$	Shear force corresponding to 0.3mm shear displacement
$\epsilon_{cs}$	Concrete surface strain
$\epsilon_s$	Tensile strain in ASB
$\epsilon_u$	Ultimate tensile strain in ASB
$\phi$	Change of included angle
$\rho$	Steel ratio
$\theta$	Included angle
$\theta_o$	Original included angle
$\theta_{cr}$	Included angle corresponding to first crack moment
$\theta_u$	Included angle at ultimate stage





# CHAPTER I

## INTRODUCTION

### 1.1 Introduction

This chapter briefly introduces the background of the research and out-line of the thesis. The objective and scope of the research are defined clearly, to orientate the research that has been carried out in the present study

### 1.2 An Overview

Nowadays, there are two types of construction methods, which are the conventional cast-in-situ method and the precast method. In the conventional cast-in-situ method, the structural elements are cast at the final position in the structure; whereas, in the precast method, the structural elements are cast separately at another places before they are fabricated and installed at the desired position.

Precast method has increasingly become popular compared to the conventional cast-in-situ method due to its fast speed, high quality and wide range of architectural finishes. Precast method possesses all of these

advantages because the precast concrete elements are manufactured under a controlled environment. Due to the demand of fast construction, especially after the Second World War, precast concrete elements have been industrialized and several industrialized building systems have been developed. One of the industrialized building systems (IBS) is a load-bearing wall system using the precast concrete sandwich panels (PCSP).

### **1.2.1 Precast Structural System**

The building structural systems are mainly categorized into load bearing wall structure system (Figure 1.1(a)), and frame and skeletal structure system (Figure 1.1(b)). The structural elements of load-bearing wall structure systems consist of load-bearing walls and floors. However, the structural elements of frame and skeletal structure systems consist of columns, beams and floors. Due to the inherent nature of the structural system properties, the frame and skeletal structure systems offer a higher degree of flexibility of the space than the load-bearing wall structure systems. Thus, the frame and skeletal structure systems are utilized mainly for industrial buildings, shopping malls, car parks, sporting facilities and office buildings, whereas the load-bearing wall structures are suitable for apartment buildings, nursing homes, dormitories, hotels, etc. In an attempt to develop an economic residential building, load-bearing wall system using PCSP has been chosen for the present study.

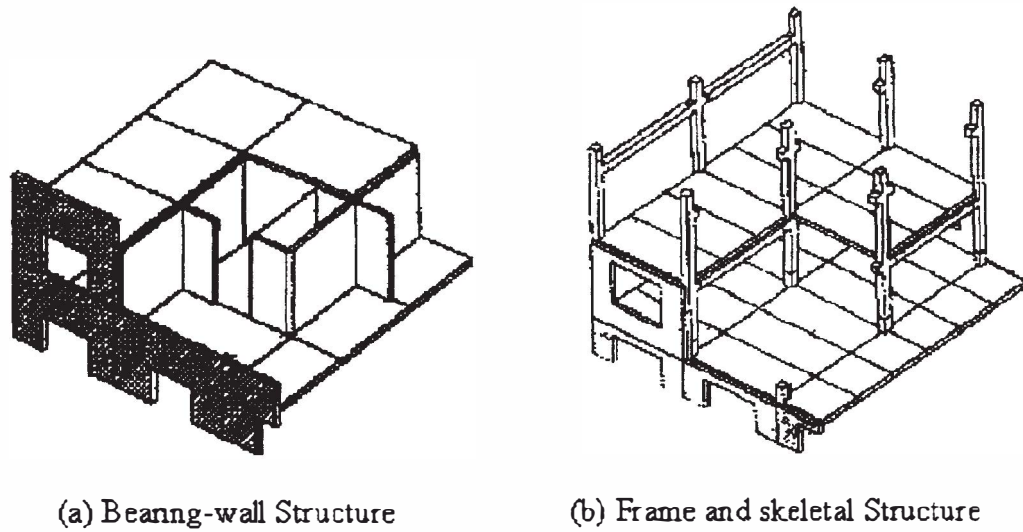


Figure 1.1: Precast Structure Systems (Bohdan, 1966)

### 1.2.2 Precast Concrete Sandwich Panel (PCSP)

Collins (1954) defines the PCSP as the panel, which consists of two layers of relatively thin, high-density materials bonded to a core of relatively thick, low-density material. The function of the core is to split away the two layers of high-density materials, hence to provide a higher stiffness factor. However, the PCSP owns a higher thermal insulation due to the lower thermal conductivity material of the core. Thus, PCSP is a lighter, stronger and more insulated wall.

PCI Committee Report (1997) has presented various types of PCSP. Expanded polystyrene and polyurethane, which exhibit high thermal insulation, low strength and low density, are commonly used as insulation layers. The concrete wythe may be divided into structural or non-structural wythe. However, shear connectors are mainly categorized as concentrated shear connectors, continuous shear connectors and non-shear connectors. One of the most preferred PCSP is shown in Figure 1.2.

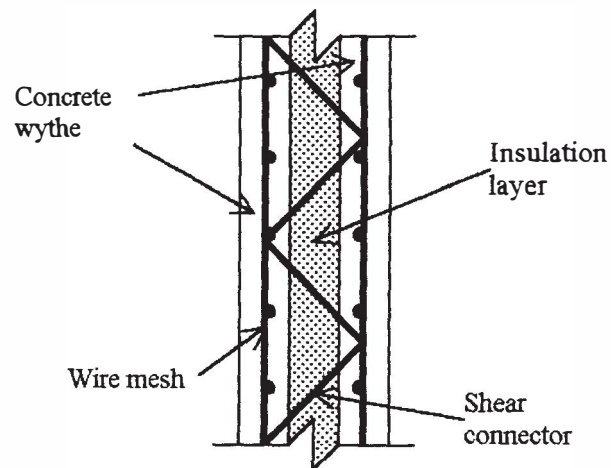


Figure 1.2: Precast Concrete Sandwich Panel with Its Components

### 1.2.3 Important Aspects in Precast Construction Method

As mentioned by Elliot (1994), there are four main aspects to be considered at the preliminary design stage of a precast structure, namely

- i) Structural form,
- ii) Frame stability and robustness
- iii) Component selection
- iv) Connection design

All these aspects are interrelated and should be dealt with simultaneously and interactively. These aspects for any construction solution should therefore be understood thoroughly before the construction solution is attempted.

Stability and robustness of a building are very important and are achieved through the integrity of the building. Therefore, having good connections between the structural elements are very important in integrating the structural elements in the building.

The reinforcement for the building constructed by conventional cast in-situ method is continuous throughout the entire structure. Therefore, it has sufficient stability and robustness. But due to the inherent nature of the precast components, the reinforcement from a precast component cannot extend into another precast component. This phenomenon emphasises the

role of the suitable connection between the precast elements in aspects of stability and robustness of the building. As stated by Huyghe and Bruggeling (1991), “ prefabrication does not mean to ‘cut’ the already designed concrete structure into manageable pieces...” Therefore all aspects in components design and structural stability should be dealt with simultaneously in the designer’s mind.

#### **1.2.4 Type of Connection in The Load-bearing Wall Structure**

In the precast wall load bearing structure, there is only panel-panel connection, such as wall-floor, wall-roof and wall-wall etc. The panel-panel connections can be categorized as horizontal connections and vertical connections. The wall-floor and wall-roof connections are the horizontal connections. However, the connections between the wall panels in the same floor are the vertical connections. The vertical wall-wall connections may be further divided into L-connections, T-connections and X-connections as shown in Figure 1.3.

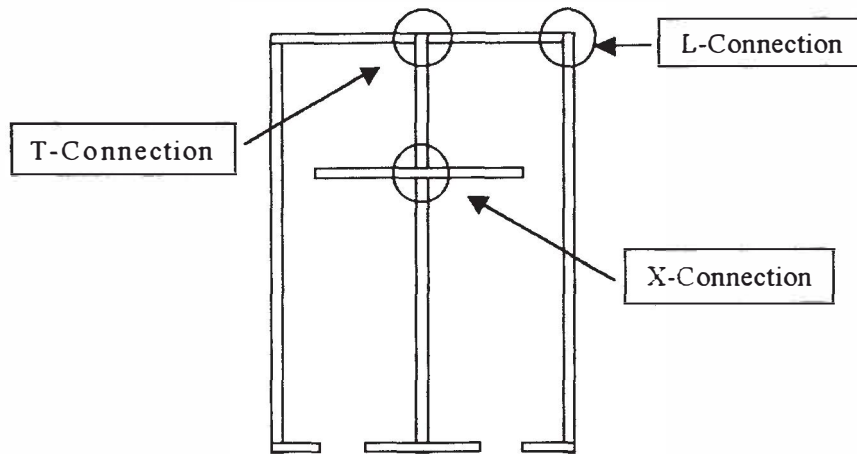


Figure 1.3: Plan Of Typical Precast Load Bearing Wall Structure

### 1.2.5 Connection Methods for Precast Elements

Basically, precast elements can be connected by cast-in-situ methods and mechanical means (Figure 1.4). The cast-in-situ methods offer a simple connection while the mechanical procedures offer fast speed but complicated connections. Most precast structure designers recommend the cast-in-situ method of connections, as the connections are more efficient and probably economical compared to the mechanical connections.

A cast-in-situ connection is designed by using the usual principles of reinforced concrete. Nevertheless, previous research results indicate that the connections do not behave as expected. The distress in precast structure may result from the lack of understanding of the behaviour of the connections under the design loads in service.