



UNIVERSITI PUTRA MALAYSIA

***CONTINUOUS-WAVE FIBER OPTICAL PARAMETRIC AMPLIFIERS AND
OSCILLATORS***

Lim Lien Tze

FK 2015 130



**CONTINUOUS-WAVE FIBER OPTICAL PARAMETRIC AMPLIFIERS AND
OSCILLATORS**

By

LIM LIEN TZE

**Thesis Submitted to the School of Graduate Studies,
Universiti Putra Malaysia, in Fulfilment of the Requirements for the
Degree of Doctor of Philosophy**


December 2015

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



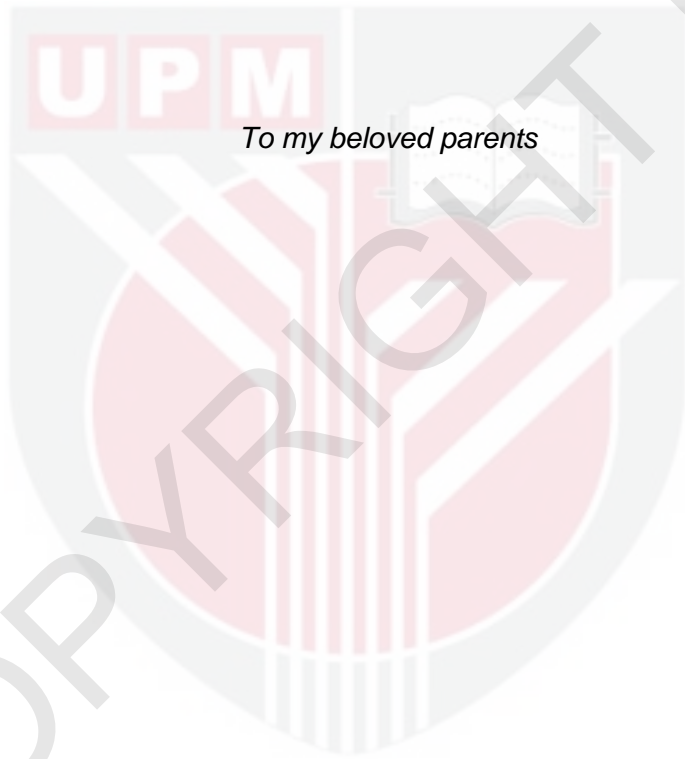

To my beloved parents

© COPYRIGHT UPM

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Doctor of Philosophy

CONTINUOUS-WAVE FIBER OPTICAL PARAMETRIC AMPLIFIERS AND OSCILLATORS

By

LIM LIEN TZE

December 2015

Chair: Professor Mohd Adzir Bin Mahdi, PhD

Faculty: Engineering

Fiber optical parametric amplifier (FOPA) is an optical amplifier that operates based on an optical nonlinear phenomenon known as four-wave mixing (FWM). Parametric amplification takes place when a forward-propagating pump light and a signal light are injected into a gain medium of highly nonlinear fiber (HNLF). This fiber medium of choice has its nonlinearity enhanced by about a factor of 10 than conventional silica fiber, which could easily lead to the onset of nonlinear effects such as FWM, stimulated Raman scattering (SRS) and stimulated Brillouin scattering (SBS) when a high continuous-wave (CW) pump power is supplied into a long interaction length of gain fiber. The formation of parametric gain spectrum is dependent on the chromatic dispersion characteristics of the fiber as well, whereby the phase-matching condition has to be met through the detuning between the pump and zero dispersion wavelength (ZDW) of the fiber in achieving uniformity and wide bandwidth over 100 nm at any arbitrary wavelength. Several advantages reported on FOPA have brought to its discovery in various important functions such as large gain amplification, optical oscillation, optical sampling, transparent wavelength conversion and pulse generation. Previous investigation has shown that it is possible to transform a fiber optical parametric oscillator (FOPO) into a tunable radiation source that is capable of accessing wavelength regimes beyond the reach of conventional lasers. The nonlinear process of SRS on parametric amplification was found to be a useful mechanism in creating a broadband laser source since SRS allows the generation of new frequency at 100 nm away from the pump. The presented work in relation to wavelength conversion under SRS effect has proven to be successful through the achievement of tunable S-band idlers from a lasing signal at long oscillation wavelengths (where SRS is dominant) in an anomalously pumped FBG-formed linear cavity FOPO. On the other hand, by using similar configuration with cascaded oscillators, the generation of broadband multi-wavelength (MW) lasers through the degeneration of FWM was also reported to span from 1436 nm to 1704 nm at initial power of 450 mW (26.5 dBm). There is

a need to control the gain competition between SRS and parametric process via the fiber Bragg grating (FBG) output reflectivity to achieve balance oscillation in this setup. Compared to previous Raman-assisted ring cavity FOPOs that operated under high pump power ranging from 3 W (35 dBm) to 5 W (37 dBm), the linear cavity FOPOs reported in this thesis have shown to perform well under low pump power of less than 1 W (30 dBm) to produce broadband laser at large pump-signal separation of over 100 nm. Moreover, further effort was made towards a single-frequency FOPO in a ring cavity configuration. In this demonstration, the single longitudinal mode (SLM) operation is realized using a 5 m fiber loop mirror (FLM) to increase the cavity mode spacing and a 35 cm long of un-pumped erbium-doped fiber (EDF) as the saturable absorber (SA) to select a single longitudinal mode in the cavity. As an outcome, an SLM laser with narrow linewidth of about 300 kHz (short term) has successfully measured at pump power of 1.188 W (30.75 dBm). Such achievement has indicated a significant improvement in the field since the first demonstration of SLM-FOPO did not specify nor reveal the performance of its SLM laser linewidth spectrally through measurement.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

GELOMBANG BERTERUSAN PENGUAT DAN PENGAYUN PARAMETRIK GENTIAN OPTIK

Oleh

LIM LIEN TZE

Disember 2015

Pengerusi: Professor Mohd Adzir Bin Mahdi, PhD

Fakulti: Kejuruteraan

Penguat parametrik gentian optik (*'Fiber optical parametric amplifier'*, FOPA) merupakan sejenis penguat optik yang beroperasi berdasarkan fenomena optik tidak linear yang biasanya diketahui sebagai pergaulan empat gelombang (*'Four-wave Mixing'*, FWM). Amplikasi parametrik optik ini berlaku apabila gelombang pam dan gelombang isyarat memasuki ke dalam gentian silika amat tidak linear (*'Highly nonlinear fiber'*, HNLF) yang selalunya digunakan sebagai medium gandaan. Sebab pilihan gentian medium ini ialah ia mempunyai tahap tidak linear yang sangat tinggi (dengan faktor kira-kira 10 jika dibanding dengan gentian silika konvensional) dan ia dengan mudahnya boleh mengakibatkan pelbagai fenomena tidak linear, termasuk penyerakan Raman teransang (*'Stimulated Raman scattering'*, SRS) dan penyerakan Brillouin teransang (*'Stimulated Brillouin scattering'*, SBS) apabila kuasa pam yang tinggi disalurkan ke dalam gentian optik yang panjang. Pembentukan spektrum ganda parametrik bergantung kepada serak kromat dalam gentian optik, di mana syarat padan fasa perlu dipenuhi melalui pelarasan antara jarak gelombang pam dengan jarak sifar serak dalam gentian optik untuk mencapai lebar jalur ganda yang luas dan seragam. Kelebihan yang dilaporkan atas penguat parametrik gentian optik telah membawa kepada penemuan dalam pelbagai fungsi penting seperti penguat isyarat, system pertukaran jarak gelombang, persampelan optik, pengayunan optik, penjana nadi dan sebagainya. Siasatan menunjukkan bahawa adalah mungkin untuk mengubah pengayun parametrik gentian optik (*'Fiber optical parametric oscillator'*, FOPO) ke sumber radiasi boleh tala yang mampu mencapai regim panjang gelombang di luar jangkauan laser konvensional. Kewujudan penyerakan Raman teransang dalam amplikasi parametrik boleh digunakan sebagai peranti yang berguna dalam menghasilkan sumber laser sedemikian. Ini kerana ia membenarkan generasi frekuensi baru pada jarak 100 nm dari jarak gelombang pam. Kerja kajian yang berkenaan penukaran panjang gelombang di bawah pengaruh penyerakan Raman teransang dalam tesis ini

menunjukkan idlers boleh tala dalam S-band boleh dihasilkan melalui ayunan panjang gelombang isyarat dalam rongga linear pengayun parametrik gentian optik. Tambahan pula, dengan konfigurasi pengayun parametrik gentian optik yang serupa tetapi terdiri daripada lanta pengayun, jalur lebar untuk laser jarak gelombang berbilang dari 1436 nm ke 1704 nm berjaya diperolehi melalui proses merosot pencampuran empat gelombang pada permulaan kuasa pam lebih 450 mW (26.5 dBm). Persaingan ganda antara penyerakan Raman teransang dan proses parametrik melalui pantulan parutan Bragg gentian ('*Fiber Bragg grating*', FBG) perlu dikawal untuk mencapai keseimbangan ayunan dalam konfigurasi ini.

Eksperimen bagi rongga linear pengayun parametrik gentian optik dengan bantuan penyerakan Raman teransang menunjukkan bahawa pengayun yang beroperasi di bawah kuasa pam yang rendah iaitu kurang daripada 1 W (30 dBm) ini boleh menghasilkan laser jalur lebar pada jarak antara pam dan isyarat yang jauh. Tidak seperti rongga linear pengayun parametrik, rongga cincin pengayun parametrik gentian optik di bawah pengaruh penyerakan Raman teransang yang dilaporkan sebelum ini memerlukan kuasa pam yang agak tinggi iaitu dari 3 W (35 dBm) ke 5 W (37 dBm) untuk berfungsi pada jarak antara gelombang pam dan isyarat yang jauh. Selain itu, usaha untuk menghasilkan laser bersifat mod bujur tunggal melalui konfigurasi cincin rongga pengayun parametrik gentian optik juga dibuat. Dalam demonstrasi ini, operasi penghasilan laser bersifat mod bujur tunggal dilaksanakan dengan menggunakan cermin gelung dengan 5 m panjangnya untuk meluaskan jarak mod rongga dan 35 cm panjang erbium-didopkan gentian tanpa pam ('*Erbium-doped fiber*', EDF) yang berfungsi sebagai sempit lebar garis turas untuk mendapatkan mod tunggal dalam rongga. Dengan mekanisme tersebut, lebar garis bagi laser yang bersifat mod bujur tunggal berjaya dicapai dengan sempit lebar 300 kHz (jangka pendek) pada kuasa pam 1.188 W (30.75 dBm). Daripada hasil kerja ini, pencapaian dalam mengukur lebar garis untuk laser yang bersifat mod tunggal menandakan peningkatan yang penting dalam bidang penyelidikan tersebut kerana awal kerja kajian tidak mendedahkan penilaian tersebut dalam ekperimennya.

ACKNOWLEDGEMENTS

First and foremost, I would like to express my gratitude to Professor Mohd Adzir Bin Mahdi, my supervisor for his invaluable support, guidance and freedom throughout my research life. I am indebted to him for the time and patience that he has invested in every aspect of my doctoral studies. Also thanks to both my co-supervisors, Dr. Muhammad Hafiz Bin Abu Bakar and Dr. Nizam Tamchek for the assistance and suggestion that they provided in my research study. In addition, I would like to deliver many thanks to Dr. Yeo Kwok Shien and Dr. Amirah Binti Abdul Latif for their valuable time and willingness to share their professional knowledge and opinions with me, whenever I encountered problems in my experiments. I also want to express my apology to any of my colleagues for any offence that I may have caused unintentionally. Thanks for your forgiveness and tolerance toward me.

Not to forget, I hope to express my earnest appreciation to Professor Marhic Michel for offering me a golden opportunity to have my research attachment with him in Swansea University, United Kingdom. He was a prestigious researcher as well as the expert in the field of nonlinear fiber optics. Some part of my research work were inspired by his teaching. I felt lucky and happy to have knew him in my life. He was also a friend to me and I will always remember him.

Last but not least, I wish to convey my full-hearted love and appreciation to my family, especially to my parents, for their unconditional support, understanding and encouragement. They are always the force to keep me moving forward and to stay strong during hard time. And, I dedicate this thesis to my family.

I would like to deliver my special acknowledgement to Ministry of Science, Technology and Innovation, Malaysia (National Science Fellowship program) for funding the entire duration of my doctoral study.

I certify that a Thesis Examination Committee has met on 18 December 2015 to conduct the final examination of Lim Lien Tze on her thesis entitled "Continuous-wave Fiber Optical Parametric Amplifiers and Oscillators" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

NOR KAMARIAH BT NOORDIN, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

AHMAD SHUKRI BIN MUHAMMAD NOOR, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

MOHD HANIF BIN YAACOB, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

NEIL GREGORY RAPHAEL BRODERICK, PhD

Associate Professor
University of Auckland
New Zealand
(External Examiner)



ZULKARNAIN ZAINAL, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 28 June 2016

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Mohd Adzir Mahdi, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Muhammad Hafiz Abu Bakar, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Nizam Tamchek, PhD

Senior Lecturer
Faculty of Science
Universiti Putra Malaysia
(Member)

BUJANG KIM HUAT, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: _____ Date: _____

Name and Matric No.: _____

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____

Name of Chairman of Supervisory Committee: Mohd Adzir Mahdi, PhD

Signature: _____

Signature: _____

Name of Member of Supervisory Committee: Muhammad Hafiz Bin Abu Bakar, PhD

Signature: _____

Name of Member of Supervisory Committee: Nizam Tamchek, PhD

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	viii
LIST OF TABLES	xiii
LIST OF FIGURES	xiv
LIST OF ABBREVIATIONS	xxii
CHAPTER	
1 INTRODUCTION	1
1.1 Overview	1
1.2 Problem Statement	2
1.3 Research Objectives	3
1.4 Scope of Research Work	4
1.5 Thesis Organization	6
2 LITERATURE REVIEW	7
2.1 Introduction to Nonlinear Fiber Optics	7
2.1.1 Fiber Dispersion	7
2.1.2 Nonlinear Effects in Optical Fibers	11
2.1.2.1 Self-Phase Modulation (SPM)	15
2.1.2.2 Cross-Phase Modulation (XPM)	15
2.1.2.3 Stimulated Brillouin Scattering (SBS)	15
2.1.2.4 Stimulated Raman Scattering (SRS)	16
2.2 Fiber Optical Parametric Amplifier (FOPA)	16
2.2.1 Four-wave Mixing (FWM)	17
2.2.2 Single-Pump & Dual-pump Parametric Amplifiers	19
2.3 Fiber Optical Parametric Oscillator (FOPO)	21
2.3.1 Laser Oscillation	22
2.3.2 Resonant Cavity Mode	23
2.3.3 Single Longitudinal Mode Cavity	27
2.3.4 Laser Linewidth Measurement	29
2.3.5 Implementation of FOPO	32
2.4 Summary	34
3 CHARACTERIZATION OF SINGLE-PUMPED FIBER OPTICAL PARAMETRIC AMPLIFIER	36
3.1 Introduction	36

3.2	Construction of Parametric Amplifiers	37
3.3	Parametric Gain & Bandwidth	44
3.3.1	Phase Matching Condition	47
3.3.2	Chromatic Dispersion and Zero Dispersion Wavelength	55
3.3.3	Stimulation and Results	56
3.3.4	Experimental Investigation	62
3.4	SBS Suppression	67
3.4.1	Pseudo Random Binary Code	69
3.4.1.1	Modulation Frequency	70
3.4.1.2	Pattern Length	72
3.4.1.3	Fiber Length	74
3.4.1.4	Pump Linewidth	75
3.4.1.5	Type of RF amplifiers	76
3.4.2	Radio Frequency	78
3.5	Drawback of SBS in Parametric Amplifier	83
3.6	Summary	85
4	RAMAN-INFLUENCED LINEAR-CAVITY FIBER OPTICAL PARAMETRIC OSCILLATORS	87
4.1	Overview	87
4.2	Theoretical Studies	87
4.3	Extended Nonlinear Parametric Process in Linear Cavity Oscillator	93
4.3.1	Setup Design	94
4.3.2	Results and Discussion	99
4.3.2.1	Lasing Threshold	99
4.3.2.2	Tunability	101
4.3.2.3	Conversion Efficiency	103
4.3.2.4	Stability	104
4.3.3	Investigation of Raman effect in Parametric Amplifiers	105
4.3.4	Extension of Work	107
4.4	Multiwavelength Fiber Optical Parametric Oscillator	108
4.4.1	Setup Design	108
4.4.2	Results and Discussion	110
4.4.2.1	Lasing Threshold	117
4.4.2.2	Pump Power Increment	119
4.4.2.3	Conversion Efficiency	120
4.4.2.4	Stability	122
4.5	Summary	125
5	SINGLE-LONGITUDINAL MODE FIBER OPTICAL PARAMETRIC OSCILLATOR	127
5.1	Overview	127
5.2	Devices for Single Longitudinal Mode Operation	127
5.2.1	Narrowband Filters	128
5.2.2	Subring Cavity	128

5.2.3	Unpumped EDF	129
5.3	Performance Requirement	134
5.3.1	Pump Noise	134
5.3.2	Residue Pump	137
5.3.3	Filtering Scheme	143
5.3.4	Saturable Absorber (SA) Setting	144
5.4	Setup Design	146
5.5	Results and Discussion	152
5.5.1	Mode Observation	153
5.5.2	Linewidth Measurement	156
5.5.3	Stability	158
5.6	Summary	159
6	CONCLUSION AND RECOMMENDATIONS FOR FUTURE WORK	161
6.1	Conclusion	161
6.2	Recommendations for Future Work	162
	REFERENCES	164
	BIODATA OF STUDENT	180
	LIST OF PUBLICATIONS	181

LIST OF TABLES

Table		Page
2.1	Calculation of mode spacing between erbium doped fiber laser and fiber optical parametric oscillator	27
3.1	Comparison between DSF, HNLF, PCF and BiF [100]	37
3.2	Specification of readily available dispersion-shifted HNLF	37
3.3	Measurement of splicing and insertion losses within the ring cavity FOPO	44
3.4	Normalized equation for parametric gain as a function of L , γ and P_p	54
3.5	Specifications of the electrical amplifiers used in modulation system	77
3.6	Calculation of Brillouin threshold depending on the number of RF tones used	81
3.7	The relationship between dispersion characteristics and gain bandwidth based on the location of pump wavelength	86
4.1	The outcome of a linear cavity oscillator when output reflectivity $R_{1(out)}$ and $R_{2(out)}$ are varied with 20%, 30%, 80% and 90% respectively	113
4.2	Summary of the lasing threshold with varying output reflectivity $R_{1(out)}$ and $R_{2(out)}$ in respective operation of 1585 nm and 1675 nm oscillator.	117
4.3	Theoretical analysis of threshold with respect to different reflectivity loss coefficient	118
4.4	Summary of the lasing threshold with varying output reflectivity $R_{1(out)}$ and $R_{2(out)}$ in combined oscillators lase at 1585 nm and 1675 nm	119
4.5	Related work done in Raman-assisted ring cavity FOPO	125

LIST OF FIGURES

Table	Page	
1.1	Scope of work chart	5
2.1	(a) Step-index multimode fibers permit the propagation of several optical modes. (b) Graded-index multimode fibers allow propagation of several modes with similar propagation constant. (c) Step-index single-mode fibers have a small core diameter and no modal dispersion [17]	13
2.2	Assignment of frequency components through four-wave mixing in both the degenerated and non-degenerated cases when three waves are present in a fiber	18
2.3	Modulation instability process in a single-pumped fiber optical parametric amplifier	19
2.4	Nondegenerate and degenerate processes in a dual-pumped fiber optical parametric amplifier	20
2.5	A Fabry-Perot resonator consists of amplifying medium and two reflecting mirrors	24
2.6	Light propagation between two mirrors at a cavity length, l during a time period of t_1 , t_2 and t_3	24
2.7	Standing wave pattern in a resonant laser cavity	25
2.8	Output spectra of (a) laser gain bandwidth and (b) the longitudinal modes of a cavity. (c) Characteristics of the actual laser output	26
2.9	Graphical representation of mode spacing under a laser gain bandwidth in an example of (a) EDFL and (b) FOPO	28
2.10	Schematic diagram of heterodyne method	30
2.11	Experimental setup of a (a) self-homodyne and (b) self-delayed heterodyne detection method	31
2.12	A fiber optical parametric oscillator with silica-based fiber as the amplifying medium and the optical reflectors to form a Fabry-Perot cavity	32
2.13	Schematic diagram of a FOPO in (a) linear and (b) ring cavity configurations	33
2.14	Classification of nonlinear effects in optical fiber	35
3.1	Setup of a FOPA when its pump path is (a) with and (b) without tunable bandpass filter, in the absence of highly nonlinear fiber	39
3.2	Output spectra of the FOPA when its pump path is (a) with and (b) without tunable bandpass filter	39
3.3	(a) Schematic diagram of an ITU coupler. (b) The passband of ITU coupler at wavelengths of 1560.38 nm, 1560.61 nm and 1560.88 nm. (c) Measurement of insertion loss	41

3.4	(a) Connection of an ITU coupler in a fiber optical parametric amplifier. (b) A graph of signal power at Point Y versus attenuation controlled through TLS2 to determine insertion loss of the coupler in the setup. (c) Experimental parametric gain compared using a 10 dB coupler and ITU coupler	43
3.5	Setup of a fiber optical parametric oscillator using an ITU coupler to construct ring cavity	43
3.6	Theoretical parametric gain of a fiber optical parameter amplifier with $P_p = 400$ mW, $L = 500$ m, $\gamma = 11.5$ W ⁻¹ km ⁻¹ , $\lambda_p = 1560$ nm, $\lambda_0 = 1557.6$ nm and $S = 0.015$ ps/nm ² · km. Arrows indicate regions with exponential gain and the region with quadratic gain [101]	52
3.7	Theoretical gain spectra when the fiber length, L is varied from 100 m to 500 m with $\lambda_0 = 1560$ nm, $\lambda_p = 1560.6$ nm, $P_p = 1$ W, $\gamma = 19$ W ⁻¹ km ⁻¹ , $S = 0.034$ ps/nm ² .km, $\beta_3 = 5.68 \times 10^{-41}$ s ³ m ⁻¹ , $\beta_4 = 2.82 \times 10^{-55}$ s ⁴ m ⁻¹	53
3.8	Theoretical gain spectra when the fiber nonlinearity, γ is varied from 5 W ⁻¹ km ⁻¹ to 20 W ⁻¹ km ⁻¹ with $\lambda_0 = 1560$ nm, $\lambda_p = 1560.6$ nm, $P_p = 1$ W, $L = 300$ m, $S = 0.034$ ps/nm ² .km, $\beta_3 = 5.68 \times 10^{-41}$ s ³ m ⁻¹ , $\beta_4 = 2.82 \times 10^{-55}$ s ⁴ m ⁻¹	53
3.9	Theoretical gain spectra when the pump power, P_p is varied from 0.2 W to 2 W with $\lambda_0 = 1560$ nm, $\lambda_p = 1560.6$ nm, $L = 300$ m, $\gamma = 19$ W ⁻¹ km ⁻¹ , $S = 0.034$ ps/nm ² .km, $\beta_3 = 5.68 \times 10^{-41}$ s ³ m ⁻¹ , $\beta_4 = 2.82 \times 10^{-55}$ s ⁴ m ⁻¹	54
3.10	Dispersion spectrum shows the relationship between chromatic dispersion and second-order dispersion β_2 of a dispersion-shifted HNLF	55
3.11	Simulated parametric gain when the pump wavelength is tuned at 1559.5 nm, 1560 nm, 1560.5 and 1561.5 nm correspondingly with respect to zero dispersion wavelength, $\lambda_0 = 1560$ nm and $\beta_4 = +1.3175 \times 10^{-55}$ s ⁴ m ⁻¹	58
3.12	An entire spectrum of the stimulated parametric gain when $\beta_4 > 0$	58
3.13	Stimulated gain when the pump wavelength is placed at $\Delta\lambda_p = \pm 2$ nm from zero dispersion wavelength, λ_0 when $\beta_4 > 0$	59
3.14	Simulation of narrow gain band when the pump is deviated $\Delta\lambda_p \geq 2$ nm from zero dispersion wavelength λ_0 , for (a) 1562 nm, (b) 1562.5 nm, (c) 1563 nm, (d) 1563.5 nm, (e) 1564 nm and (f) 1564.5 nm	60
3.15	Simulated parametric gain when the pump wavelength is deviated between -0.5 nm $< \Delta\lambda_p < 1.5$ nm at $\lambda_p = 1559.5$ nm, 1560 nm, 1560.5 and 1561.5 nm and $\beta_4 = -1.3175 \times 10^{-55}$ s ⁴ m ⁻¹	61
3.16	Entire spectrum of the stimulated parametric gain when $\beta_4 < 0$	61
3.17	Stimulated parametric gain when the pump wavelength is tuned $\Delta\lambda_p = \pm 2$ nm away from zero dispersion wavelength, λ_0 when $\beta_4 < 0$	62

3.18	Experimental setup of fiber optical parametric amplifier to investigate the effect of pump wavelength and pump power on its gain spectrum	63
3.19	Output spectra of the fiber optical parametric amplifier when the pump is turned ON and OFF to measure ON-OFF signal gain	64
3.20	Theoretical and experimental investigation of the pump power on parametric gain spectrum	64
3.21	(a) Experimental and (b) theoretical gain spectra when the pump wavelength is detuned from 1555 nm to 1565 nm, at the pump power of 1.2 W (30.8 dBm)	66
3.22	Downshift of Brillouin gain bandwidth from the pump spectral linewidth	67
3.23	Experimental setup to investigate SBS suppression using PRBS modulation method	69
3.24	Observation of pump linewidth through optical spectrum analyzer when the modulation frequency of PRBS is varied from 100 MHz to 3.6 GHz, at fixed pattern length of $n = 31$ bits	70
3.25	(a) Frequency spectrum of sinc^2 function and the PRBS pattern at bit rate of (b) 600 MHz and (c) 1 GHz	71
3.26	(a) Experimental graph shows the backscattered power versus pump power with and without PRBS modulation. (b) Summary of the increase of Brillouin threshold with modulation frequency	72
3.27	Experimental graphs show the transmitted power and backscattered power versus input power, under (a) no modulation and with PRBS of its bit length varied to (b) 15 bits, (c) 23 bits and (d) 31 bits. The modulation frequency is fixed at 3.6 GHz	73
3.28	Experimental graph shows the improvement of Brillouin threshold through (a) backscattered power and (b) transmitted power measurement without and with PRBS modulation	74
3.29	Experimental graph shows the influence of fiber length to SBS suppression	75
3.30	Experimental graph shows the effect of pump linewidth to SBS suppression	76
3.31	A functional phase modulation system	77
3.32	Experimental graph shows SBS suppression with the use of different type of RF amplifiers in modulation system	78
3.33	Experimental setup to characterize SBS suppression using RF modulation	79
3.34	The underlying process of RF modulation when (a) single RF tone or (b) multitone is applied to an external phase modulator [130]	80
3.35	Experimental graph shows the Brillouin threshold improvement through (a) backscattered power and (b) transmitted power measurement as a result of the RF modulation	82
3.36	Brillouin Stokes spectra shows linewidth broadening when the number of RF tone is increased during modulation	83

3.37	The impact of phase modulation to parametric gain in experiment	84
3.38	The effect of polarization alignment to parametric gain with phase modulation	85
4.1	Measured real and imaginary part of the complex Raman susceptibility of a fused silica fiber versus pump-signal frequency shift [139]	91
4.2	Classification of gain region versus wavelength separation between signal and pump with different values of mismatch wavevector along the Raman-parametric gain	91
4.3	Experimental setup to measure Raman gain	92
4.4	The spectrum of Raman gain versus pump-signal frequency shift	93
4.5	Proposed setup of extended nonlinear parametric process in linear cavity oscillator	94
4.6	(a) Characterization of the power couplers at output coupling ratio of 1%, 2%, 5% and 10%. (b) Measured coupling loss of a 95/5 coupler	95
4.7	Output spectrum of the linear cavity FOPO with a lasing signal at 1675 nm to produce a converted idler at 1457 nm, at pumping power of 500 mW. Resolution bandwidth = 0.2 nm	96
4.8	Measured optical signal to noise ratio of the (a) converted signal and (b) lasing signal. Resolution bandwidth = 0.02 nm	97
4.9	Comparison of the (a) converted idler and (b) lasing signal at pump power of 650 mW, with output reflectivity $R_{1(out)}$ varies from 20% to 91.34%	97
4.10	Output spectra of the converted idler and signal when the pump power is increased from 0.3 W to 0.8 W, fixed at $R_{1(out)} = 91.39\%$	98
4.11	Graph shows the average power of signal and idler with corresponds to the input power increment from 200 mW to 1 W	99
4.12	The effect of varying output feedback coefficient to threshold power	100
4.13	The outcome of various pump wavelength to the oscillator's threshold power, at respective output reflectivity of $R_{1(out)} = 20.02\%$ and $R_{1(out)} = 91.39\%$	100
4.14	Output spectrum of the tunable idlers from 1456.12 nm (black line in left) to 1462.48 nm (dashed line in right) when the pump wavelength is detuned from 1558 nm to 1561.6 nm	101
4.15	Measured 3 dB linewidth of the tunable idlers when output reflectivity is fixed at $R_{1(out)} = 91.39\%$	102
4.16	Peak power of the tunable idlers from 1456 nm to 1463 nm at pump power of 650 mW, with varying output reflectivity $R_{1(out)}$ from 20.02% to 91.39%	102
4.17	Graph shows the idler average power measurement before and after 5% coupling loss	103
4.18	The relationship between the total average power and conversion efficiency of the tunable idlers, at output reflectivity (a) $R_{1(out)} = 91.39\%$ and (b) $R_{1(out)} = 20.02\%$	104

4.19	(a) Output spectra of the fiber optical parametric oscillator scanned for a time period of 30 minutes, at pump wavelength $\lambda_p = 1559$ nm and (b) its peak power fluctuation during the scanning	105
4.20	Presentation of the importance of nonlinear parametric and Raman processes in FOPA	106
4.21	Extended output spectrum of the fiber optical parametric oscillator with wavelength region until 1900 nm	107
4.22	Proposed design of MW-FOPO in linear cavity configuration. A 1585 nm and 1675 nm FBG pairs (in dashed boxes) are arranged in series to form cascaded parametric oscillator (PO) and Raman oscillator (RO)	109
4.23	Comparison of total output power between a 1675 nm oscillator and a combined oscillators with two lasing wavelength at 1585 nm and 1675 nm	110
4.24	Output spectra shows the optimization of pump wavelength at (a) 1557 nm, (b) 1559 nm and (c) 1562 nm	111
4.25	Spectra comparison between theoretical and experimental phase-matched parametric gain under the influence of Raman effect	112
4.26	Output spectra (a) when parametric oscillator and Raman oscillator are oscillated independently and (b) their combined at pump power of 450 mW. The feedback reflectivity for parametric oscillator and Raman oscillator is fixed at 92.54% and 20.02% respectively	115
4.27	Output spectra of every MW lasers covers from 1436 nm to 1704 nm, in a short wavelength span of 4 nm	116
4.28	Development of the oscillators when pump power increment from 300 mW to 1 W, and (b) the peak power difference between MW lasers at pump power of 300 mW and 450 mW to 1W respectively	120
4.29	(a) Total average power and (b) conversion efficiency measurement of the signals and idlers from single operation of 1585 nm and 1675 nm oscillator	121
4.30	(a) Total average power and (b) conversion efficiency measurement of the MW lasers from combined oscillators	122
4.31	(a) Output spectra scanned repeatedly over a time period of 30 minutes for stability performance and (b) the summary of the peak power fluctuation for every MW lasers	123
5.1	Schematic diagram of a resonant cavity (or coupled subring cavity) formed using a 3 dB coupler with variable length, l_m	129
5.2	Configuration of the unpumped EDF with variable length, L_g in a (a) Sagnac loop and (b) feedback mirror configuration	131
5.3	Spatial interference pattern generated by two counter-propagating optical waves insides the erbium doped fiber segment	131
5.4	Arrangement of the proposed subring cavity and saturable absorber in the parametric oscillator to perform single longitudinal mode oscillation	133

5.5	Experimental setup to investigate the effect of pump quality to the performance of a single frequency fiber optical parametric oscillator	134
5.6	RF spectrum shows the emission of a fluctuating laser for pump 1	135
5.7	Mode observation of the output laser through electrical spectrum analyzer when a fluctuating pump is injected into the parametric oscillator	136
5.8	RF spectrum demonstrates a noiseless and stable laser for pump 2	136
5.9	Mode observation of the output laser through electrical spectrum analyzer when a stable pump laser is provided into the parametric oscillator	137
5.10	Characterization of the setup design in (a) open ring and (b) close ring to study the residual pump within cavity	138
5.11	Output spectra show the behavior of lasing signal and pump when the parametric oscillator is configured in (a) open and (b) close ring cavity	139
5.12	The outcome of oscillator when the residue of incident pump entering saturable absorber with length set at $L_g = 20$ cm and $L_g = 3$ m respectively	140
5.13	Output spectra observed at Point A, B and C covering from 600 nm to 1600 nm	140
5.14	Characterization of the improved design to prevent the residual pump within the ring cavity	141
5.15	RF spectrum shows (a) no input and (b) when the output laser from parametric oscillator with a 35 cm of saturable absorber to electrical spectrum analyzer	142
5.16	Output spectra observed at Point X, Y and Z spanning from 1500 nm to 1600 nm	143
5.17	Lineshape of the output laser when the parametric oscillator is (i) without SA and (ii-iv) with SA	144
5.18	Parametric oscillator design with a saturable absorber inline in the ring cavity	144
5.19	Mode observation of the output laser when 10 cm, 40 cm and 1.7 m length of saturable absorber are characterized respectively	145
5.20	Mode observation of the output laser over a time period from initial time, t_0 to t_1	145
5.21	Proposed design of a tunable SLM-FOPO	146
5.22	Schematic diagram of the wavelength division multiplexer coupler (WDM1) and C/L WDM2	147
5.23	Output spectra of the (a) WDM1 and (b) C/L WDM2 couplers at their respective output port	148
5.24	Output spectra observed at (a) Point A and (b) Point B with wavelength range from 600 nm to 1600 nm	149
5.25	Tuning wavelength of the parametric oscillator without saturable absorber at a pump power of 794 mW (29 dBm)	150
5.26	Tuning wavelength of the fiber optical parametric oscillator with a 35 cm saturable absorber at pump power of 1.32 W (31.2 dBm)	151

5.27	Graph of the output power versus pump power in SLM-FOPO	151
5.28	The influence of the length of saturable absorber to lasing threshold of the oscillator	152
5.29	Mode observation of the output laser through electrical spectrum analyzer when the fiber optical parametric oscillator is (a) without and (b) with a coupled subring cavity in the main ring	154
5.30	Mode observation of the output laser through electrical spectrum analyzer when (a) $l_m = 5$ m and (b) $l_m = 40$ cm of subring cavity length are characterized	155
5.31	Mode observation of the output laser through electrical spectrum analyzer when the parametric oscillator is characterized (a) without and (b) with a 35 cm saturable absorber	156
5.32	Laser linewidth measurement using optical spectrum analyzer when the parametric oscillator is characterized (a) without and (b) with a 35 cm saturable absorber	157
5.33	RF spectrum of the laser linewidth measurement with saturable absorber in the parametric oscillator. Resolution bandwidth: 300 kHz	158
5.34	(a) Scanned spectra of the output laser at 1539 nm over a time period of 30 minutes and (b) evaluation of their peak power fluctuation during the scanning	159

LIST OF ABBREVIATIONS

ASE	Amplifier spontaneous emission
AOM	Acousto-optic modulator
BiF	Bismuth doped fiber
BS	Bragg scattering
CE	Conversion efficiency
CIR	Circulator
CW	Continuous wave
DRO	Doubly-resonant oscillator
DSF	Dispersion shifted fiber
EDFA	Erbium-doped fiber amplifier
EDFL	Erbium-doped fiber laser
ESA	Electrical spectrum analyser
FBG	Fiber Bragg grating
FLM	Fiber loop mirror
FOPA	Fiber optical parametric amplifier
FOPO	Fiber optical parametric oscillator
FSR	Free spectral range
FWHM	Full width half maximum
FWM	Four-wave mixing
HNLF	Highly nonlinear fiber
ITU	International Telecommunication Union
MI	Modulation instability
MLM	Multi-longitudinal mode
MW	Multiwavelength
MZI	Mach-Zehnder interferometer
OPA	Optical parametric amplifier
OPO	Optical parametric oscillator
OPM	Optical power meter
OSA	Optical spectrum analyser
OSNR	Optical signal noise ratio
PC	Polarization controller
PCF	Photonics crystal fiber
PCG	Phase-conjugation
PD	Photodetector
PM	Phase modulator
PO	Parametric oscillator
PPM	Pump phase modulation
PRBS	Pseudo random bit sequence
RA	Raman amplifier
RFSA	Radio frequency spectrum analyzer
RFL	Raman fiber laser
RO	Raman oscillator
SA	Saturable absorber
SBS	Stimulated Brillouin scattering
SHB	Spatial hole burning

SLM	Single longitudinal mode
SMF	Single mode fiber
SOP	State of polarization
SPM	Self-phase modulation
SRO	Single-resonant oscillator
SRS	Stimulated Raman scattering
TBF	Tunable bandpass filter
TLS	Tunable laser source
TWM	Two-waves mixing
VCO	Voltage controlled oscillators
VOA	Variable optical attenuator
WDM	Wavelength division multiplexing
XPM	Cross phase modulation
XGM	Cross gain modulation
ZDW	Zero dispersion wavelength



© COPYRIGHT UPM

CHAPTER 1

INTRODUCTION

1.1 Overview

The variety of applications that are fully utilizing web services nowadays has created a high demand for advancements in optical telecommunications. Presently, much of the data transmission in computing and communication industry are conducted through fiber optic systems, as the optical fiber cables provide greater bandwidth that enables them to carry more information with greater fidelity than copper wire over massive distance. They are reliable to perform under noisy environment as well. Thus, these advantages have encouraged the widespread of fiber transmission line worldwide, connecting every possible corner to the global fiber network. The statement included below describes the rapid growth of activities for the expansion of current optical telecommunications networks in the recent years.

“Tokyo, June 27, 2013: The SJC Parties, today announced that the Southeast Asia-Japan Cable (SJC) system is now operational. The SJC is an 8,900-kilometer cable system, which could further extend to 9,700 kilometers. At a project cost of around US\$400 million, the SJC cable system consists of 6 fiber pairs with the initial design capacity of 28 Terabits per second to meet bandwidth-intensive applications such as internet TV, online games and enterprise data exchange.

NEC News, June 27, 2013 [1]

“MANILA, Philippines, Aug. 28, 2014: The Southeast Asia - United States Cable (SEA-US) will provide much needed Asia-US connectivity and will be the fastest cable connecting Indonesia and the Philippines to the United States. NEC has awarded contract to build first 100 Gb/s submarine cable with a span over 10,000 km. This capacity will cater to the exponential growth of bandwidth demand between both continents.”

NEC News, Aug 28, 2014 [2]

In the early 1980s, the existing transmission technology using coaxial cables has been recognized as inadequate to accommodate high data capacity transmission. As an alternative to meet the required capacity, the telecommunication industry has expanded their transmission capabilities by slowly replacing copper wires with fiber optic cables, which permits large amount of data to be transmitted over vast distance in high speed [3]. The optical fiber was originally impractical in long distance communications due

to high loss experienced by the propagating signals during transmission. With relentless effort from the researchers to resolve the problem, the first optical fiber with attenuation less than 20 dB/km was successfully demonstrated in 1970 [4] and that brought remarkable progress in the production of low loss transmission medium for long haul transmission system. To encounter inevitable power attenuation across the long distance, electrical repeater system acting as optoelectronic regenerator device was initially installed to amplify and retransmit the signal. This scheme appears effective, though it has a drawback in that the bandwidth of the device is much less than the bandwidth of the optical fibers thus the repeaters become bottlenecks that severely limit the speeds of signals transmission. The incompetency of optoelectronic repeaters has motivated the development of optical amplifiers, which are capable of wideband amplification without undergoing the E/O conversion process.

The first successful optical amplifier that has been developed and revolutionized the optical communication industry is the erbium-doped fiber amplifiers (EDFAs) [5]. With subsequent modern fibers that exhibit losses of less than 0.2 dB/km at 1550 nm, new type of optical amplifier called fiber optical parametric amplifier (FOPA) was created [6]. Like the EDFA, FOPA can support the technology of wavelength division multiplexing (WDM) where the capacity can be increased by enabling multiple channel wavelengths to be carried in a single fiber, reducing the number of cables deployed [7]. Current WDM technologies have the ability to transport data in excess of 10 Gb/s. With the development of optical amplifiers, laser can be produced simply by operating the optical amplifier with a positive feedback. By feeding back the output of an optical amplifier to its input for laser oscillation, a fiber laser could be obtained when a continuous-wave (CW) or pulsed pump is added into the cavity. The output laser can consist of either a single or multi wavelength with certain tunability. Most research work presented in this thesis focus on the fiber laser generated from fiber optical parametric oscillator (FOPO) as its architectural concept is based on the addition of fiber-Bragg gratings (FBGs) to provide light feedback. FOPO can be utilized in applications with WDM technology that will be demonstrated by generating broadband multiwavelength (MW) based on the nonlinear effect of four-wave mixing (FWM) and Stimulated Raman Scattering (SRS). The parametric gain obtained from FOPA under combined influence of FWM and SRS is investigated first before continuing on to the experimental studies of FOPO. Besides that, a single frequency FOPO will be developed and analyzed. This type of fiber laser has found to be useful in coherent communication.

1.2 Problem Statement

Typical FOPOs operate under relatively high pump power oscillation between 1 W (30 dBm) to 5 W (37 dBm). Unfortunately, if the pump power is not properly managed, the induced nonlinear processes will bring a detrimental effect to the desired output. This effect involves the growth of

backward Stimulated Brillouin scattering (SBS) when there is increasing pump power within the gain fiber and that would consequently reduce the amount of transmitted power from the oscillator. Such a drawback cannot be eliminated, but proper approach has been suggested to minimize them. In the study of fiber lasers, most single wavelength and MW fiber lasers operated and confined within C- or L-band region due to the limited gain bandwidth. One possible way to achieve single wavelength as well as MW lasers across wide wavelength region for > 100 nm in FOPO is to utilize the influence of nonlinear Raman scattering to perform laser oscillation. So far, the investigation on Raman-assisted parametric oscillator has only been found using ring cavity configuration. And, no previous work on the laser oscillation under nonlinear Raman effect in U-band is reported using a linear cavity FOPO. A few issues have been encountered when pursuing the development of a single-longitudinal mode (SLM) operation in FOPO. This includes the use of a long gain medium (> 50 m) for achieving high gain (~ 30 dB) with wide bandwidth (~ 80 nm), which forms a long cavity on FOPO. This characteristic favors the generation of densely spaced longitudinal modes within the cavity. Hence, a noisy laser could likely be produced from this type of fiber laser. It is impossible to achieve SLM-FOPO without any external mode suppression mechanism. The introduction of an external mode suppression mechanism into the cavity of FOPO for achieving SLM oscillation however comes with some disadvantages such as the structure of the cavity would get complex and it demands an even higher pump power to overcome the cavity losses for lasing. Furthermore, the stability of FOPO system could also be severely affected as the devices used for generating a single mode laser are sensitive to the environment perturbation. In the past, there is only one research work done on SLM-FOPO which a subring cavity and an un-pumped EDF are deployed as the mode suppression devices in the setup to produce SLM laser. However, no result was reported on the performance of its SLM linewidth and stability from this demonstration.

1.3 Research Objectives

The research objectives of this thesis are stated below:

- a. To investigate the SBS suppression through pump phase modulation (PPM) technique using different waveform of pseudo random binary sequence (PRBS) and sinusoidal frequency in FOPO.
- b. To investigate the system performance of a linear cavity FOPO under Raman effect in ultralong (U-band) wavelength region.
- c. To design a new structure of linear cavity FOPO utilizing Raman effect to generate a broadband multiwavelength lasers.
- d. To design and investigate a SLM-FOPO based on the proposed mechanism of subring cavity and unpumped EDF in the ring cavity.

1.4 Scope of Research Work

This research study emphasizes mainly on the implementation of single-pump FOPOs, which utilize a standard highly nonlinear fiber (HNLf) as its gain medium to generate laser. Prior to the experimental work of FOPO, a setup of FOPA is characterized experimentally first and the pump phase modulation technique is adopted in the FOPA to suppress the backward SBS from the high pump power injection into the fiber. Next, a FOPO using a normal FBG pair to form its linear cavity is introduced to operate under the influence of SRS with parametric amplification. The proposed work that is based on combined processes of FWM and SRS will then be applied for different applications in two different architectures as listed below:


- 1) **Architecture 1:** A linear cavity FOPO formed using a pair of FBGs with its center wavelength lasing within the Raman-dominant gain region. This proposed design intends to investigate the wavelength conversion at large pump-signal separation of about 100 nm under SRS effect.
- 2) **Architecture 2:** Cascaded oscillators formed using two pairs of FBGs, with one center wavelength oscillating within the parametric-dominant gain region and another in the Raman-dominant region, in a linear cavity configuration. The motivation of this study is to obtain MW lasers in extended FWM bandwidth by deliberately manipulating each of their oscillation strength through FBG reflectivity to balance gain competition between parametric oscillator (PO) and Raman oscillator (RO) in series.

This dissertation also includes the investigation of SLM operation in a ring cavity FOPO using proposed setup mentioned below.

- 3) **Architecture 3:** A ring-cavity SLM-FOPO is designed using a passive subring cavity and an unpumped EDF as the saturable absorber to obtain an SLM laser. The outcome of this experimental setup will be evaluated between two cases under multiple longitudinal mode (MLM) and SLM condition of the cavity.

The research scope of this dissertation is summarized using a flow chart in Figure 1.1.

Figure 1.1: Scope of work chart

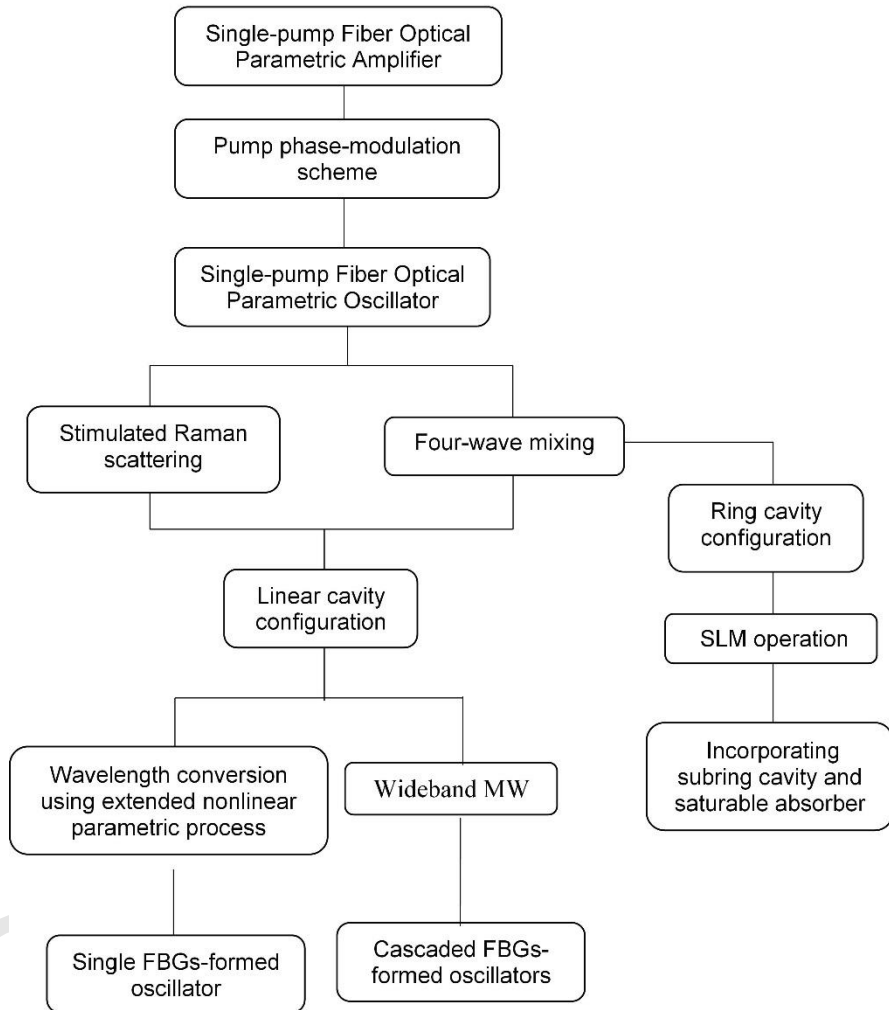

1.5 Thesis Organization

The content of this thesis is organized into six chapters. The present chapter 1 introduces the latest trends in modern optical fiber communication networks and the research objectives of this thesis.

In Chapter 2, a comprehensive review on the literature of nonlinear optics is included and the nonlinear phenomena based on third-order susceptibility of the optical fiber are discussed in detail. The chapter also includes the association of the configuration of a laser resonator to the cavity modes. The basic theory of SLM operation is studied and discussed with a graphical description.

Chapter 3 introduces the theoretical studies and experiments to characterize the fiber optical parametric amplifiers (FOPAs) by including their experimental set-up and results. Several techniques such as multi-tone radio frequency (RF) modulation and PRBS modulation for SBS suppression are investigated. The impact of SBS suppression on FOPA is presented.

Chapter 4 presents extensive theoretical studies of the combined influence of nonlinear parametric process and SRS in a FOPA. Using these nonlinear effects, a linear-cavity FOPO with oscillation occurs at long wavelength will then be described. The performance of linear cavity FOPO will be determined and discussed through these parameters: threshold power, output power, wavelength tunability, conversion efficiency (CE) and stability.

Chapter 5 proposes the mechanism involved to produce SLM in a FOPO. The performance requirement for obtaining SLM in an optical oscillator will be identified through experimental results. The proposed system design utilizing feedback mirror configuration for narrow laser in ring cavity will be discussed and evaluated based on mode observation, laser linewidth measurement and stability.

Chapter 6 summarizes the overall research work done and at the end, some recommendations for future works are included.

REFERENCES

- [1] "Southeast Asia-Japan (SJC) Cable System strengthens connectivity in 7 territories," 27-June-2013. Available: http://www.nec.com/en/press/201306/global_20130627_03.html [Accessed: 11-Dec-2014].
- [2] "SEA-US: Global Consortium to Build Cable System Connecting Indonesia, the Philippines, and the United States," 28-August 2014. Available: http://www.nec.com/en/press/201408/global_20140828_04.html. [Accessed: 11-Dec-2014].
- [3] L. Carter, D. Burnett, S. Drew, G. Marle, L. Hagadorn, D. Bartlett-McNeil, and N. Irvine, *Submarine cables and the oceans: connecting the world*. Lavenham Press, 2009.
- [4] F. P. Kapron, D. B. Keck, and R. D. Maurer, "Radiation losses in glass optical waveguides," *Appl. Phys. Lett.*, vol. 17, pp. 423–425, 1970.
- [5] P. M. Becker, A. A. Olsson, and J. R. Simpson, *Erbium-Doped Fiber Amplifiers: Fundamentals and Technology*. Academic Press, 1999.
- [6] K. K. Y. Wong, M. E. Marhic, G. Kalogerakis, and L. G. Kazovsky, "Recent Advances in the Design and Implementation of Practical Fiber Optical Parametric Amplifiers," *Conference on Optoelectronic and Microelectronic Materials and Devices, 2004.*, 2004, pp. 409–412.
- [7] G. E. Keiser, "A Review of WDM Technology and Applications," *Opt. Fiber Technol.*, vol. 5, no. 1, pp. 3–39, Jan. 1999.
- [8] T. Maiman, "Stimulated optical radiation in ruby," *Nature*, vol. 187, pp. 493–494, 1960.
- [9] G. P. Agrawal, *Nonlinear fiber optics*, 3rd edition. Academic Press, 2001.
- [10] Y. R. Shen, *The Principles of Nonlinear Optics*. Wiley, New York, 1984.
- [11] S. P. Singh and N. Singh, "Nonlinear effects in optical fibers: origin, management and applications," *Progress In Electromagnetics Research*, 2007, pp. 249–275.
- [12] H. Rongqing and Mautice O'Sullivan, *Fiber Optic Measurement Techniques*. Elsevier Academic Press, 2009.

- [13] D. Mahgerefteh, D. L. Butler, J. Goldhar, B. Rosenberg, and G. L. Burdge, "Technique for measurement of the Raman gain coefficient in optical fibers," *Opt. Lett.*, vol. 21, no. 24, pp. 2026–2028, Dec. 1996.
- [14] M. E. Marhic, *Fiber optical parametric amplifiers, oscillators and related devices*. Cambridge University, 2008.
- [15] A. Mussot, E. Lantz, A. Durecu-Legrand, C. Simonneau, D. Bayart, T. Sylvestre, and H. Maillotte, "Zero-dispersion wavelength mapping in short single-mode optical fibers using parametric amplification," *IEEE Photonics Technol. Lett.*, vol. 18, no. 1, pp. 22–24, Jan. 2006.
- [16] R. W. Boyd, *Nonlinear Optics*, 3rd edition. Academic Press, 2008.
- [17] E. F. Schubert, *Light-Emitting Diodes*. Cambridge University Press, 2003, p. 313.
- [18] M. Cvijetic, *Optical Transmission Systems Engineering*. Artech House, 2004.
- [19] M. J. Li, S. Li, and D. A. Nolan, "Nonlinear fibers for signal processing using optical Kerr effects," *IEEE J. Light. Technol.*, vol. 23(11), pp. 3606–3614, 2005.
- [20] R. H. Stolen and C. Lin, "Self-phase-modulation in silica optical fibers," *Phys. Rev. Lett.*, vol. 17(4), pp. 1448–1453, 1978.
- [21] M. Karlsson and H. Sunnerud, "Effects of nonlinearities on PMD-induced system impairments," *J. Light. Technol.*, vol. 24, no. 11, pp. 4127–4137, 2006.
- [22] S. P. Singh, R. Gangwar, and N. Singh, "Nonlinear scattering effects in optical fibers," *Prog. Electromagnetics Res.*, no. PIER 74, pp. 379–405, 2007.
- [23] R. H. Stolen and E. P. Ippen, "Raman gain in glass optical waveguides," *Appl. Phys. Lett.*, vol. 22, no. 6, pp. 276–278, Mar. 1973.
- [24] V. E. Perlin and H. G. Winful, "Optimal design of flat-gain wide-band fiber Raman amplifiers," *J. Light. Technol.*, vol. 20, no. 2, pp. 250–254, 2002.
- [25] M. Ikeda, "Stimulated Raman amplification characteristics in long span single-mode silica fibers," *Opt. Commun.*, vol. 39, no. 3, pp. 148–152, Oct. 1981.
- [26] S. B. Poole, D. N. Payne, R. J. Mears, M. E. Fermann, and R. E. Laming, "Fabrication and characterization of low-loss optical fibers containing rare-earth ions," *IEEE J. Light. Technol.*, vol. 4, no. 7, pp. 870–876, 1986.

- [27] R. I. Laming, M. N. Zervas, and D. N. Payne, "Erbium-doped fiber amplifier with 54 dB gain and 3.1 dB noise figure," *IEEE Photonics Technol. Lett.*, vol. 4, no. 12, pp. 1345–1347, Dec. 1992.
- [28] Z. G. Lu, J. R. Liu, F. G. Sun, G. Z. Xiao, and P. Lin, "A hybrid fiber amplifier with 36.9-dBm output power and 70-dB gain," *Opt. Commun.*, vol. 256, pp. 352–357, Dec. 2005.
- [29] F. A. Food, "L-band Erbium-doped fiber amplifiers," *OFC 2000*, 2000.
- [30] M. Foroni, F. Poli, A. Cucinotta, and S. Selleri, "S-band depressed-cladding erbium-doped fiber amplifier with double-pass configuration," *Opt. Lett.*, vol. 31, no. 22, pp. 3228–3230, 2006.
- [31] J. Bromage, "Raman amplification for fiber communications systems," *J. Light. Technol.*, vol. 22, no. 1, pp. 79–93, Jan. 2004.
- [32] H. Dutton, *Understanding Optical Communication*. Prentice Hall PTR, 1998.
- [33] M. E. Marhic, N. Kagi, T.-K. Chiang, and L. G. Kazovsky, "Broadband fiber optical parametric amplifiers," *Opt. Lett.*, vol. 21, no. 8, pp. 573–575, Apr. 1996.
- [34] K. Inoue, "Four-wave mixing in an optical fiber in the zero-dispersion wavelength region," *IEEE J. Light. Technol.*, vol. 10, no. 11, pp. 1553–1561, 1992.
- [35] G. P. Agrawal, *Applications of nonlinear fiber optics*. Academic Press, 2001.
- [36] F. Forghieri, R. W. Tkach, A. R. Chraplyvy, and D. Marcuse, "Reduction of four-wave mixing crosstalk in WDM systems using unequally spaced channels," *IEEE Photonics Technol. Lett.*, vol. 6, no. 6, pp. 754–756, Jun. 1994.
- [37] G. Cappellini and S. Trillo, "Third-order three-wave mixing in single-mode fibers: exact solutions and spatial instability effects," *J. Opt. Soc. Am. B*, vol. 8, no. 4, pp. 824–838, Apr. 1991.
- [38] J. Hansryd and P. A. Andrekson, "Broadband CW pumped fiber optical parametric amplifier with 49 dB gain and wavelength conversion efficiency," *IEEE Photonics Technol. Lett.*, vol. 13, no. 3, pp. 194–196, 2001.
- [39] K. K.Y. Wong, K. Shimizu, K. Uesaka, G. Kalogerakis, M. E. Marhic, and L. G. Kazovsky, "Continuous-wave fiber optical parametric amplifier with

- 60-dB gain using a novel two-segment design," *IEEE Photonics Technol. Lett.*, vol. 15, no. 12, pp. 1707–1709, Dec. 2003.
- [40] M. E. Marhic, N. Kagi, G. Kalogerakis, T.-K. Chiang, and L. G. Kazovsky, "Fiber optical parametric amplifier with 35 nm bandwidth," *OFC*, 1996, p. WA6.
- [41] M.-C. Ho, M. A. Marhic, Y. Akasaka, and L. G. Kazovsky, "Fiber optical parametric amplifier and wavelength converter with 208-nm gain bandwidth," *Prof. Conf. on Laser and Elect.-Opt*, 2000, p. CThC6.
- [42] C. J. Mckinstrie, S. Radic, and A. R. Chraplyvy, "Parametric Amplifiers Driven by Two Pump Waves," *IEEE J. Sel. Top. Quantum Electron.*, vol. 8, no. 3, pp. 538–547, 2002.
- [43] C. J. Mckinstrie, S. Radic, and A. R. Chraplyvy, "Correction to parametric amplifiers driven by two pump waves," *IEEE J. Sel. Top. Quantum Electron.*, vol. 8, no. 4, p. 956, 2002.
- [44] R. M. Jopson and R. E. Tench, "Polarisation-independent phase conjugation of lightwave signals," *Electron. Lett.*, vol. 29, no. 25, pp. 2216–2217, Jan. 1993.
- [45] C. J. Mckinstrie, J. D. Harvey, S. Radic, and M. G. Raymer, "Translation of quantum states by four-wave mixing in fibers," *Opt. Express*, vol. 13, no. 22, pp. 9131–9142, 2005.
- [46] M. E. Marhic, Y. Park, F. S. Yang, and L. G. Kazovsky, "Broadband fiber-optical parametric amplifiers and wavelength converters with low-ripple Chebyshev gain spectra," *Opt. Lett.*, vol. 21, no. 17, p. 1354, Sep. 1996.
- [47] S. Radic, C. J. Mckinstrie, R. M. Jopson, and J. C. Centanni, "Continuous wave fiber parametric amplifier with 41.5nm of flat gain," *Prof. Optical Fiber Conf. (OFC)*, 2004, p. TuC4.
- [48] F. S. Yang, M. C. Ho, M. E. Marhic, and L. G. Kazovsky, "Demonstration of two-pump fibre optical parametric amplification," *Electron. Lett.*, vol. 21, no. 33, pp. 1812–1813, Oct. 1997.
- [49] J. M. Chavez Boggio, F. A. Callegari, S. Tenenbaum, and H. L. Fragnito, "Demonstration of 26 dB on-off gain of a two-pump fiber optical parametric amplifier," *OFC 2002*, 2002, vol. 70, p. ThGG18.
- [50] C. Florida, M. L. Sundheimer, S. R. Lüthi, and A. S. L. Gomes, "Simultaneous S+band amplification and S+–C-band wavelength conversion in CW pumped fibre optic parametric amplifier," *Electron. Lett.*, vol. 40, no. 5, pp. 335–336, Mar. 2004.

- [51] K. Seki, "Narrowband and tunable optical parametric amplification in Bismuth-Oxide-based highly nonlinear fiber," *Opt. Express*, vol. 16, no. 18, pp. 13871–13877, 2008.
- [52] A. T. Clausen, L. Oxenlowe, C. Peucheret, H. N. Poulsen, P. Jeppesen, S. N. Knudsen, and L. Gruner-Nielsen, "10-GHz return-to-zero pulse source tunable in wavelength with a single- or multiwavelength output based on four-wave mixing in a newly developed highly nonlinear fiber," *IEEE Photonics Technol. Lett.*, vol. 13, no. 1, pp. 70–72, Jan. 2001.
- [53] T. Yamamoto and M. Nakazawa, "Active optical pulse compression with a gain of 29.0 dB by using four-wave mixing in an optical fiber," *IEEE Photonics Technol. Lett.*, vol. 9, no. 12, pp. 1595–1597, Dec. 1997.
- [54] J. Hansryd and P. A. Andrekson, "Wavelength tunable 40GHz pulse source based on fibre optical parametric amplifier," *Electron. Lett.*, vol. 37, no. 9, pp. 584–585, Apr. 2001.
- [55] M. N. Islam and O. Boyraz, "Fiber parametric amplifiers for wavelength band conversion," *IEEE J. Sel. Top. Quantum Electron.*, vol. 8, no. 3, pp. 527–537, May 2002.
- [56] K. Inoue, "Arrangement of fiber pieces for a wide wavelength conversion range by fiber four-wave mixing," *Opt. Lett.*, vol. 19, no. 16, pp. 1189–1191, Aug. 1994.
- [57] J. Hansryd, P. O. Hedekvist, P. A. Andrekson, and S. N. Knudsen, "300-Gb/s eye-diagram measurement by optical sampling using fiber-based parametric amplification," *IEEE Photonics Technol. Lett.*, vol. 13, no. 9, pp. 987–989, Sep. 2001.
- [58] J. Hansryd and P. A. Andrekson, "O-TDM demultiplexer with 40-dB gain based on a fiber optical parametric amplifier," *IEEE Photonics Technol. Lett.*, vol. 13, no. 7, pp. 732–734, Jul. 2001.
- [59] P. O. Hedekvist, M. Karlsson, and P. A. Andrekson, "Fiber four-wave mixing demultiplexing with inherent parametric amplification," *J. Light. Technol.*, vol. 15, no. 11, pp. 2051–2058, 1997.
- [60] M. T. B. Saleh and M. C. Teich, *Fundamentals of Photonics*, 2nd Edition. Wiley, 2007.
- [61] W. T. Silfvast, *Laser Fundamentals*. Cambridge University Press, 2008, pp. 371–382.
- [62] S. O. Kasap, *Optoelectronics & Photonics: Principles & Practices*. Prentice Hall, 2001, pp. 28–32.

- [63] R. Kiyan, S. K. Kim, and B. Y. Kim, "Bidirectional single-mode Er-doped fiber-ring laser," *IEEE J. Sel. Top. Quantum Electron.*, vol. 8, no. 12, pp. 1624–1626, 1996.
- [64] Y. Cheng, J. T. Kringlebotn, W. H. Loh, R. I. Laming, and D. N. Payne, "Stable single-frequency traveling-wave fiber loop laser with integral saturable-absorber-based tracking narrow-band filter," *Opt. Lett.*, vol. 20, no. 8, pp. 875–877, 1995.
- [65] G. K. P. Lei, L. T. Lim, and M. E. Marhic, "Continuous-wave fiber optical parametric oscillator with sub-MHz linewidth," *Opt. Commun.*, vol. 306, pp. 17–20, Oct. 2013.
- [66] L. Rodríguez-Cobo, M. A. Quintela, S. Rota-Rodrigo, M. López-Amo, and J. M. López-Higuera, "Single-longitudinal mode laser structure based on a very narrow filtering technique.," *Opt. Express*, vol. 21, no. 8, pp. 10289–10294, Apr. 2013.
- [67] X. P. Cheng, P. Shum, C. H. Tse, J. L. Zhou, M. Tang, W. C. Tan, R. F. Wu, and J. Zhang, "Single-Longitudinal-Mode Erbium-Doped Fiber Ring Laser Based on High Finesse Fiber Bragg Grating Fabry–Perot Etalon," *IEEE Photonics Technol. Lett.*, vol. 20, no. 12, pp. 976–978, Jun. 2008.
- [68] T. Pfau, S. Hoffmann, O. Adamczyk, R. Peveling, V. Herath, M. Porrmann, and R. Noé, "Coherent optical communication: Towards realtime systems at 40 Gbit/s and beyond," *Opt. Express*, vol. 16, no. 2, pp. 866–872, 2008.
- [69] J. Mes, M. Leblans, and W. Hogervorst, "Single-longitudinal-mode optical parametric oscillator for spectroscopic applications," *Opt. Lett.*, vol. 27, no. 16, pp. 1442–1444, 2002.
- [70] L. M. Little, K. J. Beernink, G. C. Papen, and J. J. Coleman, "Performance characteristics of a narrow-linewidth distributed-Bragg reflector laser for optical remote sensing systems," *IEEE Photonics Technol. Lett.*, vol. 8, no. 10, pp. 1302–1304, Oct. 1996.
- [71] J. Geng, S. Staines, Z. Wang, J. Zong, M. Blake, and S. Jiang, "Highly Stable Low-Noise Brillouin Fiber Laser With Ultranarrow Spectral Linewidth," *IEEE Photon. Technol. Lett.*, vol. 18, no. 17, pp. 1813–1815, 2006.
- [72] C. Spiegelberg, J. Geng, Y. Hu, Y. Kaneda, S. Jiang, and N. Peyghambarian, "Low-Noise Narrow-Linewidth Fiber Laser at 1550 nm," *J. Light. Technol.*, vol. 22, no. 1, pp. 57–62, 2004.

- [73] S. Camatel and V. Ferrero, "Narrow Linewidth CW Laser Phase Noise Characterization Methods for Coherent Transmission System Applications," *J. Light. Technol.*, vol. 26, no. 17, pp. 3048–3055, 2008.
- [74] O. Llopis, P. Merrer, H. Brahim, K. Saleh, and P. L. Phase, "Phase noise measurement of a narrow linewidth CW laser using delay lines approaches," *Opt. Lett.*, vol. 36, no. 14, pp. 2713–2715, 2011.
- [75] A. H. Ali and S. N. Abdul-wahid, "Analysis of Self-Homodyne and Delayed Self-Heterodyne Detections for Tunable Laser Source Linewidth Measurements," *IOSR J. Eng.*, vol. 2, no. 10, pp. 1–6, 2012.
- [76] P. Horak and W. H. Loh, "On the delayed self-heterodyne interferometric technique for determining the linewidth of fiber lasers," *Opt. Express*, vol. 14, no. 9, pp. 3923–3928, 2006.
- [77] L. Richter, H. Mandelberg, M. Kruger, and P. McGrath, "Linewidth determination from self-heterodyne measurements with subcoherence delay times," *IEEE J. Quantum Electron.*, vol. 22, no. 11, pp. 2070–2074, Nov. 1986.
- [78] H. Tsuchida, "Simple technique for improving the resolution of the delayed self-heterodyne method," *Opt. Lett.*, vol. 15, no. 11, pp. 640–642, 1990.
- [79] S. A. Havstad, Y. Xie, A. B. Sahin, Z. Pan, A. E. Willner, and B. Fischer, "Delayed self-heterodyne interferometer measurements of narrow linewidth fiber lasers," *CLEO 2000*, 2000, pp. 310–311.
- [80] A. H. Ali, "Simultaneous Measurements for Tunable Laser Source Linewidth with Homodyne Detection," *Comput. Inf. Sci.*, vol. 4, no. 4, pp. 138–144, Jun. 2011.
- [81] I. Breunig, D. Haertle, and K. Buse, "Continuous-wave optical parametric oscillators: recent developments and prospects," *Appl. Phys. B*, vol. 105, no. 1, pp. 99–111, Sep. 2011.
- [82] M. E. Marhic, K. K.-Y. Wong, L. G. Kazovsky, and T.-E. Tsai, "Continuous-wave fiber optical parametric oscillator," *Opt. Lett.*, vol. 27, no. 16, pp. 1439–1441, Aug. 2002.
- [83] C. J. S. De Matos, J. R. Taylor, and K. P. Hansen, "Continuous-wave , totally fiber integrated optical parametric oscillator using holey fiber," *Opt. Lett.*, vol. 29, no. 9, pp. 983–985, 2004.
- [84] R. Malik and M. E. Marhic, "Narrow-linewidth tunable continuous-wave fiber optical parametric oscillator with 1 W output power," *ECOC 2010*, pp. 1–3, Sep. 2010.

- [85] M. Ebrahimzadeh and M. H. Dunn, *Optical parametric oscillators*. New York: McGraw Hill, 2001.
- [86] J. Li, S. Member, T. Huang, L. R. Chen, and S. Member, "A Comprehensive Study of Actively Mode-Locked Fiber Optical Parametric Oscillators for High-Speed Pulse Generation," *J. Light. Technol.*, vol. 31, no. 7, pp. 1120–1131, 2013.
- [87] S. Yang, K. K. Y. Cheung, Y. Zhou, and K. K. Y. Wong, "Tunable single-longitudinal-mode fiber optical parametric oscillator," *Opt. Lett.*, vol. 35, no. 4, pp. 481–483, Feb. 2010.
- [88] F. C. Commission, R. Mitra, Y. Z. Yin, S. G. Zhou, Q. Z. Liu, M. N. Azarmanesh, M. Sreenivasan, G. R. Dadashzadeh, D. Z. Kim, K. J. Kim, J. W. Yu, A. Chousseaud, S. Toutain, B. Sun, K. Hu, D. Chen, Y. Wei, H. Chen, and S. Gao, "Wavelength-spacing tunable multiwavelength fiber optical parametric oscillator," *Microw. Opt. Technol. Lett.*, vol. 54, no. 10, pp. 2405–2408, 2012.
- [89] T. Torounidis, P. A. Andrekson, and B. Olsson, "Fiber-optical parametric amplifier with 70-dB gain," *IEEE Photonics Technol. Lett.*, vol. 18, no. 10, pp. 1194–1196, 2006.
- [90] T. Torounidis and P. Andrekson, "Broadband Single-Pumped Fiber-Optic Parametric Amplifiers," *Photonics Technol. Lett. IEEE*, vol. 19, no. 9, pp. 650–652, May 2007.
- [91] R. Malik and M. E. Marhic, "Continuous Wave Fiber Optical Parametric Oscillator with 254 nm Tuning Range," *ECOC 2010*, p. MD1, Sep. 2010.
- [92] S. Radic, C. J. McKinstrie, R. M. Jopson, J. C. Centanni, Q. Lin, and G. P. Agrawal, "Record performance of parametric amplifier constructed with highly nonlinear fibre," *Electron. Lett.*, vol. 39, no. 11, p. 838, May 2003.
- [93] M. Hirano, T. Nakanishi, T. Okuno, and M. Onishi, "Silica-Based Highly Nonlinear Fibers and Their Application," *IEEE J. Sel. Top. Quantum Electron.*, vol. 15, no. 1, pp. 103–113, 2009.
- [94] M. Onishi, T. Okuno, T. Kashiwada, S. Ishikawa, N. Akasaka, and M. Nishimura, "Highly nonlinear dispersion shifted fiber and its application to broadband wavelength converter," *ECOC 1997*, vol. 2, pp. 115–118, 1997.
- [95] S. Watanabe, "Optical signal processing using nonlinear fibers," *J. Opt. Fiber Commun. Reports*, vol. 3, no. 1, pp. 1–24, Dec. 2005.

- [96] N. G. R. Broderick, T. M. Monro, P. J. Bennett, and D. J. Richardson, "Nonlinearity in holey optical fibers: measurement and future opportunities," *Opt. Express*, vol. 24, no. 20, pp. 1395–1397, 1999.
- [97] V. Tombelaine, A. Labruyère, J. Kobelke, K. Schuster, V. Reichel, P. Leproux, V. Couderc, R. Jamier, and H. Bartelt, "Nonlinear photonic crystal fiber with a structured multi-component glass core for four-wave mixing and supercontinuum generation.," *Opt. Express*, vol. 17, no. 18, pp. 15392–401, Aug. 2009.
- [98] P. Petropoulos, S. Asimakis, V. Finazzi, R. C. Moore, K. Frampton, F. Koizumi, D. J. Richardson, and T. M. Monro, "Bismuth glass holey fibers with high nonlinearity," *Opt. Express*, vol. 12, no. 21, pp. 5082–5087, 2004.
- [99] N. Sugimoto, T. Hasegawa, T. Nagashima, and S. Ohara, "Nonlinearity and Dispersion Characteristics of Bismuth-Based Highly Nonlinear Fiber," *Frontiers in Optics 2007*, 2007, p. FThS2.
- [100] J. H. Lee, T. Tanemura, and K. Kikuchi, "Experimental comparison of a Kerr nonlinearity figure of merit including the stimulated Brillouin scattering threshold for state-of-the-art nonlinear optical fibers," *Opt. Express*, vol. 30, no. 13, pp. 1698–1700, 2005.
- [101] J. Hansryd, P. A. Andrekson, M. Westlund, J. Li, and P. Hedekvist, "Fiber-based optical parametric amplifiers and their applications," *IEEE J. Sel. Top. Quantum Electron.*, vol. 8, no. 3, pp. 506–520, 2002.
- [102] R. H. Stolen and J. E. Bjorkholm, "Parametric amplification and frequency conversion in optical fibers," *IEEE J. Quantum Electron.*, vol. 18, no. 7, pp. 1062–1072, 1982.
- [103] M. E. Marhic, K. K. Wong, and L. G. Kazovsky, "Wide-Band Tuning of the Gain Spectra of One-Pump Fiber Optical Parametric Amplifiers," *IEEE J. Sel. Top. Quantum Electron.*, vol. 10, pp. 1133–1141, 2004.
- [104] T. Torounidis, M. Karlsson, and P. A. Andrekson, "Fiber Optical Parametric Amplifier Pulse Source: Theory and Experiments," *J. Light. Technol.*, vol. 23, no. 12, p. 4067, Dec. 2005.
- [105] T. Kato, Y. Suetsugu, M. Takagi, E. Sasaoka, and M. Nishimura, "Measurement of the nonlinear refractive index in optical fiber by the cross-phase-modulation method with depolarized pump light," *Opt. Lett.*, vol. 20, no. 9, p. 988, May 1995.
- [106] L. Thevenaz, J.-P. Pellaux, and J.-P. Von der Weid, "All-fiber interferometer for chromatic dispersion measurements," *J. Light. Technol.*, vol. 6, no. 1, pp. 1–7, 1988.

- [107] M. Karlsson, "Four-wave mixing in fibers with randomly varying zero-dispersion wavelength," *J. Opt. Soc. Am. B*, vol. 15, no. 8, pp. 2269–2275, 1998.
- [108] J. P. Gordon and H. Kogelnik, "PMD fundamentals: polarization mode dispersion in optical fibers.," *Proc. Natl. Acad. Sci. U. S. A.*, vol. 97, no. 9, pp. 4541–50, Apr. 2000.
- [109] A. Kobayakov, M. Sauer, and D. Chowdhury, "Stimulated Brillouin scattering in optical fibers," *Adv. Opt. Photonics*, vol. 2, no. 1, p. 1, Dec. 2009.
- [110] Y. Aoki, K. Tajima, and I. Mito, "Input power limits of single-mode optical fibers due to stimulated Brillouin scattering in optical communication systems," *J. Light. Technol.*, vol. 6, no. 5, pp. 710–719, May 1988.
- [111] T. Kurashima, T. Horiguchi, and M. Tateda, "Suppression of stimulated Brillouin scattering in a fibre by changing the core radius," *IEE Electron. Lett.*, vol. 31(8), pp. 668–669, 1995.
- [112] K. Shiraki, M. Ohashi, and M. Tateda, "SBS threshold of a fiber with a Brillouin frequency shift distribution," *J. Light. Technol.*, vol. 14, no. 1, pp. 50–57, 1996.
- [113] J. M. C. Boggio, J. D. Marconi, and H. L. Fragnito, "Experimental and Numerical Investigation of the SBS-Threshold Increase in an Optical Fiber by Applying Strain Distributions," *J. Light. Technol.*, vol. 23, no. 11, pp. 3808–3814, 2005.
- [114] J. D. Marconi, J. M. C. Boggio, and H. L. Fragnito, "Narrow linewidth fibre-optical wavelength converter with strain suppression of SBS," *Electron. Lett.*, vol. 40, no. 19, pp. 1213–1214, 2004.
- [115] J. D. Marconi, J. M. C. Boggio, and H. L. Fragnito, "7.3 dB increase of the SBS threshold in an optical fiber by applying a strain distribution," *OFC 2004*, 2004, vol. 1, p. MF12.
- [116] Y. Imai and N. Shimada, "Dependence of stimulated Brillouin scattering on temperature distribution in polarization-maintaining fibers," *IEEE Photonics Technol. Lett.*, vol. 5, no. 11, pp. 1335–1337, Nov. 1993.
- [117] J. Hansryd, F. Dross, M. Westlund, P. A. Andrekson, and S. N. Knudsen, "Increase of the SBS threshold in a short highly nonlinear fiber by applying a temperature distribution," *J. Light. Technol.*, vol. 19, no. 11, pp. 1691–1697, 2001.

- [118] Y. Takushima and T. Okoshi, "Suppression of simulated Brillouin scattering using optical isolators," *Electron. Lett.*, vol. 28, no. 12, p. 1155, Jun. 1992.
- [119] M. Nikles, L. Thevenaz, and P. A. Robert, "Brillouin gain spectrum characterization in single-mode optical fibers," *J. Light. Technol.*, vol. 15, no. 10, pp. 1842–1851, 1997.
- [120] S. Radic, R. M. Jopson, C. J. McKinstrie, J. C. Centanni, and A. R. Chraplyvy, "Stimulated-Brillouin-scattering suppression using a single modulator in two-pump parametric architectures," *OFC 2005*, 2005, vol. 3, p. OWN5.
- [121] J. Hansryd and P. A. Andrekson, "Broad-Band Continuous-Wave-Pumped Fiber Optical Parametric Amplifier with 49-dB Gain and Wavelength-Conversion Efficiency," *IEEE Photonics Technol. Lett.*, vol. 13, no. 3, pp. 194–196, 2001.
- [122] K. K. Y. Wong, M. E. Marhic, and L. G. Kazovsky, "All-Optical Fiber Parametric Wavelength Converter Preserving Signal Spectrum," *ECOC 2002*, p. PD2.7, 2002.
- [123] K. K. Y. Wong, K. Shimizu, M. E. Marhic, K. Uesaka, G. Kalogerakis, and L. G. Kazovsky, "Continuous-wave fiber optical parametric wavelength converter with +40-dB conversion efficiency and a 3.8-dB noise figure," *Opt. Lett.*, vol. 28, no. 9, p. 692, May 2003.
- [124] J. V. S.K. Korotky, P. B. Hansen, L. Eskildsen, "Efficient phase modulation scheme for suppressing stimulated Brillouin scattering," *Dig. IOOC, Hong Kong*, no. WD2–1, 1995.
- [125] A. Flores, C. Robin, A. Lanari, and I. Dajani, "Pseudo-random binary sequence phase modulation for narrow linewidth, kilowatt, monolithic fiber amplifiers," *Opt. Express*, vol. 22, no. 15, pp. 17735–17744, 2014.
- [126] E. Lichtman, R. G. Waarts, and A. A. Friesem, "Stimulated Brillouin scattering excited by a modulated pump wave in single-mode fibers," *J. Light. Technol.*, vol. 7, no. 1, pp. 171–174, Jan. 1989.
- [127] H. K. Y. Cheung, R. W. L. Fung, P. P. Kuo, C. H. Kwok, and K. K. Y. Wong, "Effect of stimulated Raman scattering and optical parametric amplification on wavelength exchange," *TENCON 2006*, 2006, pp. 1–4.
- [128] J. B. Coles, B. P. Kuo, N. Alic, S. Moro, C. Bres, J. M. C. Boggio, P. A. Andrekson, M. Karlsson, and S. Radic, "Bandwidth-efficient phase modulation techniques for Stimulated Brillouin Scattering suppression in fiber optic parametric amplifiers," *Opt. Express*, vol. 18, no. 17, pp. 18138–18150, 2010.

- [129] J. Coles, "Advanced phase modulation techniques for stimulated Brillouin scattering suppression in fiber optic parametric amplifiers," *M.S thesis*, University of California, San Diego, 2009.
- [130] K. S. Yeo, "Nonlinear fiber optical parametric amplifiers and lasers with idler removal filter," *Phd thesis*, Universiti Putra Malaysia, 2013.
- [131] F. W. Willems, J. C. van der Plaats, and W. Muys, "Harmonic distortion caused by stimulated Brillouin scattering suppression in externally modulated lightwave AM-CATV systems," *Electron. Lett.*, vol. 30, no. 4, pp. 343–345, Feb. 1994.
- [132] A. Mussot, A. Durecu-Legrand, E. Lantz, C. Simonneau, D. Bayart, H. Maillotte, and T. Sylvestre, "Impact of Pump Phase Modulation on the Gain of Fiber Optical Parametric Amplifier," *IEEE Photonics Technol. Lett.*, vol. 16, no. 5, pp. 1289–1291, May 2004.
- [133] S. Radic, C. J. McKinstrie, R. M. Jopson, A. H. Gnauck, J. C. Centanni, and A. R. Chraplyvy, "Performance of Fiber Parametric-Processing Devices Using Binary-Phase-Shift-Keyed Pump Modulation," *IEEE Photonics Technol. Lett.*, vol. 16, no. 2, pp. 548–550, Feb. 2004.
- [134] J. M. Chavez Boggio, A. Guimarães, F. A. Callegari, J. D. Marconi, and H. L. Fragnito, "Q penalties due to pump phase modulation and pump RIN in fiber optic parametric amplifiers with non-uniform dispersion," *Opt. Commun.*, vol. 249, no. 4–6, pp. 451–472, May 2005.
- [135] N. Bloembergen and Y. Shen, "Coupling Between Vibrations and Light Waves in Raman Laser Media," *Phys. Rev. Lett.*, vol. 12, no. 18, pp. 504–507, May 1964.
- [136] K. J. Blow and D. Wood, "Theoretical description of transient stimulated Raman scattering in optical fibers," *IEEE J. Quantum Electron.*, vol. 25, no. 12, pp. 2665–2673, 1989.
- [137] S. Trillo and S. Wabnitz, "Parametric and Raman amplification in birefringent fibers," *J. Opt. Soc. Am. B*, vol. 9, no. 7, p. 1061, Jul. 1992.
- [138] E. A. Golovchenko, P. V. Mamyshev, A. N. Pilipetskii, and E. M. Dianov, "Mutual influence of the parametric effects and stimulated Raman scattering in optical fibers," *IEEE J. Quantum Electron.*, vol. 26, no. 10, pp. 1815–1820, 1990.
- [139] A. S. Y. Hsieh, G. K. L. Wong, S. G. Murdoch, S. Coen, F. Vanholsbeeck, R. Leonhardt, and J. D. Harvey, "Combined effect of Raman and parametric gain on single-pump parametric amplifiers," *Opt. Express*, vol. 15, no. 13, pp. 8104–8114, Jun. 2007.

- [140] F. Vanholsbeeck, P. Emplit, and S. Coen, "Complete experimental characterization of the influence of parametric four-wave mixing on stimulated Raman gain," *Opt. Lett.*, vol. 28, no. 20, p. 1960, Oct. 2003.
- [141] R. H. Stolen, J. P. Gordon, W. J. Tomlinson, and H. A. Haus, "Raman response function of silica-core fibers," *J. Opt. Soc. Am. B*, vol. 6, no. 6, pp. 1159–1166, Jun. 1989.
- [142] A. S. Y. Hsieh, S. G. Murdoch, S. Coen, R. Leonhardt, and J. D. Harvey, "Influence of Raman susceptibility on optical parametric amplification in optical fibers," *Opt. Lett.*, vol. 32, no. 5, pp. 521–523, Mar. 2007.
- [143] M.-C. Ho, K. Uesaka, M. Marhic, Y. Akasaka, and L. G. Kazovsky, "200-nm-bandwidth fiber optical amplifier combining parametric and Raman gain," *J. Light. Technol.*, vol. 19, no. 7, pp. 977–981, 2001.
- [144] K. Rottwitz, J. Bromage, A. J. Stentz, M. E. Lines, and H. Smith, "Scaling of the raman gain coefficient: applications to germanosilicate fibers," *J. Light. Technol.*, vol. 21, no. 7, pp. 1652–1662, Jul. 2003.
- [145] A. S. Y. Hsieh, S. G. Murdoch, S. Coen, R. Leonhardt, and J. D. Harvey, "Influence of Raman susceptibility on optical parametric amplification in optical fibers," *Opt. Lett.*, vol. 32, no. 5, pp. 521–523, Mar. 2007.
- [146] M. E. Marhic, K. K.-Y. Wong, L. G. Kazovsky, and T.-E. Tsai, "Continuous-wave fiber optical parametric oscillator," *Opt. Lett.*, vol. 27, no. 16, pp. 1439–1441, 2002.
- [147] Y. Q. Xu, S. G. Murdoch, R. Leonhardt, and J. D. Harvey, "Raman-assisted continuous-wave tunable all-fiber optical parametric oscillator," *J. Opt. Soc. Am. B*, vol. 26, no. 7, pp. 1351–1536, Jun. 2009.
- [148] A. Gershikov, E. Shumakher, A. Willinger, and G. Eisenstein, "Fiber parametric oscillator for the 2 μm wavelength range based on narrowband optical parametric amplification," *Opt. Lett.*, vol. 35, no. 19, pp. 3198–3200, Oct. 2010.
- [149] A. Gershikov and G. Eisenstein, "Narrowband phase sensitive fiber parametric amplifier," *Opt. Lett.*, vol. 37, no. 15, pp. 3204–3206, Aug. 2012.
- [150] A. E. H. Oehler, S. C. Zeller, K. J. Weingarten, and U. Keller, "Broad multiwavelength source with 50 GHz channel spacing for wavelength division multiplexing applications in the telecom C band.," *Opt. Lett.*, vol. 33, no. 18, pp. 2158–2160, Sep. 2008.
- [151] Y. Han, T. V. A. Tran, S. Kim, and S. B. Lee, "Multiwavelength Raman-fiber-laser-based long-distance remote sensor for simultaneous

- measurement of strain and temperature,” *Opt. Lett.*, vol. 30, no. 11, pp. 1282–1284, 2005.
- [152] Y. Yao, X. Chen, Y. Dai, and S. Xie, “Dual-Wavelength erbium-doped fiber laser with a simple linear cavity and its application in microwave generation,” *IEEE Photonics Technol. Lett.*, vol. 18, no. 1, pp. 2005–2007, 2006.
- [153] Y. Oki, S. Miyamoto, M. Maeda, and N. J. Vasa, “Multiwavelength distributed-feedback dye laser array and its application to spectroscopy,” *Opt. Lett.*, vol. 27, no. 14, pp. 1220–1222, Jul. 2002.
- [154] Z. Wang, H. Wu, M. Fan, Y. Li, Y. Gong, and Y. Rao, “Broadband flat-amplitude multiwavelength Brillouin-Raman fiber laser with spectral reshaping by Rayleigh scattering,” *Opt. Express*, vol. 21, no. 24, pp. 231–235, 2013.
- [155] N. A. Cholani, M. H. Al-Mansoori, A. S. M. Noor, A. Ismail, and M. A. Mahdi, “Multi-wavelength generation by self-seeded four-wave mixing,” *Opt. Express*, vol. 21, no. 5, pp. 6131–6138, Mar. 2013.
- [156] X. Liu, L. Zhan, S. Luo, Y. Wang, and Q. Shen, “Individually switchable and widely tunable multiwavelength erbium-doped fiber laser based on cascaded mismatching long-period fiber gratings,” *J. Light. Technol.*, vol. 29, no. 21, pp. 3319–3326, 2011.
- [157] X. Dong, P. Shum, N. Q. Ngo, and C. C. Chan, “Multiwavelength Raman fiber laser with a continuously-tunable spacing,” *Opt. Express*, vol. 14, no. 8, pp. 3288–3293, Apr. 2006.
- [158] D. Chen and B. Sun, “Multi-wavelength fiber optical parametric oscillator with ultra-narrow wavelength spacing,” *Opt. Express*, vol. 18, no. 17, pp. 18425–18430, Aug. 2010.
- [159] B. Sun, K. Hu, D. Chen, Y. Wei, S. Gao, and S. He, “Wavelength-Spacing-Tunable Double-Pumped Multiwavelength Optical Parametric Oscillator Based on a Mach–Zehnder Interferometer,” *J. Light. Technol.*, vol. 30, no. 12, pp. 1937–1942, Jun. 2012.
- [160] B. Sun, K. Hu, Y. Wei, D. Chen, S. Gao, T. Wang, and S. He, “Double-pumped multiwavelength fiber optical parametric oscillator based on a Sagnac loop filter,” *Opt. Lett.*, vol. 37, no. 1, pp. 106–108, Jan. 2012.
- [161] J. Li and L. R. Chen, “Tunable and reconfigurable multiwavelength fiber optical parametric oscillator with 25 GHz spacing,” *Opt. Lett.*, vol. 35, no. 11, pp. 1872–1874, Jun. 2010.

- [162] "Power of the pump at the lasing threshold." Available: http://www.optique-ingenieur.org/en/courses/OPI_ang_M01_C01/co/Contenu_25.html. [Accessed: 13-Apr-2016].
- [163] A. R. Chraplyvy, "Limitations on Lightwave Communications Imposed by Optical-Fiber Nonlinearities," *J. Light. Technol.*, vol. 8, no. 10, pp. 1548–1557, 1990.
- [164] N. Kishi and T. Yazaki, "Frequency Control of a Single-Frequency Fiber Laser by Cooperatively Induced Spatial-Hole Burning," *IEEE Photonics Technol. Lett.*, vol. 11, no. 2, pp. 182–184, 1999.
- [165] K. Zhang and J. U. Kang, "C-band wavelength-swept single-longitudinal mode erbium-doped fiber ring laser," *Opt. Express*, vol. 16, no. 18, pp. 14173–14179, 2008.
- [166] S. Yang, K. K. Y. Cheung, Y. Zhou, and K. K. Y. Wong, "Tunable single-longitudinal-mode fiber optical parametric oscillator," *Opt. Lett.*, vol. 35, no. 4, pp. 481–483, Feb. 2010.
- [167] J. Zhang, C. Yue, G. W. Schim, W. R. L. Clements, and J. W. Y. Lit, "Stable single-mode compound-ring erbium-doped fiber laser," *J. Light. Technol.*, vol. 14, pp. 104–109, 1996.
- [168] C. Lee and Y. Chen, "Single-longitudinal-mode fiber laser with a passive multiple-ring cavity and its application for video transmission," *Opt. Express*, vol. 23, no. 5, pp. 358–360, 1998.
- [169] C.-H. Yeh, M.-C. Lin, and S. Chi, "Stabilized and wavelength-tunable S-Band erbium-doped fiber ring laser with single-longitudinal-mode operation.," *Opt. Express*, vol. 13, no. 18, pp. 6828–6832, Sep. 2005.
- [170] Y. W. Song, S. A. Havstad, D. Starodubov, Y. Xie, A. E. Willner, and J. Feinberg, "40-nm-wide tunable fiber ring laser with single-mode operation using a highly stretchable FBG," *IEEE Photonics Technol. Lett.*, vol. 13, no. 11, pp. 1167–1169, Nov. 2001.
- [171] F. Zhang and J. W. Y. Lit, "Direct-coupling single-mode fiber ring resonator," *J. Opt. Soc. Am. A*, vol. 5, no. 8, pp. 1347–1355, 1988.
- [172] R. Paschotta, D. J. B. Brinck, S. G. Farwell, and D. C. Hanna, "Resonant loop mirror with narrow-band reflections and its application in single-frequency fiber lasers," *Appl. Opt.*, vol. 36, no. 3, p. 593, Jan. 1997.
- [173] J. L. Rivera, M. P. Sánchez, A. Miridonov, and S. Stepanov, "Adaptive Sagnac interferometer with dynamic population grating in saturable rare-earth-doped fiber," *Opt. Express*, vol. 21, no. 4, pp. 4280 – 4290, 2013.

- [174] S. Melle, O. G. Calderón, Z. C. Zhuo, M. A. Antón, and F. Carreño, "Dynamic population gratings in highly doped erbium fibers," *J. Opt. Soc. Am. B*, vol. 28, no. 7, pp. 1631–1637, 2011.
- [175] S. Stepanov, E. Hernández, P. Mégret, and A. Fotiadi, "Phase contribution to the dynamic population gratings recorded in rare-earth doped optical fibers," *OSA/OMD*, 2007.
- [176] Z. J. Chaboyer, P. J. Moore, and G. Das, "Medium power single-mode single-wavelength fiber laser," *Opt. Commun.*, vol. 282, no. 15, pp. 3100–3103, Aug. 2009.
- [177] J. Yang, R. Qu, G. Sun, J. Geng, H. Cai, and Z. Fang, "Suppression of mode competition in fiber lasers by using a saturable absorber and a fiber ring," *Chin. Opt. Lett.*, vol. 4, no. 7, pp. 410–412, 2006.
- [178] R. N. Liu, I. A. Kostko, R. Kashyap, K. Wu, and P. Kiiveri, "Inband-pumped, broadband bleaching of absorption and refractive index changes in erbium-doped fiber," *Opt. Commun.*, vol. 255, no. 1–3, pp. 65–71, Nov. 2005.
- [179] X. Fan, Z. He, Y. Mizuno, and K. Hotate, "Bandwidth-adjustable dynamic grating in erbium-doped fiber by synthesis of optical coherence function," *Opt. Express*, vol. 13, no. 15, pp. 5756–5761, 2005.
- [180] S. J. Frisken, "Transient Bragg reflection gratings in erbium-doped fiber amplifiers," *Opt. Lett.*, vol. 17, no. 24, pp. 1776–1778, Dec. 1992.
- [181] S. Pan and J. Yao, "A wavelength-switchable single-longitudinal-mode dual-wavelength erbium-doped fiber laser for switchable microwave generation," *Opt. Express*, vol. 17, no. 7, p. 5414, Mar. 2009.
- [182] J. Jung, H. Nam, J. H. Lee, N. Park, and B. Lee, "Simultaneous Measurement of Strain and Temperature by use of a Single-Fiber Bragg Grating and an Erbium-Doped Fiber Amplifier," *Appl. Opt.*, vol. 38, no. 13, pp. 2749–2751, May 1999.
- [183] H.-C. Chien, C.-H. Yeh, C.-C. Lee, and S. Chi, "A tunable and single-frequency S-band erbium fiber laser with saturable-absorber-based autotracking filter," *Opt. Commun.*, vol. 250, no. 1–3, pp. 163–167, Jun. 2005.
- [184] J. Liu, J. Yao, and T. H. Yeap, "Single-Longitudinal-Mode Multiwavelength Fiber Ring Laser," *IEEE Photonics Technol. Lett.*, vol. 16, no. 4, pp. 1020–1022, Apr. 2004.

LIST OF PUBLICATIONS

L.T. Lim, K. S. Yeo, M. H. Abu Bakar, N. Tamchek, F. R. Mahamd Adikan, and M. A. Mahdi, "Multiwavelength hybrid fiber Raman/parametric linear oscillator," *IEEE Photonics J.*, vol. 7, no. 4, 2015.

L. T. Lim, K. S. Yeo, M. H. Abu Bakar, N. Tamchek, and M. A. Mahdi, "Extended Nonlinear Parametric Process in Anomalously Pumped Linear Cavity Oscillator", *Optics Express*, Vol. 22, No.18, pp. 22190-22195, Sept. 2014.

