



**UNIVERSITI PUTRA MALAYSIA**

***HYBRID SUBCARRIER MULTIPLEXING SAC-OCDMA DEPLOYING  
MSCODE  
OVER FREE SPACE OPTICAL LINK FOR MALAYSIA WEATHER  
CONDITION***

**GHUSOON ABDULAMEER ERHAYEM AL-NASSAR**

**FK 2018 150**



**HYBRID SUBCARRIER MULTIPLEXING SAC-OCDMA DEPLOYING MS-CODE OVER FREE SPACE OPTICAL LINK FOR MALAYSIA WEATHER CONDITION**

By

**GHUSOON ABDULAMEER ERHAYEM AL-NASSAR**

**This thesis submitted to the School of Graduate Studies, University Putra Malaysia, in Fulfilment of the Requirement for the Degree of Master of Science**

**August 2018**

## **COPYRIGHT**

All material contained within the thesis, including without limitation text, logos, icons, photographs, and all other artwork, is copyright material of University Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of University Putra Malaysia.

Copyright © University Putra Malaysia



## DEDICATION

*This thesis is dedicated to my husband who has supported me in all my work.*



Abstract of the thesis presented to the Senate of University Putra Malaysia in fulfilment of the requirement for the Degree of Master of Science

**HYBRID SUBCARRIER MULTIPLEXING SAC-OCDMA DEPLOYING MS-CODE OVER FREE SPACE OPTICAL LINK FOR MALAYSIA WEATHER CONDITION**

By

**GHUSOON ABDULAMEER ERHAYEM**

**August 2018**

**Chairman : Makhfudzah Mokhtar, PhD**  
**Faculty : Engineering**

In recent years, free space optics (FSO) transmission systems are gradually being explored as alternatives to replace or to complement the available optical fibre and wired communication due to its low cost, ease of installation, higher data rate, larger bandwidth and licence-free installation.

As the aforementioned benefits come into the lime light, the large available bandwidth can essentially be benefited from, for multiple-user systems. Records have shown the effectiveness of a hybrid SCM-SAC-OCDMA in achieving greater capacity and enhanced security in FSO. Nevertheless, the available codes used suffered from many limitations such as dependency solely on prime numbers (as in the MQC code), code weight being limited to even numbers (as in the KS code) and rigid code construction as the number of users increases (as in the MD code).

The Multi-Service (MS) code has the advantage of flexibility and being dynamic as any number of code weights can be constructed without altering the wavelength of the existing light source. The code equally benefits from short length and sparsely located chips which could prevent cross-talk and hence could improve the performance of the system. Therefore, this research aims at investigating and improving multi-user FSO systems by proposing a hybrid subcarrier multiplexing SAC-OCDMA technique using the MS code with direct decoding technique. The performance are observed under different weather conditions which include clear, rain, and haze with Malaysia as a case study.

The investigation began by analysing the proposed system in mathematical modelling (using MATLAB) and simulation software (using OptiSystem) employing the Light Emitting Diode (LED) source. The subsequent works were then carried out using laser source as a result of the limitations in LED. The effects of increasing the number of code words as well as subcarriers at different distances and data rates were observed. The performance of the MS code based system was subsequently compared with KS, MD and MQC codes under clear, rainy and hazy weather conditions. Finally, the performances of the MS code under different angles of beam divergence and types of noise were evaluated based on bit error rate (BER), received power, eye diagram, and transmission distance.

At the bit rate of 1 Gb/s and BER threshold of  $10^{-9}$ , heavy rain in the proposed system indicated the worse performance compared to clear weather and heavy haze as it reduced the transmission distance from 6.3 km (in clear weather) to 0.9 km. Nevertheless, under clear weather conditions with attenuation coefficient of 0.233 dB/km, the system designed using the MS code out-performed the KS, MD and MQC systems as it is capable of supporting up to 6.3 km, which is 0.8 km, 0.9 km and 1.5 km farther than KS, MD and MQC codes respectively in six-user channels. In conclusion, this study has provided a means of improving FSO communication which suits the weather conditions in Malaysia and other tropical zones.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**HIBRID PEMULTIPLEKSAN SUBPEMBAWA SAC-OCDMA  
MENGUNAKAN KOD-MS BAGI PAUTAN OPTIK RUANG BEBAS UNTUK  
KEADAAN CUACA MALAYSIA**

Oleh

**GHUSOON ABDULAMEER ERHAYEM**

**Ogos 2018**

**Pengerusi : Makhfudzah Mokhtar , PhD**  
**Fakulti : Kejuruteraan**

Pada tahun-tahun kebelakangan ini, sistem penghantaran optik ruang bebas (FSO) secara beransur-ansur sedang dikaji sebagai alternatif untuk menggantikan atau melengkapkan komunikasi gentian optik dan berwayar sedia ada kerana kosnya yang rendah, kemudahan pemasangan, kadar data yang lebih tinggi, lebar jalur yang lebih besar dan pemasangan bebas-lesen.

Apabila faedah-faedah yang dinyatakan di atas menjadi lebih dikenali, lebar jalur yang besar boleh dimanfaatkan, untuk sistem berbilang-pengguna. Rekod-rekod telah membuktikan keberkesanan hibrid SCM-SAC-OCDMA dalam mencapai kapasiti yang lebih tinggi dan peningkatan keselamatan di dalam FSO. Walau bagaimanapun, kod sedia ada yang digunakan mengalami banyak batasan seperti kebergantungan semata-mata pada nombor perdana (seperti dalam kod MQC), berat kod terhad kepada nombor genap (seperti dalam kod KS) dan pembinaan kod yang tegar apabila bilangan pengguna meningkat (seperti dalam kod MD).

Kod Multi-Perkhidmatan (MS) mempunyai kelebihan kefleksibelan dan bersifat dinamik kerana sejumlah mana juga pemberat kod boleh dibina tanpa mengubah panjang gelombang sumber cahaya yang sedia ada. Kod tersebut sama-sama berfaedah dari kepanjangan kod yang pendek dan cip yang terletak dengan jarang yang boleh mencegah percakapan-silang dan oleh itu boleh memperbaiki prestasi sistem. Oleh itu, kajian ini bertujuan untuk mengkaji dan menambah baik sistem berbilang-pengguna FSO dengan mencadangkan teknik hibrid subpembawa pemultipleksan SAC-OCDMA menggunakan kod MS dengan teknik penyahkodan langsung. Prestasi ini diperhatikan

di bawah keadaan cuaca yang berbeza yang merangkumi cuaca cerah, hujan dan jerebu dengan Malaysia sebagai kajian kes.

Penyiasatan bermula dengan menganalisis sistem yang dicadangkan dari segi pemodelan matematik (menggunakan MATLAB) dan perisian simulasi (menggunakan OptiSystem) yang menggunakan sumber Diod Pancaran Cahaya (LED). Kerja-kerja seterusnya kemudian dijalankan menggunakan sumber laser berikutan daripada batasan LED. Kesan peningkatan bilangan perkataan kod serta subpembawa pada jarak dan kadar data yang berbeza diperhatikan. Prestasi sistem berasaskan kod MS kemudiannya dibandingkan dengan kod KS, MD dan MQC di bawah keadaan cuaca cerah, hujan dan jerebu. Akhirnya, prestasi kod MS di bawah sudut pencapahan alur dan jenis hingar yang berbeza dinilai berdasarkan kadar ralat bit (BER), kuasa yang diterima, gambar rajah mata, dan jarak penghantaran.

Pada kadar bit 1 Gb/s dan ambang BER  $10^{-9}$ , hujan lebat bagi sistem yang dicadangkan menunjukkan prestasi yang lebih teruk berbanding cuaca yang cerah dan jerebu tebal kerana ia mengurangkan jarak penghantaran dari 6.3 km (dalam cuaca yang cerah) hingga 0.9 km.

Walau bagaimanapun, di bawah keadaan cuaca yang cerah dan pekali pelemahan 0.233 dB/km, sistem yang direka menggunakan kod MS mengatasi prestasi sistem KS, MD dan MQC kerana ia mampu menyokong sehingga 6.3 km, iaitu 0.8 km, 0.9 km dan 1.5 km lebih jauh daripada kod KS, MD dan MQC masing-masing dalam saluran enam-pengguna. Sebagai kesimpulan, kajian ini telah menyediakan satu cara untuk meningkatkan komunikasi FSO yang sesuai dengan keadaan cuaca di Malaysia dan zon tropika lain.



## ACKNOWLEDGEMENTS

In the name of Allah the most beneficent the most merciful

I would like to express my deepest thanks and gratitude to my supervisor Dr Makhfudzah Mokhtar for her guidance, suggestions, and encouragement throughout this work. I have benefited from her deep knowledge and instructions on research. Without her support and help, this work would not have been finished.

I would like to convey thanks and gratitude to my co-supervisor Assoc. Prof. Dr Siti Barirah Anas for her support, help and guidance on this research. I would also like to extend my thanks to all the academic and administrative staff of University Putra Malaysia for their help. Thanks and gratitude are extended to all my friends and colleagues for their support.

Finally, I am deeply grateful to my husband for his valuable help and great support that he provided during my study. Also, I would like to thank my friend Taiwo Ambali for his guidance and help in all my work. Express my deepest thanks and gratitude to my mother and my father for their unconditional love, encouragement, and support for me. May Almighty Allah give them long life, performance health and increase them in taqwa.

**Ghusoon Abdulameer Erhayem**

I certify that a Thesis Examination Committee has met on 27 August 2018 to conduct the final examination of Ghusoon Abdulameer Erhayem Al-Nassar on her thesis entitled "Hybrid Subcarrier Multiplexing SAC-OCDMA Deploying MS-Code Over Free Space Optical Link for Malaysia Weather Condition" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

**Mohd Hanif bin Yaacob, PhD**

Senior Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Ratna Kalos Zakiah bt Sahbudin, PhD**

Senior Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Norhana Arsad, PhD**

Associate Professor Ir.  
Universiti Kebangsaan Malaysia  
Malaysia  
(External Examiner)



**RUSLI HAJI ABDULLAH, PhD**

Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 27 September 2018

This thesis was submitted to the Senate of University Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

**Makhfudzah Mokhtar, PhD**

Senior Lecturer  
Faculty of Engineering  
University Putra Malaysia  
(Chairman)

**Siti Barirah Ahmad Anas, PhD**

Associate Professor  
Faculty of Engineering  
University Putra Malaysia  
(Member)

---

**ROBIAH BINTI YUNUS, PhD**

Professor and Dean  
School of Graduate Studies  
University Putra Malaysia

Date:

### Declaration by Graduate Student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Name and Matric No.: Ghusoon Abdulameer Erhayem Al-Nassar (GS43288)

### Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the University Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) were adhered to.

Signature: \_\_\_\_\_  
Name of  
Chairman of  
Supervisory  
Committee: \_\_\_\_\_

Signature: \_\_\_\_\_  
Name of  
Member of  
Supervisory  
Committee: \_\_\_\_\_

## TABLE OF CONTENTS

	<b>Page</b>
<b>ABSTRACT</b>	i
<b>ABSTRAK</b>	iii
<b>ACKNOWLEDGEMENTS</b>	v
<b>APPROVAL</b>	vi
<b>DECLARATION</b>	viii
<b>TABLE OF CONTENTS</b>	x
<b>LIST OF TABLES</b>	xiii
<b>LIST OF FIGURES</b>	xiv
<b>LIST OF ABBREVIATIONS</b>	xvi
 <b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	<b>1</b>
1.1 Background	1
1.2 Problem Statement	2
1.3 Research Objectives	3
1.4 Significance of Study	3
1.5 Scope of Study	4
1.6 Thesis Outline	6
 <b>2 LITERATURE REVIEW</b>	 <b>7</b>
2.1 Introduction	7
2.2 FSO System Overview	7
2.3 Free Space Optics Transmission Segment Parts	9
2.3.1 FSO Transmitter	10
2.3.2 FSO Receiver	11
2.4 Transmission Distance	13
2.5 Weather Conditions	13
2.5.1 Fog	14
2.5.2 Rain	14
2.5.3 Haze	14
2.5.4 Snow	15
2.6 Multiplexing and Multiple Access Techniques	15
2.6.1 Optical Coding Division Multiple Access (OCDMA)	15
2.6.2 Wavelength Division Multiplexing / Wavelength Division Multiple Access (WDM / WDMA)	16
2.6.3 Subcarrier Multiplexing (SCM)	17
2.7 Some codes in SAC-OCDMA	19
2.7.1 KS Code	19
2.7.2 MQC Code	21
2.7.3 MD Code	22
2.7.4 MS Code	22
2.8 Hybrid SCM SAC-OCDMA	25
2.9 Summary	27
 <b>3 METHODOLOGY</b>	 <b>29</b>
3.1 Introduction	29

3.2	Methodology	29
3.3	Component Description	30
3.3.1	Light Source	30
3.3.2	Encoding and Decoding	31
3.3.3	FSO Link	31
3.3.4	Transmitted Power	32
3.3.5	Data Rate	32
3.3.6	Photodetector	32
3.3.7	Eye Opening Patterns	32
3.4	Mathematical Model of the Hybrid SCM-SAC-OCDMA System Based on FSO.	32
3.5	Simulation Setup	39
3.5.1	Simulation Setup Using LED	40
3.5.2	Simulation Setup Using Laser	42
3.6	Summary	44
<b>4</b>	<b>RESULT AND DISCUSSIONS</b>	<b>45</b>
4.1	Introduction	45
4.2	Comparison of LED in Mathematics and Simulation Model	45
4.3	Comparison of MS Code Performance at Different Codes and Subcarriers for 6 Users under Clear Weather Condition using Laser Source	46
4.4	Comparison of MS Code Performance at Different Number of Codes under Clear Weather Condition using Laser at 1Gb/s	47
4.5	Comparison of MS Code Performance at Different Number of Subcarriers under Clear Weather Condition	48
4.6	Comparison between Hybrid SCM-OCDM using MS Code and Other Codes under Clear Weather Conditions at 1Gbps	59
4.7	Comparison between Hybrid SCM-OCDM using MS Code and Other Codes under heavy haze Conditions	51
4.8	Comparison between Hybrid SCM-OCDM using MS Code and Other Codes under Heavy Rain	53
4.9	Performance of MS code at Difference Bit Rate	56
4.10	Implementation of the MS Codes over Different Weather Conditions	57
4.11	Effect of Noise on the Hybrid SCM-SAC-OCDMA FSO System	58
4.12	Effect of Beam Divergence Angle on the Hybrid SCM-SAC-OCDMA FSO System	59
4.13	Received Optical Power versus Transmission Distance	59
4.14	Summary	61

<b>5</b>	<b>CONCLUSION AND FUTURE WORKS</b>	62
5.1	Introduction	62
5.2	Conclusion	62
5.3	Recommendations	63
5.4	Contribution to Research Field	63
	<b>REFERENCES</b>	65
	<b>BIODATA OF STUDENT</b>	72
	<b>LIST OF PUBLICATIONS</b>	73





## LIST OF TABLES

Table	Page
2.1 Comparison between multiplexing / multiple access technique	19
2.2 Comparison of advantages and disadvantages of existing works	28
3.1 Code configuration for each code	31
3.2 Typical parameters for both setups using LED and laser and mathematical modeling	38
3.3 Wavelength assignment corresponding to code configuration listed on Table 3.1	39
3.4 Attenuation value for all weather condition	39
4.1 Comparison of the supported distance in the four codes at BER $10^{-9}$	55
4.2 Total received power in MS, MQC and KS codes	60

## LIST OF FIGURES

Figure	Page
1.1 Theoretical framework of the research and scope of work	5
2.1 FSO transmitter block diagram	8
2.2 Block diagram of FSO transmitter	10
2.3 FSO receiver block diagram	12
2.4 Resource sharing based on WDMA technology	16
2.5 Block diagram of Hybrid Subcarrier multiplexing in FSO	18
2.6 Performance of hybrid SCM-SAC-OCDMA based on FSO	20
2.7 Construction of KS Code Basic Matrix for $W=4$	26
3.1 Framework for the proposed methodology	30
3.2 Power spectral density of the received signal $r(v)$	35
3.3 Block diagram using LED	40
3.4 (a) Transmitter of the simulation setup using LED	41
3.4 (b) System setup in Receiver side	41
3.4 (c) Source using in LED with filter	41
3.5 Block diagram using Laser	42
3.6 (a) System setup in Transmitter side using laser source	42
3.6 (b) System setup in Receiver side using laser source	43

4.1	Comparison between simulation and mathematics using LED source	46
4.2	Comparison of MS code under different number of codes and different subcarriers	47
4.3	Comparison of MS code under different number of code and same number of subcarrier	48
4.4	Comparison of MS code at the same number of codes but different subcarriers	49
4.5	Comparison of MS, KS, MD and MQC code under clear weather conditions	50
4.6	Eye diagrams under clear weather condition at 6.3 km with (A) MS code at BER of $10^{-9}$ (B) KS code at BER of $10^{-7}$ (C) MD code at BER of $10^{-6}$ (D) MQC code at BER of $10^{-4}$	51
4.7	Comparison of MS, KS, MQC and MD code under heavy haze condition.	52
4.8	Eye diagrams under heavy haze at 3.2 km with (A) MS code at BER of $10^{-9}$ (B) KS code at BER of $10^{-7}$ and (C) MD code at BER of $10^{-5}$ (D) MQC code at BER of $10^0$	53
4.9	Comparison of MS, KS, MQC and MD code under	54
4.10	Eye diagrams under heavy rain with 0.9 a km (a) MS code at BER of $10^{-9}$ (b) KS code at BER of $10^{-6}$ nd (c) MD code at BER of $10^{-4}$ (D) MQC code at BER of $10^0$ .	55
4.11	Performance of MS code in varying transmission distance deploying several bit rates.	56
4.12	Implementation of the MS codes over different weather conditions with laser source.	57
4.13	Different types of noise on the hybrid SCM-SAC-OCDMA FSO System of MS code in clear weather condition.	58
4.14	Effect of beam divergence on the hybrid SCM-SAC-OCDMA FSO system for MS code in clear weather condition.	59
4.15	Total power received versus transmission distance at a bit rate of 1Gbps with clear weather condition for all codes.	60

## LIST OF ABBREVIATIONS

FSO	Free Space Optics
RF	Radio frequency
BER	Bit Error Rate
CDMA	Code Division Multiple Access
FBG	Fiber Bragg Grating
Gbps	Gigabit per second
Mbps	Mega bit per second
bps	Bit per second
Hz	Hertz
mrad	mili radian
LED	Light Emitting Diode
KS	Khazani Syed
MQC	Modified Quadratic Congruence
MS	Multi-Service
MD	Multi Diagonal
MZM	Mach-Zehnder Modulator
NRZ	Non-Return to Zero
OCDM	Optical Code Division Multiplexing
OCDMA	Optical Code Division Multiple Access
QoS	Quality of Service
SAC	Spectral Amplitude Coding
WDMA	Wavelength Division Multiple Access
TDMA	Time Division Multiplexing Access
BPF	Band Pass Filter
LoS	Line of Sight
MAI	Multiple Access Interference
PD	Photo-detector

SCM	Subcarrier multiplexing
SNR	Signal to noise ratio
PT	Transmitter power
PSD	Power spectral density
LPF	Low pass filter
APD	Avalanche Photodiodes
FCC	Federal Communications Commission'
DD	Direct Detection
OOC	Optical Orthogonal code
EM	Electromagnetic interference
VCSEL	Vertical cavity surface emitting laser
UHF	Ultra high frequency
API	Air Pollution Index
SLD	Super Luminescent Diode
DW	Double Weight
MDW	Modified Double Weight

## CHAPTER 1

### INTRODUCTION

#### 1.1 Background

Records have shown that various telecommunication media have been employed for efficient delivery of information between two or more communicating ends. Such media include physical cabling such as twisted pair cable, coaxial cable and fibre optics. Others are broadcast based technology, which include microwaves, satellite, radio and Free Space Optics (FSO) [1][2]. A number of literatures have identified the various challenges in copper-based technology, comprising twisted pair cable and coaxial cable [3][4]. These challenges include bandwidth limitation and high signal loss [3][5]. The latter is caused by incessant increase in inductive loss due to increasing electrical signal frequency that emanates whenever large amount of information is being transmitted [6]. Fibre optics cable has been proven to be one of the best communication technologies due to the various advantages it has over other links such as low attenuation, high speed and large bandwidth, high resistant to shock and its immunity to electromagnetic interference. Despite its numerous benefits, fibre optics is extremely expensive to deploy because; digging trenches in every street to lay fibre optic cables is exceptionally costly [7].

Due to the fact that installing copper and fibre optics require high cost and sometimes complicated configuration, medium in space, often referred to as broadcast communication, is preferred in many communication systems. This type of communication can be categorized into radio frequency (RF) communication, and optical wireless communication (OWC). The RF communications make use of frequency ranges in the radio wave spectrum, and are usually deployed in mobile, AM/FM radio, television transmission, radar, satellite and space communications. Although most of existing RF communication system technologies are full-fledged technologies, they have limited data transmission rates, require FCC licenses, and are expensive to implement compared to other technologies [8].

On the other hand, the OWC make use of optical spectrum in which unguided visible, infrared (IR), or ultraviolet (UV) light are exploited as signal carrier [9]. The OWC systems operating in the visible band (390–750 nm) are commonly referred to as visible light communication (VLC) [9][10]. In VLC systems, light emitting diodes (LEDs) are employed in various applications including wireless local area networks (WLAN), and wireless personal area networks (WPAN). Free space optics (FSO) system is a point-to-point terrestrial type of OWC system, operating at the near IR frequencies (750–1600 nm) [10][11]. FSO requires light, which can be focused by using either light emitting diodes (LEDs) or lasers (light amplification by stimulated emission of radiation). Lasers are deployed often to provide high data rates and as well as being a potential solution for the backhaul bottleneck [12]. While FSO

system has been widely used, VLC system is also catching up for wider communication application [13][14]. In addition, a growing research on ultraviolet communication (UVC) operating within solar-blind UV spectrum (200–280 nm) has emerged due to recent development in solid state optical sources and detectors [10][11][15].

This research focuses on FSO systems, which are gradually being explored as an alternative to complement the available fibre optics and wired communication, due to its low cost and ease of installation. FSO communication can transmit large amounts of data at higher transmission speeds of up to 2.5 Gbps. Its average cost is about one-fifth the cost of installing fibre optics cable system. Some other benefits of FSO system are licence-free installation, licence-free frequency band, low risk investment and fast revenue generation [11], [12][15].

As the demand for FSO systems is becoming more popular, it is essential to cope with the increasing bandwidth by increasing the available number of network users. Subsequently, there have been many multiplexing strategies used to transmit multiples signals in FSO system. Some of the techniques are Wavelength Division Multiplexing (WDM) [16], subcarrier multiplexing (SCM) [17][18] and Optical Code Division Multiplexing Access (OCDMA) [19]. Among several others, OCDMA provides not only a multiplexing strategy but also considers the transmission security of the information. When OCDMA is implemented with Spectral Amplitude Coding (SAC), it can help to eliminate MAI noise while maintaining low cost and having simple architecture via direct decoding technique [19] [20][21]. The SAC-OCDMA used in combination with subcarrier multiplexing (SCM) offers efficient management of the optical channel, as multiple data can be transmitted on the same optical path [22][23]–[25]. A number of codes have been developed for SAC-OCDMA based system. These include Optical Orthogonal code (OOC) [26], Khazani Syed Code (KS) [27], Hadamard code [28], Modified Quadratic Congruence code (MQC) [29] and Multi-Service (MS) code [30].

While analyzing the FSO system performance, it is important to identify some factors that affect the system behavior. These factors are considered as the signal challenges prior to the signal arrival at the receiver. Among them are misalignment errors, geometric losses, background noise, weather attenuation losses and atmospheric turbulence [31].

## 1.2 Problem Statement

As the demand for FSO increases, it is equally essential to utilize the bandwidth by increasing the available number of network users. Records have shown the effectiveness of sub-carrier multiplexing (SCM) in achieving greater capacity at low cost, while Spectral Amplitude Coding – Code Division Multiple Access (SAC-OCDMA) has also been introduced to offer more secured communication link at higher

capacity. By combining SCM with SAC-OCDMA, a greater capacity system with extended security have been achieved.

Nevertheless, the available codes used suffered from many limitations such as; dependency on prime number (as in MQC code), code weight limited to even number (as in KS code) and rigid code construction as the number of users increases (as in MD code).

Multi-Service (MS) code has advantage of flexibility and being dynamic as any number of code weights can be constructed without altering the wavelength of the existing light source. The code equally benefits from short length and sparsely located chips which could prevent cross talk and hence could improve the system performance. Other benefit is its ability to be implemented for different quality of service without manually altering the code structure. Therefore, application of the code in improving the performance of hybrid SCM SAC-OCDMA in FSO would therefore be investigated in this work.

### **1.3 Research Objectives**

The objectives of this research are:

- To investigate the suitability of MS-code with direct decoding technique in hybrid SCM SAC-OCDMA over FSO system using mathematical and simulation model.
- To compare the performance of MS-code in hybrid SCM SAC-OCDMA system with other SAC-OCDMA codes which are; KS, MD and MQC codes under clear, rain and hazy weather conditions.
- To evaluate the performance of MS-code in hybrid SCM SAC-OCDMA system at different angles of beam divergence and different types of noises.

### **1.4 Significance of Study**

This research aims at investigating and improving multi-user FSO systems by proposing a hybrid subcarrier multiplexing SAC-OCDMA technique using MS code with direct decoding technique. Multi-Service (MS) code has advantage of flexibility in choosing the code weight. More so, the code is dynamic as the number of users can be increased while still using the same range of light source frequency. As the proposed code has the advantage of having flexible and dynamics code weight, it is expected to preserve the use of existing technology with the development of current needs.



## 1.5 Scope of Study

Figure 1.1 shows the theoretical research framework and the scope of work. This work focuses on FSO communication using MS-code in hybrid SCM SAC-OCDMA under different weather conditions in Malaysia, which include clear, rain and haze at different attenuation coefficient. The suitable light source was explored for the implementation. In the work, mathematical analyses has been carried out by using MATLAB® while simulations was done on Optisys® software. The mathematical modelling and simulation setup has been carried out under standard performance parameters such as received power, SNR and bit error rate (BER).

The systems performance were analysed from different contribution of noise sources that contains thermal, shot and IMD noise. As the direct detection technique was used in both mathematical modelling and simulation works, the PIIN noise was not considered in the noise analyses. The system design parameters involved are adapted from existing commercial systems to make the simulations as close to the mathematics as possible. As far as the scope of work of this study is concerned, the simulation and mathematics results are expected to be sufficient to prove the viability of the code using the direct detection technique.

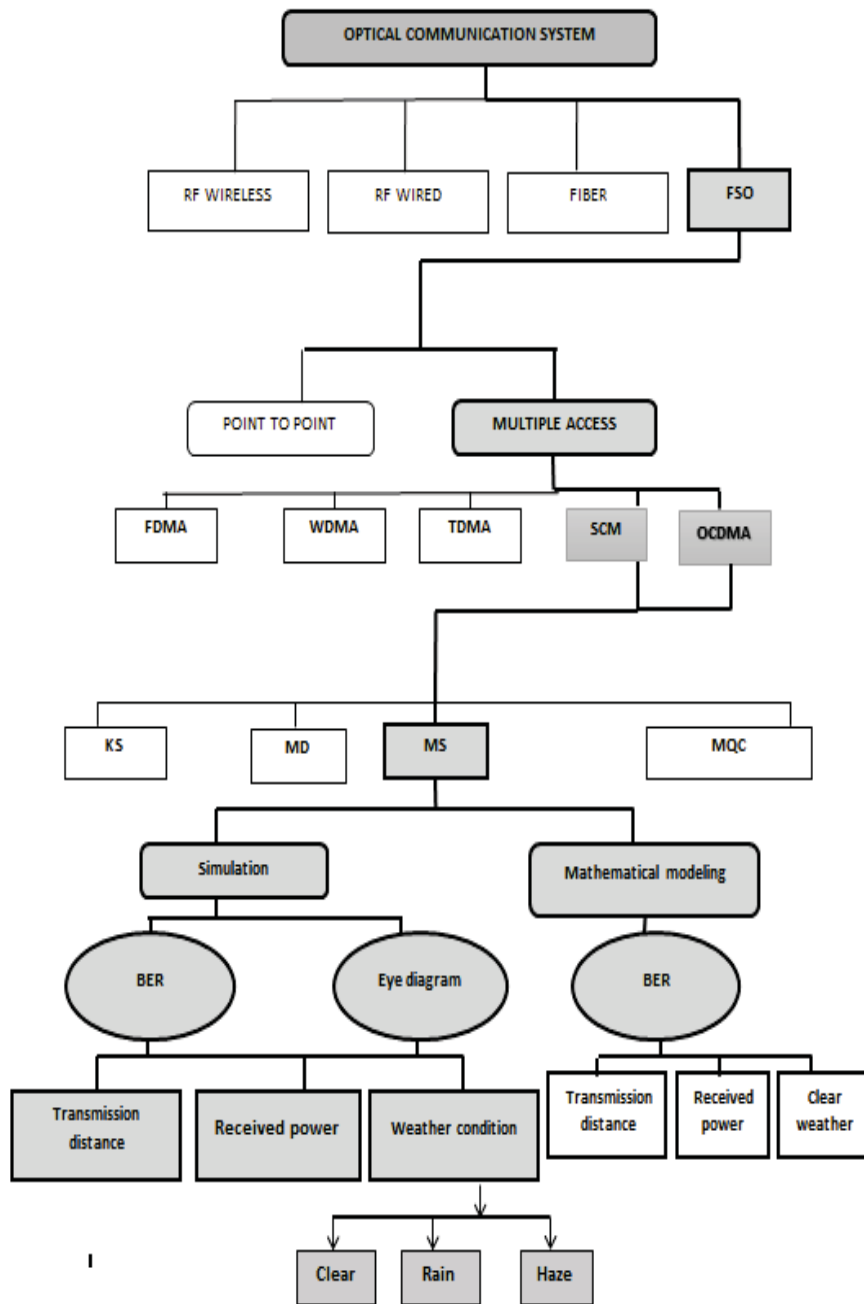


Figure 1.1: Theoretical framework of the research and scope of work

## 1.6 Thesis Outline

Chapter 1 presents the introduction, research problem statement and its significance that calls for the need for this research followed by objectives and the scope of study.

Chapter 2 discusses the literature review for FSO communication systems. It describes basic FSO systems, multiplexing techniques involved in the FSO systems including hybrid SCM SAC-OCDMA, different OCDMA code techniques, as well as different weather conditions and their effects on FSO communication system.

Chapter 3 presents methodology adopted in this research which includes mathematical modelling and simulation. This chapter presents a detailed explanation of the hybrid SCM-SAC-OCDMA system using the Multi-Service (MS) code via both the mathematical modelling and simulation setup. It also explains all the related FSO system design and performance parameters.

Chapter 4 discusses the results and the performance analysis of the proposed system using the MS code and demonstrates the feasibility of the system in rainy and hazy weather conditions. It also presents the proposed systems performance in comparison with other SAC-OCDMA codes such as KS, MD and MQC codes. The analysis of different size of beam divergences and different types of noise are also explained in this chapter.

Chapter 5 concludes the thesis by summarising the most important ideas, contributions and future works.

## REFERENCES

- [1] E. Wright and D. Reynders, *Practical telecommunications and wireless communications: for business and industry*: Elsevier, 2004.
- [2] Alexander, "Telecommunications media," *Swissns*, 2017. [Online]. Available: <https://www.swissns.ch/site/2017/05/the-different-types-of-communication-medium-used-in-networks/>. [Accessed: 18-Jun-2018].
- [3] R. B. Comizzoli, G. R. Crane, M. E. Fiorino, R. P. Frankenthal, and H. W. Krautter, "Materials reliability issues with coaxial cable systems for the information superhighway," *Mater. Res.*, vol. 12, no. 3, pp. 857–865, 1997.
- [4] R. Schneiderman, *Modern standardization: case studies at the crossroads of technology, economics, and politics*: John Wiley & Sons, 2015.
- [5] S. Babani, A. Bature, M. Faruk, and N. Dankadai, "Comparative study between fiber optic and copper in communication link," *Int. J. Tech. Res. Appl.*, vol. 2, pp. 59-63, 2014.
- [6] J. Feng and X. Zhao, "Performance analysis of mixed RF/FSO systems with STBC users," *Optics Communications*, vol. 381, pp. 244-252, 2016.
- [7] M. Moghaddasi, S. Seyedzadeh, and S. B. A. Anas, "Optical code division multiple access codes comparison in free space optics and optical fiber transmission medium," in *Region 10 Symposium, 2014 IEEE*, pp. 181-184, 2014.
- [8] M. Mukherjee, "Wireless communication—moving from RF to optical," in *Computing for Sustainable Global Development (INDIACom), 2016 3rd International Conference on*, pp. 788-795, 2016.
- [9] M. Uysal and H. Nouri, "Optical wireless communications—An emerging technology," in *Transparent Optical Networks (ICTON), 2014 16th International Conference on*, pp. 1-7, 2014.
- [10] Z. Ghassemlooy, L. N. Alves, S. Zvanovec, and M.-A. Khalighi, *Visible light communications: theory and applications*: CRC Press, 2017.
- [11] N. Chacko and S. Davies, "Free-Space Optical Networking Using the Spectrum of Visible Light," *Int. J. trends Eng. Technol.*, vol. 5, no. 2, pp. 217–224, 2015.
- [12] R. Szweda, "Lasers for free-space optical communications," *III-Vs Rev.*, vol. 14, no. 8, pp. 46–49, 2001.
- [13] Z. Dong, T. Shang, Y. Gao, and Q. Li, "Study on VLC Channel Modeling Under Random Shadowing," *IEEE Photonics Journal*, vol. 9, pp. 1-16, 2017.
- [14] C. Chen, W.-D. Zhong, H. Yang, and P. Du, "On the performance of MIMO-NOMA-based visible light communication systems," *IEEE Photonics Technology Letters*, vol. 30, pp. 307-310, 2018.
- [15] Z. Ghassemlooy, S. Zvanovec, M. A. Khalighi, W. O. Popoola, and J. Perez, "Optical wireless communication systems," *Optik (Stuttg.)*, vol. 151, pp. 1–6, 2017.

- [16] M. Singh, "Performance analysis of WDM-FSO system under adverse weather conditions," *Photonic Network Communications*, vol. 36, pp. 1-10, 2018.
- [17] B. Barua and S. Majumder, "Analytical performance evaluation of a RF subcarrier modulated optical FSO system under the influence of atmospheric turbulence," in *Electrical and Computer Engineering (ICECE), 2016 9th International Conference on*, pp. 594-597, 2016.
- [18] V. Jagadeesh, V. Palliyembil, P. Muthuchidambaranathan, and F. M. Bui, "Free space optical communication using subcarrier intensity modulation through generalized turbulence channel with pointing error," *Microwave and Optical Technology Letters*, vol. 57, pp. 1958-1961, 2015.
- [19] A. Jurado-Navas, T. R. Raddo, J. M. Garrido-Balsells, B.-H. V. Borges, J. J. V. Olmos, and I. T. Monroy, "Hybrid optical CDMA-FSO communications network under spatially correlated gamma-gamma scintillation," *Optics express*, vol. 24, pp. 16799-16814, 2016.
- [20] U. Bhanja, A. Swati, and A. Khuntia, "System design for a SAC OCDMA-FSO network," in *Signal Processing and Integrated Networks (SPIN), 2017 4th International Conference on*, pp. 454-458, 2017.
- [21] M. Talib, A. Rahman, M. Anuar, C. Rashidi, and S. Aljunid, "A novel hybrid optical code division multiple access in free space optical communication," in *Photonics (ICP), 2016 IEEE 6th International Conference on*, pp. 1-3, 2016.
- [22] R. Sahbudin and M. Abdullah, "Performance analysis of hybrid SCM/OSCDM system using the khazani-syed (KS) code," *Journal WSEAS Transactions of Communications*, pp. 1066-1074, 2008.
- [23] T. H. Abd, S. Aljunid, H. A. Fadhil, I. F. Radhi, R. Ahmad, and M. Rashid, "Performance improvement of hybrid SCM SAC-OCDMA networks using multi-diagonal ccode," *Scientific Research and Essays*, vol. 7, pp. 1262-1272, 2012.
- [24] R. Sahbudin, M. Abdullah, M. Mokhtar, S. Anas, and S. Hitam, "Performance of subcarrier-OCDMA system with complementary subtraction detection technique," 2011.
- [25] H. S. Mohammed, S. Aljunid, H. A. Fadhil, T. H. Abd, R. A. Fayadh, and A. Rahman, "Generation of a new hybrid subcarrier multiplexing-SAC-OCDMA system based on FSO," *Journal of Theoretical and Applied Information Technology*, vol. 58, pp. 389-396, 2013.
- [26] J. Ji, W. Li, and H. Zheng, "Construction and Analysis of Novel 2-D Optical Orthogonal Codes Based on Extended Quadratic Congruence Codes and Modified One-Coincidence Sequence," *Journal of Optical Communications*, vol. 37, pp. 217-219, 2016.
- [27] M. Abdullah, S. Aljunid, S. Anas, R. Sahbudin, and M. Mokhtar, "A new optical spectral amplitude coding sequence: Khazani-Syed (KS) code," in *Information and Communication Technology, 2007. ICICT'07. International Conference on*, pp. 266-278, 2007.

- [28] M. Noshad and M. Brandt-Pearce, "Hadamard-coded modulation for visible light communications," *IEEE Transactions on Communications*, vol. 64, pp. 1167-1175, 2016.
- [29] Z. Wei, H. Shalaby, and H. Ghafouri-Shiraz, "Modified quadratic congruence codes for fiber Bragg-grating-based spectral-amplitude-coding optical CDMA systems," *Journal of Lightwave Technology*, vol. 19, pp. 1274-1281, 2001.
- [30] M. H. Kakaee, S. Seyedzadeh, H. A. Fadhil, S. B. A. Anas, and M. Mokhtar, "Development of multi-service (MS) for SAC-OCDMA systems," *Optics & Laser Technology*, vol. 60, pp. 49-55, 2014.
- [31] A. Alkholidi and K. Altowij, "Effect of clear atmospheric turbulence on quality of free space optical communications in Western Asia," in *Optical Communications Systems*, ed: InTech, 2012.
- [32] S. Labghough, F. Ayoub, and M. Belkasm, "Majority logic coding schemes performance over FSO channels," in *Advanced Communication Systems and Information Security (ACOSIS), International Conference on*, pp. 1-6, 2016.
- [33] A. Mansour, R. Mesleh, and M. Abaza, "New challenges in wireless and free space optical communications," *Optics and lasers in engineering*, vol. 89, pp. 95-108, 2017.
- [34] H. Kaushal and G. Kaddoum, "Optical communication in space: Challenges and mitigation techniques," *IEEE communications surveys & tutorials*, vol. 19, pp. 57-96, 2017.
- [35] M. Prajapat and C. Selwal, "Free Space Optical link performance simulation under different atmospheric conditions and diversity," in *Computer, Communications and Electronics (Comptelix), 2017 International Conference on*, pp. 135-139, 2017.
- [36] M. A. Khalighi and M. Uysal, "Survey on free space optical communication: A communication theory perspective," *IEEE communications surveys & tutorials*, vol. 16, pp. 2231-2258, 2014.
- [37] G. Soni and V. K. Banga, "Performance analysis of free space optics link at different data rates," in *Contemporary Computing and Informatics (IC3I), 2014 International Conference on*, pp. 1251-1255, 2014.
- [38] R. Boluda-Ruiz, A. García-Zambrana, B. Castillo-Vázquez, and C. Castillo-Vázquez, "Impact of nonzero boresight pointing error on ergodic capacity of MIMO FSO communication systems," *Optics express*, vol. 24, pp. 3513-3534, 2016.
- [39] H. A. Fadhil, A. Amphawan, H. A. Shamsuddin, T. H. Abd, H. M. Al-Khafaji, S. Aljunid, *et al.*, "Optimization of free space optics parameters: An optimum solution for bad weather conditions," *Optik-International Journal for Light and Electron Optics*, vol. 124, pp. 3969-3973, 2013.
- [40] A. Malik and P. Singh, "Comparative analysis of point to point FSO system under clear and haze weather conditions," *Wireless personal communications*, vol. 80, pp. 483-492, 2015.
- [41] N. R. Chauhan and M. K. Vala, "System Design and Performance Analysis on the Free Space Optics (FSO) System in Atmospheric Turbulence," *IRJET*, vol. 4, pp. 1789-1793, 2017.

- [42] CableFree, "FSO: LED Transmitters," *CableFree*, 2017. [Online]. Available: <http://www.cablefree.net/wirelesstechnology/free-space-optics/fso-led-transmitters/>. [Accessed: 06-Jun-2018].
- [43] M. F. Memon, V. Mahadik, and A. Fakhri, "Comparing Free Space Optical Communication using LED and LASER under Low Turbulence Region," 2014.
- [44] A. K. Majumdar, "Modulation, Detection, and Coding for Free-space Optical (FSO) Communications," in *Advanced Free Space Optics (FSO)*, ed: Springer, pp. 69-103, 2015.
- [45] M. Bass, E. W. Van Stryland, D. R. Williams, and W. L. Wolfe, *Handbook of optics* vol. 2: McGraw-Hill New York, 1995.
- [46] A. K. Virk, J. S. Malhotra, and S. Pahuja, "Link margin optimization of free space optical link under the impact of varying meteorological conditions," *International Journal of Engineering Science and Technology (IJEST)*, vol. 4, 2012.
- [47] A. Anis, A. Rahman, C. Rashidi, and S. Aljunid, "Link budget analysis for free space optical (FSO) communication under haze condition with adverse wavelength," in *Electronic Design (ICED), 2016 3rd International Conference on*, pp. 354-357, 2016.
- [48] M. A. A. Ali and E. H. Ahmed, "Performance of FSO communication system under various weather condition," *Adv. Phys. Theor. Appl.*, vol. 43, pp. 10-19, 2015.
- [49] H. Khanna, M. Aggarwal, and S. Ahuja, "Optimum Distance and Power allocation Strategies for Quantum-limited Inter-Relayed FSO Communication System," *AEU-International Journal of Electronics and Communications*, vol. 80, pp. 10-18, 2017.
- [50] A. Bluschke, P. Rietzsch, and H. Willebrand, "High bitrate optical wireless communication for indoor & outdoor applications," in *Broadband Coverage in Germany; 10th ITG-Symposium; Proceedings of*, pp. 1-6, 2016.
- [51] A. Trichili, A. B. Salem, A. Dudley, M. Zghal, and A. Forbes, "Encoding information using Laguerre Gaussian modes over free space turbulence media," *Optics letters*, vol. 41, pp. 3086-3089, 2016.
- [52] H. Alma and W. Al-Khateeb, "Effect of weather conditions on quality of Free Space Optics links (with focus on Malaysia)," in *Computer and Communication Engineering, 2008. ICCCE 2008. International Conference on*, pp. 1206-1210, 2008.
- [53] S. A. Kadhim, A. H. Ali, and K. M. A. Hussain, "Simulation and Comparative Analysis of ( SISO over MIMO ) FSO Communication Channel," *Int. J. Innov. Res. Sci. Eng. Technol.*, vol. 6, no. 4, pp. 5743-5751, 2017.
- [54] L. Mustafa, E. Černič, and B. Thomsen, "FSO artificial low-cost fog attenuation experiment design," in *Communication Systems, Networks and Digital Signal Processing (CSNDSP), 2016 10th International Symposium on*, pp. 1-5, 2016.
- [55] S. Ghoname, H. A. Fayed, A. A. El Aziz, and M. H. Aly, "Performance analysis of FSO communication system: Effects of fog, rain and humidity," in *Digital Information Processing and Communications (ICDIPC), 2016 Sixth International Conference on*, pp. 151-155, 2016.

- [56] M. A. Esmail, H. Fathallah, and M.-S. Alouini, "Outdoor FSO communications under fog: attenuation modeling and performance evaluation," *IEEE photonics journal*, vol. 8, pp. 1-22, 2016.
- [57] J. Cabaniss and S. Jefferson, "Getting through fog & clouds with FSO," in *Space Optical Systems and Applications (ICSOS), 2015 IEEE International Conference on*, pp. 1-1, 2015.
- [58] M. A. Esmail, H. Fathallah, and M.-S. Alouini, "Channel modeling and performance evaluation of FSO communication systems in fog," in *Telecommunications (ICT), 2016 23rd International Conference on*, pp. 1-5, 2016.
- [59] M. Yahya, K. Salleh, N. A. M. Akib, and Z. Awang, "Low cost hybrid RF-FSO to reduce rain effect in tropical region," in *RF and Microwave Conference (RFM), 2011 IEEE International*, pp. 250-253, 2011.
- [60] D. Y. Choi, J. Y. Pyun, S. K. Noh, and S. W. Lee, "Comparison of measured rain attenuation in the 12.25 GHz band with predictions by the ITU-R model," *International Journal of Antennas and Propagation*, vol. 2012, 2012.
- [61] F. Giannetti, R. Reggiannini, M. Moretti, E. Adirosi, L. Baldini, L. Facheris, *et al.*, "Real-time rain rate evaluation via satellite downlink signal attenuation measurement," *Sensors*, vol. 17, p. 1864, 2017.
- [62] C. Wong, R. Venneker, S. Uhlenbrook, A. Jamil, and Y. Zhou, "Variability of rainfall in Peninsular Malaysia," *Hydrology and Earth System Sciences Discussions*, vol. 6, pp. 5471-5503, 2009.
- [63] A. Anis, C. Rashidi, S. Aljunid, and A. Rahman, "Evaluation of FSO System Availability in Haze Condition," in *IOP Conference Series: Materials Science and Engineering*, p. 012077, 2018.
- [64] N. K. Verma and H. Narayan, "Analysis of Free-space Optical system under different atmospheric channel," *Int. Res. J. Eng. Technol.*, vol. 4, no. 7, pp. 80-83, 2017.
- [65] M. Singh, S. Bhatia, and H. Kaushal, "Performance Evaluation of Free Space Optical Link Under Various Weather Conditions," in *Proceedings of the Second International Conference on Computer and Communication Technologies*, pp. 329-342, 2016.
- [66] S. Arora and A. Sharma, "High speed, long reach OCDMA-FSO transmission link employing FBG encoder under various atmospheric condition and power levers," ed: IRJET, 2016.
- [67] A. N. Islam and S. Majumder, "Performance analysis of multi-wavelength optical CDMA system over atmospheric turbulence FSO channel using SIK receiver," in *Telecommunications and Photonics (ICTP), 2017 IEEE International Conference on*, pp. 232-236, 2017.
- [68] G. Soni, "A Performance Analysis of Free-Space Optical Link at 1,550 nm, 850 nm, 650 nm and 532 nm Optical Wavelengths," *Journal of Optical Communications*, vol. 39, pp. 335-341, 2018.
- [69] F. Rashidi, J. He, and L. Chen, "Spectrum slicing WDM for FSO communication systems under the heavy rain weather," *Optics Communications*, vol. 387, pp. 296-302, 2017.



- [70] H. Singh and M. Arora, "Investigating wavelength dependency of terrestrial free space optical communication link," *International journal of Scientific Research in Science and Technology*, vol. 2, 2016.
- [71] W.-S. Tsai, H.-H. Lu, C.-Y. Li, T.-C. Lu, H.-H. Lin, B.-R. Chen, *et al.*, "A 50-m/320-Gb/s DWDM FSO communication with afocal scheme," *IEEE Photonics Journal*, vol. 8, pp. 1-7, 2016.
- [72] S. Parkash, A. Sharma, H. Singh, and H. P. Singh, "Performance investigation of 40 GB/s DWDM over free space optical communication system using RZ modulation format," *Advances in Optical Technologies*, vol. 2016, 2016.
- [73] R. Jee and S. Chandra, "Performance analysis of WDM-free-space optical transmission system with M-QAM modulation under atmospheric and optical nonlinearities," in *Microwave, Optical and Communication Engineering (ICMOCE), 2015 International Conference on*, pp. 41-44, 2015.
- [74] R. Hui, B. Zhu, R. Huang, C. T. Allen, K. R. Demarest, and D. Richards, "Subcarrier multiplexing for high-speed optical transmission," *Journal of lightwave technology*, vol. 20, p. 417, 2002.
- [75] H. S. Mohammed, S. Aljunid, H. A. Fadhil, and T. H. Abd, "Impact of attenuations on the hybrid Subcarrier Multiplexing SAC OCDMA-FSO system," in *Open Systems (ICOS), 2013 IEEE Conference on*, pp. 199-202, 2013.
- [76] M. Junita, R. Rahim, N. Ahmad, S. Aljunid, and A. Rahman, "Performance of hybrid subcarrier multiplexed—optical CDMA system based on different detection methods," in *Electronic Design (ICED), 2016 3rd International Conference on*, pp. 117-122, 2016.
- [77] R. K. Z. Sahbudin, M. Kamarulzaman, S. Hitam, M. Mokhtar, and S. B. A. Anas, "Performance of SAC OCDMA-FSO communication systems," *Optik-International Journal for Light and Electron Optics*, vol. 124, pp. 2868-2870, 2013.
- [78] S. A. Anas, M. Abdullah, M. Mokhtar, S. Aljunid, and S. Walker, "Optical domain service differentiation using spectral-amplitude-coding," *Optical Fiber Technology*, vol. 15, pp. 26-32, 2009.
- [79] G. Feng, W.-Q. Cheng, and F.-J. Chen, "Design of variable-weight quadratic congruence code for optical CDMA," *Infrared Physics & Technology*, vol. 72, pp. 281-285, 2015.
- [80] A. Taiwo, J. Basri, Y. Idriss, M. Kakaee, and M. Mokhtar, "Experimental demonstration of MS-code based SAC-OCDMA for triple play services," in *Photonics (ICP), 2016 IEEE 6th International Conference on*, pp. 1-3, 2016.
- [81] S. Chaudhary, A. Amphawan, and K. Nisar, "Realization of free space optics with OFDM under atmospheric turbulence," *Optik-International Journal for Light and Electron Optics*, vol. 125, pp. 5196-5198, 2014.
- [82] A. B. Mohammad, "Optimization of FSO system in tropical weather using multiple beams," in *Photonics (ICP), 2014 IEEE 5th International Conference on*, pp. 109-112, 2014.

- [83] S. Gupta and A. Goel, "Advance Method for Security Enhancement in Optical Code Division Multiple Access System," *IETE Journal of Research*, vol. 64, pp. 17-26, 2018.
- [84] B. Barua and S. Majumder, "Analytical performance evaluation of a multiple subcarrier modulated FSO communication system with coherent optical receiver under strong atmospheric turbulence," in *Telecommunications and Photonics (ICTP), 2017 IEEE International Conference on*, pp. 237-241, 2017.
- [85] M. A. Esmail, A. Ragheb, H. Fathallah, and M.-S. Alouini, "Investigation and demonstration of high speed full-optical hybrid FSO/fiber communication system under light sand storm condition," *IEEE Photonics Journal*, vol. 9, pp. 1-12, 2017.
- [86] N. Sahu and J. C. Prajapati, "Optimization of WDM-FSO link using multiple beams under different rain condition," *Int. J. Adv. Res. Electron. Commun. Eng.* vol. 4, pp. 1125-1131, 2015.