



UNIVERSITI PUTRA MALAYSIA

**ELECTRICAL AND THERMAL PROPERTIES OF THE COMPOSITE
SEMICONDUCTORS, $(\text{CdSe})_{1-x}(\text{Se})_x$ AND $(\text{CdS})_{1-x}(\text{S})_x$**

NUR AMALINA MUSTAFFA

FS 2008 43



**ELECTRICAL AND THERMAL PROPERTIES OF THE COMPOSITE
SEMICONDUCTORS, $(\text{CdSe})_{1-x}(\text{Se})_x$ AND $(\text{CdS})_{1-x}(\text{S})_x$**

By

NUR AMALINA MUSTAFFA

**Thesis Submitted to the School of Graduate Study, Universiti Putra Malaysia,
in Fulfilment of the Requirements for the Degree of Master of Science**

October 2008



DEDICATION

Specially Dedicated to My Beloved Family,

Mustaffa Tupir Mohamed & Che Norlia Abdullah

Mohd. Taufiq Mustaffa

Amal Nabilah Mustaffa

Amal Aqilah Mustaffa

and to My Beloved ONE,

Muhammad Naguib Thasleem Mohd.

for their unconditional support, inspiration, patience and love.

Abstract of thesis submitted to the Senate of Universiti Putra Malaysia in fulfilment of the requirements for the Degree of Master of Science

ELECTRICAL AND THERMAL PROPERTIES OF THE COMPOSITE SEMICONDUCTORS, $(\text{CdSe})_{1-x}(\text{Se})_x$ AND $(\text{CdS})_{1-x}(\text{S})_x$

By

NUR AMALINA MUSTAFFA

October 2008

Chairman: Associate Professor Dr. Zainal Abidin Talib, PhD

Faculty : Science

A series of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$ composite semiconductors were prepared with different stoichiometric compositions of Se and S with $x = 0$ to $x = 0.8$ both in the interval of 0.2 by varying the ratio of CdSe:Se and CdS:S in a reaction mixture. The following powder of CdSe, Se and CdS, S were used as the starting materials.

X-ray diffraction analysis was carried out in order to investigate the structural character of the composites obtained. For both samples, analysis of the X-ray diffractogram revealed that the samples were in hexagonal form. Atomic Force Microscopy (AFM) was used for analyzing the surface morphology of the composites samples.

Parallel plate method was used to determine the dc conductivity of all samples in the temperature range of 300 – 460 K. Both samples, $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$, show variation in $\ln \sigma$ with $1000/T$ (K^{-1}) that indicated that there are three distinct



temperature zones with three different characteristic regions. This behaviour suggests that two types of conduction mechanisms were present. The first region is identified as the extrinsic region, the second region is the intermediate region and the third region is the intrinsic region. For both series of samples, the conductivity obtained for all series of samples shown similar trend, the dc conductivity increased as the temperature increased. For $(\text{CdSe})_{1-x}(\text{Se})_x$ composite where $x = 0$, the dc conductivity at 300 K is about 10^{-8} S/cm and increase up to 10^{-5} S/cm at 460 K. While for $(\text{CdS})_{1-x}(\text{S})_x$ composite where $x = 0$, the dc conductivity at 300 K is about 10^{-10} S/cm and increase up to 10^{-8} S/cm at 503 K. The activation energies were calculated from the Arrhenius relation and the values of the activation energy indicated that all the prepared samples were semiconductors.

The ac conductivity properties of polycrystalline $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$ were studied in temperature range of 300 – 523 K and frequency range of 100 Hz – 1 MHz using Impedance Analyzer. Obtained data of ac conductivity revealed that at low frequency $\sigma_{AC}(\omega)$ was independent of frequency and proportional to ω^s at higher frequency for all samples. The values of the frequency exponent, s were found to decrease with increasing temperature which suggested that the dominant transport process as Correlated Barrier Hopping (CBH).

Thermal diffusivity values of both $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$ were investigated using photoflash technique. Thermal diffusivity value decrease as we increase the Se and S compositions in the samples.



Abstrak tesis ini yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk Ijazah Master Sains

**SIFAT ELEKTRIK DAN PENGUKURAN PENYERAPAN TERMA BAHAN
KOMPOSIT SEMIKONDUKTOR, $(\text{CdSe})_{1-x}(\text{Se})_x$ DAN $(\text{CdS})_{1-x}(\text{S})_x$**

Oleh

NUR AMALINA MUSTAFFA

Oktober 2008

Pengerusi : Professor Madya Dr. Zainal Abidin Talib, PhD

Fakulti : Sains

Dalam kajian ini, siri $(\text{CdSe})_{1-x}(\text{Se})_x$ dan $(\text{CdS})_{1-x}(\text{S})_x$ komposit semikonduktor telah disediakan dalam pelbagai komposisi stoichiometri Se dan S dengan $x = 0$ hingga $x = 0.8$ kedua-duanya, pada selangan sebanyak 0.2 dengan mempelbagaikan ratio CdSe :Se dan CdS :S dalam bahan tindak balas. CdSe, Se dan CdS, S digunakan sebagai bahan asas di dalam penyediaan sample.

Belauan sinar-X telah digunakan untuk mengenal pasti struktur bahan komposit yang telah diperolehi. Bagi kedua-dua bahan, struktur heksagonal diperolehi daripada spektra belauan sinar-X. Mikroskop Daya Atom (AFM) digunakan untuk mengkaji struktur permukaan bahan komposit tersebut.

Kaedah kepingan selari telah digunakan untuk mengkaji kekonduksian dc bagi semua bahan di dalam julat suhu 300 - 460 K. Bagi kedua-dua sample, $(\text{CdSe})_{1-x}(\text{Se})_x$ dan



$(\text{CdS})_{1-x}(\text{S})_x$, graf $\ln \sigma$ melawan $1000/T$ (K^{-1}) menunjukkan, terdapat tiga zon dengan tiga ciri yang berbeza. Ini menunjukkan terdapat dua jenis kekonduksian yang terlibat. Zon pertama merupakan zon yang tidak tulen, zon kedua ialah zon pertengahan, dan zon ketiga merupakan zon yang tulen. Untuk kedua-dua siri sample, didapati kekonduksian dc meningkat apabila suhu meningkat. Bagi $(\text{CdSe})_{1-x}(\text{Se})_x$ apabila $x = 0$, kekonduksian dc pada suhu 300 K ialah 10^{-8} S/cm dan meningkat kepada 10^{-5} S/cm pada suhu 460 K. Manakala bagi sample $(\text{CdS})_{1-x}(\text{S})_x$ apabila $x = 0$ pula, kekonduksian dc meningkat dari 10^{-10} S/cm pada suhu 300 K ke 10^{-8} S/cm pada suhu 503 K. Tenaga pengaktifan telah dikira daripada persamaan Arrhenius dan nilai-nilainya menunjukkan semua bahan yang telah disediakan merupakan bahan semikonduktor.

Kekonduksian ac bagi bahan $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$ telah dikaji di dalam julat suhu 300 - 523 K dan julat frekuensi 100 – 1 MHz menggunakan Impedance Analyzer. Data yang telah diperolehi menunjukkan pada julat frekuensi yang rendah, $\sigma_{AC}(\omega)$ adalah tidak bergantung pada frekuensi tetapi berkadaran dengan ω^s pada frekuensi yang lebih tinggi pada semua sample bahan. Nilai frekuensi exponen, s didapati menurun dengan penurunan suhu. Ini menunjukkan proses kekonduksian di dalam bahan tersebut telah dikenal pasti sebagai Loncatan Halangan Berkaitan (CBH).

Nilai penyerapan terma bagi kedua-dua bahan telah diperolehi daripada kaedah sinaran flash kamera. Nilai penyerapan terma menurun dengan pertambahan Se and S di dalam bahan tersebut.

ACKNOWLEDGEMENTS

First and foremost, I would like to extend my praise to Allah s.w.t that gives me the strength, determination, patience and courage to produce this thesis.

I would like to express my special gratitude to Assoc. Prof. Dr. Zainal Abidin Talib for all he has done for me as a research advisor. Without his assistance, guidance, ideas, supervision and encouragement, I would not be able to complete my graduate studies at Universiti Putra Malaysia. I would also like to extend my sincere appreciation to my co-supervisor, Assoc. Prof. Dr. Wan Mohd. Daud Wan Yusoff for his advice and helpful discussion during my period of study. I would also like to express my gratitude to all the lecturers and staff in Physics Department for providing research facilities and for all their help and cooperation given throughout my study. I gratefully acknowledge the Academy of Sciences Malaysia and MOSTI through SAGA Grant (5486512) for their financial support. I would also like to acknowledge Universiti Teknologi Mara and Ministry of Higher Education for the scholarship that allows me to complete this work.

My sincere thanks to all my friends who have directly or indirectly contributed toward the success of this study. Last but not least, to my beloved parents, siblings, relatives and also to my beloved Naguib, I would like to extend my special thanks for their love, understanding, support, patience and encouragement. Without them, the path to this thesis will be a lonely endeavor. Your love and belief have given me strength to walk through difficulties to achieve success.



I certify that an Examination Committee met on 14th October 2008 to conduct the final examination of Nur Amalina Mustaffa on her Master of Science thesis entitled “Electrical and Thermal Properties of the Composite Semiconductors, $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$ ” in accordance with Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The committee recommends that the candidate be awarded the relevant degree. Members of the examination committee are as follows:

Zaidan Abdul Wahab, PhD

Associate Professor
Faculty of Science
Universiti Putra Malaysia
(Chairperson)

Senin Hassan, PhD

Professor
Faculty of Science and Technology
Universiti Malaysia Terengganu
(External Examiner)

Wan Mahmood Mat Yunus, PhD

Professor
Faculty of Science
Universiti Putra Malaysia
(Internal Examiner)

Abdul Halim Shaari, PhD

Professor
Faculty of Science
Universiti Putra Malaysia
(Internal Examiner)

Hasanah Mohd. Ghazali, PhD
Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 30th December 2008



This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as partial fulfilment of the requirements for the Degree of Master of Science. The members of the Supervisory Committee are as follows:

Zainal Abidin Talib, PhD

Associate Professor
Faculty of Science
Universiti Putra Malaysia
(Chairman)

Wan Mohd. Daud Wan Yusoff, PhD

Associate Professor
Faculty of Science
Universiti Putra Malaysia
(Member)

Hasanah Mohd. Ghazali, PhD
Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 15th January 2009



DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations which have been fully acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.

NUR AMALINA MUSTAFFA

Date:



TABLE OF CONTENTS

	PAGE
DEDICATION	ii
ABSTRACT	iii
ABSTRAK	v
ACKNOWLEDGEMENTS	vii
APPROVAL	viii
DECLARATION	x
LIST OF TABLES	xiv
LIST OF FIGURES	xv
LIST OF ABBREVIATION	xix
LIST OF SYMBOLS	xx
CHAPTER	
1 INTRODUCTION	
1.1 Introduction	1
1.2 II-VI Semiconductor	3
1.3 Cadmium Selenide, CdSe	4
1.4 Cadmium Sulphide, CdS	5
1.5 Electrical Properties	7
1.5.1 Electrical Resistivity and Conductivity	7
1.6 Thermal Properties	8
1.6.1 Thermal Diffusivity	8
1.7 The Objective of Study	10
2 LITERATURE REVIEW	
2.1 Introduction	11
2.2 Brief Literature on CdSe and $(\text{CdSe})_{1-x}(\text{Se})_x$	11
2.2.1 Structural Properties	12
2.2.2 Electrical Properties	14
2.3 Brief Literature on CdS and $(\text{CdS})_{1-x}(\text{S})_x$	18
2.3.1 Structural Properties	18
2.3.2 Electrical Properties	20
2.4 Measurement of Thermal Diffusivity using Photoflash Technique	24

3	THEORY	
3.1	Semiconductor Materials	26
3.2	Compound Semiconductor	27
3.3	Electrical Conductivity	29
3.4	Charge Carriers and Energy Level in Semiconductor	32
3.5	Drift and Diffusions Current	35
3.6	Conductivity and Resistivity	36
3.7	Intrinsic Semiconductors	37
3.8	Extrinsic Semiconductors	37
3.9	Correlated Barrier Hopping	38
3.10	Thermal Properties	43
3.11	Photoflash technique	43
4	METHODOLOGY	
4.1	Samples Preparation	46
4.2	X-Ray Diffraction (XRD) Analysis	49
4.3	Microstructure Analysis	51
4.4	DC Conductivity Measurements	52
4.5	AC Conductivity Measurements	53
4.6	Photoflash Technique	55
	4.6.1 Experimental Procedure of Photoflash Technique	57
5	RESULTS AND DISCUSSION	
5.1	Introduction	58
5.2	X-Ray Diffraction (XRD) Analysis	59
5.3	Microstructure Analysis	62
5.4	Electrical Properties of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$	65
	5.4.1 The Effect of Temperature on the Dc Conductivity of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$	65
	5.4.2 The Effect of Se and S Compositions on the Dc Conductivity of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$	82
	5.4.3 The Effect of Temperature on the Ac Conductivity of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$	85
	5.4.4 The Effect of Se and S Compositions on the Ac Conductivity of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$	99
5.4	Thermal Diffusivity of $(\text{CdSe})_{1-x}(\text{Se})_x$ and $(\text{CdS})_{1-x}(\text{S})_x$	104
6	CONCLUSION AND SUGGESTION	
6.1	Conclusion	107
6.2	Suggestion for Future Work	110



REFERENCES	111
APPENDICES	115
BIODATA OF THE STUDENT	116



LIST OF TABLES

Table		Page
1.1	Semiconductor crystalline structure	4
5.1	Activation energies values for $(\text{CdSe})_{1-x}(\text{Se})_x$, ($x = 0, 0.2, 0.4, 0.5, 0.6, 0.8$)	77
5.2	Activation energies values for $(\text{CdS})_{1-x}(\text{S})_x$, ($x = 0, 0.2, 0.4, 0.5, 0.6, 0.8$)	82
5.3	The binding energy, W_M for samples with various concentration of x , Se x for $(\text{CdSe})_{1-x}(\text{Se})_x$	96
5.4	The binding energy, W_M for samples with various concentration of x , S x for $(\text{CdS})_{1-x}(\text{S})_x$	98

LIST OF FIGURES

Figure		Page
1.1	Crystalline structures of the a) diamond and zinc blende (cubic) and b) wurzite (hexagonal) semiconductors	3
1.2	Crystalline structures of CdSe	5
1.3	Crystalline structures of CdS	6
3.1	Classifications of material	26
3.2	Elements found in elemental and compound semiconductors	28
3.3	Compound II-VI semiconductors, CdSe	28
3.4	Electrical conductivities of some common materials	30
3.5	The energy bands of insulator, semiconductor and conductor	31
3.6	Energy level diagrams of a semiconductor	33
3.7	Model of overlapping Coulomb-type wells for charged centers	40
3.8	Schematic diagram of the hopping process for bipolarons in amorphous chalcogenide	41
3.9	Schematic diagram of the hopping process for single polarons in amorphous chalcogenide	41
3.10	Schematic diagram of the flash method	44
3.11	Temperature increase for various experimental conditions	45
4.1	Flow chart for sample preparation	48
4.2	Schematic representations of reflection of x-ray in crystalline material	50
4.3	Basic block diagram of an AFM	51
4.4	Schematic diagram for two probe system	52

4.5	Connections of the Novotherm units and the sample cell	54
4.6	Schematic diagram of the photoflash technique	55
5.1	X-Ray Diffraction Pattern of $(\text{CdSe})_{1-x}(\text{Se})_x$	60
5.2	X-Ray Diffraction Pattern of $(\text{CdS})_{1-x}(\text{S})_x$	62
5.3	The surface morphology of $(\text{CdSe})_{1-x}(\text{Se})_x$ (a) $x=0$ (b) $x=0.2$ (c) $x=0.4$ (d) $x=0.5$ (e) $x=0.6$ (f) $x=0.8$ obtained from AFM	63
5.4	The surface morphology of $(\text{CdS})_{1-x}(\text{S})_x$ (a) $x=0$ (b) $x=0.2$ (c) $x=0.4$ (d) $x=0.5$ (e) $x=0.6$ (f) $x=0.8$ obtained from AFM	64
5.5	I-V characteristic of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0$	66
5.6	I-V characteristic of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.2$	67
5.7	I-V characteristic of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.4$	67
5.8	I-V characteristic of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.5$	68
5.9	I-V characteristic of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.6$	68
5.10	I-V characteristic of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.8$	69
5.11	I-V characteristic of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0$	70
5.12	I-V characteristic of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.2$	70
5.13	I-V characteristic of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.4$	71
5.14	I-V characteristic of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.5$	71
5.15	I-V characteristic of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.6$	72
5.16	I-V characteristic of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.8$	72
5.17	Arhenius plot of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0$, solid line represent the best fitted value for activation energy	74
5.18	Arhenius plot of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.2$ solid line represent the best fitted value for activation energy	75
5.19	Arhenius plot of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.4$ solid line represent the best fitted value for activation energy	75

5.20	Arhenius plot of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.5$ solid line represent the best fitted value for activation energy	76
5.21	Arhenius plot of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.6$ Solid line represent the best fitted value for activation energy	76
5.22	Arhenius plot of $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x = 0.8$ Solid line represent the best fitted value for activation energy	77
5.23	Arhenius plot of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0$, solid line represent the best fitted value for activation energy	79
5.24	Arhenius plot of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.2$ solid line represent the best fitted value for activation energy	79
5.25	Arhenius plot of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.4$ solid line represent the best fitted value for activation energy	80
5.26	Arhenius plot of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.5$ solid line represent the best fitted value for activation energy	80
5.27	Arhenius plot of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.6$ solid line represent the best fitted value for activation energy	81
5.28	Arhenius plot of $(\text{CdS})_{1-x}(\text{S})_x$ with $x = 0.8$ solid line represent the best fitted value for activation energy	81
5.29	Dc conductivity of $(\text{CdSe})_{1-x}(\text{Se})_x$ with different Se concentration	83
5.30	Dc conductivity of $(\text{CdS})_{1-x}(\text{S})_x$ with different Se concentration	84
5.31	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x=0$	88
5.32	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x=0.2$	88
5.33	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x=0.4$	89
5.34	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x=0.5$	89
5.35	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x=0.6$	90
5.36	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdSe})_{1-x}(\text{Se})_x$ with $x=0.8$	90
5.37	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdS})_{1-x}(\text{S})_x$ with $x=0$	92
5.38	Frequency dependence of $\sigma_{AC}(f)$ for $(\text{CdS})_{1-x}(\text{S})_x$ with $x=0.2$	92

5.39	Frequency dependence of $\sigma_{AC}(f)$ for $(CdS)_{1-x}(S)_x$ with $x=0.4$	93
5.40	Frequency dependence of $\sigma_{AC}(f)$ for $(CdS)_{1-x}(S)_x$ with $x=0.5$	93
5.41	Frequency dependence of $\sigma_{AC}(f)$ for $(CdS)_{1-x}(S)_x$ with $x=0.6$	94
5.42	Frequency dependence of $\sigma_{AC}(f)$ for $(CdS)_{1-x}(S)_x$ with $x=0.8$	94
5.43	Parameter of s with different Se compositions for $(CdSe)_{1-x}(Se)_x$	97
5.44	Parameter of $1-s$ with different Se compositions for $(CdSe)_{1-x}(Se)_x$	97
5.45	Parameter of s with different S compositions	98
5.46	Parameter of $1-s$ with different S compositions	99
5.47	AC Conductivity of $(CdSe)_{1-x}(Se)_x$, $x = 0.2 - 0.8$ at 100 Hz	101
5.48	AC Conductivity of $(CdSe)_{1-x}(Se)_x$, $x = 0.2 - 0.8$ at 1 kHz	101
5.49	AC Conductivity of $(CdS)_{1-x}(S)_x$, $x = 0.2 - 0.8$ at 100 Hz	103
5.50	AC Conductivity of $(CdS)_{1-x}(S)_x$, $x = 0.2 - 0.8$ at 1 kHz	103
5.51	Thermal diffusivity value of $(CdSe)_{1-x}(Se)_x$ with different Se concentration	106
5.52	Thermal diffusivity value of $(CdS)_{1-x}(S)_x$ with different S Concentration	106



LIST OF ABBREVIATION

AC	Alternating Current
AFM	Atomic Force Microscopy
CBH	Correlated Barrier Hopping
CBD	Chemical Bath Deposition
CB	Conduction Band
CdSe	Cadmium Selenide
CdS	Cadmium Sulphide
DC	Direct Current
EHP	Electron-Hole Pairs
ITO	Indium-Tin Oxide
S	Sulphur
SCLC	Space Charge Limited Conductivity
Se	Selenium
SILAR	Successive Ionic Layer Absorption and Reaction
SP	Screen Printing
VB	Valence Band
VE	Vacuum Evaporation
VRH	Variable Range Hopping
XRD	X-Ray Diffraction Analysis



LIST OF SYMBOLS

ρ	Resistivity
σ	Electrical Conductivity
I	Current though the object
V	Potential difference across the object
R	Resistance of an object
L	Thickness of the pellet sample
A	Cross sectional area of the object
n	Number of the charge carriers in the material
q	The charge carrier by each carrier
μ	Mobility of the carrier
ω	Angular frequency
E_g	Energy gap
E	Electric field
W_m	Maximum barrier height
s	Frequency exponent
k_B	Boltzmann constant
τ_o	Characteristic relaxation time
W_H	Effective barrier height
α	Thermal Diffusivity
$t_{0.5}$	Time to reach 50% of the maximum
G	Conductance



CHAPTER I

INTRODUCTION

1.1 Introduction

The phenomenal growth in research effort devoted to the study of semiconductor, whose conductivity lies between a conductor and an insulator, during the past two decades has resulted in a very large literature on the subject. The first feature used to distinguish semiconductors from electrical conductors was their negative temperature coefficient of resistance which their resistance generally falls as the temperature is raised. This effect has been first notice by Michael Faraday when carrying his experiments on silver sulphide (Smith, 1978).

II-VI compound semiconductors and their alloys have been the subject of extensive research for several decades in both fundamental studies and device applications. The broad range of band gaps and lattice constants, the highly polar nature of these materials and the possibility of incorporating magnetic ions isoelectronically have been key factors that distinguish II-VI materials from their III-V counterparts. Because of this, II-VI semiconductors are particularly attractive for a wide range of applications such as infrared lasers and detectors, blue-green lasers and light emitting diodes (LEDs), nonlinear optical materials, magneto-optical devices and radiation detectors. Such applications have significantly improved photonics, computers, telecommunications as well as many other industries and technologies.



Nevertheless, during 1960s and 1970s II-VI materials did not receive much attention from the semiconductor community due to limitations of growth and doping techniques. Only in the 1980s and 1990s, with the advent of advanced crystal growth techniques such as metal-organic chemical vapor deposition (MOCVD) and molecular beam epitaxy (MBE), did a new surge of research devoted to II-VIs emerge. Presently, with progress along many new directions, including spintronics, nonlinear optical devices and, especially, quantum heterostructures, II-VI materials are beginning to be looked at again.

Among the II-VI materials, Cadmium Selenide (CdSe) and Cadmium Sulphide (CdS) are of great interest because of their potential in many practical applications such as solar cells, optical detectors, field-effect transistors, dosimeters of ionized radiation and optoelectronics devices. CdSe and CdS are very promising for solar cells because of their suitable direct band gap as the band gap for CdS is 2.4 eV (Prabahar and Dhanam, 2005) at 300 K and CdSe is 1.74 eV (Shreekanthan et al. 2003) at 300 K. Furthermore, their optical absorption and good stability also make them ideal and suitable as a medium for solar cells.



1.2 II-VI Semiconductor

For the last five decades, a huge number of research activities have been devoted to the studies of the crystalline structure of binary semiconductor materials, resulting in the fact that this physical property has been well known and documented. Among the types of the crystalline structure, diamond, zinc blende and wurzite are common ones and the semiconductors possessing these structures are of interest for device applications. Depending on growth conditions, one can obtain both the cubic (diamond, zinc blende) and the hexagonal (wurzite) structures for most of II-VI binaries. These crystalline structures are illustrated in Fig.1.1 below.

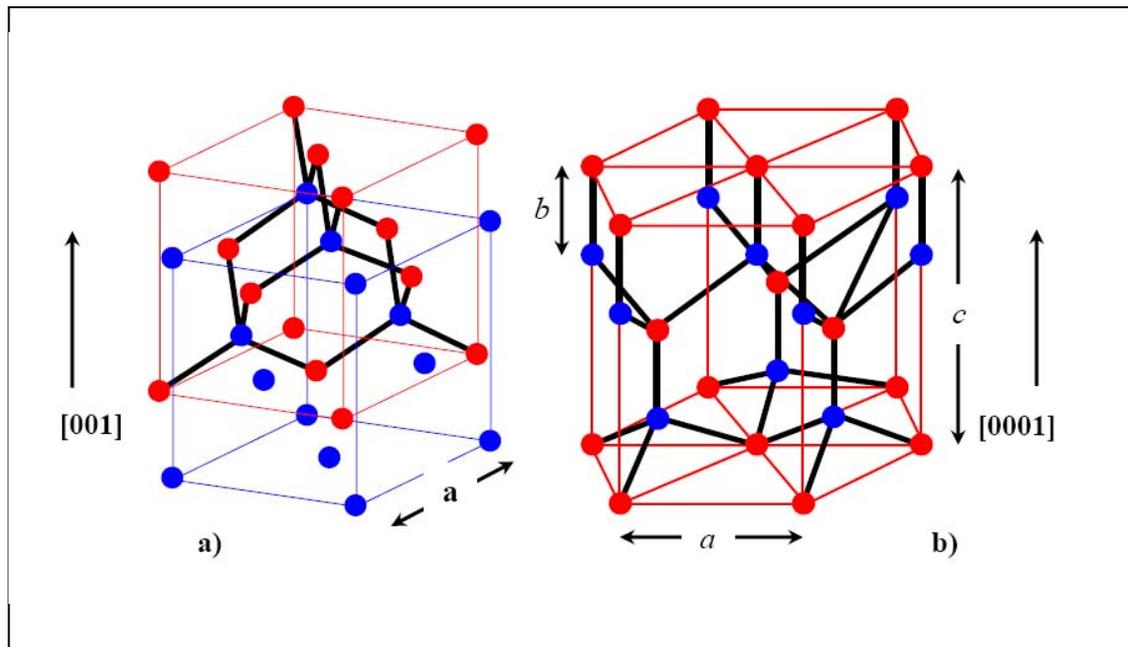


Figure 1.1: Crystalline structures of the a) diamond and zinc blende (cubic) and b) wurzite (hexagonal) semiconductors

As mentioned, the crystal structure of a semiconductor depends on growth conditions. During the growth of thin films of the II-VIs, it is common to obtain the cubic and hexagonal phases simultaneously (which is rarely found in bulk materials). Table 1.1 below summarizes the lattice parameters of CdTe and CdSe, II-VI binaries with both zinc blende and wurzite structures.

Table 1.1: Semiconductor crystalline structure

Zinc blende (Å)			Wurzite (Å)			
Compound	a	b	a	c	c/a	b
CdTe	6.478	2.805	4.572	7.484	1.637	2.802
CdSe	6.050	2.620	4.30	7.013	1.631	2.630

1.3 Cadmium Selenide, CdSe

Cadmium selenide, CdSe is a solid, binary compound of cadmium and selenium. This material is transparent to infra-red (IR) light, and has seen limited use in windows for instruments utilizing IR light. CdSe in its wurzite crystal structure is an important II-VI semiconductor. As a semiconductor CdSe has a band gap of 1.74 eV (Shreekanthan et al. 2003) at 300 K and a n-type semiconductor as reported by Velumani et al (2004). CdSe is also being developed for use in photoconductors, solar cells, thin film transistors, gas sensors, acousto-optic devices, photographic photoreceptors, photoelectrochemical (PEC) cells, non-linear optics, gamma-ray detectors, large-screen liquid crystal display (Velumani et al., 2004).