



**UNIVERSITI PUTRA MALAYSIA**

***TREATMENT OF PALM OIL MILL EFFLUENT USING SANDWICH  
ULTRAFILTRATION TECHNIQUE***

**NAZATUL SHIMA BINTI AZMI**

**FK 2015 47**



**TREATMENT OF PALM OIL MILL EFFLUENT USING  
SADWICH ULTRAFILTRATION TECHNIQUE**

**By**

**NAZATUL SHIMA BINTI AZMI**

**Thesis Submitted to the School of Graduate Studies, Universiti  
Putra Malaysia, in Fulfilment of the Requirements for the Degree of  
Master Science**

**May 2015**

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

## **TREATMENT OF PALM OIL MILL EFFLUENT USING SANDWICH ULTRAFILTRATION TECHNIQUE**

By

**NAZATUL SHIMA BINTI AZMI**

**May 2015**

**Chairman : Khairul Faezah Md. Yunos, PhD**

**Faculty : Engineering**

Nowadays, the treatment of palm oil mill effluent (POME) has become a major critical issue in Malaysia that needs to be highlighted. This is due to the extreme organic matter in POME that needs to be treated properly to tackle the environmental issue. POME is a thick brownish viscous liquid waste with an unpleasant odour, and high in colloidal suspension and organic matter. With the needs to solve the problems in terms of environmental protection, economical viability, and sustainable development, a recent innovative ultrafiltration technique using multiple membranes known as “sandwiches membrane”, has been extended for POME treatment. This work was carried out to evaluate the potential of pre-treatment methods (adsorption-settling-surface filtration) prior to ultrafiltration treatment and to investigate the potential of ultrafiltration membrane using single and sandwich configurations to reclaim clear water in the POME. This work is divided into two parts which are: (1) pre-treatment stage prior to ultrafiltration membrane and (2) POME treatment using sandwich membranes. For the pre-treatment of POME prior to ultrafiltration there were two stages involved; adsorption with settling treatment and surface filtration. In the first stage, the combined effects for adsorption with settling experimental conditions such as adsorbent dosage, treatment time and stirring speed in one hour settling time were investigated. The performance of the adsorption and settling stage using palm kernel shell-based activated carbon (PKS-AC) was based on the analysis of the suspended solid. The supernatant was then

pipette out and subjected to simple surface filtration, under vacuum through Whatman® qualitative filter paper, Grade 4 (20-25 µm) and finally to Whatman® qualitative filter paper, Grade 3 (6 µm) before proceeding to the ultrafiltration process. For ultrafiltration membrane treatment, dead-end filtration mode was used. Two 5 kDa flat sheets regenerated cellulose (RC) ultrafiltration membranes were sandwiched together in various orientations without any spacer in between. The effect of operating pressure, stirring speed and pH on the permeate flux and qualities namely total solid, dissolved solid, suspended solid, biological oxygen demand (BOD<sub>5</sub>), chemical oxygen demand (COD), and turbidity were also investigated. The pollutant concentration percentage reduction for the first stage of pre-treatment using 0.20g/L of PKS-AC at 39.82 rpm stirring speed in 35.94 min and 60 min of sedimentation time of POME showed a significant reduction in term of total solid (67.30%), dissolved solid (47.11%), suspended solid (71.26%), BOD<sub>5</sub> (63.23%), COD (42.38%) and turbidity (63.31%) respectively. In the second stage of pre-treatment, the pollutant concentration was further reduced to 65.36%, 48.75%, 87.57%, 84.5%, 48.9% and 78.9% for total solid, dissolved solid, suspended solid, BOD<sub>5</sub>, COD and turbidity respectively. After the pre-treatment stage, the membrane technique was applied with purpose to further reduce the pollutant concentration and reclaiming the crystal clear water that complied with WHO water reuse standard. Result for single membrane was compared to those of sandwich with various configurations. Interestingly, SB-sandwich configuration with bottom membrane in the reverse orientation significantly reduced almost 99% of pollutant in raw POME. The best conditions using SB-sandwich was achieved at pH 8, 600 rpm of stirring speed and by applying 2 bar of operating pressure for 90 min of operating time with 47.24 L/m<sup>2</sup>h of permeate flux. Applying these conditions successfully reclaimed clear water with low concentration of total solid (138 mg/L), dissolved solid (123 mg/L), suspended solid (15 mg/L), BOD<sub>5</sub> (90 mg/L), COD (113.3 mg/L) and turbidity (0.8 NTU) from POME. Moreover, by comparing between the single and SB-sandwich membrane, showed some differences in pollutant reduction: total solid (11.45%), dissolve solid (0.28%), suspended solid (53.85%), BOD<sub>5</sub> (60%), COD (14.12%) and turbidity (70.12%). Hence, by applying the combination technique of adsorption-settling-surface filtration (pre-treatment) with sandwich membrane ultrafiltration technique successfully treat POME and reclaim crystal clear water that complied with WHO water reuse standard.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah sarjana sains

**RAWATAN EFLUEN KILANG MINYAK KELAPA SAWIT  
MENGUNAKAN TEKNIK SANDWIC MEMBRAN  
ULTRATURASAN**

Oleh

**NAZATUL SHIMA BINTI AZMI**

**Mei 2015**

**Pengerusi : Khairul Faezah Md. Yunos, PhD**

**Fakulti : Kejuruteraan**

Pada masa kini, rawatan efluen kilang minyak kelapa sawit (POME) telah menjadi isu utama dan kritikal di Malaysia. Isu ini telah diketengahkan kerana kandungan organik yang amat tinggi dalam POME yang perlu dirawat dengan betul untuk mengurangkan isu alam sekitar. POME adalah sisa cecair likat berwarna coklat dengan bau yang tidak menyenangkan, dan tinggi di dalam pepejal terampai dan bahan organik. Oleh kerana perlunya untuk menyelesaikan masalah ini dari segi perlindungan alam sekitar, daya maju ekonomi, dan pembangunan mampan, teknik ultraturasan yang inovatif bagi rawatan POME, dengan menggabungkan beberapa membran yang dikenali sebagai "membran sandwich", telah dikaji dengan lebih lanjut. Kerja penyelidikan ini dilakukan untuk menilai potensi teknik pra-rawatan (jerapan-enapan-turasan permukaan) terdahulu sebelum rawatan ultraturasan dan mengkaji potensi membran ultraturasan dengan menggunakan konfigurasi tunggal dan sandwich bagi pulih guna air jernih daripada POME. Kerja penyelidikan ini terbahagi kepada dua bahagian iaitu: (1) peringkat pra-rawatan terdahulu sebelum membrane ultraturasan dan (2) rawatan POME menggunakan sandwich membrane. Terdapat dua peringkat pra-rawatan terdahulu sebelum ultraturasan; rawatan jerapan dengan enapan dan turasan permukaan. Di dalam peringkat pertama, kajian telah dilakukan terhadap kesan gabungan keadaan uji kaji bagi jerapan dengan enapan seperti dos bahan penyerap, masa rawatan dan

kelajuan dengan satu jam penganapan. Prestasi peringkat jerapan dan enapan menggunakan karbon teraktif berasaskan tempurung buah kelapa sawit (PKS-AC) adalah berdasarkan analisa peratusan pepejal terampai yang dapat dikurangkan. Selepas itu, supernatan di keluarkan menggunakan pipet dan menjalani turasan permukaan yang mudah melalui kertas turasan kualitatif Whatman®, Gred 4 (20-25 µm) dan akhir sekali kertas turasan kualitatif Whatman®, Gred 3 (6 µm) menggunakan vakum Untuk rawatan membran ultraturasan, mod penapisan buntu digunakan. Dua helai ultraturasan bersaiz 5 kDa selulosa berregenerasi selulosa (RC) membran ultraturasan telah diapit bersama-sama dalam pelbagai orientasi tanpa pemisah di antaranya. Kesan tekanan operasi, kelajuan aduk dan pH terhadap fluks dan kualiti air seperti jumlah pepejal, pepejal terlarut, pepejal terampai, keperluan oksigen biologi (BOD<sub>5</sub>), keperluan oksigen kimia (COD), dan kekeruhan juga disiasat. Daripada analisis pengoptimuman dengan menggunakan 0.20g/L PKS-AC pada kelajuan 39.82 rpm selama 35.94 min dan 60 min masa pemendapan,peratus kepekatan bahan cemar bagi pra-rawatan POME peringkat pertama menunjukkan penurunan signifikan pada jumlah pepejal (67.30%), larut pepejal (47.11%), pepejal terampai (71.26%) BOD<sub>5</sub> (63,23%), COD (42.38%) dan kekeruhan (63.31%). Kepekatan bahan cemar dapat dikurangkan lagi di dalam pra-rawatan peringkat kedua sebanyak 65.36%, 48.75%, 87.57%, 84.5%, 48.9% dan 78.9% untuk jumlah pepejal, larut pepejal, pepejal terampai, BOD<sub>5</sub>, COD dan kekeruhan. Selepas peringkat pra-rawatan, teknik membran telah digunakan dalam tujuan untuk mengurangkan lagi kepekatan bahan pencemar dan pulih air jernih. Menariknya, konfigurasi SB-sandwic dengan susunan konfigurasi membran yang berada di bahagian bawah yang sonsang menunjukkan pengurangan hampir 99% pengurangan bahan pencemar. Kondisi yang terbaik telah dicapai dalam ultraturasan POME dengan menggunakan konfigurasi membran SB-sandwic, pH 8, 600 rpm kelajuan pengadukan dan dengan tekanan 2 bar selama 90 minit bersama 47.24 L/m<sup>2</sup> h fluks telap. Dengan menggunakan kondisi ini, pulih guna air bersih berjaya diperolehi daripada POME dengan kepekatan jumlah pepejal (138 mg/L), larut pepejal (123 mg/L), pepejal terampai (15 mg/L) BOD<sub>5</sub> (90 mg/L), COD (113.3 mg/L) dan kekeruhan (0.8 NTU) yang rendah. Tambahan pula, perbandingan antara membran tunggal dan SB-sandwic menunjukkan perbezaan penurunan bahan pencemar: jumlah pepejal (11.45%), larut pepejal (0.28%), pepejal terampai (53.85%) BOD<sub>5</sub> (60%), COD (14.12%) dan kekeruhan (70.12%). Oleh yang demikian, dengan menggunakan teknik gabungan jerapan-enapan-turasan permukaan (pra-rawatan) dengan teknik ultraturasan membran sandwic boleh merawat POME dan memperoleh

air guna semula yang jernih yang memenuhi syarat standard WHO bagi air guna semula berjaya diperolehi dari POME





## ACKNOWLEDGEMENTS

First and foremost, I would like to thank to ALLAH S.W.T because with His blessing, I had complete this research after a few years of struggles. Special thanks and gratitude to my supervisory committee, Dr. Khairul Faezah binti Md. Yunos, Dr. Azhari Samsu bin Baharuddin and Dr. Amimul Ahsan for their guidance, advices and support.

I also would like to express my thanks to my family whom has been very supportive and always be on my side. Not to forget, to all my friends who are always there to support and especially during the hard time.

Lastly, my sincere thanks to the all staff and Lab Technician from Department of Process and Food Engineering for their kindness, willingness and cooperation in helping me.

I certify that a Thesis Examination Committee has met on 29 May 2015 to conduct the final examination of (student's name) on her thesis entitled "Treatment of Palm Oil Mill Effluent using Sandwich Ultrafiltration Technique" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

**Yus Aniza Yusof, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Siti Mazlina Mustapa Kamal, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Rozita Omar, PhD**

Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Abdul Wahab Mohammad, PhD**

Professor Dato' Ir.  
Universiti Kebangsaan Malaysia  
Malaysia  
(External Examiner)



**ZULKARNAIN ZAINAL PhD**

Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 12 August 2015

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of master science. The members of the Supervisory Committee were as follows:

**Khairul Faezah Md. Yunos, PhD**

Senior Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Azhari Samsu Baharuddin, PhD**

Senior Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**Amimul Ahsan, PhD**

Senior Lecturer  
Department of Civil  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

---

**BUJANG KIM HUAT, PhD**

Professor and Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

## Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Name and Matric No.: NAZATUL SHIMA BINTI AZMI (GS30095)

## Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: \_\_\_\_\_

Name of Chairman  
of Supervisory  
Committee:

Khairul Faezah Md.  
Yunos, PhD

Signature: \_\_\_\_\_

Name of Member  
of Supervisory  
Committee:

Azhari Samsu Baharuddin,  
PhD

Signature: \_\_\_\_\_

Name of Member  
of Supervisory  
Committee:

Amimul Ahsan, PhD

## TABLE OF CONTENTS

	<b>Page</b>
<b>ABSTRACT</b>	i
<b>ABSTRAK</b>	iii
<b>ACKNOWLEDGEMENT</b>	v
<b>APPROVAL</b>	vi
<b>DECLARATION</b>	viii
<b>LIST OF TABLES</b>	xiii
<b>LIST OF FIGURES</b>	xv
<b>LIST OF ABBREVIATIONS</b>	xvi
<b>LIST OF NOMECLATURES</b>	xvii
<b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	
1.1 Background of study	1
1.1.1 Palm oil industry in Malaysia	1
1.1.2 Palm oil mill effluent (POME)	2
1.1.3 POME treatment	3
1.2 Problem statement and research gap	4
1.3 Motivation	5
1.4 Objectives	6
1.5 Summary of thesis	6
1.6 Significant and limitation of the study	6
1.7 Outline of thesis	8
<b>2 LITERATURE REVIEW</b>	
2.1 POME and its legislation	9
2.2 POME treatments	11
2.2.1 Anaerobic, facultative pond and anaerobic and facultative digestion	11
2.2.2 Evaporation treatment	11
2.2.3 Membrane treatment	12
2.3 Adsorption and settling treatment	14
2.3.1 Activated carbon	15
2.3.2 Activated biocarbon (biochar)	16
2.4 Surface Filtration	17
2.5 Membrane technology	18
2.5.1 Ultrafiltration	21
2.5.2 Permeate flux	23
2.6 Modification of membrane configuration	26
2.7 Sandwich membrane	27
2.8 Conclusions	30

<b>3</b>	<b>GENERAL MATERIAL AND METHODS</b>	
	3.1 Palm oil mill effluent (POME)	31
	3.2 Characteristics of adsorbent	31
	3.3 Characteristics of media filter for surface filtration	32
	3.4 Characteristic of ultrafiltration membrane	32
	3.5 General experimental plan	33
	3.6 Adsorption and settling treatment	36
	3.6.1 Batch study for adsorption and settling treatment	35
	3.6.2 Experimental design	36
	3.7 Ultrafiltration membrane treatment	37
	3.7.1 Single ultrafiltration membrane treatment	39
	3.7.2 Sandwich ultrafiltration membrane treatment	39
	3.7.3 Permeate flux analysis	41
	3.8 Analytical method	41
	3.8.1 pH	41
	3.8.2 Total solid (TS)	41
	3.8.3 Suspended solid (SS)	42
	3.8.4 Dissolved solid (DS)	42
	3.8.5 Biological oxygen demand (BOD <sub>5</sub> )	42
	3.8.6 Chemical oxygen demand (COD)	44
	3.8.7 Turbidity	46
<b>4</b>	<b>CHARACTERISTICS OF PALM OIL MILL EFFLUENT (POME) AND PRE-TREATMENT STAGE PRIOR TO ULTRAFILTRATION MEMBRANE</b>	
	4.1 Overview	47
	4.2 Raw POME characteristics	47
	4.3 Batch adsorption and settling study	48
	4.3.1 Effect of adsorbent dosage of activated carbon for adsorption-settling treatment	48
	4.3.2 Effect of stirring time	49
	4.3.3 Effect of stirring speed	50
	4.5 Experimental range and levels of the independent variables	52
	4.6 Optimization and verification of models	53
	4.7 Comparison of quality pre-treated POME using two different adsorbent	54
<b>5</b>	<b>POME TREATMENT USING SANDWICH MEMBRANES</b>	
	5.1 Overview	57
	5.2 Water flux analysis	57

5.3 Ultrafiltration of POME using single membrane	58
5.3.1 Effect of stirring speed on the permeate flux, dissolved solid and turbidity	58
5.3.2 Effect of pH on the permeate flux, dissolved solid and turbidity	64
5.4 Ultrafiltration of POME using sandwich membrane	69
5.4.1 SS-sandwich and SB-sandwich ultrafiltration membrane configurations	72
5.4.2 Comparison of single and sandwich membrane configurations	
<b>6 CONCLUSIONS AND RECOMMENDATIONS</b>	
6.1 Conclusions	82
6.2 Recommendations	84
<b>REFERENCES</b>	85
<b>APPENDIXES</b>	95
<b>BIODATA OF STUDENTS</b>	108
<b>LIST OF PUBLICATIONS</b>	109

## LIST OF TABLES



<b>Table</b>	<b>Page</b>	
1.1	Characteristics of POME and its respective standard discharge limit by the Malaysian Department of the Environment.	3
2.1	Characteristic of POME.	10
2.2	Summary of various treatments to treat POME.	13
2.3	Size of material retained, driving force and type of membrane.	19
2.4	Four types of membrane devices.	20
2.5	Summary of the relevant previous work on sandwich configurations.	29
3.1	Properties of activated carbon.	32
3.2	Experimental conditions and range batch study for adsorption-sedimentation experiments.	36
3.3	Actual and coded factor for 20 runs of experimental design.	37
4.1	Experimental range and levels of the independent variables.	53
4.2	Optimization of factors for adsorption treatment using Design Expert® Version 6.0.4 software with theoretical and experimental value of response.	54
4.3	Comparison of various parameter on quality of pre-treated POME using two different activated carbon in adsorption-settling treatment	55
4.4	Summary of the pre-treatment of POME	55
5.1	Permeate flux (L/m <sup>2</sup> h) at early and end stage of sandwich ultrafiltration of pre-treated POME for pH 5.85.	72
5.2	Table 5.2: Comparison of various parameters on quality of treated POME after ultrafiltration	79

## LIST OF FIGURES

<b>Figure</b>		<b>Page</b>
1.1	Palm oil processing flow chart	2
2.1	Adsorption equilibrium	14
2.2	Mechanism of surface filtration	18
2.3	The schematic diagrams of the dead-end mode and its effect on the permeate flux and height of the cake layer	21
2.4	The schematic diagrams of the cross-flow mode and its effect on the permeate flux and height of the cake layer	21
2.5	Schematic diagrams of the principal types of membranes	22
2.6	Illustration for an actual membrane compared to an ideal membrane	22
2.7	Pressure dependence of permeate flux and limiting flux concept	24
2.8	Concentration polarization on a membrane surface	25
2.9	Schematic illustration of membrane configuration used by Boyd and Zydney	28
3.1	SEM image of RC membrane.	33
3.2	Flow diagram of the experimental work	34
3.3	Ultrafiltration stirred cell set up	38
3.4	Schematic diagram of ultrafiltration stirred batch system	38
3.5	Ultrafiltration membrane configurations: (a) single membrane; (b) SS-sandwich membrane; (c) SB-sandwich membrane	40
3.6	The BOD <sub>5</sub> procedure	43
3.7	The DO procedures	44
3.8	The COD procedures	45
4.1	Raw POME	47
4.2	Effect of adsorbent dosage on suspended solid reduction	48
4.3	Effect of stirring speed on suspended solid reduction	50
4.4	Effect of stirring speed on suspended solid reduction	51
4.5	SEM image of CAC (a) before and (b) after the adsorption treatment of POME	52
4.6	SEM image of PKS-AC (a) before and (b) after adsorption treatment of POME.	52
4.7	Comparison of parameter concentration with different samples.	56
5.1	Water flux analysis	58
5.2	Permeate flux profile without stirring (0 rpm)	59
5.3	Permeate flux profile for three different stirring speeds	60
5.4	Permeate flux analysis on different pressure and speed for 90 minutes operation time at pH 5.85	61
5.5	Effect of stirrer speed on dissolved solid concentration after ultrafiltration of POME.	62
5.6	Effect of stirrer speed on turbidity after ultrafiltration of	63

	POME.	
5.7	Permeate flux analysis on different pressure and feed pH for 90 minutes operation time using stirrer speed 600 rpm	65
5.8	Effect of pH solution on dissolved solid concentration after ultrafiltration of POME using 600 rpm stirrer speed.	66
5.9	Intrinsic and self-rejection of particles by membrane	67
5.10	Effect of solution pH on turbidity after ultrafiltration of POME using 600 rpm stirring speed	68
5.11	Permeate flux changes at pressure 1.5 bar with various pH using SS-sandwich ultrafiltration membrane configuration	70
5.12	Permeate flux changes at pressure 2 bar with various pH SS-sandwich ultrafiltration membrane configuration	70
5.13	Permeate flux changes at pressure 1.5 bar with various pH using SB-sandwich ultrafiltration membrane configuration	71
5.14	Permeate flux changes at pressure 2 bar with various pH SB-sandwich ultrafiltration membrane configuration	71
5.15	Permeate flux comparison on single, SS-sandwich and SB-sandwich configuration on different feed pH at pressure 1.5 bar	73
5.16	Permeate flux comparison on single, SS-sandwich and SB-sandwich configuration on different feed pH at pressure 2 bar	73
5.17	Comparison of dissolved solid concentration after ultrafiltration of pre-treated POME in different configuration and feed pH with operating pressure 1.5 bar	75
5.18	Comparison of dissolved solid concentration in permeate after ultrafiltration of pre-treated POME in different configuration and feed pH with operating pressure 2 bar	75
5.19	Comparison of turbidity in permeate after ultrafiltration of POME in different configuration and feed pH with operating pressure 1.5 bar	76
5.20	Comparison of turbidity in permeate after ultrafiltration of POME in different configuration and feed pH with operating pressure 2 bar	77
5.21	From left – Raw POME, Pre-treated POME, treated POME using single membrane, treated POME using SB-sandwich membran	80
5.22	SEM images of the RC ultrafiltration membrane surface for (a) new membrane and (b) fouled membrane	81

## LIST OF ABBREVIATIONS

POME	Palm oil mill effluent
EFB	Empty fruit bunches
FFB	Fresh fruit bunches
PKS-AC	Palm kernel shell - based activated biocarbon
ANOVA	Analysis of variance
CAC	Commercial activated carbon
BOD <sub>5</sub>	Biological oxygen demand
COD	Chemical oxygen demand
DOE	Department of the environment
PKS	Palm kernel shell
RC	Regenerated cellulose
SEM	Scanning electron microscope
BET	Brunauer, Emmett, and Teller
BJH	Barret-Joyner-Halenda
FC-CCD	Face centred central composite design
DO	Dissolved oxygen
FAS	Ferrous ammonium sulphate
DOE	Design of experiment

## LIST OF NOMECLATURE

$\text{CH}_4$	Methane
VS	Volatile solid
MOs	Microorganism
J	Permeate flux
$A_m$	Membrane area
dv	Amount of permeate collected
dt	Time taken for permeate flow to be taken
$S_{\text{BET}}$	Surface area
NTU	Nephelometric turbidity units



# CHAPTER 1

## INTRODUCTION

### 1.1 Background of study

#### 1.1.1 Palm oil industry in Malaysia

Oil palm has become one of the most important and profitable crops in Malaysia. Malaysia was operated about 425 palm oil mill and became the largest producer and exporter around the world (MPOB, 2012). Furthermore, during the period between 2013 and 2014, the palm oil production is increasing 6,975,292 tonne to 7,494,682 tonne (MPOB, 2014). Hence, the palm oil production is expected to increase based on the current demand for palm oil and oleo chemical industries (Ahmad *et al.*, 2011).

Unfortunately, along with the increase of this profitable industry, the productions of wastes resulted from the palm oil processing also increases. There are two types of wastes which are solid and liquid wastes. Solid wastes typically consist of palm kernel shell, mesocarp fruit fibres and empty fruit bunches. The liquid waste generated from the palm oil mill is called palm oil mill effluent (POME).

Typical palm oil processing flow chart can be seen on Figure 1.1. From the waste production view point, the amount of solid palm oil waste available from a mill can be substantial. This consists of empty fruit bunches (EFB), palm kernel shell, mesocarp fibres, and possibly solids from decanters. This biomass normally can be converted into useful product. Along with the palm oil production, a palm oil mill also produces an average of 0.65 tonne of raw POME from every ton of fresh fruit bunches (FFB) processed. Mainly, the most critical waste that needs to be treated seriously is POME due to the high contents of pollutant concentration such as natural organic matter, BOD<sub>5</sub>, COD, oil and grease. This is because POME will give big impact to the river and environment with the emission of biogas if it is discharge without proper treatment.

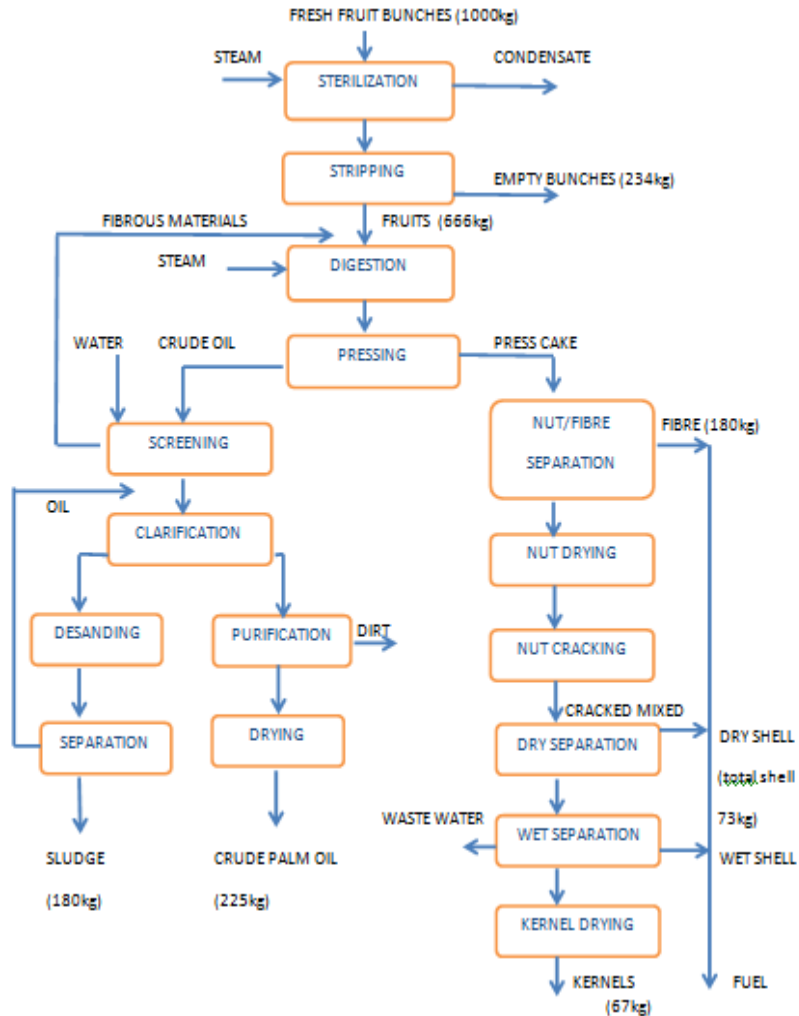


Figure 1.1: Palm oil processing flow chart (Sivasothy, 2000).

### 1.1.2 Palm oil mill effluent (POME)

As a general definition from the words itself, palm oil mill effluent (POME) is a wastewater that produce from the palm oil processing plant. From visual and sensory observation, POME is a thick brownish viscous liquid waste with an unpleasant odour that is high in colloidal suspended matter (Ahmad *et al.*, 2009). POME is produced mainly from oil extraction, washing and cleaning processes in the mill and it includes cellulosic material, fat, oil and grease (Agamuthu, 1995; Rupani *et al.*, 2010). POME can be classified as non-toxic waste because there were no chemical added during the process. It contains water (95-96%), suspended solids (2-4%) and oil (0.6-0.7%) with pH 4.0 – 4.5 (Foo and Hameed, 2010). POME also has a high organic content, namely

oil and fatty acids (Baharuddin *et al.*, 2010). If POME is discharged without a proper treatment apply, waterways will be polluted due to its high BOD<sub>5</sub> (25,000 mg/L), COD (53,630 mg/L), oil and grease content (8,370 mg/L) and suspended solid content (19,020 mg/L) (Ma 1995; Wu *et al.*, 2007). In addition, as reported by Department of Environmental (DOE), Malaysia account about 10% of heavily polluted or dead river, 63% are polluted and only 27% are clean (Fuadi *et al.*, 2012). For this reason, the palm oil industry has a strong responsibility to face the problem in terms of environmental protection, economical viability, and sustainable development.

In order to implement the strict regulations of the Environmental Quality (Prescribed Premises) (Crude Palm Oil) Order, 1997 and the Environment Quality (Prescribed Premises) (Crude Palm Oil) Regulations, 1997, POME needs to be treated effectively and in a proper way. Moreover because of the huge capacity in this sector, it is critical to treat palm oil mill effluent (POME) to an acceptable level (Table 1.1) before discharging it. If POME did not being treat accordingly, it give a big impact and cause severe pollution of waterways due to oxygen depletion and other reflected effect. This is due to the presence of unrecovered oil which causes the raw or partially treated POME to have an extremely high content of degradable organic matter.

**Table 1.1: Characteristics of POME and its respective standard discharge limit by the Malaysian Department of the Environment (Ahmad, 2003; Hanif, 1994).**

Parameter	Standard limit, mg/L
pH	5-9
Oil and grease	50
BOD <sub>5</sub>	100
COD	-
Total solids	-
Suspended solids	400
Total nitrogen	150

### 1.1.3 POME treatment

Nowadays, there is several innovative treatment technologies have been developed to treat POME wastewater. It is important to consider some of the factors before applying the technology such as available space for construction for treatment facilities, ability of process equipment, limitation of waste disposal, desired final water quality and cost of capital and operating (Fuadi *et al.*,2012). There are three treatments technologies that can be used to treat POME wastewater which are biological, physical and chemical treatment. Biological treatment is normally involved with biodegradation process that involves adsorption by microbial biomass and bioremediation systems (Ahmaruzzaman, 2008). This is because many microorganisms are able to accumulate and degrade different pollutant. Anaerobic digestion, ponding system, activated sludge process and aerated lagoon fall under biological treatment. Physical method of wastewater treatment is solid-liquid separations technique of which filtrations is the main role that can use various media as medium of filtration (Cheremisinoff, 2002).



Some of the examples of physical treatment are granular-medium filtration, sedimentation, membrane separation, and screening. Chemical method relies upon the chemical interactions of the components that need to be demolished from wastewater. The use of the chemical is as either aid in the contaminant separation from wastewater or assists in the destruction or neutralization of harmful effects that associated with contaminants. Some of the chemical method uses are chemical precipitation, adsorption, disinfection, coagulation and others.

## 1.2 Problem statement and research gap

Over the years, most of the palm oil mills apply biological treatment such as anaerobic or facultative digestion which is believed can overcome the waterways pollution problem (Quah *et al.*, 1982; Ahmad *et al.*, 2003a). Other than that, there are also some mills that utilized zero waste technologies and the treated POME is applied to land (Shah and Kaur, 2004). Conversely, there are several problems and disadvantages arise from the current treatment. In order to ensure that a conducive environment is maintained for microorganisms in which to survive, the biological treatment system requires proper maintenance and monitoring as the bacteria is very sensitive to the changes in the environment. In addition, attentions from skilled operators as well as the commitment from the management are also required. Other than that, biological treatment also generates vast amount of biogas. This biogas consists of methane, carbon dioxide and trace amounts of hydrogen sulphide. These gases are corrosive and odorous (Ahmad *et al.*, 2003a). Normally these issues are always ignored by the mill owners because the effluent treatment is often viewed as a burden and given the lowest priority. Due to the problems and disadvantages of biological treatment, it is suggested and believed that membrane separation technology will be able to treat POME in a more beneficial ways.

However, palm oil industries always find the membrane technology as the expensive treatment due to the high cost of installation set up and maintenance. A lot of study has been done on applying the membrane technology for POME treatment but still it cannot convince the palm oil management due to this high cost problem.

Currently, the ultrafiltration of POME showed a great potential in reclaim a better quality of treated POME. However, the industries face the problem in obtaining the clear crystal water from ultrafiltration of POME without using reverse osmosis membrane which is more expensive. This is mainly due to an uneven and rather broad pore size distribution of the membranes which often limit the rejection and the efficiency of the separation. Although some commercial membranes today have a tighter pore size distribution, it has been found by other researcher that sandwich membrane can improve the rejection characteristics of ultrafiltration membranes. Based on the critical review of previous work, the multilayer or sandwiches of membrane was commonly studied for the protein separation and there was no study applying this technology for POME treatment yet. The potential of membrane layers or sandwich membrane for ultrafiltration of POME has not been explored yet. Therefore, an interest arises to investigate the potential of sandwich membranes of various orientations and the effect of these configurations on the filtration behavior of particles solid in POME. These particles solid in POME which will contribute in determine the other pollutant concentration in POME. Consequently, two flat membranes are sandwiched together in

various configurations in a single stirred cell ultrafiltration device and the effects of various sandwiches on the ultrafiltration of POME are examined in this study. Moreover, the high cost of maintenance can be solved by applying the adsorption-settling-surface filtration treatment as a pre-treatment to reduce fouling effect during ultrafiltration process.

### 1.3 Motivation

The use of membrane separation technology is normally coupled with pre-treatment. There are several advantages to use membrane separation technology. It can be applied across a wide range of industries; the quality of the treated water is more consistent regardless of the influent variations; it can be used in a process to allow the recycling of selected waste streams within a plant; highly skilled operators would not be required when the plant can be fully automated (Cheryan and Rajagopalan, 1998); and the water reclaimed from this treatment could be reused in the mill. Thus, the primary advantages lie in the reduction of the cost for the water supply and its further treatment as well as in the effective elimination of the pollutant from the POME. Furthermore, if the methods of treatment are easy to operate, this method will then reduce the cost of operation (Wang *et al.*, 2012).

Generally, membrane cannot be used directly to treat oily wastewater like POME. This is because membrane is sensitive and costly component of the treatment process. In order to reduce the cost of maintenance later on, pre-treatment should be applied to POME and membrane life can be extended also long-term system performance can be improved (Water Environment Federation, 2006). Pre-treatment was applied to avoid membrane fouling which can reduce membrane performance. There are several pre-treatment can be applied such as flow equalization, fine screens, strainers, chlorination, chemical coagulation, adsorption and others. These pre-treatment is include based on influent water quality, filtrate quality requirements, and the membrane used (Water Environment Federation, 2006). It is suggested to apply palm kernel shell-based activated carbon (PKS-AC) adsorption-settling-surface filtration as pre-treatment.

## **1.4 Objectives**

The objectives of the study are as follows:

1. To evaluate the potential of pre-treatment methods (adsorption-settling-surface filtration) prior to ultrafiltration treatment
2. To investigate the potential of ultrafiltration membrane using single and sandwich configurations to reclaim clear water in the POME.

## **1.5 Summary of thesis**

This study describes the treatment process in treating the raw POME. The raw POME was treated by coupling together ultrafiltration membrane treatment with pre-treatment method involves adsorption-settling-surface filtration treatment. This study also describes sandwich ultrafiltration membranes and discusses the potential of sandwich membrane configuration to enhance the performance of ultrafiltration module to effectively treating the POME.

The first part of the study involved pre-treatment by using adsorption-settling-surface filtration which initially applied before ultrafiltration of POME, to reduce the sludge and particles in POME. This pre-treatment was performed prior to reduce and avoid fouling effect on membrane during ultrafiltration membrane process.

The second part of this study proposed the use of ultrafiltration membrane in POME treatment. After pre-treatment stage, pre-treated POME was subjected to ultrafiltration membrane treatment. The ultrafiltration experimental was conducted using single and sandwich membrane (two flat ultrafiltration membranes were stack together without any spacer). The performance and behavior of these configurations were compared. The performance was in term of permeate flux behaviour and reduction in dissolved solid and turbidity.

## **1.6 Significant and limitation of the study**

Current treatments applied by the palm oil mill industries to treat POME have some disadvantages in term of economy viability, management facilities and maintenance, large treatment area required and time consuming. Moreover, almost all the method applied by the palm oil mill industries manage to reduce the pollutants in POME but failed to improve the color (clear water). Thus it is necessary to suggest and investigate a more practical method in treating POME.

This study will provide knowledge concerning the suggested method applied which is sandwich membrane configuration couple with PKS-AC adsorption-settling-surface filtration as pre-treatment. It is believed the findings from the suggested method will improve the colour of treated POME to clear water in line with significant reduction on

the pollutant in the POME. The findings in this study can also provide a fundamental knowledge for the sandwich membrane configuration in term of improving the pore size distribution arrangement in the membrane.

As a result of this study, knowledge of the ultrafiltration of POME using sandwich membrane couple with PKS-AC adsorption-settling-surface filtration (pre-treatment) can be obtained. Suitable operating conditions for both pre-treatment and sandwich membrane treatment also can be obtained to achieve high output with the better quality of treated POME

Unfortunately, there were some limitations encounters in this study. The problems were based on time constraint, condition of the lab surrounding and experimental rig (stirred cell) used in this study. In addition, the temperature of the solution cannot be changed due to the ultrafiltration cell was not suitably set up for temperature control. Due to these limitations, there was some ranges of variables were not being included in this study.

## **1.7 Outline of thesis**

### **Chapter 1 – Introduction:**

This chapter contains a short description of the subject that initiated this research, background on POME characteristics and treatment, motivation, objectives, summary and outline of the thesis.

### **Chapter 2 – Literature review:**

This chapter reviews the overall background of the POME treatment, including the concepts and technology that form a core of the thesis, and give a brief overview of the previous work. This overview provides a general discussion of related research.

### **Chapter 3 – Materials and methods**

This chapter presents the material and methods relevant to adsorption-settling-surface filtration treatment and ultrafiltration membrane treatment. This includes the experimental details of this proposed technique and procedures use in the thesis.

### **Chapter 4 - Characteristics of POME and pre-treatment stage prior to ultrafiltration**

This chapter presented the result and discussions on the pre-treatment method (adsorption-settling-surface filtration treatment).

### **Chapter 5 – POME treatment using sandwich membranes**

The objective in this section is to evaluate and compare the effectiveness of single and sandwich membrane in ultrafiltration of POME.

### **Chapter 6 – Conclusion and recommendations**

This chapter contains concluding remarks and recommendation for future work.

© COPYRIGHT UPM



## REFERENCES

- Abdelrasoul A., Doan H., and Lohi A. (2013). Chapter 8 - Fouling in membrane filtration and remediation methods, *Mass transfer-advanced in sustainable energy and environment oriented*. Dr. Hironori Nakajima (Ed.), DOI: [10.5772/52370](https://doi.org/10.5772/52370).
- Adi, H., Larson, I. and Stewart, P. (2007). Laser diffraction particles sizing of cohesize lactose powders. *Powder Technology* 179 (1-2): 90-94.
- Afonso, M. D. and Borquez, R. (2002). Review of the treatment of seafood processing wastewaters and recovery of proteins therein by membrane separation processes-prospects of the ultrafiltration of wastewaters from the fish meal industry. *Desalination*, 142(1): 29-45.
- Afonso, M. D. and Borquez, R. (2003). Nanofiltration of wastewater from the fish meal industry. *Desalination*, 151 (2): 131-138.
- Agamuthu, P. (1995). Palm oil mill effluent treatment and utilization In: Sastry CA, Hashim MA, Agamuthu, P. (eds) *Waste treatment plant*. New Delhi: Narosa Publishing House. 338-360.
- Agamuthu, P. and Tan, E. L. (1985). Digestion of dried palm oil mill ffluent by *Cellulomonas species*. *Microbiology Letters*. 30: 109-113
- Ahmad, A. L., Ismail, S., and Bahtia, S. (2005a). Ultrafiltration behavior in the treatment of agro industry effluent: Pilot scale studies. *Chemical Engineering Science*. 60 (19): 5385-5394.
- Ahmad, A. L. and Chan, C.Y. (2009). Sustainability of palm oil industries: An innovative treatment via membrane technology. *Journal of Applied Sciences*. 9 (17): 3074-3079.
- Ahmad, A. L., Chong, M. F., Bhatia, S., and Ismail, S. (2006). Drinking water reclamation from palm oil mill effluent (POME) using membrane technology. *Desalination*, 191 (1-3): 35-44.
- Ahmad, A. L., Ibrahim, N., Ismail, S. and Bhatia, S. (2002). Coagulation-sedimentation-extraction pre-treatment method for the removal of suspended solids and residual oil from palm oil mill effluent (POME). *IJUM Engineering Journal*, 3(1): 25-33.
- Ahmad, A. L., Ismail, S., and Bhatia, S. (2003a). Water recycling from palm oil mill effluent (POME) using membrane technology, *Desalination*. 157(1-3): 87-95.
- Ahmad, A. L., Ismail, S., Ibrahim, N. and Bhatia, S. (2003b). Removal of suspended solids and residual oils from palm oil mill effluent. *Journal of Chemical Technology and Biotechnology*, 78 (9):971-978.
- Ahmad, A.L., Sumathi, S. and Hameed, B.H. (2005b). Residual oil and suspended solid removal using natural adsorbents chitosan, bentonite and activated carbon. A comparative study. *Chemical Engineering Journal*. 108: 179-185.
- Ahmad, M. N., Mokhtar, M. N., Baharuddin, A. S., Hock, L. S., Ali, S. R. A., Aziz, S. A., Rahman, N. A., and Hassan, M. A. (2011). Changes in physiochemical and microbial community during co-composting of oil palm frond with palm oil mill effluent anaerobic sludge, *Bioresource Technology*, 6(4): 4762-4780.
- Ahmaruzzaman, M. (2008). Adsorption of phenolic compound on low-cost adsorbents: A review. *Advanced in Colloids and Interface Science*, 143 (1-2): 48-67.
- Alrawi, R. A., Rahman, N. N. N. A., Ahmad, A., Ismail, N. and Omar, A. K. M. (2013). Characterization of Oily and Non-Oily Natural Sediment in Palm Oil Mill Effluent. *Journal of Chemistry*. 213: 1-11.
- Ang, W. L., Mohammad, A. W., Hilal, N., and Leo, C. P. (2015). A review on the applicability of integrated/hybrid membrane processes in water treatment and desalination plants. *Desalination*. 363: 2-18.

- Anonymous,(2015). Porous ceramics filtrations and separation application. Retrieved 6 July 2015 from [http:// www.induc ceramic.com](http://www.induc ceramic.com).
- Arnal, J. M., Sancho, M., Verdú, G., Lora, J., Marín, J. F., and Cháfer, J.(2004). Selection of the most suitable ultrafiltration membrane for water disinfection in developing countries. *Desalination*, 168, 265-270.
- Azmi, N.S., Yunos, K. F. M., Bahrudin, A. S., Dom, Z. M. (2013). The effect of operating parameters on ultrafiltration and reverse osmosis of palm oil mill effluent for reclamation and reuse of water, *BioResources*. 8(1): 76-87
- Baharuddin, A. S., Lim, S. H., Md. Yusof, M. Z., Abdul Rahman, N. A., Md. Shah., U. K., Hassan, M. A., Wakisaka, M., Sakai, K., and Shirai, Y. (2010). Effects of palm oil mill effluent (POME) anaerobic sludge from 500 m<sup>3</sup> of closed anaerobic methane digested tank on press-shredded empty fruit bunch (EFB) composting process, *African Journal of Biotechnology*. 9 (16): 2427-2436.
- Baker, R. W. (2004). *Membrane Technology and Applications*. England: McGraw-Hill.
- Benito, J.M., Ebel, S., Gutierrez, B., Pazos, C. and Coca, J. (2001). Ultrafiltration of a waste emulsified cutting oil using organic membranes. *Water, Air and Pollution*, 128 (1-2): 181-195.
- Benito, J.M., Ebel, S., Gutierrez, B., Pazos, C. and Coca, J. (2001). Ultrafiltration of a waste emulsified cutting oil using organic membranes. *Water, Air and Soil Pollution*, 128 (1-2): 181-195
- Bhatnagar, A. and Sillanpaa, M. (2010). Utilization of agro-industrial and municipal waste materials as potential adsorbents for water treatment – A review. *Chemical Engineering Journal*. 157:277-296.
- Bong, K. P., Seung, H. S. and Young, J. Y. (2004). Selective biosorption of mixed heavy metal ions using polysaccharides. *Korean Journal of Chemical Engineering*, 21 (6): 1168-1172.
- Boyd, R. F. and Zydney, A. L. (1997). Sieving characteristics of multilayer ultrafiltration membranes. *Journal of Membrane Science*, 131 (1-2): 155-165.
- Braghetta, A. H., DiGiano, F. A., and Ball W. P. (1997). Nanofiltration of natural organic matters: pH and ionic strength effects. *Journal of Environmental. Engineering*,. 123 (7): 628-641.
- Brinck, J., Jonsson, A.S., Jonsson, B., and Lindau J. (2005). Influence of pH on the adsorptive fouling of ultrafiltration membranes by fatty acid. *Journal of Membrane Science*, 164 (1-2): 187-194.
- Çeçen, F., and Aktas, Ö. (2012). Activavated Carbon for Water and Wastewater Treatment. Intergration of Adsorption and Biological Treatment. Istanbul: Wiley-VCH Verlag GmbH & Co. KGaA.
- Cheremisinoff, N. P. (2002). *Handbook of water and wastewater treatment technologies*. Woburn: Butterworth-Heinemann.
- Cheryan, M., and Rajagopalan, M. (1998). Membrane processing of oily streams. Wastewater treatment and waste reduction, *Journal of Membrane. Science*. 151 (1): 13-28.
- Cho, J., Amy G. And Pellegrino J. (2000). Membrane filtration of natural organic matter factors and mechanisms affecting rejection and flux decline with charged ultrafiltration (UF) membrane. *Journal of Membrane Science*, 164 (1-2):89-100.
- Chun, Y., Sheng, G., Chiu, T. and Xing, B. (2004). Compositions and sorptive properties of crop residue-derived chars. *Environmental Science and Technology*, 38 (17): 4649-4655.
- Cui, Z. F., Jiang, Y., and Field, R. W. (2010). Chapter 1 - Fundamentals of Pressure-Driven Membrane Separation Processes. In Z. F. Cui and H. S. Muralidhara (Ed.), *Membrane Technology*, (pp 1-18). USA
- Das, R., Bhattacharjee, C., and Ghosh, S. (2009). Effects of operating parameters and nature of fouling behavior in ultrafiltration of sesame protein hydrolysate. *Journal of Desalination* 237:268-276.
- Dickenson, T. C. (2004). *Filters and Filtration Handbooks (4<sup>th</sup> Edition)*. Oxford: Elsevier Science Ltd.

- Doorn, M. R. J., Towprayoon, S., Vieira, S. M. M., Irving, W. Palmer, C., Pipatti, R. and Wang, C. (2006). 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Hayama: Institute for Global Environmental Strategies,
- Eaton, A. D., Clesceri, L.S. and Greenburg, A.E. (editors). (1995). Standard methods for the examination of water and wastewater. Washington D.C. U.S.A.: American Public Health Association, American water works association, and water environment association.
- Elmaleh, S. and Ghaffor, N. (1996). Crossflow Ultrafiltration of hydrocarbon and biological solid mixed suspension. *Journal of Membrane Science*, 118 (1): 111-120.
- Fane, A. G., Fell, C. J. D. and Waters, A. G. (1983). Ultrafiltration of protein solution through partially permeable membranes – the effect of adsorption and solution environment. *Journal Membrane Science*, 16:211-224.
- Feins M. and Sirkar. K. (2005). Novel internally staged ultrafiltration for protein purification. *Journal Membrane Science*, 248 (1-2): 137-148.
- Feins, M. and Sirkar, K. (2004). Highly selective membrane in protein ultrafiltration. *Biotechnology and Bioengineering*, 86 (6): 603-611.
- Field, R. W., Md. Yunus, K. F., and Cui, Z. (2009). Separation of proteins using sandwich membranes. *Desalination*. 245 (1-3): 597-605.
- Foo, K. Y. and Hameed B. H. (2010). Insight into the applications of palm oil mill effluent: A renewable utilization of the industrial agricultural waste. *Renewable and Sustainable Energy Reviews*. 14(5): 1445-1452.
- Fuadi, N. A., Ibrahim, A. S. and Ismail, K. N. (2012). Review study for activated carbon from palm shell used for treatment of wastewater. *Journal of Purity*. 1(5): 252-266.
- Garg, V.K., Gupta, R., Yadav, A. B., Kumar R.D. (2003). Dye removal from aqueous solution by adsorption on treated sawdust. *Bioresource Technology*, 89 (2): 121-124.
- Ghosh, R. (2003). *Protein bioseparation using ultrafiltration*. London: Imperial college press.
- Gimba, C. E. and Turoti, M. (2006). Adsorption Efficiency of Coconut Shell-Based Activated Carbons on Colour of Molasses, Oils, Dissolved Oxygen and Related Parameters from Industrial Effluent. *Science World Journal*. 1 (1): 21-26.
- Hameed, B.H., Tan, I. A. W., and Ahmad, A. L. (2008). Optimization of basic dye removal by palm oil palm fibre-based activated carbon using response surface methodology. *Journal of Hazardous Materials*, 158 (2-3): 324-332.
- Hammer, M. J. and JR, M. J. H. (2005). *Water and wastewater technology*. Singapore: Prentice Hall.
- He, Y., Li, G., Wang, H., Zhao, J., Su, H. and Huang, Q. (2008). Effect of operating conditions on separation performance of reactive dye solution with membrane process. *Journal of Membrane Science*, 321 (2): 183-189.
- Holdich, R. G., Cumming I. W., and Smith, I. D. (1998). Crossflow microfiltration of oil in water dispersions using surface filtration with imposed fluid rotation. *Journal of Membrane Science*. 143: 263-274.
- Huang, C. P. and Morehart, A. L. (1991). Proton competition in Cu (II) adsorption in fungal Mycellia. *Water Resources*, 25 (11): 1365-1375.
- Igwe, J. C. and Onyegbado, C. C. (2007). A review of palm oil mill effluent (POME) water treatment, *Global Journal of Environmental Research*, 1 (2): 54-62
- Issabayeva, G., Aroua, M. K. and Sulaiman, N. M. N. (2006). Removal of lead from aqueous solutions on palm shell activated carbon. *Bioresource Technology*. 97: 2350-2355.



- Jonsson, G. and Wenten, I. G. (1994). Control of concentration polarisation fouling and protein transmission of microfiltration processes within the agro-based industry, *Proceeding of the ASEAN-EU Workshop on Membrane Technology in Agro-based Industry*, Kuala Lumpur, Malaysia. 157-166
- Jumasiah, A., Chuah, T. G., Gimbon, J., Choong, T. S. U. and Azni, I. (2005). Adsorption of basic dye onto palm kernel shell activated carbon : sorption equilibrium and kinetic studies. *Desalination*. 186: 57-64.
- Kang, S.K. and Choo, K.H.(2003). Use of MF and UF membranes for reclamation of glass industry wastewater containing colloidal clay and glass particles. *Journal Membrane Science*, 223 (1-2): 89-103.
- Koltuniewicz, A.B. and Field, R. W. (1996). Process factor during removal of oil-in-water emulsions with cross flow microfiltration. *Desalination*, 105 (1-2): 79-89.
- Koros, W. J., Ma, Y. H. and Shimidzu, T. (1996). Terminology for membranes and membrane processes. *Pure & Applied Chemistry*, 68 (7):1479-1489.
- Kumar, S. M. and Roy, S. (2008). Recovery of water from sewage effluents using alumina ceramic microfiltration membranes. *Separation Science and Technology*, 43 (5): 1034-1064.
- Lau, W.J. and Ismail, A.F. (2010). Application of response surface methodology in PES/SPEEK blend NF membrane for dyeing solution treatment. *Membrane Water Treatment*. 1: 49–60.
- Ma, A. N. (1995). A novel treatment for palm oil mill effluent, *Palm Oil Research. Institute. Malaysia (PORIM)*, 29: 201-212.
- Ma, A. N. (2002). Carbon Credit from Palm Biogas and Biodeiesel. *Palm Oil Engineering Bulletin*. 65:24-26.
- Ma, A. N., (2000). Environmental management for the oil palm industry. *Palm Oil Development*, 30: 1-10.
- Mannan, S., Fakhru-Razi, A. and Alam, M. Z. (2007). Optimization of process parameters for the bioconversion of activated sludge by *Penicillium corylophilum*, using response surface methodology. *Journal of Environmental Science*, 19 (1): 23-28.
- Manttari, M., Pihlajamaki, A. and Nysrom, M. (2006). Effect of pH on hydrophilicity and charge and their effect on the filtration efficiency of NF membranes at different pH, *Journal of Membrane Science*, 280 (1-2): 311-320.
- Md. Yunos, K. F. and Field, R. W. (2008). Rejection amplification in the ultrafiltration of binary protein mixtures using sandwich configurations. *Chemical Engineering and Processing: Process Intensification*. 47 (7): 1053-1060.
- Mochizuki, S. A. and Zydney, A. L. (1993). Theoretical analysis of pore size distribution effects on membrane transport. *Journal of Membrane Science* 82 (3): 211-227.
- Mohammadi, T. and Esmaelifar, A. (2005). Wastewater treatment of a vegetable oil factory by a hybrid ultrafiltration-activated carbon process. *Journal of Membrane Science*. 254 (1-2): 129-137.
- Mohan, D. and Pittman, C. U. J. (2006). Activated carbons and low cost adsorbents for remediation of tri- and hexavalent chromium from water. *Journal of Hazardous Material*, 137 (2): 762-811.
- Mohan, D. and Sigh, K.P. (2002). Single- and multi-component adsorption of cadmium and zinc using activated carbon derived from bagasse – an agricultural waste. *Water Research*, 36 (9): 2304-2318.
- MPOB, (2012). Number and capacities of palm oil sectors, December 2012 (Tonnes/years),<http://bepi.mpob.gov.my/index.php/statistics/sectoral-status/106-sectoral-status-2012/512-number-a-capacities-of-palm-oil-sectors-2012.html>.

- MPOB, (2014). Monthly production of oil palm products summary for the month of May 2014. Retrieved 03 July 2014 from <http://bepi.mpob.gov.my/index.php/statistics/production/125-production-2014/660-production-of-oil-palm-products-2014.html>
- Najafpour, G. D. 2007. Chapter 16 - Membrane Separation Processes, *Biochemical Engineering and Biotechnology* (pp. 351-389). Elsevier.
- Najua, D. T., Luqman, C. A. Zawani, Z. and Suraya, A.R. (2008). Adsorption of copper from aqueous solution by *Elais Guineensis* kernel activated carbon. *Journal Engineering Science Technology*, 3 (2): 180-189
- Nakatsuka, S. and Michaels, A.S. (1992). Transport and separation of proteins by ultrafiltration through sorptive and non-sorptive membrane. *Journal of Membrane Science*, 69 (3): 189-211.
- Nicholas, P. C and Paul, N.C (1993). *Carbon adsorption for pollution control*. Englewoods cliffs, New Jersey: PTR prentice-Hall Inc.
- Oh, S. Y. and Shin, D. S. (2014). Removal of total dissolved solids in spent caustic using biochar: pretreatment for subsequent biological treatment. *Clean-soil,air, water*. 41: 1-4.
- Ohya, H., Kim, J.J., Chinen, A., Alihara, M., Semonoya, S.I., Negishi, Y., Mori, M. and Yasuda, M. (1998). Effect of pore size on separation of microfiltration of oily water using porous glass tubular membrane. *Journal of Membrane Science*, 145 (1): 1-14.
- Onundi, Y.B., Mamun, A.A., Al Khatib, M.F. and Ahmed, Y.M. (2010). Adsorption of copper nickel and lead ions from synthetic semiconductor industrial wastewater by palm shell activated carbon. *Journal Environmental Science Technology*, 7 (4): 751-758.
- Pfafflin-Zingler. (1980). Encyclopedia of Environment Science and Technology. *Gordon and Technology Scientific Publisher* pp. 962-964.
- Pons, M. P. and Fuste, C.M. (1993). Uranium uptake by immobilized cells of *Pseudomonas* strain EPS 5028. *Applied Microbiology and Biotechnology*, 39 (4-5): 661-665.
- Prazeres, D. M. (1997) A theoretical analogy between multistage ultrafiltration and size-exclusion chromatography. *Chemical Engineering Science*, 52 (6): 953-960.
- Quah, S. K., Lim, K. H., Gillies, D., Wood, B. J., and Kanagaratnam, J. POME treatment and land application system, Proceedings of the Regional Workshop on Palm Oil Mill Technology and Effluent Treatment, Kuala Lumpur, Aug. 17-18,1982. pp. 193-200.
- Ramalho, R. (2012). *Introduction to Wastewater Treatment Processes*. Oxford: Elsevier Science Ltd. pp. 71-72.
- Reed, B. E., Lin, W., Viadero, R. and Young, J. (1997). Treatment of oily wastes using high-shear rotary ultrafiltration. *Journal of Environmental Engineering*, 123 (12): 1234-1242.
- Ripperger, S., Gösele, W. and Alt, C. (2012). *Encyclopedia of industrial chemistry*. Filtrations (vol. 14). Weinheim: Wiley-VCH Verlag GmbH & Co. pp. 679.
- Rohrsetzer, S., Paszli, I. and Csempesz, F. (1998). Colloid stability of electro-statistically stabilized sols. Part III: The role of pH in hydration coagulation and peptization of SiO<sub>2</sub>- and Al<sub>2</sub>O<sub>3</sub> sols. *Colloid and Polymer Science*, 276 (3): 260-266.
- Rupani, P. F., Singh, R. P., Ibrahim M. H. and Esa, N. (2010). Review of current palm oil mill effluent (POME) treatment methods: Vermicomposting as a sustainable practice. *World applied science journal*. 10 (10): 1190-1201.
- Salahi, A., Abbasi, M. and Mohammadi, T. (2010). Permeate flux decline during UF of oily wastewater: Experimental and modelling. *Desalination*. 251 (1-3): 153-160.

- Scott K., Mahmood A.J., Jachuck R.J., Hu B. (2000). Intensified membrane filtration with corrugated membranes. *Journal of Membrane Science*, 173 (1): 1-16.
- Shah R. S., Kaur P. Treatment of Palm Oil Mill Effluent using membrane technology, Regional Symposium on Membrane Science and Technology 2004, Johor Bahru, Johor, April. 21-25, 2004. pp. 1-9
- Sivasothy, K. (2000). Palm oil milling technology, *Advances in Oil Palm Research*, 1 (747), Y. Basiron, B.S. Jalani, and K.W. Chan (eds) . 1: 744-782.
- Spricigo, C.B., Bolzan, A., Machado, R.A.F., Carlson, L.H.C., and Petrus, J.C.C. (2001). Separation of nutmeg essential oil and dense CO<sub>2</sub> with a cellulose acetate reverse osmosis membrane. *Journal of Membrane Science*, 146 (2): 173-179.
- Sulaiman, F., Abdullah, N., Gerhauser, H. and Shariff, A. (2011). An outlook of Malaysian energy, oil palm industry and its utilization of wastes as useful resources. *Biomass and Bioenergy*, 35 (9): 3775-3786.
- Sun, D., Duan, X., Li, W. and Zhou, D. (1998). Demulsification of water-in-oil emulsion by using porous glass membrane. *Journal Membrane Science*, 146 (1): 65-72.
- Sutanto J. Solvent extraction process to achieve zero-effluent and to produce quality animal feed from mill sludge. Paper presented at Proceeding National Workshop on Oil Palm By-Products Utilization, Kuala Lumpur, Malaysia. December 1981. pp 85-99.
- Tan, I. A. W., Ahmad, A. I. and Hameed, B. H. (2008). Enhancement of basic dye adsorption uptake from aqueous solutions using chemically modified oil palm shell activated carbon. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*. 318: 88-96.
- Tchobanoglous, G., Burton, F. L. and Stensel, H. D. (2003). *Wastewater Engineering Treatment & Reuse*. New York: Metcalf & Eddy, Inc., McGraw-Hill Companies.
- Templeton, M. R. and Butler. D. (2011). Introduction to wastewater treatment. *Sedimentation*. United Kingdom: Dr. Michael R. Templeton, Prof. David Butler and Ventus Publishing ApS. pp. 24-29.
- van Reis, R. and Zydney, A. (2001). Membrane separations in biotechnology. *Current Opinion in Biotechnology*. 12: 208-211.
- Van Reis, R., Brake, J. M., Charkoudian, J., Burns, D. B. and Zydney, A. L. (1999). High performance tangential flow filtration using charged membranes. *Journal of Membrane Science*. 159: 133-142.
- Wagner, J. (2001). *Membrane Filtration Handbook (2<sup>nd</sup> Edition)*. Albany: Osmonics Inc.
- Wahab, N. A., Aziz, A. A., Berahim, N., Ali, S., Kamal, S. M. M. and Jalani, N. F. (2013). Combined effect of operational variables on aqueous enzymatic oil extraction from palm pressed fibre. *Journal of Oil Palm Research*, 25 (2): 197-207.
- Wang, J., Zhou, X., and Ma, J. (2012). Preparation and characteristics of paper-based ultrafiltration membrane. *Bioresource Technology*, 7 (1): 545-533.
- Wang, P., Xu, N. and Shi, J. (2000). A pilot study of the treatment of waste rolling emulsion using zirconia microfiltration membranes. *Journal of Membrane Science*, 173 (2): 159-166.
- Water Environment Federation (2006). *Membrane systems for wastewater treatment*. New York: WEF Press.
- Wong, P. W., Sulaiman, N. M., Nachiaapan, M. and Varadaraj, B. (2002). Pre-treatment and membrane ultrafiltration using treated palm oil mill effluent. *Journal of Science Technology*, 24: 891-898
- Wu, T. Y., Mohammad, A. W., Md. Jahim, J., and Anuar, N. (2007). Palm oil mill effluent (POME) treatment and bioresources recovery using ultrafiltration membrane: Effect of pressure on membrane fouling. *Biochemical Engineering Journal*. 35(3): 309-317.

- Xia, S., Nan, J., Liu, R., and Li, G. (2004). Study of drinking water treatment by ultrafiltration of surface water and its application to China. *Desalination*. 170: 41-47.
- Yularizam, A. W., Ismail, A. F., Salim, A. R., Sakinah, M. and Matsura, T. (2009). Application of coagulation-ultrafiltration hybrid process for drinking water treatment: optimization of operating conditions using experimental design. *Separation and Purification Technology*, 65 (2): 193-210.
- Yuliwati, E., Ismail, A. F., Lau, W. I., Ng, B. C., Mataram, A. and Kassim, M. A. (2012). Effects of process conditions in submerged ultrafiltration for refinery wastewater treatment: Optimization of operating process by response surface technology. *Desalination*. 287: 350-361.
- Zularisam, A. W., Ismail, A. F., and Salim R. (2006). Behaviors of natural organic matter in membrane filtration for surface water treatment – a review. *Desalination*. 194 (1-3): 211-231.

