

**PERFORMANCE OF TRANSMISSION CONTROL PROTOCOL (TCP)
CONGESTION CONTROL OVER WIRELESS LINKS USING
MODIFIED SNOOP PROTOCOL**

By

FURAT ASMAT MOOJID

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia
In Partial Fulfillment of the Requirements for the degree of Master of Science**

December 2003

*To my Parents,
My friends,
My cousin Bahaa,
And especially my wife.*

Abstract of thesis presented to Senate of Universiti Putra Malaysia in partial fulfilment of the requirement for the degree of Master of Science

**PERFORMANCE OF TRANSMISSION CONTROL PROTOCL (TCP)
CONGESTION CONTROL OVER WIRELESS LINKS USING
MODIFIED SNOOP PROTOCOL**

By

FURAT ASMAT MOOJID

December 2003

Chairman: Professor Borhanuddin Mohd. Ali, Ph.D.

Faculty: Engineering

Because of the burgeoning increase for data communication and multimedia services over wireless links, and rapid growth of wireless communications, many researches have been undertaken to find effective integrated protocols that satisfy this demands. Since wireless links normally show higher bit error rate and temporal disconnections compared with wired links, the losses are greater, this may also be caused by the mobility like handoff, and many wireless channel impairment errors and not just congestion. TCP deals with packet losses by applying congestion control mechanisms, which tends to degrade its performance.

Many protocols have been proposed including Snoop, to alleviate this problem. Our objectives here are to study and enhance the Snoop protocol using the modified ACK called Fake Acknowledgment under various network parameters.

In this thesis, a Fake ACK technique proposed based on the Snoop Acknowledgment procedure; this reduces the waiting time of the Fixed Host waiting for the right Acknowledgment to be received, and hence reducing the probability of initiating congestion control mechanism. The results show that the throughput of our technique is increased and the losses are decreased compared to traditional Snoop protocol, under different parameter values.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

Oleh

FURAT ASMAT MOOJID

Desember 2003

Pengerusi: Professor Borhanuddin Mohd. Ali, Ph.D.

Fakulti: Kejuruteraan

Disebabkan peningkatan mendadak komunikasi data dan servis-servis multimedia melalui penghubung wayarles, dan perkembangan mendadak komunikasi wayarles, banyak kajian telah dijalankan untuk mencari protokol yang dapat memenuhi keperluan ini. Memandangkan penghubung wayarles kebiasaannya mempunyai kadar kesalahan bit yang lebih tinggi dan kemungkinan terputus hubungan yang lebih tinggi berbanding penghubung wayar, kehilangannya adalah lebih besar disebabkan masalah pergerakan seperti “handoff” dan banyak kesalahan pada saluran wayarles dan peringisan bukan sahaja kesesakan.

Pelbagai protokol telah dicadangkan antaranya Snoop, untuk mengatasi masalah ini. Matlamat kami adalah untuk mengkaji dan mengemaskini protokol Snoop menggunakan kaedah yang telah diubahsuai dipanggil “Fake Acknowledgment” dibawah parameter rangkaian dasar yang berbeza. Di dalam tesis ini, kaedah “Fake ACK” dicadang berdasarkan kepada prosedur “Snoop Acknowledgment”; ini

mengurangkan masa menunggu untuk hos tetap sementara “Acknowledgment” yang betul diterima, dan dari itu mengurangkan kemungkinan memulakan mekanisme kawalan kesesakan. Keputusan yang diperolehi menunjukkan bahawa prestasi pencapaian untuk kaedah kami ini akan meningkat dan kehilangan akan berkurangan berbanding protokol Snoop tradisional, dibawah nilai parameter yang berbeza.

ACKNOWLEDGEMENTS

I would like to express deep gratitude to my advisor and chairman of my supervisory committee Prof. Dr. Borhanuddin Mohd Ali, who has helped me with his guidance, advices, and corrections, especially his kind and patient.

I am no less grateful to the other committee members Dr. Mohamed Hadi Habaebi for support me all the times with his ideas and experience, which helped me to solve a number of problems those faced me.

And Puan Ratna, who is kind enough to read and comments on my work.

Also my thanks, to my colleagues at the wireless and broadband laboratories, for their kindness and help during my research time.

It is particular that I express my affectionate and deeply felt gratitude to my parents, my brothers, especially my wife who joined me step by step, my dear friend Khalid and my cousin Bahaa who encourage and support me to complete my work.

I certify that an examination committee met on 23rd December 2003 to conduct the final examination of Furat Asmat Moojid on his Master of Science thesis entitled “Performance of Transmission Control Protocol (TCP) Congestion Control Over Wireless Links using Snoop Protocol” in accordance with Universiti Pertanian Malaysia (Higher Degree) act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The committee recommends that the candidate be awarded the relevant degree. Members of Examination Committee are as follows:

SAMSUL BAHARI BIN MOHD NOOR, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

BORHANUDDIN MOHD ALI, Ph.D.

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

MOHAMED HADI HABAEBI, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Member)

RATNA KALOS ZAKIAH

Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

GULAM RUSUL RAHMAT ALI, Ph.D.

Professor/Deputy Dean
School of Graduate Studies,
Universiti Putra Malaysia

Date: 21 APR 2004

This thesis submitted to the Senate of Universiti Putra Malaysia has been accepted as fulfilment of the requirement for the degree of Master of Science. The members of the Supervisory Committee are as follows:

BORHANUDDIN MOHD ALI, Ph.D.

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

MOHAMED HADI HABAEBI, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Member)

RATNA KALOS ZAKIAH

Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

AINI IDRIS, Ph.D.

Professor/Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously or currently submitted for any other degree at UPM or other institution.

FURAT ASMAT MOOJID

Date:

TABLE OF CONTENTS

DEDICATION	<i>Page</i> ii
ABSTRACT	iii
ABSTRAK	v
ACKNOWLEDGEMENTS	vii
APROVAL	viii
DECLARATION FORM	x
LIST OF FIGURES	xiii
LIST OF ABBREVIATIONS	xv

CHAPTER

1	Background	
	1.1 Introduction	1
	1.2 Objectives	3
	1.3 Thesis Organization	4
2	Literature Review	
	2.1 Introduction	6
	2.2 TCP Protocol	6
	2.2.1 TCP Header	9
	2.2.2 Sliding window	12
	2.2.3 TCP's self-clocking mechanism	15
	2.2.4 TCP congestion control mechanisms	16
	2.3 TCP over wireless networks and related problems	20
	2.4 Alternative solutions	21
	2.4.1 End-to-End schemes	23
	2.4.2 Split-connection schemes	23
	2.4.3 Link layer schemes	24
	2.5 Optimum link-layer scheme	25
	2.6 The reason for choosing link-layer schemes	26
	2.7 Snoop protocol	27
	2.8 Snoop procedures	29
	2.8.1 Snoop data	29
	2.8.2 Snoop ACK	31
	2.9 Brief analysis using TCP equations	34
	2.10 Conclusions	37
3	Methodology	
	3.1 Introduction to NSv2	38
	3.2 Designing the Simulator	39
	3.3 The proposed technique	41
	3.3.1 Fake ACK technique	43

3.4 Conclusion	44
4 RESULTS AND DISCUSSION	
4.1 Introduction	46
4.1.1 Dropped packets over different used BW in wired networks	47
4.1.2 Effect of different used wired TD values on dropped packets	48
4.1.3 Effect of loss probability on sent packets	48
4.1.4 Effect of different used CHD on E2E dropped packets	49
4.1.5 Effect of different used BW on E2E dropped packets	50
4.1.6 Effect of different TD values on E2E dropped packets	51
4.2 applying Fake ACK technique on W/Ws network	55
4.3 Effect of Fake acknowledgment technique on the buffers	63
4.4 Conclusion	65
5 CONCLUSION AND FUTURE WORKS	
5.1 Conclusion	66
5.2 Future works	67
REFERENCES	68
APPENDICES	71
Appendix A	71
Appendix B	74
BIODATA OF THE AUTHOR	102

LIST OF FIGURES

Figure		Page
1	The TCP protocol	7
2	Three-Way handshaking method	8
3	TCP header	9
4	Sliding window	13
5	Congestion control mechanisms	17
6	Packet losses recovery mechanism in TCP	18
7	(Snoop agent) modified module at base station	27
8	Link-layer protocol	28
9	Snoop data procedure	29
10	Snoop acknowledgement procedure	31
11	Wired-cum-wireless (FH to MH) topology	39
12	ACK procedure in Snoop protocol	42
13	Fake ACK proposed procedure in Snoop protocol	43
14	Comparison between the effects of different wired BW values On dropped packets	47
15	Comparison between the effects of different wired transmission delay values on dropped packets	48
16	Comparison between the effects of different loss probability values on received packets	49
17	Comparison between the effects of different channel delay values on dropped packets	50

18	Comparison between the effects of different wireless bandwidth values on dropped packets	51
19	Comparison between the effects of different wireless transmission delay values on dropped packets	51
20	Comparison between the cumulative dropped packets for wired And wired-cum-wireless with 10Mbps bandwidth	50
21	Comparison between the cumulative dropped packets for wired and wired-cum-wireless with 10ms transmission delay	53
22	Comparison between the original Snoop and Fake ACK technique (Cumulative sent packets with BW=5Mbps)	56
23	Comparison between the original Snoop and Fake ACK technique (Cumulative dropped packets with BW=5Mbps)	57
24	Comparison between the original Snoop and Fake ACK technique (Seq. Numbers of all dropped packets with BW=5Mbps)	58
25	Comparison between the original Snoop and Fake ACK technique (Cumulative sent packets with BW=10Mbps)	60
26	Comparison between the original Snoop and Fake ACK technique (Cumulative dropped packets with BW=10Mbps)	61
27	Comparison between the original Snoop and Fake ACK technique (Sequence Numbers of all dropped packets with BW=10Mbps)	62
28	Comparison between total buffered packets in original and Fake ACK Snoop with BW=10Mbps	63
29	Comparison between total buffered packets in original and Fake ACK Snoop with BW=5Mbps	64

LIST OF ABBREVIATIONS

ACK	Acknowledgment
ARQ	Automatic repeat request
ATM	Asynchronous Transfer Mode
BER	Bit Error Rate
BS	Base Station
BW	Bandwidth
CHD	Channel Delay
Cwnd	Congestion Window
Dup ACK	Duplicate Acknowledgment
E2E	End-to End
FEC	Forward Error Correction
FH	Fixed Host
FIFO	First In First Out
ELN	Explicit Loss Notification
FDDI	Fiber Distributed Data Interface
FIN	Finish
HDR LEN	Header Length
IP	Internet Protocol

LP	Losses Probability
MH	Mobile Host
MSS	Maximum Segment Size
MTU	Maximum Transfer Unit
NSv2	Network Simulator version 2
OTcl	Objective Tcl
PER	Packet Error Rate
Pkt	Packet
PS	Packet Size
PSH	Push Flag
RST	Request
RTT	Round Trip Time
SACK	Selective Acknowledgment
Ssthresh	Slow Start Threshold
SYN	Synchronization
TCP	Transmission Control Protocol
TD	Transmission Delay
URG	Urgent Flag

CHAPTER 1

BACKGROUND

1.1 Introduction

The transport layer is a heart of the whole protocol hierarchy. Its task is to provide reliable, cost-effective data transport from the source machine to the destination machine, independently of the physical network or networks currently in use.

Transmission Control Protocol was designed to provide a reliable end-to-end byte stream over an unreliable internetwork. An internetwork differs from a single network because different parts may have wildly different topologies, bandwidths, delays, packet sizes, and other parameters [18].

TCP was formally defined in RFC 793; the transmission control protocol (TCP) is a reliable connection oriented, end-to-end, error free protocol. A TCP connection is like telephone connection but with reliable data transmission between the computers.

The reliability guaranteed by sending cumulative Acknowledgment (ACK) after receiving in-sequence segment. Early TCP implementations only had a simple sliding window flow control mechanism without any congestion control. After observing a series of congestion collapses in 1980's, several innovative

congestion control mechanisms introduced into TCP in 1988. This TCP version called TCP Tahoe, includes the slow start, congestion avoidance, and fast retransmit algorithm. Two years later in 1990, the fast recovery algorithm was added to Tahoe to form a new TCP version called TCP Reno. And currently the dominating TCP version deployed in the Internet is TCP Reno version. These clarifications and some bug fixes are detailed in RFC 1122. Extensions are given in RFC 1323.

Since 1988, the Internet has grown tremendously; it has become clear that the TCP congestion avoidance mechanisms are not sufficient to provide good service in all circumstances [24]. Especially for instance, in wireless networks, the traditional assumption that packet loss is an indicator of network congestion may be invalid since high bit error rate and temporarily disconnection could be the main reason behind packet losses in wireless networks. Likewise, in asymmetric networks in which two directions of the connection could have vastly different bandwidth and different characteristics, TCP performance may suffer in the current heterogeneous networks.

Over the past decade, many schemes proposed to solve wireless networks low performance. Some of them attempt to make the TCP sender aware of existing wireless; others try to hide non-congestion related losses from TCP sender, because that some of packets losses can avoid invoking the congestion control algorithm when new congestion related losses occur [1]. A different solution, due to Balakrishnan, Snoop protocol does not break the semantics of TCP. It works by making several small modifications to the network layer code in the

base station. One of the changes is the addition of Snooping agent that observes and caches TCP segments going out to the mobile host and acknowledgments coming back from it. When the snooping agent sees a TCP segment going out to the mobile host but does not see an acknowledgment coming back before its (relatively short) timer goes off, it just retransmits when it sees duplicate acknowledgments from the mobile host go by [18].

Most current network application is Snoop protocol that desirable to achieve improving wireless part performance without changing existing TCP implementations [2]. The truth that is Snoop or any other solution could also suffer from not being able to completely shield the sender from wireless losses [3].

1.2 Objectives

The objectives of this thesis are as follow:

- a) To study the transmission control protocol, and its problems over wireless networks.
- b) To investigate Fake ACK proposed scheme to improve TCP performance over wireless links especially link layer schemes.
- c) To examine the effect of some parameters on the performance of TCP, by using Snoop Protocol, between fixed host and mobile host over Wireless Local Area Network.

- d) To propose a modified Snoop Protocol to evaluate the performance of the TCP congestion control, and**
- e) To improve the TCP congestion control by Proposed technique called Fake ACK Scheme to minimize the opportunity of referring to congestion control mechanism.**

In our study we focus on the packets dropping as a standard for the performance. For pure wired network we studied the effect of three parameters on the dropping packets (performance). The original simulation runs within 10 seconds with fixed host, base station, mobile host.

The design parameters are Bandwidth, Transmission Delay, Loss Probability, and Channel Delay, while the performance parameters are the Throughput and Number of Packets Lost. The performance parameters observed by changing the design parameters one after another.

1.3 Thesis Organization

The thesis is organized as follow:

Chapter 1 is divided into five sections. The first three sections introduce the transmission control protocol (TCP), performance of TCP over wireless networks, and the motivations and objectives of this thesis.

Chapter 2 consists of five sections introducing the evaluation of the transmission control protocol and its versions with basic explanations and simple

mechanisms that used in TCP. Detailed explanation of how congestion control mechanisms work, and the TCP over wireless networks, with the related problems and the existing solutions proposed to enhance TCP over wireless and its performance.

Chapter 3 describes the methodology, including problem formulation and Snoop protocol as a link layer scheme, then the simulation and modeling including the topology and our proposed technique.

Chapter 4 presents the results and discussion of the comparisons and proposed technique in the thesis.

Finally, chapter 5 concludes the thesis and proposed future work to be done in this research area.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

Wireless networks play a very important role in communications today. People want information on demand – any place, any time. Wireless networks help solve this problem. Reliable transport protocols however, such as TCP that have been traditionally used for wired networks do not perform as well on wireless networks. This is because TCP assumes that packet loss and unusual delays are mainly caused by congestion. TCP is thus tuned to adapt to such congestion losses by slowing down the amount of data it transmits. It drops its transmission window size and backs off its retransmission timer, thus reducing the load and congestion on the network. In wireless networks however, packet loss is often caused due to other factors besides congestion. Wireless channels often suffer from high bit error rates (BER) and intermittent connectivity due to handoffs [8].

2.2 TCP Protocol

Since 1981, TCP is the most popular transfer layer protocol, which provides transparent segmentation and reassembly of user data, and handles flow and

congestion control. For that reason, TCP is the base for Internet in this period [4].

Simply, TCP is transport layer connection oriented, reliable, full duplex, byte stream and end-to-end protocol [5]. Early TCP implementations only had a simple sliding window flow control mechanism without any congestion control. After observing a series of congestion collapses in 1980's, Jacobson introduced several innovative congestion control mechanisms into TCP in 1988 and they called this version of TCP Tahoe, includes slow start congestion avoidance and fast retransmit algorithms. After two years, in 1990, they added fast recovery algorithm to Tahoe to form a new TCP version called TCP Reno, and currently it is the most popular version used in the Internet. The current TCP versions seem to be not so efficient for the modern networking environment. TCP can be used over a large variety of networking and physical infrastructures that have very different characteristics: Ethernet, FDDI, and ATM over wires, optical fibers, radio waves, or infrared signals.

A TCP connection may, and usually does, work over all these different quality of service levels, and segments face different transmission environments [13].

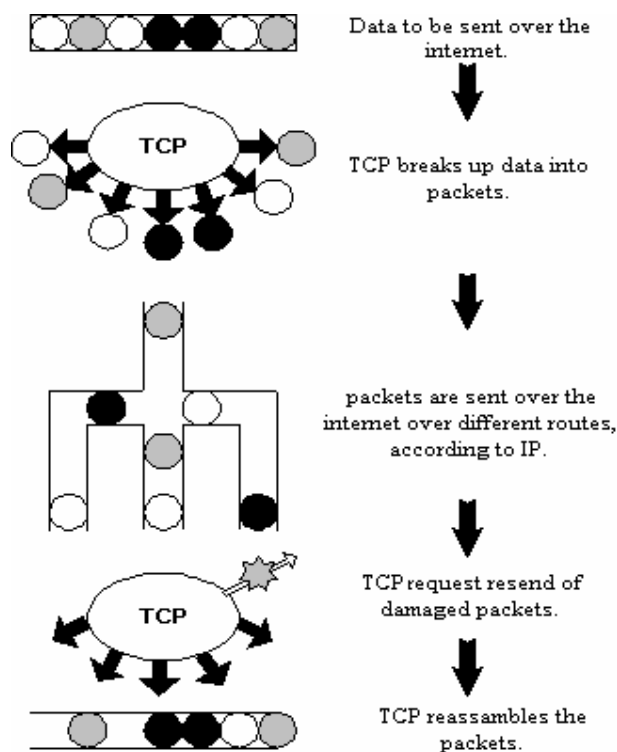


Fig.1 The TCP protocol

TCP assumes that all losses indicate congestion simply as increased delay, and it avoids this problem by retransmitting the lost packet, but sometimes when TCP retransmit the lost packets, this retransmission will aggravate the congestion instead of alleviating it, leading to increased traffic, until the network becomes useless (Congestion collapse). To avoid congestion collapse, when losses are detected, TCP retransmits the lost packet, and also reduces its transmission rate, allowing router queues to drain. Subsequently, it gradually increases its transmission rate so as to gently probe the network's capacity [15].

We must remember that the router or any switching point has a finite strong capacity (buffer) so on the worst case the total number of data-grams arriving at the congested switching point will grow until it reaches full capacity and starts to drop data-grams. [16]. From TCP definition, TCP is a connection-