



UNIVERSITI PUTRA MALAYSIA

**DESIGN, CONSTRUCTION AND PERFORMANCE OF AN OHMIC
FRUIT JUICE EVAPORATOR**

MOHAMED HASSAN MOHAMED GAILY

FK 1999 13



**DESIGN, CONSTRUCTION AND PERFORMANCE OF AN OHMIC FRUIT
JUICE EVAPORATOR**

By

MOHAMED HASSAN MOHAMED GAILY

**Thesis Submitted in Partial Fulfilment of the Requirements for the
Degree of Master of Science in the
Faculty of Engineering
Universiti Putra Malaysia**

July 1999



ACKNOWLEDGEMENTS

First of all the author would like to express his utmost thanks and gratitude to Almighty Allah S.W.T. for the completion of this work, and his Salawat and Salaam extended to the messenger, prophet Mohamed (PBUH).

The author would like to express his appreciation and gratitude to the Chairman of his Supervisory committee, Ir. Hishamuddin Bin Jamaludin, for his encouraging, advice, guidance, valuable suggestions, his kindness and willingness to help. The author also very grateful to his supervisory committee members Prof. Dr. Coskan Ilikali for his valuable discussion, and constructive comments and to Dr. Ibrahim Omer Mohamed for his dynamic help and encouragement throughout the practical work and preparation of this thesis.

Special thanks extended to the retired Associate Prof. Dr. Mohamed Nur Ahmed for his guidance advice and comments in preparing the proposal and the preliminary work for this project.

The author indebted to all the staff of the Unit operation Laboratory, Department of Food and Process Engineering, Encik Meor Nazri and Encik Nasharudin Mohamed for their generous co-operation. Acknowledgement is also due to the staff of the Engineering workshop and the Central-store, Faculty of Engineering, UPM.

The author is also grateful to the Government of Sudan, Ministry of Higher Education and Research for giving him scholarship to pursue his studies in Malaysia and to his direct employer, University of Khartoum.



Lastly and more important, the author would like to express his most sincere and wormiest gratitude to his mother for her Doaa and special thanks to his wife who inspired and accompanied him through the research work. Not forgotten his Brother Faisal for his concern during his period in Malaysia.



TABLE OF CONTENTS

	Page
ACKNOWLEDGEMENTS	ii
LIST OF TABLES	vii
LIST OF FIGURES	viii
LIST OF PLATES	x
LIST OF ABBREVIATIONS	xi
ABSTRACT	xii
ABSTRAK	xiv

CHAPTER

I	INTRODUCTION	1
	Concentration of Liquid Foods.....	1
	Objective of the Study.....	3
II	LITERATURE REVIEWS	5
	Principles of Concentration by Evaporation.....	5
	Evaporation Equipment.....	6
	Solar Evaporators.....	6
	Batch-pan Evaporators.....	6
	Natural-circulation Evaporators.....	7
	Forced-circulation Evaporators.....	10
	Rising-film Evaporators.....	12
	Falling-film Evaporators.....	13
	Agitated-thin Film Evaporators.....	14
	Vacuum Evaporation.....	15
	Advantages and Disadvantages of Various Types of Evaporators.....	16
	Heating Methods.....	19
	Ohmic Heating.....	20
	Ohmic Heating Principles.....	20
	Major Benefits of Ohmic Heating.....	24
	Various Designs of Ohmic Heaters.....	26
	The Pineapple Juice.....	32
	Varieties and Production Centres.....	32
	Pineapple Juice Development.....	34
	Sources of Beverage Juice.....	34
	Pineapple Juice Beverage Juice Steps.....	35
	Uses of Pineapple Juice.....	36
	Pineapple Juice Composition and Dietetic Properties....	37
	pH.....	39
	Pigments.....	39



III	MATERIALS AND METHODS.....	40
	Design of Fruit Juice Ohmic Evaporator FJOE.....	40
	Essential Parameter for Design.....	40
	Electrical Conductivity Test.....	41
	Material Used for Electrical	
	Conductivity Measurement.....	42
	Preparation of the Samples.....	42
	Concentration of the Pineapple Juice	
	by Rotavapour™.....	42
	Electrical Conductivity	
	Testing Procedure.....	43
	Design of the Heating Cell.....	44
	Electrodes.....	45
	The Heating Vessel.....	46
	Instrumentation and Measuring Devices.....	49
	Vacuum Gauge.....	49
	Temperature Transmitter.....	50
	Clamp-meters.....	50
	Support Equipment.....	51
	Feed and Product Pumps.....	51
	Construction	52
	The Platform.....	52
	The Electric Power Distribution Panel.....	53
	System Protection.....	57
	Fluid Level Indicator.....	57
	Assembling the Heating Cell.....	58
	The Test Method.....	59
	Standard Operating Procedure.....	60
IV	RESULTS AND ANALYSIS.....	65
	Preliminary Tests.....	65
	Vacuum Test.....	65
	Fluid Leakage Test.....	67
	Electrical Leakage Test.....	67
	Material and Energy Balance on the Evaporator.....	68
	Salt-water Solution Tests.....	74
	Salt-water Solution Batch Test.....	75
	The Evaporation Rate.....	75
	Evaporation Rate Test Procedure.....	76
	Vacuum Pressure and Temperature During	
	the Test.....	77
	Change of Level Inside the FJOE.....	78
	Change of Electric Current.....	79
	Performance of the System.....	82
	Salt-water Solution Continuous Tests.....	83
	The Pineapple Juice Tests	87
	Pineapple Juice Batch Test.....	87



	Pineapple Juice Continuous Test.....	91
	Performance of the System Under Continuous Tests.....	100
	Problems Recorded During the Operation.....	102
	Evaporation Economy and Energy Equivalent for Evaporation.....	103
V	CONCLUSION AND RECOMMENDATIONS.....	105
	Conclusion	105
	Recommendations.....	106
	Design	106
	Electrodes	107
	The Heating Vessel Geometry.....	108
	Safety Considerations.....	109
	BIBLIOGRAPHY	111
	APPENDIX	114
A	Technical Drawings.....	115
B	Material of Construction.....	121
C	Physical Properties, Calibrations and Design Calculations.....	126
D	Test Results Sheets.	156
VITA	175



LIST OF TABLES

Table		Page
2.1	Advantages and Disadvantages of Various Types of Evaporators.....	16
2.2	Fresh Pineapple Production in 1998.....	33
2.3	Estimated World Production of Pineapple Juice Expressed as 60° Brix Concentrate.....	37
2.4	Chemical Composition of Canned Pineapple Juice.....	38
2.5	Proximate, Mineral and Vitamin Composition of Frozen Pineapple Juice.....	38
4.1	Comparison of Product and Feed Floe Rates Between Experimental Settings and Calculated Values.....	74
4.2	Summary of the Salt-water Solution Batch Tests Results.....	81
4.3	Summary of the Salt-water Solution Continuous Tests Results.....	86
4.4	Summary of the Pineapple Juice Batch Tests Results.....	91
4.5	Summary of the Pineapple Juice Continuous Tests Results.....	100



LIST OF FIGURES

FIGURE	Page
2.1 Batch-pan Evaporator.....	7
2.2 Natural-circulation Evaporator.....	8
2.3 Short-tube Vertical Evaporator.....	9
2.4 Basket-type Evaporator.....	10
2.5 Forced-circulation Evaporator.....	11
2.6 Rising-film Evaporator.....	12
2.7 Falling-film Evaporator.....	13
2.8 Agitated Thin-film Evaporator.....	15
2.9 Parallel Plate Ohmic Heating Cell.....	27
2.10 Flow Sheet of the APV Baker Ohmic Heater (Parrott,1992).....	28
2.11 Three-zone Ohmic Heater Designed by Sastry (1992).....	30
2.12 Experimental Ohmic Heater Device Developed by Palaniappan and Sastry (1991).....	31
2.13 Flow Sheet of a Typical Pineapple Beverage Juice Plant.....	35
3.1 Schematic Diagram of the Wiring System of the FJOE.....	55
3.2 Start-stop Control Circuit for the FJOE.....	56
4.1 Rate of Change of Vacuum Pressure During the Vacuum Test.....	66
4.2 Material and Energy Balance Block Diagram.....	69
4.3 Rate of Change of the Level Inside the FJOE During the Salt-water Solution Batch Test no. 1.....	78
4.4 Rate of Change of the Level Inside the FJOE During the Salt-water Solution Batch Test no. 2.....	79
4.5 Rate of Change of the Average Apparent Current in the Salt-water Solution Batch Test no. 1.....	80
4.6 Rate of Change of the Average Apparent Current in the Salt-water Solution Batch Test no. 2.....	80
4.7 Rate of Change of the Level Inside the FJOE in a Salt-water Solution Continuous Tests.....	84
4.8 Rate of Change of the Average Apparent Current During the Salt-water Solution Continuous Tests.....	84
4.9 Rate of Change of the Electrical Conductivity During the Salt-water Solution Tests.....	86
4.10 Rate of Change of the Average Apparent Current During the Pineapple Juice Batch Test no. 1.....	88
4.11 Rate of Change of the Average Apparent Current During the Pineapple Juice Batch Test no. 2.....	89
4.12 Rate of Change of the Level Inside the FJOE During The Pineapple Juice Test no. 1.....	90
4.13 Rate of Change of the Level Inside the FJOE During The Pineapple Juice Test no. 2.....	90
4.14 Rate of Change of the Average Apparent Current During the Pineapple Juice Continuous Test no. 1.....	93
4.15 Rate of Change of the Average Apparent Current During the Pineapple Juice Continuous Test no. 2.....	93



4.16	Rate of Change of the Level Inside the FJOE During the Pineapple Juice Continuous Test no. 1	94
4.17	Rate of Change of the Level Inside the FJOE During the Pineapple Juice Continuous Test no. 2.....	95
4.18	Rate of Change of Electrical Conductivity in the Pineapple Juice Continuous Tests.....	96
4.19	Change of Power Consumption and Level of the Juice Inside the FJOE in the Pineapple Continuous Test No. 1.....	97
4.20	Change of Power Consumption and Level of the Juice Inside the FJOE in the Pineapple Continuous Test No. 2.....	97
4.21	Change of Power Consumption and Evaporation Rate in a Pineapple Batch Test No. 1.....	99
4.22	Change of Power Consumption and Evaporation Rate in a Pineapple Batch Test No. 2.....	99



LIST OF PLATES

Plate		Page
3.1	The Three Sets of Electrodes Fixed to the Resin Wood.....	46
3.2	The Heating Cell With Electrodes Inside (Top View).....	47
3.3	The Heating Cell With Electrodes Inside (Bottom View).....	47
3.4	Front View of the FJOE.....	62
3.5	Side View of the FJOE.....	63
3.6	Rear View of the FJOE.....	64



LIST OF ABBREVIATIONS

A	The effective cross-sectional area of the conducting space between the metal conductors (electrodes), cm ²
C _p	Specific heat capacity, kJ/kg°C.
F	Feed mass flow rate kg/h.
h	Enthalpy, kJ/kg °C.
h _f	Enthalpy of the feed steam, kJ/kg°C.
h _p	Enthalpy of the product steam, kJ/kg°C.
I	Electric current, amperes.
I ₁	Apparent current passing through set 1 of electrodes, amperes.
I ₂	Apparent current passing through set 2 of electrodes, amperes.
I ₃	Apparent current passing through set 3 of electrodes, amperes.
I _{av}	Average apparent current, amperes.
K	Temperature compensation constant.
K ₁	Constant.
K ₂	Constant
L	The distance between the inert metal electrodes at the end of the gab (the shortest distance between electrodes), cm.
l	The level inside the FJOE, cm.
l _{in}	Initial level of the fluid inside the FJOE, cm.
l _{in}	Final level of the fluid inside the FJOE, cm
m	Temperature coefficient (constant).
M _s	Mass flow rate of the equivalent steam, kg/h
P	Electric power consumption kJ/s..
P	Product mass flow rate, kg/h.
Q	Heat rate input to the FJOE, kJ/kg
Q _s	Equivalent steam energy, kJ/kg
R	Electric resistance, ohms.
T	Temperature, °C.
T _f	Feed stream temperature, °C.
T _p	Product stream temperature, °C.
T _{ref}	Reference temperature, °C.
u	Energy generation per unit volume.
v	Voltage, volts.
V	Evaporation rate, kg/h.
X _f	Mass fraction of the pineapple juice in the feed stream.
X _p	Mass fraction of the pineapple juice in the product stream.
∇v	Voltage gradient.
σ	Electrical conductivity (mS/cm).
σ _T	Electrical conductivity at any temperature T (mS/cm).
σ _{ref}	Electrical conductivity at reference temperature (mS/cm).
λ	Latent heat of vaporization, kJ/kg°C.
λ _s	Latent heat of vaporization of steam at boiling point, kJ/kg°C.
ρ	Electric resistivity of the metal electrode, μΩ.cm



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in partial fulfilment of the requirements for the degree of Master of Science.

**DESIGN, COSTRUCTION AND PERFORMANCE OF AN OHMIC FRUIT
JUICE EVAPORATOR**

By

MOHAMED HASSAN MOHAMED GAILY

July 1999

Chairman: Ir Hishamuddin Bin Jamaludin

Faculty: Engineering

A fruit juice ohmic evaporator (FJOE) was designed and constructed. The design was done in accordance with the basic principle of ohmic heating to provide heat for evaporation instead of steam or conventional direct heating, to overcome problems arising through these methods of heating.

The FJOE was constructed mainly from stainless-steel. A cylindrical heating vessel of internal diameter 20.5 cm and length of 31 cm was constructed to enclose electrodes supplying the heat for evaporation. The heating vessel was coated internally with epoxy resin to isolate the wall of the vessel from electric current passing through the fluid. Three sets of electrodes connected to the three-phase alternating current supply were used. Each set of electrodes composed of a three parallel stainless-steel plates. A vacuum pump was used to lower the boiling point of the juice below 65 °C and as low as 45 °C to prevent the nutrient material from damage.

Salt-water solution and pineapple juice were used to study the performance of the FJOE. Three types of tests were done. Preliminary tests were conducted to ensure



that the FJOE operates within the design limits and to check for fluid and electric leakage. Performance of the FJOE was computed by testing the system in both batch and continuous operation using salt-water solution and pineapple juice.

Electric conductivity of the dilute pineapple juice was first measured to find the maximum allowable level of the juice inside the FJOE to prevent current overload or high temperatures during evaporations.

Four tests using salt-water solution, two of them in batch mode and two in a continuous mode were conducted. Another four test using pineapple juice of initial concentration of 10% were conducted to achieve a final concentration of 40%, two of them were batch tests and the others in continuous mode operation.

Results of all tests were tabulated and illustrated in graphs. Electric current and the total area of electrodes used was found to be the controlling factors during evaporation using the FJOE. Increasing the total contact area between electrodes and the fluid was found to increase the average apparent current and hence the power consumption.

Energy cost using the FJOE was found to be relatively cheap and of low cost and the evaporation economy was found to be 0.7. The FJOE was found to be a suitable evaporation equipment for concentrating fruit juices and other food materials in a small scale industries without any need of steam boilers and of low energy cost.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi sebahagian keperluan untuk ijazah Master Sains.

**REKABENTUK, PEMBINAAN DAN PRESTASI SEBUAH ALAT PENYEJAT
JUS BUAH-BUAHAN OHMIC**

Oleh

MOHAMED HASSAN MOHAMED GAILY

Julai 1999

Pengerusi: Ir. Hishamuddin Bin Jamaludin

Fakulti: Kejuruteraan

Penyejat Jus Buah-buahan Ohmic (PJBO) telah direkabentuk dan di bina. Rekabentuknya adalah mengikut prinsip asas pemanasan ohmic bagi penyejatan dengan tidak menggunakan stim atau pemanasan secara langsung untuk mengatasi masalah yang terdapat dengan kaedah tersebut.

PJBO dibina menggunakan “stainless-steel” sebagai komponen utama. Takungan silinder pemanas mempunyai ukuran jejari dalam 20.5 cm dan panjangnya ialah 31cm dimana diletakkan elektrod di dalamnya untuk membekalkan haba penyejatan. Takungan pemanasan disalut dibahagian dalamnya dengan “epoxy resin” sebagai penebat dinding takungan daripada arus elektrik yang melalui cecair. Tiga sel elektrod disambungkan kepada bekalan arus tiga fasa. Setiap sel elektrod mempunyai tiga plat “stainless-steel” selari. Pam hampagas telah digunakan untuk menurunkan titik didih jus kepada 65 °C dan tidak melebihi 45 °C untuk mengelakkan zat-zat makanan dimusnahkan.



Larutan garam dan jus nanas telah digunakan di dalam menentukan keupayaan PJBO. Tiga jenis ujian telah dijalankan. Ujian permulaan dilakukan untuk memastikan PJBO beroperasi didalam had rekabentuk dan untuk memastikan tiada kebocoran cecair dan arus. Keupayaan PJBO dikira secara ujian berkelompok dan berterusan dengan menggunakan larutan garam dan jus nanas.

Konduktiviti elektrik bagi jus nanas cair diukur untuk mendapatkan paras maksimum jus dalam PJBO bagi mengatasi arus berlebihan atau suhu yang tinggi ketika penyejatan.

Empat ujian menggunakan larutan air-garam, dimana dua daripadanya secara berkelompok dan selebihnya secara berterusan. Empat ujian menggunakan jus nanas dengan kepekatan 10% hingga mencapai 40% kepekatan telah juga dilakukan.

Keputusan dari ujian ini dijadualkan serta dipersembahkan dalam bentuk graf. Arus elektrik dan luas elektrod yang di gunakan ditentukan sebagai faktor yang mempengaruhi penyejatan oleh PJBO. Peningkatan luas permukaan antara elektrod dan bendalir di dapati meningkatkan kadar arus elektrik purata dan penggunaan kuasa.

Kos tenaga menggunakan PJBO didapati murah dan ekonomi stim ialah 0.7. PJBO didapati sebagai alat yang sesuai untuk memekatkan jus buah-buahan dan bahan makanan lain dalam industri kecil tanpa memerlukan dandang dengan kos tenaga yang rendah.

CHAPTER I

INTRODUCTION

Recently, there has been a widespread growth of interest and research activity in the heat processing, aseptic packing and processing of food products. Interest in rapid methods of heating and non-thermal microbial inactivation in the food industry has resulted in revived attention towards new technologies. One of these new technologies is ohmic heating.

Ohmic heating is an operation in which heat is internally generated within foods due to the passage of alternating electrical current.

Ohmic heating works because most foods contain ionic species such as salts and acids, which acts as electrolytes, thus an electric current can be made to pass through the food. The food is internally heated due to its electrical resistance, without involving any heating medium or heat transfer surface.

Concentration of Liquid Foods

Industrially concentration is achieved by evaporation of water to a certain level using particular type of evaporator depending on specification of the material under evaporation and its characteristics.



Any evaporator utilised for liquid food products will contain the following units:

- a. A container.
- b. A heat source
- c. A condenser.
- d. And a method of maintaining vacuum.

In most evaporators, the heating medium will be steam or some other condensing vapour. When using steam as a heating medium, the resistance to heat transfer is normally created by a condensate film on the heating-medium side of the heat transfer surface, so problems occurs with this type of heating. Fouling of heat transfer surfaces is one of these problems, which can be a major cause of declining efficiency in evaporation system. Another problem arises with proteinaceous food that when exposed to hot heat transfer surface will result in some destruction of flavours and nutrients.

These heat-transfer problems can now be overcome by ohmic heating, which operates by the direct passage of electrical current through the continuous flow of food product.

The specialised designs of evaporator that have been developed since the open evaporating pan, have been based primarily upon the target of decreasing overall heat treatment i.e. the time-temperature combination, to which the product is exposed during the evaporation (Clark, 1971). The use of vacuum operation was an early step in this direction of reducing the level of heat treatment otherwise occurring.

Several methods of heating were applied to provide heat for evaporation such as direct heating, utilising waste or low-pressure steam and mechanical vapour compression.

Previous work on ohmic heating is limited, and researches were focused towards heating and pasteurisation and till now there is no published work on concentration of fluid foods by ohmic evaporation.

Objective of the Study

The concentration of fruit juices by conventional evaporation systems usually causes loss of volatile flavour substances. Other problems may arise with liquid foodstuffs, such as foaming, which makes it difficult to separate the vapours from condensed liquids, and the fouling of the heat transfer surface by already suspended or developed in solubilised matter. Thus recently, other methods of heating were established to overcome the above mentioned problems. These alternative methods include dielectric heating, microwave heating and ohmic heating.

Commercial concentration processes by evaporators require steam boilers to provide the required heat. However, for small-scale industries it will be uneconomical to use steam boilers. Hence it will be beneficial to apply an economical method(s) that overcomes all the above mentioned problems.

In Sudan and Malaysia the small and medium scale food industries are wide spread. They serve socio-economic objectives, and it will be advantageous for these industries if a technique for concentrating fruit juice that overcomes the stated problems. Thus there will be no need for steam boiler to be used by small and medium

scale food industries and the concentration of the fruit juice by evaporation can be achieved by the heat generated from the passage of electric current through the juice. Recent researches on ohmic heating in food industry were conducted and further work is needed in this area and till now there is no published papers or work in application of ohmic heating in evaporation.

The main objectives of this study are:

1. To design and construct an ohmic fruit juice concentrator which operates from an alternating current source of 50-60 Hz i. e. from a public mains supply system.
2. To study the performance of the ohmic fruit juice concentrator by evaluating the following parameters:
 - The concentration.
 - The temperature.
 - Change of electrical conductivity.
 - Change of electric current during the process.
 - Time needed to complete the process from initial concentration to the final concentration.
 - Power consumption
3. To develop a control strategy for the system.

CHAPTER II

LITERATURE REVIEWS

The literature review was done and divided into the following aspects as a good guide for design, material selection and the method used in this project:

1. Concentration by evaporation.
2. The ohmic heating.
3. The pineapple juice.

Principles of Concentration by Evaporation

Water is the predominant ingredient in most food materials and exceeds 85% in milk and in fruit and vegetable juices. This water content can frequently be advantageously reduced, to lower container, storage and shipping costs, or to achieve other desirable results in food processing. The concentration of a solution (fruit juice) by boiling off solvents (water) is usually achieved by evaporation.

For liquid foods, evaporation is the most common method for reducing the water content. There is some application of fractional crystallisation to citrus juices, but for practical reasons, single and multiple effect vacuum pans with or without recovery devices are most widely used for reducing the water content of liquid foods.



Evaporation Equipment

Basically, evaporation is used to concentrate a solution consisting of non-volatile solute and a volatile solvent, without any attempt to fractionate the solvent. The more common types of evaporators are described briefly. Mehra, (1986) in his feature report discussed most types of evaporators and their uses, advantages and disadvantages. These types are:

Solar Evaporators

These evaporators consist of a series of large ponds, in which seawater or brine is concentrated, with solar energy as a heating source. This is followed by further evaporation in large, open natural basins or crystallising areas.

Batch-pan Evaporators

These were the first devices to use steam for indirect heat transfer to accomplish evaporation. Batch pan evaporation is one of the oldest methods of concentration. The batch pan can be jacketed vessel or one with internal coils. Heat transfer can be aided by agitation, though this may not always be possible. In most cases, large temperature difference cannot be used, as these may result in product

degradation and increased fouling. Thus the capacity of this type of evaporator is low compared with other types, limiting its application.

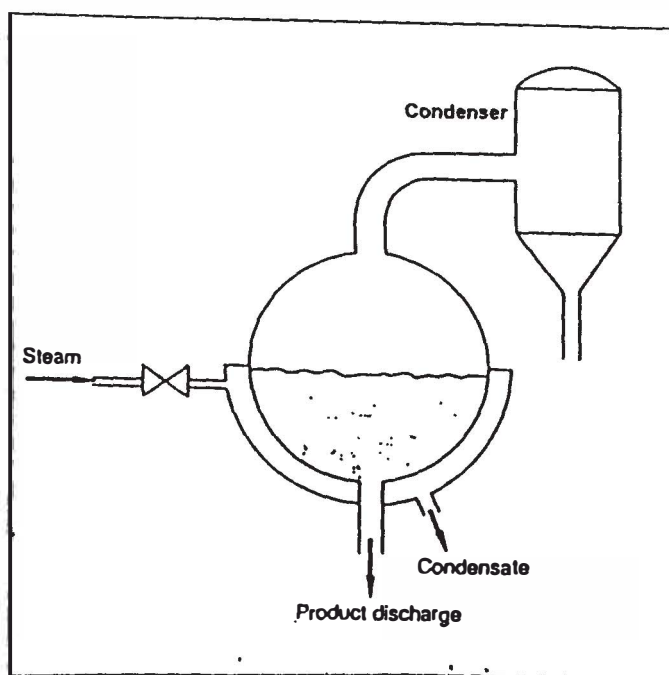


Figure 2.1: Batch-pan Evaporator

Natural- circulation Evaporators

Natural-circulation units offer a moderate range of operation and are not recommended for services where wide load fluctuations are expected. They may be operated as once-through or re-circulating units. In once-through service all evaporation is accomplished in a single pass. These units are specially useful in handling heat-sensitive materials, due to their short residence times. In re-circulating units the liquor entering the heat -transfer surfaces is at a higher concentration than the

feed, its density viscosity and boiling point are high. Accordingly heat transfer coefficients tend to be low. The advantages of these evaporators are that they can be operated over a wide range of concentrations and loads and are well suited for single-effect evaporation.

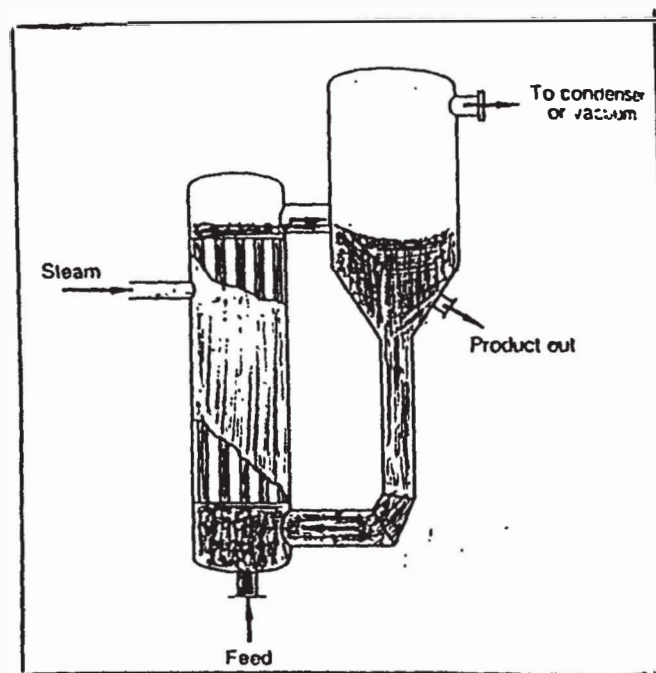


Figure 2.2: Natural-circulation Evaporator

There are several types of natural-circulation evaporators:

Short-tube Vertical Evaporators

These evaporator can be used with scaling liquids, since evaporation takes place inside the tubes, which are accessible for cleaning, but it have a disadvantage that a large area is required since the units are squat. Heat-transfer coefficients are

sensitive to temperature difference and liquor viscosity, and due to large liquid hold-up, these evaporators cannot be used with heat-sensitive materials.

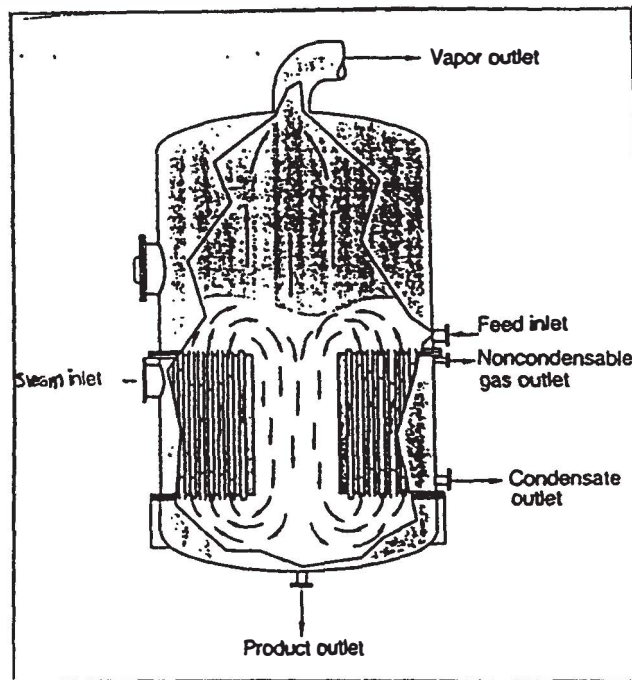


Figure 2.3: Short tube vertical Evaporator

Basket-type Evaporators

These are similar to calandria-type unit except that the tube bundle is removable, allowing easy cleaning and maintenance. Also due to construction, differential thermal expansion is not a problem.