



UNIVERSITI PUTRA MALAYSIA

**DIAMETRICAL AND AXIAL INDIRECT TENSILE TESTING USING
H-OMETER ON A WEAK ROCK MODEL AND ITS
FINITE ELEMENT SIMULATION**

JURAIDAH AHMAD

FK 2001 55

**DIAMETRICAL AND AXIAL INDIRECT TENSILE TESTING USING
H-OMETER ON A WEAK ROCK MODEL AND ITS
FINITE ELEMENT SIMULATION**

JURAIDAH AHMAD

**MASTER OF SCIENCE
UNIVERSITI PUTRA MALAYSIA**

2001



**DIAMETRICAL AND AXIAL INDIRECT TENSILE TESTING USING
H-OMETER ON A WEAK ROCK MODEL AND ITS
FINITE ELEMENT SIMULATION**

By

JURAIDAH AHMAD

**Thesis Submitted in Fulfilment of the Requirement for the
Degree of Master of Science in the Faculty of Engineering
Universiti Putra Malaysia**

June 2001



Specially Dedicated to My Beloved

Late Father

Allahyarham Hj. Ahmad Ujod

Mother

Hjh. Che Rose Dewa

Husband

Ahmad Kailani Muhammad

Children

Abdul Azim Al-Abrar Ahmad Kailani

Muhammad Al-Fateh Ahmad Kailani

Ainul Faqihah Ahmad Kailani

Anis Munibah Ahmad Kailani



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Master of Science

DIAMETRICAL AND AXIAL INDIRECT TENSILE TESTING USING H-OMETER ON A WEAK ROCK MODEL AND ITS FINITE ELEMENT SIMULATION

By

JURAIDAH AHMAD

June 2001

Chairman : Ir. Salihudin Hassim

Faculty : Engineering

A method of testing for the tensile strength of weak rock from H-Ometer is presented. H-Ometer tests are carried out on artificial weak rock specimen to test for the accuracy of the model. The weak rock is a simulation of weakly cemented sandstone, which is assumed homogeneous and isotropic and contains no discontinuities. Presently, the existing method of indirect tensile testing using the H-Ometer test is carried out on diametrical specimen model. In this study, efforts to determine a suitable method of testing are carried out on both axial and diametrical model position. The test was conducted on both model specimens, which is subjected to incremental load until failure occurs, and at each load response, the deformation, crack pattern and tensile strength were determined.

In this study, a 3-Dimensional elasto-plastic analysis of the experimental work using commercially available LUSAS Finite Element Method is carried out to simulate



the performance of H-Ometer on both axial and diametrical model specimens. The ability of the simulated models to predict the tensile strength and crack pattern from H-Ometer will validate the experimental results. Comparison of results for both diametrical and axial model specimen will determine the appropriate model specimen that will give accurate results from H-Ometer test.

Throughout this investigation, results of both model specimens carried out using H-Ometer testing device is found to be reliable with indirect tensile strength values ranging from 0.256 MPa to 0.218 MPa. As for the numerical analysis, tensile strength results of both models differ by 1.3%, which is almost negligible and indicates that ideally, either testing position is appropriate. However, experimentally, the axial model agreed more closely to the finite element analysis, which differs by 3.6% compared to 11.3% for the diametrical model.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi keperluan untuk ijazah Master Sains

**UJIAN KEKUATAN TEGANGAN TAK LANGSUNG KE ATAS MODEL
GARISPUSAT DAN PAKSI MENGGUNAKAN H-OMETER DAN
SIMULASI KAEDAH UNSUR TAK TERHINGGA**

Oleh

JURAIDAH AHMAD

Jun 2001

Pengerusi : Ir. Salihudin Hassim

Fakulti : Kejuruteraan

Satu kaedah telah digunakan untuk menguji kekuatan tegangan tak langsung ke atas batu lembut buatan menggunakan H-Ometer. Batu lembut yang digunakan dalam kajian ini adalah simulasi bagi batu pasir bersimen lembut yang homogen, isotropi dan tidak mempunyai ketakselajaran.

Buat masa kini, model garispusat digunakan untuk menguji kekuatan tegangan tak langsung bagi batuan lembut. Dalam kajian ini, usaha untuk menentukan kaedah terbaik untuk menguji batu lembut dengan menggunakan H-Ometer dijalankan ke atas dua model iaitu model garispusat dan model paksi. Kedua-dua model dikenakan beban tokokan sehingga berlakunya kegagalan dan pada setiap tahap beban, ubah bentuk, corak retakan dan kekuatan tegangan ditentukan.

Selain dari ujian yang dijalankan di makmal, analisa menggunakan kaedah unsur tak terhingga menggunakan perisian LUSAS digunakan untuk menjalankan simulasi ujian H-Ometer. Dalam kajian ini, kedua-dua model dianalisa secara bahan anjal-plastik tiga dimensi. Keputusan dari analisa unsur tak terhingga ini akan mengesah dan menentukan kekuatan tegangan dan corak retakan dari ujian H-Ometer di makmal. Perbandingan yang dilakukan akan menentukan model yang terbaik untuk digunakan dengan H-Ometer yang akan memberikan keputusan yang tepat.

Dari kajian ini, keputusan ujikaji menunjukkan bahawa kedua-dua model memberikan keputusan yang munasabah dimana nilai kekuatan tegangan adalah di antara 0.256 MPa hingga 0.218 MPa. Keputusan dari analisa unsur tak terhingga pula menunjukkan peratus perbezaan nilai kekuatan tegangan antara kedua model adalah 1.3%. Ini menunjukkan secara idealnya kedua-dua model boleh digunakan untuk ujikaji H-Ometer. Walau bagaimanapun, keputusan dari ujikaji model paksi menunjukkan peratus perbezaan yang lebih kecil iaitu 3.6% dibandingkan dengan analisa unsur tak terhingga manakala sebanyak 11.3% bagi model garispusat.

ACKNOWLEDGEMENTS

In the Name of Allah Most Merciful & Most Compassionate

I would like to extend my gratitude to my supervisor, En. Husaini Omar for his supervision and guidance throughout my studies. I am also grateful to my supervisory committee, Dr. Rosely Abdul Malik and En. Shukri Mail for their comments and suggestions. My sincere gratitude also goes to Dr. Yousif A. Khalid for his kind assistance related to the finite element analysis.

Special thanks are also extended to my sponsor, MARA University of Technology (UiTM) for funding my studies and also my sincere appreciation to my colleagues at the Faculty of Civil Engineering, MARA University of Technology, Shah Alam and staffs at Mountainous Terrain Development Research Centre (MTD-RC), Universiti Putra Malaysia, Serdang for their support.

I would also like to acknowledge members of the civil engineering laboratory staffs for their assistance and support, especially to En. Razali Rahman.

Finally, my deep appreciation goes to the entire members of my family especially my beloved husband and children for their invaluable love and patience. Also to my dearly beloved mother, Hjh. Che Rose Dewa, for her constant prayers and blessings for my success. Most of all, to Almighty Allah who has given me the strength and His blessings. Amiin.



I certify that an Examination Committee met on 8th June 2001 to conduct the final examination of Juraidah Ahmad on her Master of Science thesis entitled "Diametrical and Axial Indirect Tensile Testing Using H-Ometer on A Weak Rock Model and its Finite Element Simulation" in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows :

Ir. Salihudin Hassim
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Husaini Omar
Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Rosely Abdul Malik, Ph.D.
Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Shukri Maail
Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)



MOHD. GHAZALI MOHAYIDIN, Ph.D.
Professor/Deputy Dean of Graduate School
Universiti Putra Malaysia

Date : 27 JUN 2001.

This thesis submitted to the Senate of Universiti Putra Malaysia has been accepted as fulfilment of the requirement for the degree of Master of Science.




AINI IDERIS, Ph.D.
Professor
Dean of Graduate School
Universiti Putra Malaysia

Date : 12 JUL 2001

DECLARATION

I hereby declare that the thesis is based on my original work except for the quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.



Name : Juraidah Ahmad

Date : 27 June 2001

TABLE OF CONTENTS

	Page
DEDICATION	ii
ABSTRACT	iii
ABSTRAK	v
ACKNOWLEDGEMENTS	vii
APPROVAL SHEET	viii
DECLARATION FORM	x
TABLE OF CONTENTS	xi
LIST OF TABLES	xiii
LIST OF FIGURES	xiv
LIST OF ABBREVIATIONS	xviii
CHAPTER	
I INTRODUCTION	1
General	1
Research Objectives	3
Scope and Limitations	3
Structure of Thesis	4
II LITERATURE REVIEW	6
Introduction	6
The H-Ometer	10
Components of H-Ometer	11
Calibration	15
Insertion Technique	18
Estimating Horizontal Stress from H-Ometer Test	19
The Curve Fitting Method	21
Interpretation of H-Ometer Test	23
Comparison of the H-Ometer Test to Brazilian Test	30
Numerical Analysis of Weak Rock Tensile Strength	32
Ring Test	35
Direct Method	37
Propagation of Crack Model	38
III METHODOLOGY	44
Introduction	44
Artificial Weak Rock Specimen	46
Curing Strength Test	48
Sample Preparation Technique	51
H-Ometer Test	57
Diametrical Model	60
Axial Model	61



Finite Element System	62
Finite Element Modelling of Specimen	64
Pre-Processing Datafile	67
Post-Processing	70
Discussion	71
IV RESULTS AND DISCUSSIONS	72
Introduction	72
Experimental Results	72
Curing Process and Strength of Artificial Weak Rock	73
Indirect Tensile Strength From H-Ometer Test	77
Discussion	85
Finite Element Analysis Results	88
Simulation of Diametrical Model	88
Simulation of Axial Model	97
V CONCLUSION AND RECOMMENDATION	104
Conclusions	104
Recommendations for Future Work	105
REFERENCES	106
APPENDICES	
A Specimen Preparation and Testing	111
B Calibration	116
C H-Ometer Test	124
D Finite Element Crack Pattern of Specimen Model	153
E Summary Results of Finite Element Analysis of Specimen Model	158
F LUSAS Nonlinear Analysis Example	170
VITA	179



LIST OF TABLES

Table		Page
1	Geometrical Model of Artificial Weak Rock Specimen	48
2	Composition of the Model Material	52
3	Material Properties of the Model Specimen	70
4	Curing Test Results of Artificial Weak Rock	74
5	Percentage Strength Gain from Curing Process	76
6	Indirect Tensile Modulus Test	77
7	Tensile Strength of Diametrical Model	79
8	Tensile Strength of Axial Model	82
9	Tensile Strength of Artificial Weak Rock from H-Ometer Test	87
10	Finite Element Results for Diametrical Model under Tensile Loading	89
11	Finite Element Results for Axial Model under Tensile Loading	97



LIST OF FIGURES

Figure	Page
1 Flow Chart of Research Work	5
2 The Historical Development of the Pressuremeter Showing Categories According to the Method of Installation and the Method of Measuring Deformation	8
3 Schematic Diagram of the H-Ometer Probe	9
4 H-Ometer Set	10
5 Schematic Diagram of the H-Ometer (a) Components ; (b) H-Ometer Device	11
6 H-Ometer Components	13
7 Schematic Diagram of the H-Ometer Set-Up	14
8 Typical Calibration Curve for H-Ometer (a) Membrane Resistance Calibration ; (b) Line Calibration	15
9 Membrane Resistance Calibration	17
10 Line Calibration	18
11 Influence of Borehole Diameter on Pressuremeter Curves	19
12 The Position of the Reference Datum on PBP, SBP and PIP Test Curves	20
13 A Typical H-Ometer Test Curve	22
14 Development of Radial Tensile Cracking During Pressuremeter Test	23
15 The Definitions Used in the Analysis of the Expansion of a Cylindrical Cavity ; (a) Expansion of a cylindrical cavity ; (b) Expansion of an Element at Radius, r	25
16 Total Stress Path for Cavity Expansion	27
17 Failure Processes Around Expanding Cavity in Weak Rock	28
18 Relationship Between Tensile Strength From H-Ometer Test And Brazilian Test	31
19 Definitions of Weak Rock According to Various Standards	33



20	(a) Finite Element Mesh for Simulation of Ring Test ; (b) Stress Distribution in Samples of Different Geometry for Ring Test Method	36
21	(a) Finite Element Mesh for Simulation of Direct Method; (b) Stress Distribution in Samples as a Function of P/A for Direct Method	37
22	Failure Process Around Pile Tip	39
23	Modes of Fracture	39
24	Examples of Fracture in Geotechnics (a) Mode 1 Cracking During Pressuremeter Expansion ; (b) Mode II Cracking During Direct Shear Test ; © Mixed Mode I & II Cracking at Pile Tip	40
25	Crack Tip Mesh Geometry	41
26	Diagrammatic Views of Thick Walled cylindrical Test Specimens	41
27	Finite Element Mesh for Simulation of Laboratory Tests	42
28	Overview of the Experimental Work Flow	45
29	Geometrical Models of Testing Specimen (a) Diametrical Model; (b) Axial Model (all dimensions in mm)	47
30	Curing Test Specimens	49
31	Uniaxial Compressive Strength Test	50
32	Set Up of MATTA Machine to Determine Elastic Modulus of Specimen	51
33	Material Constituents of Artificial Weak Rock	52
34	Hobart A120 Mechanical Mixer	53
35	Diametrical Model PVC Cylindrical Moulds	54
36	Axial Model PVC Cylindrical Moulds	54
37	Diametrical Specimens of Artificial Weak Rock	55
38	Axial Specimens of Artificial Weak Rock	55
39	Drilling Process	56
40	Predrilled Holes in Specimens	57
41	Important Parts of the H-Ometer	58
42	Membrane Resistance Calibration	59

43	Line Calibration	59
44	H-Ometer Test on Diametrical Model	60
45	H-Ometer Test on Axial Model	61
46	Meshed Diametrical Model	65
47	Meshed Axial Model	65
48	LUSAS Finite Element System	66
49	Finite Element Meshes Used for Numerical Investigation for Diametrical Model	68
50	Finite Element Meshes Used for Numerical Investigation for Axial Model	69
51	Curing Strength of Artificial Weak Rock	74
52	Uniaxial Compressive Strength Test Using Tri-Stand ELE Device	75
53	Percentage of Water Loss of Specimen after Curing	76
54	Typical H-Ometer Test Curve	78
55	Fractured Diametrical Model from H-Ometer Test	80
56	Stages in Failure Process for H-Ometer Test on Diametrical Model Specimen	81
57	Fractured Axial Model from H-Ometer Test	83
58	Crack Propagation of the Axial Model (a) Elastic Cracks Initiate At Cavity Wall; (b) Cracks Propagate in the Weakest Direction	83
59	Results of Tensile Strength of Various Models from H-Ometer test (a) Diametrical Model; (b) Axial Model	86
60	Stress Contour of Diametrical Model Under Tensile Load	93
61	Load Deformation Graph of Diametrical Model	94
62	Diametrical Model Showing Y-Y and Z-Z Section Planes	95
63	Stress Intensity Along Section Planes (a) Y-Y; (b) Z-Z of Diametrical Model	95
64	Stress Contour of Axial Model Under Tensile Load	100
65	Load Deformation Graph of Axial Model	101



66	Half Axial Model Showing Y-Y and Z-Z Section Planes	102
67	Stress Intensity Along Section Planes (a) Y-Y; (b) Z-Z of Axial Model	103



LIST OF ABBREVIATIONS

σ_h	Horizontal stress
a_o	Initial cavity radius
P	Applied load
a_o	Radius of cavity
a_i	Expansion of the cavity
δr	Linear element of length
ε_o	Tensile circumferential strain
σ_r	Radial stress
σ_θ	Tangential stress
$\Delta\sigma_r$	Change in radial stress
$\Delta\sigma_\theta$	Change in tangential stress
σ_t	Tensile strength
σ_{HO}	Tensile strength from H-Ometer test
P_f	Pressure at failure
E	Elastic Modulus
ν	Poisson's Ratio
P_f	Failure Pressure
P_o	Initial pressure
$\sigma_{HO(ax)}$	Axial tensile strength from H-Ometer test
$\sigma_{FE(ax)}$	Finite element axial tensile strength
$\sigma_{HO(dia)}$	Diametrical tensile strength from H-Ometer test
$\sigma_{FE(dia)}$	Finite element diametrical tensile strength

CHAPTER I

INTRODUCTION

General

Pressuremeter has been a standard tool used widely as an in-situ measuring device to obtain deformation properties of soils and over recent years a variety of pressuremeters have been developed since its first creation in 1955 (Clarke, 1995). Major developments have taken place since then with regard to pressuremeter capacity, robustness and resolution to permit weak rocks to be easily and reliably tested (Ervin et al., 1980, Clarke et al., 1989 and Haberfield, 1996). In the past, the pressuremeter test has been modelled as the expansion of a long cylindrical cavity in a semi-infinite, elasto-plastic medium. (Gibson & Anderson, 1961, Baguelin et al., 1972, Ladyani, 1972, Vesic, 1972 and Hughes et al., 1977). All of these models assumed that the material adjacent to the pressuremeter probe fails in shear, and as such, failure is only dependent on the cohesive or frictional properties of the material tested. However, studies have demonstrated that, under the conditions which normally apply to pressuremeter testing in weak rocks, failure can be influenced by the development of tension cracks initially at the cavity wall and propagate radially into the surrounding material (Haberfield & Johnston, 1986). It was suggested that the extent of any tensile failure was dependent on the relative tensile strength and brittleness of the weak rock, and on the in-situ horizontal stress at the start of each test. This shows that the occurrence of tensile failure invalidates the assumptions made by current interpretation techniques, which considered shear failure only (Haberfield & Johnston, 1990).



As a result of recent development in pressuremeter technology, a newly developed testing device known as the H-Ometer were developed by Mountainous Terrain Development Research Centre, Universiti Putra Malaysia, to test for indirect tensile strength on hard soils and weak rocks in the laboratory, which has gained various accreditation locally and also at international level. Development of the H-Ometer device is a bonus to the site investigation industry due to the portability of the equipment which can be used in both laboratory and insitu testing. In South Afirca a smaller pressuremeter (PENCEL pressuremeter) as developed principally to test pavement layers where holes are easily predrilled in materials. The size of this device is 32 mm and 22.5 mm in diameter. Studies have shown that the tensile testing device available in the market is not applicable to test the tensile strength of weak rock, hard soil or highly weathered material. Hence, an attempt was made to develop the H-Ometer for that purpose. The determination of tensile strength of weak rock particularly is a difficult task due to the inherent variability of natural weak rocks. In this study, an artificial weak rock simulated as weakly cemented sandstone, which is assumed isotropic, homogeneous and contains no discontinuities was prepared. The properties of these weak rocks are similar to the naturally occurring weak sedimentary rocks, which can be controlled and accurately determined in laboratory. These rocks can also be reproduced within very high tolerances of geometry and well-defined material properties.

Modelling of geotechnical problems using finite element method has been used extensively, but very little attention has been directed to the analysis of tensile failure (Haberfield and Johnston, 1990). In this study, a numerical technique to simulate the experimental work using LUSAS Finite Element Method is carried out. The ability of the

simulated models to predict the performance and failure pattern of H-Ometer can be verified by conducting various tests in laboratory using H-Ometer probe.

Research Objectives

The aim of this research is to study the suitability and reliability of the H-Ometer to measure the indirect tensile strength of artificial weak rock in both axial and diametrical testing position. The experimental study is further verified by analysing the simulated model using the finite element method. The specific objectives of this study will include:

1. Simulation of the different testing position method of weak rock and observation of crack patterns from both H-Ometer test and LUSAS Finite Element Method.
2. Evaluate and determine the indirect tensile strength of weak rock in both axial and diametrical testing position from H-Ometer and finite element method.

Scope and Limitations

H-Ometer is a device, developed by a group of researchers at the Mountainous Terrain Development Research Centre, Faculty of Engineering, Universiti Putra Malaysia. Initially, few testing have been carried out using the H-Ometer to obtain geotechnical parameters on soft soil, hard soil and weak rock (Husaini et al., 2000a) and also unconfined compression test on compacted soil (Husaini et al., 2000c). The

study focuses on two aspects of determining the indirect tensile strength of artificial weak rock. Firstly, an experimental work is conducted using the H-Ometer to determine the indirect tensile strength of artificial weak rock. A diametrical and axial model of a cylindrical weak rock specimens are used in this test to determine the appropriate model suitable for use with the H-Ometer.

Secondly, to determine the accuracy of tensile strength obtained experimentally, a finite element method is used to simulate the test mention model, which will enable a better evaluation of the laboratory tests. Both diametrical and axial model is analysed as a 3-dimensional non-linear model which will enable a better evaluation and verification of the accuracy of the H-Ometer test.

Structure of Thesis

The thesis is divided into five chapters. A literature survey of research work in various areas relevant to this research is presented in Chapter 2. The structure of methodology for both experimental work and simulation using the LUSAS Finite Element Method software and modelling techniques of artificial weak rocks is outlined in Chapter 3. Chapter 4 presents a complete account of results and analysis of study obtained from both experimental work and finite element simulation. The conclusion and recommendations of this study are presented in Chapter 5. Figure 1 summarises the flow of research process to be carried out in general.

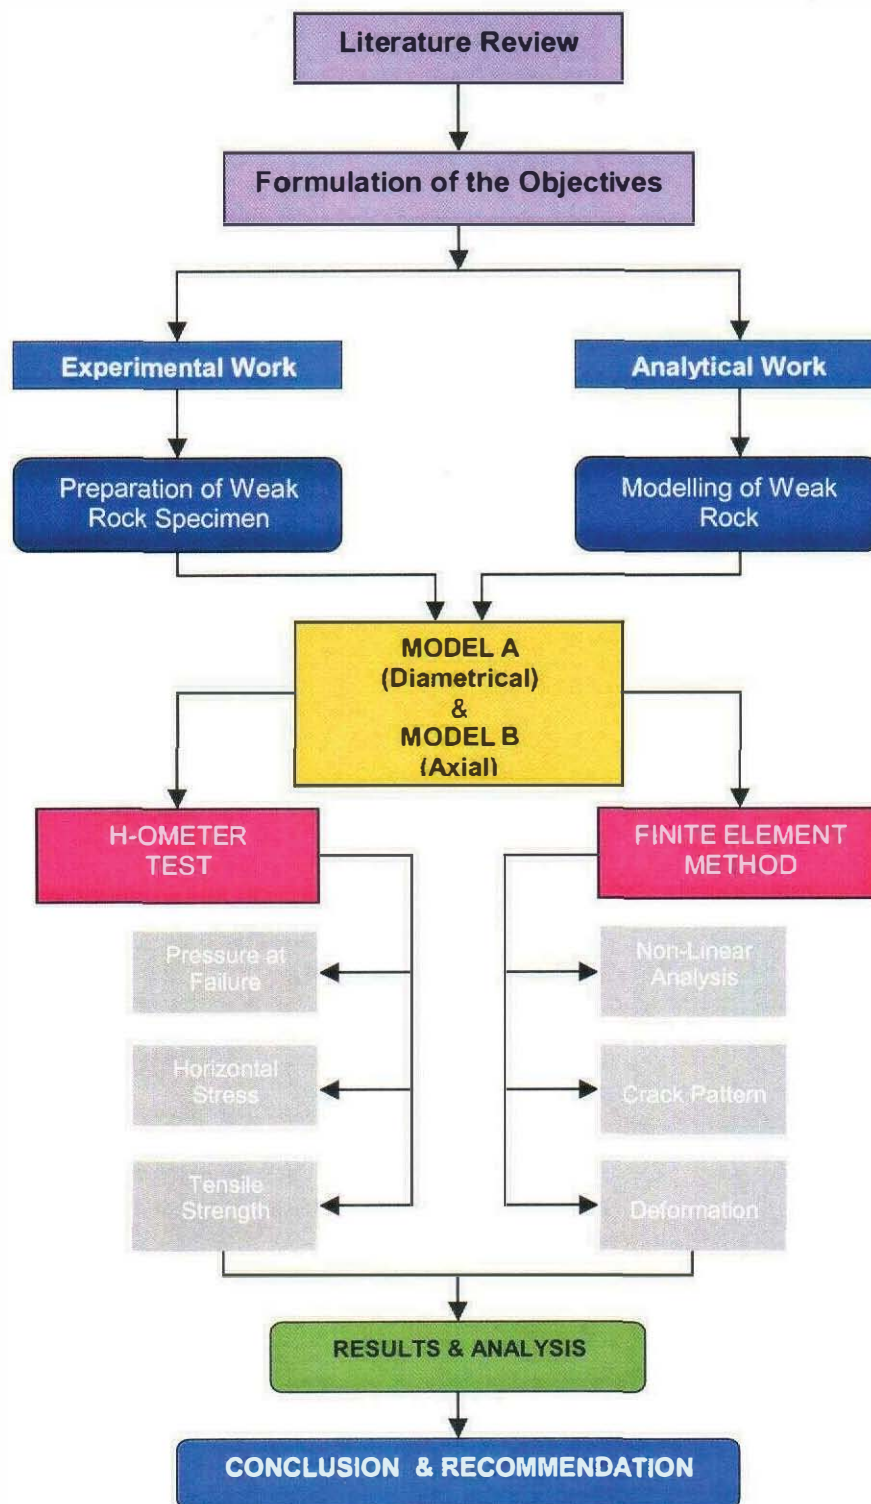


Figure 1: Flow Chart of Research Work