



**UNIVERSITI PUTRA MALAYSIA**

**DESIGN AND EVALUATION OF A MODIFIED  
CSMA/CD MAC PROTOCOL ON SINGLE-CHANNEL  
OPTICAL LOCAL AREA NETWORK**

**KHARINA KHAIRI**

**FK 2003 70**

**DESIGN AND EVALUATION OF A MODIFIED CSMA/CD MAC PROTOCOL  
ON SINGLE-CHANNEL OPTICAL LOCAL AREA NETWORK**

**By**

**KHARINA KHAIRI**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,  
In Partial Fulfilment of the Requirement for the Degree of Master Science**

**February 2003**



*To my parents...*



Abstract of the thesis submitted to the senate of Universiti Putra Malaysia in partial fulfillment of the requirements for the degree of Master of Science

**DESIGN AND EVALUATION OF A MODIFIED CSMA/CD MAC PROTOCOL  
ON SINGLE-CHANNEL OPTICAL LOCAL AREA NETWORK**

By

**KHARINA KHAIRI**

**February 2003**

**Chairman : Associate Professor Dr. Mohamad Khazani Abdullah**

**Faculty : Engineering**

The project carried out was a study of a single-channel optical Local Area Network (LAN) based on an improved CSMA/CD protocol that was adapted from the conventional one. The algorithm of the new version of CSMA/CD was developed, and the LAN was comprehensively studied from a performance perspective within two different scenarios, namely, the Fast Ethernet and the Gigabit Ethernet.

The algorithm was developed in Visual Basic 6.0v programming language. This algorithm paved the way for the generation of performance parameters through simulation of the new LAN. The parameters were then studied and compared against corresponding parameters of conventional LAN that are well reported in the literature. The coding of the new algorithm also incorporated a new type of signal known as '*special jamming signal*' that served to stop all nodes from attempting to transmit except the one whose number of transmission attempts matched the maximum value



specified. This resulted in a condition whereby there was no packet loss at all. The algorithm also focused on providing adequate delay, throughput and efficiency that were needed to support the existing LAN.

The results of this study showed that at least two significant contributions; the average delay and the percentage of collisions which were both shown to improve significantly. Additionally, as far as operating environments were concerned, the throughput (measured on a percentage scale) of Fast Ethernet performed better than that of its Gigabit competitor. The difference in their throughput was attributed to the carrier extension mechanism that was employed by the former. Efficiency, on the other hand, did not show any difference in both transmission rates.

The summary of the overall performance of our network showed improvement for all parameters under study: delay, throughput, efficiency and percentage of collisions by using the improved CSMA/CD protocol.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi sebahagian keperluan Ijazah Master Sains

**REKABENTUK DAN PENILAIAN PROTOKOL KAWALAN CAPAIAN  
MEDIA CSMA/CD TERUBAHSUAI KE ATAS RANGKAIAN KAWASAN  
SETEMPAT OPTIK SALURAN TUNGGAL**

Oleh

**KHARINA KHAIRI**

**February 2003**

**Pengerusi : Profesor Madya Dr. Mohd. Khazani Abdullah**

**Fakulti : Kejuruteraan**

Kajian ke atas Rangkaian Kawasan Setempat optik saluran tunggal berdasarkan protokol CSMA/CD yang telah diadaptasikan daripada protokol asal telah dijalankan. Melalui pengembangan daripada algoritma baru CSMA/CD, kefahaman mengkaji dari perspektif penilaian Rangkaian Kawasan Setempat dilihat ke atas dua senario, iaitu Fast Ethernet dan Gigabit Ethernet.

Algoritma tersebut telah dibangunkan dengan menggunakan bahasa pengaturcaraan Visual Basic 6.0. Algoritma ini memberi laluan untuk menjana parameter-parameter prestasi melalui simulasi daripada Rangkaian Kawasan Setempat yang baru. Parameter-parameter ini kemudiannya dikaji dan dibandingkan terhadap parameter-parameter prestasi asal yang mana telah dilaporkan.

Algoritma baru yang telah direkabentuk di mana telah membawa kepada satu pengenalan iaitu 'isyarat sekatan khas'. Di mana isyarat sekatan ini memberhentikan semua stesen-stesen yang cuba untuk menghantar paket kecuali stesen yang mempunyai nilai percubaan yang sama dengan nilai maksimum yang telah ditetapkan. Ini menyebabkan satu keadaan di mana tiada berlaku kehilangan paket. Algoritma ini juga difokuskan untuk memperolehi purata lengah masa, truput dan juga kecekapan yang memadai supaya menyokong Rangkaian Kawasan Setempat yang sedia ada.

Keputusan-keputusan daripada kajian ini menunjukkan dua sumbangan utama; purata lengah masa dan peratus pelanggaran, di mana kedua-duanya menunjukkan prestasi yang baik. Prestasi truput ke atas Fast Ethernet lebih tinggi daripada Gigabit Ethernet kerana Gigabit Ethernet menggunakan 'pembawa sambungan' yang menyebabkan truput Fast Ethernet lebih tinggi. Prestasi kecekapan juga tiada bezanya pada kedua-dua kadar penghantaran.

Sebagai rumusan daripada keseluruhan prestasi daripada rangkaian ini telah menunjukkan peningkatan iaitu: purata lengah masa, truput, kecekapan serta peratus pelanggaran dengan menggunakan protokol CSMA/CD yang lebih baik.

## ACKNOWLEDGMENTS

In the Name of Allah, the Most Gracious, the Most Merciful.....

First of all, I would like to express my greatest gratitude to ALLAH the almighty, for his help and support during the course of life and moment of truth.

I would like to express my appreciation and sincere gratitude to my supervisor, Associate Professor Dr Mohamad Khazani Abdullah for his continual support, endless encouragement and patience towards completing the research. Without all that nothing would have been accomplished.

My heartfelt thanks are extended to other supervisory committee members, Professor Dr Borhanuddin Mohd Ali and Puan Salasiah Hitam for their invaluable guidance, support and constructive criticisms throughout the success of this project.

A big thank you to all KKK staffs, all my colleagues from Wireless and Multimedia Lab especially to all the members of Photonics Lab for their helps and cooperations. I am also very thankful to Siti Barirah Ahmad Anas, Norhana Arsad, Ramizan Ramlee, Aduwati Sali, and Siti Mariam; whose friendship, support and help contribute to a large portion of this achievement and also to my housemates for their concern and support.

My greatest appreciation and obliged to the very important persons in my life, abah and mak, En. Khairi b. Mohd Ariffin and Pn. Rohana bt Lazim; whose support,





encouragement and inspiration has sustained me and help me succeed in my study. And not forget to my brothers and sisters for their supports.

Special thanks to Muhammad Ammar Kamilin, for his devoted care and support for all the time.

Last but not least, to all others not mentioned but whose help has been tremendous, I express my sincere thanks and appreciation.



I certify that an Examination Committee met on 6<sup>th</sup> February 2003 to conduct the final examination of Kharina Khairi on her Master of Science thesis entitled "Design and Evaluation of a Modified CSMA/CD MAC Protocol on Single-channel Optical Local Area Network" in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

**ABDUL RAHMAN RAMLI, Ph.D.**

Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**MOHAMAD KHAZANI ABDULLAH, Ph.D.**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**BORHANUDDIN MOHD ALI, Ph.D.**

Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**SALASIAH HITAM, M.Sc.**

Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

  
**SHAMSHER MOHAMED RAMADILI, Ph.D.**

Professor / Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 7 MAR 2003

This thesis submitted to the senate of Universiti Putra Malaysia has been accepted as partial fulfillment of the requirement for the degree of Master of Science. The members of the Supervisory Committee are as follows:

**MOHAMAD KHAZANI ABDULLAH, Ph.D.**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**BORHANUDDIN MOHD ALI, Ph.D.**

Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**SALASIAH HITAM, M.Sc.**

Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

---


**AINI IDERIS, Ph.D.**  
Professor / Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:



## DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.



---

**KHARINA KHAIRI**

Date: 5 . 3 . 0 3

## TABLE OF CONTENTS

	<b>Page</b>
DEDICATION	ii
ABSTRACT	iii
ABSTRAK	v
ACKNOWLEDGMENTS	vii
APPROVAL SHEETS	ix
DECLARATION FORM	xi
LIST OF TABLES	xv
LIST OF FIGURES	xvi
LIST OF ABBREVIATIONS	xix
LIST OF NOTATIONS	xxi
<b>CHAPTER</b>	
<b>I INTRODUCTION</b>	
1.1 Optical Networks Today	1
1.2 Optical Local Area Network	4
1.3 Statement of Problems	6
1.4 Objectives	7
1.5 Thesis Organization	8
<b>II REVIEW ON FIBER ACCESS LOCAL AREA NETWORK</b>	
2.1 Introduction	9
2.1.1 Optical Local Area Network	9
2.1.2 MAC Protocol: CSMA/CD	11
2.2 Ethernet	16
2.2.1 Ethernet on Optical Fiber: Gigabit Ethernet	19
2.2.2 Half-Duplex Operation: CSMA/CD	23
2.3 Conclusion	24
<b>III SIMULATION: CSMA/CD MAC PROTOCOL</b>	
3.1 Introduction	25
3.2 Physical Network Architecture	25
3.2.1 Protocol Description: CSMA/CD	27
3.2.2 Simulation Model	30
3.3 Conclusion	35
<b>IV RESULTS AND DISCUSSIONS ON FAST ETHERNET</b>	
4.1 Introduction	36
4.2 Design Parameters	36
4.3 Performance Metrics	39
4.3.1 Average Delay	40
4.3.1.1 The Effect of Number of Nodes	41



4.3.1.2	The Effect of Distance	42
4.3.1.3	The Effect of Offered Load	44
4.3.2	Throughput	46
4.3.2.1	The Effect of Number of Nodes	47
4.3.2.2	The Effect of Distance	50
4.3.2.3	The Effect of Offered Load	51
4.3.3	Efficiency	53
4.3.3.1	The Effect of Number of Nodes	54
4.3.3.2	The Effect of Distance	55
4.3.3.3	The Effect of Offered Load	56
4.3.4	Percentage of Collision	58
4.3.4.1	The Effect of Number of Nodes	59
4.3.4.2	The Effect of Distance	60
4.3.4.3	The Effect of Offered Load	61
4.4	Conclusion	62
<b>V</b>	<b>RESULTS AND DISCUSSIONS ON GIGABIT ETHERNET</b>	
5.1	Introduction	63
5.2	Design Parameters	63
5.3	Performance Metrics	65
5.3.1	Average Delay	66
5.3.1.1	The Effect of Number of Nodes	66
5.3.1.2	The Effect of Distance	68
5.3.1.3	The Effect of Offered Load	70
5.3.2	Throughput	71
5.3.2.1	The Effect of Number of Nodes	71
5.3.2.2	The Effect of Distance	73
5.3.2.3	The Effect of Offered Load	74
5.3.3	Efficiency	76
5.3.3.1	The Effect of Number of Nodes	76
5.3.3.2	The Effect of Distance	78
5.3.3.3	The Effect of Offered Load	79
5.3.4	Percentage of Collision	80
5.3.4.1	The Effect of Number of Nodes	80
5.3.4.2	The Effect of Distance	81
5.3.4.3	The Effect of Offered Load	83
5.4	Conclusion	84
<b>VI</b>	<b>CONCLUSIONS AND FUTURE WORK</b>	
6.1	Introduction	85
6.2	Thesis Contributions	85
6.3	Future Research	89



**REFERENCES**

91

**VITA**

95



## LIST OF TABLES

<b>Table</b>		<b>Page</b>
I	Simulation variables for Fast Ethernet	39
II	Simulation variables for Gigabit Ethernet	65





## LIST OF FIGURES

Figure		Page
1.1	The basic idea behind the three generations of fiber usage in networks	2
1.2	Some physical topologies of typical optical networks (T=Transmitter, R=Receiver)	4
2.1	Physical network architecture consisting of a share local oscillator, a passive star coupler, and N different stations	11
2.2	Sequence of events in a collision using the CSMA/CD protocol	14
2.3	Single-channel LAN logical bus topology (N nodes and M=1 wavelengths)	15
2.4	Standard Ethernet frame format	17
2.5	A general Ethernet implementation for a network station	18
2.6	Gigabit Ethernet application environments and supported link distances for fiber-optic and twisted-pair media	21
2.7	Gigabit Ethernet protocol stack	22
3.1	Illustration of proposed network architecture	26
3.2	Single-channel logical bus topology	27
3.3	Collision detection in CSMA/CD	29
3.4	The transmitter operation with proposed algorithm within the dotted box	32
3.5	Sense channel algorithm	33
3.6	Collision detection and the proposed algorithm	34
4.1	Generic multi-access network for performance studies	37
4.2	Average packet delay versus number of nodes at a fixed distance of 550 meters and bit rate of 100 Mbps	41



4.3	Average packet delay at 2000 meters length with 100 nodes connected with 100 Mbps of transmission rate	43
4.4	Average packet delay versus offered load at a fixed distance of 550 meters with 100 nodes attached at bus rate of 100 Mbps	45
4.5	Network throughput with 100 nodes connected. $d$ distance = 550 meters, capacity = 100 Mbps	48
4.6	Throughput versus distance varied from 100 meters to 2000 meters with 100 stations connected at 100 Mbps	50
4.7	Throughput against offered load. $d$ distance = 550 meters, $N$ nodes = 100 at 100 Mbps of bus rate	52
4.8	Efficiency against number of nodes (100) at a fixed distance of 550 meters and a bit rate of 100 Mbps	54
4.9	Network efficiency when varied by the distance of 2000 meters with 100 nodes connected at transmission rate of 100 Mbps	56
4.10	Efficiency versus offered load. $d$ distance = 550 meters, $N$ host = 100 and capacity = 100 Mbps	57
4.11	Performance of percentage of collisions with 100 nodes connected at 550 meters with transmission rate of 100 Mbps	59
4.12	Percentage of collisions against 2000 meters with 100 nodes attached at a bus rate of 100 Mbps	60
4.13	Percentage of collisions versus offered load. $N$ stations = 100, $d$ = 550 meters, bus rate = 1 Gbps	61
5.1	Average delay versus number of nodes at a fixed distance of 550 meters with 1 Gbps transmission rate.	67
5.2	Average packet delay at the distance of 2000 meters, with 100 nodes attached at the bit rate of 1 Gbps	69
5.3	Average delay versus offered load. $d$ distance = 550 meters, $N$ host = 100 and capacity = 100 Mbps	70
5.4	Network throughput with 100 nodes connected at a fixed distance of 550 meters at transmission rate of 1 Gbps	72



5.5	Throughput performance with 100 nodes attached to 2000 meters length with bus rate of 1 Gbps	73
5.6	Throughput versus offered load, $d$ distance = 550 meters, $N$ nodes = 100 and capacity = 1 Gbps	75
5.7	Efficiency versus 100 nodes connected at 550 meters length at bus rate of 1 Gbps	77
5.8	Network efficiency with 100 nodes connected at 2000 meters length at channel capacity of 1 Gbps	78
5.9	Efficiency versus offered load with 100 nodes connected at a fixed distance of 550 meters with bus rate of 1 Gbps	79
5.10	Percentage of collisions versus number of nodes. $N$ nodes = 100, $d$ = 550 meters, transmission rate = 1 Gbps	81
5.11	Percentage of collision performance at 2000 meters with 100 hosts connected with 1 Gbps of transmission rate	82
5.12	Percentage of collisions versus offered load. $N$ stations = 100, $d$ = 550 meters, bus rate = 1 Gbps	83



## LIST OF ABBREVIATIONS

ANSI	-	American National Standards Institute
ANSI X3T11	-	American National Standards Institute Fiber Channel
BER	-	Bit Error Rate
CSMA/CD	-	Carrier Sense Multiple Access / Collision Detection
DNC	-	Digital Network Architecture
DTE	-	Data Terminal Equipment
EMI	-	Electromagnetic Interference
FC	-	Fiber Channel
FDDI	-	Fiber Distributed Data Interface
FE	-	Fast Ethernet
FTP	-	File Transfer Protocol
Gbps	-	Giga bits per second
GE	-	Gigabit Ethernet
ICT	-	Information and Communication Technology
IEEE	-	Institute of Electrical and Electronic Engineers
IEEE 802.3	-	Ethernet Standard
LAN	-	Local Area Network
LX	-	Long-wavelength
MAC	-	Medium Access Control
MAN	-	Metropolitan Area Network
Mbps	-	Mega bits per second
MMF	-	Multimode Fiber



NIC	-	Network Interface Card
OSI	-	Open System Interconnect
PHY	-	Physical Layer
SDH	-	Synchronous Digital Hierarchy
SMF	-	Single Mode Fiber
SONET	-	Synchronous Optical Network
SX	-	Short-wavelength
UTP	-	Unshielded Twisted Pair
WAN	-	Wide Area Network



## LIST OF NOTATIONS

$\delta$	-	Collision Time
$t$	-	Time
$t_w$	-	Waiting Time
$t_{tx}$	-	Transmission Time
$t_d$	-	Propagation Time
$a$	-	Propagation Delay
$b$	-	Length of Jamming signal
$y$	-	Idle Time
$N$	-	Node or Station
$M$	-	Wavelength
$rand()$	-	Random Number
$P_n$	-	Poisson Distribution
$\lambda$	-	Arrival Rate
$n$	-	Probability of Success
$d$	-	Distance
$\rho$	-	Offered Load
$D$	-	Average Delay
$\xi$	-	Throughput
$\eta$	-	Efficiency
$C$	-	Collision
$\gamma$	-	Mean Number of Occurance
$p$	-	Probability

$m$	-	Number of Trials
$X$	-	Random Variable
$E(X)$	-	Mean Value of $X$
$V(X)$	-	Variance of $X$



# CHAPTER 1

## INTRODUCTION

### 1.1 Optical Networks Today

For years, the networking sector has grappled with the notion of the all-optical network. It offers the promise to solve many problems to provide enormous capacities in the network. Optical networking opens up a new field of multimedia applications and also of an enhancement network protocols adapted to high-speed network architectures. In addition, it provides a common infrastructure over which a variety of services can be delivered (Rajiv and Kumar, 2002). More generally known, optical fiber offers much higher bandwidth than copper cable. Therefore, it is natural that many telecommunication providers have moved to the optical fiber cable.

The first modification to the existing networks was performed on the physical layer. The low cost of the optical fiber and the tremendous increase of bandwidth obtained with this technology convinced the network engineers to invest in the optical devices- such as transmitter, receivers and amplifiers- forecasting on improvement of performances at acceptable costs (McCullough, 2000). Figure 1.1 shows the basic topologies behind the three generations of optical fiber networks. For the first-generation, fiber was not used. For the second-generation, fiber was used as a replacement for copper. For the third-generation, unique fiber properties are exploited.





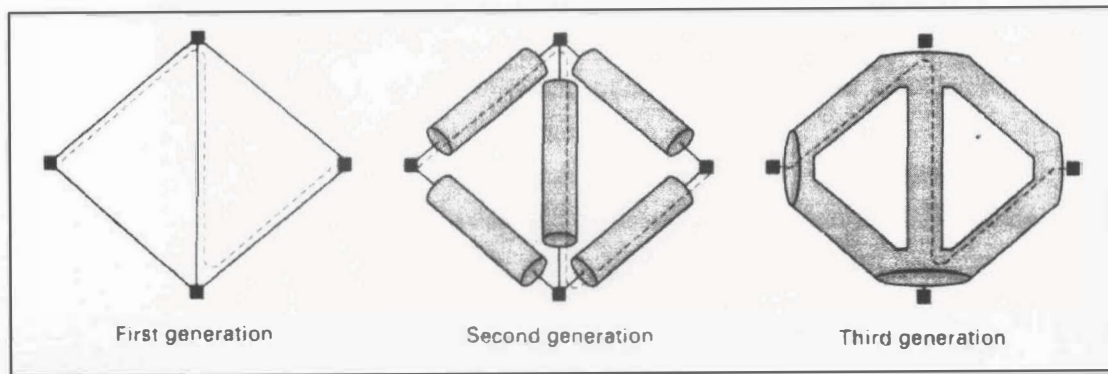


Figure 1.1: The basic idea behind the three generations of fiber usage in networks (Dutton, 1998)

The upper layers of the network would be the same with the previous generation: all the data are transmitted point-to-point in optical forms on the links, but at each node an opto-electronic conversion is performed and the data are analyzed with the usual devices; then they would return in optical form on the next link (McCullough, 2000), (Djafar et. al, 2001). Synchronous Optical NETWORKS (SONET) and Synchronous Digital Hierarchy (SDH) represent examples for such networks, which are now widely implemented all over the world.

Today we are seeing the deployment of second generation optical networks, where some of the routing, switching, and intelligence is moving into the optical layer (Rajiv and Kumar, 2002). It exploits the intrinsic characteristics of optical domain not only point-to-point transmission, but also for other functions such as the routing process, which is an optical evolution penetration more into the architecture, affecting more than one network layer. Of course an optical network must provide other characteristics beyond high bandwidth capacity: it must be robust, flexible, and cost effective due to an