



**UNIVERSITI PUTRA MALAYSIA**

**FABRICATION AND CHARACTERIZATION OF DNA SENSORS FROM  
METAL OXIDES NANOPARTICLES AND CHITOSAN-MODIFIED GLASSY  
CARBON ELECTRODES**

**NOR AMIRAH BINTI MOHD MAAMOR**

**FS 2011 30**

**FABRICATION AND CHARACTERIZATION OF  
DNA SENSORS FROM METAL OXIDES  
NANOPARTICLES AND CHITOSAN-MODIFIED  
GLASSY CARBON ELECTRODES**

**NOR AMIRAH BINTI MOHD MAAMOR**

**MASTER OF SCIENCE  
UNIVERSITI PUTRA MALAYSIA**

**2011**


**FABRICATION AND CHARACTERIZATION OF DNA SENSORS FROM  
METAL OXIDES NANOPARTICLES AND CHITOSAN-MODIFIED  
GLASSY CARBON ELECTRODES**

By

**NOR AMIRAH BINTI MOHD MAAMOR**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,  
in Fulfilment of the Requirements for the Degree of Master of Science**

**MAY 2011**

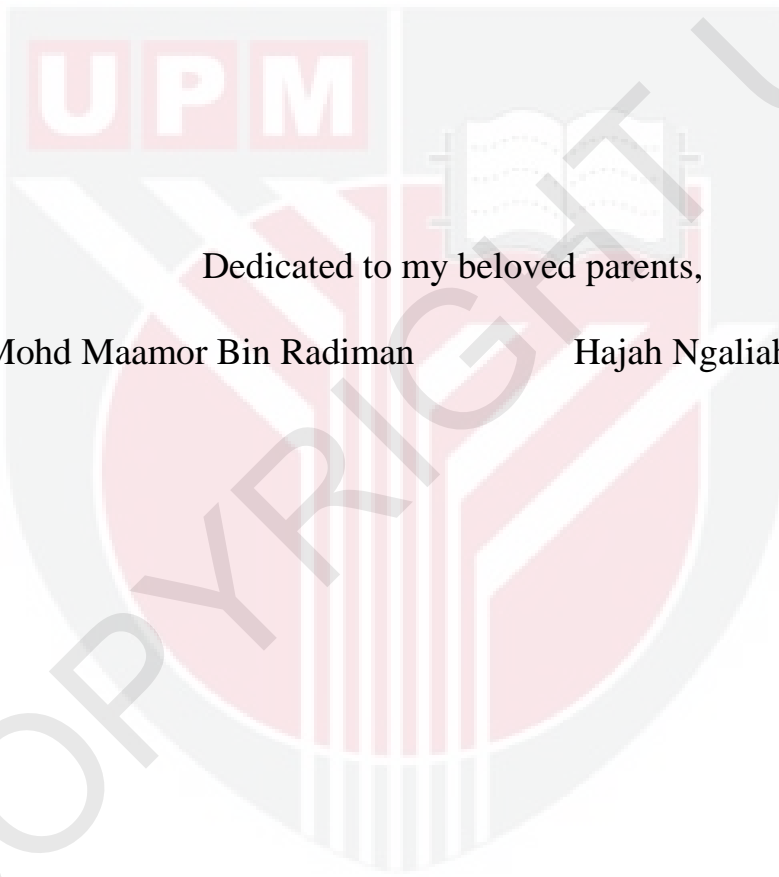

Dedicated to my beloved parents,

Haji Mohd Maamor Bin Radiman

Hajah Ngaliah Binti Barindi

© COPYRIGHT UPM

Abstract of the thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

**FABRICATION AND CHARACTERIZATION OF DNA SENSORS FROM METAL OXIDES NANOPARTICLES AND CHITOSAN-MODIFIED GLASSY CARBON ELECTRODES**

By

**NOR AMIRAH BINTI MOHD MAAMOR**

**MAY 2011**

**Chairman: Tan Wee Tee, PhD**

**Faculty: Science**

Voltammetric studies of a sensitive electrochemical deoxyribonucleic acid (DNA) sensor based on nano particles and multi-walled carbon nanotube (MWCNTs) for DNA immobilization is described. In this study, two nanoparticles were used, zirconium oxide ( $ZrO_2$ ) and titanium oxide ( $TiO_2$ ). Layer deposition technique was used to prepare nanoparticles/MWCNTs/chitosan (CHIT)-modified glassy carbon electrode (GCE) and DNA were immobilized to the GCE. The immobilization of DNA on the electrode was monitored by cyclic voltammetry (CV) analysis by measuring the change of peak currents using electroactive methylene blue (MB) as an indicator.

Compared with previous DNA sensor with DNA directly incorporated on carbon electrodes, this carbon nanotube-based assay with its large surface area and good charge-transport characteristics increased DNA attachment quantity. Parameters used on this study including electrochemical characterization, scan rate study and pH optimization as well as chronoamperometry (CA) and chronocoulometry (CC). The

electrochemical reduction and oxidation of the redox couples of MB (as a DNA indicator) can be recognized easily by the solid-phase voltammetry of nanoparticles. The cyclic voltammograms for the three differently modified electrodes, nanoparticles/CHIT, MWCNTs/CHIT and nanoparticles/MWCNTs/CHIT, showed that there are 2 major peaks due to the redox couple of MB. Electrochemical characterization of the two modified electrodes, nanoparticles/MWCNTs/CHIT, shows that both of this modified electrode give highest peak current, evident that the composite mixtures cause the increase in the redox peak current of MB.

For hybridization study, the current enhancement observed in three differently fabricated DNA sensor based on DNA/TiO<sub>2</sub>/CHIT/GCE, DNA/MWCNTs/CHIT/GCE and DNA/TiO<sub>2</sub>/MWCNTs/CHIT/GCE, responding to redox couple of MB are compared. The sensor DNA/TiO<sub>2</sub>/MWCNTs/CHIT/GCE was found to the most be sensitive towards hybridized DNA. Parameters, used in this study include hybridization time, hybridization temperature, accumulation time, effect of varying concentration of probe, calibration curve, selectivity of DNA sensor, reproducibility and repeatability. From the studies, the optimized condition of hybridization for target ssDNA reaching the ssDNA probe is 30 min at 30 °C. The accumulation time of MB, time taken for MB to bind with dsDNA is 150 seconds, while, 100 µM of ssDNA probe was found to be the appropriate dosage for the fabrication of the sensor

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains.

**FABRIKASI DAN PENCIRIAN DNA SENSOR DARI NANOPARTIKEL  
OKSIDA LOGAM DAN KITOSAN-TERUBAHSUAI ELEKTROD-ELEKTROD  
KARBON BERKACA**

Oleh

**NOR AMIRAH BINTI MOHD MAAMOR**

**MEI 2011**

**Pengerusi: Tan Wee Tee, PhD**

**Fakulti: Sains**

Kajian voltametri sensor DNA yang peka menggunakan nanopartikel dan multi-lapisan nanotub karbon (MWCNTs) untuk pemegungan DNA dijelaskan. Dalam kajian ini, dua nanopartikel digunakan iaitu zirkonium oksida ( $ZrO_2$ ) dan titanium oksida ( $TiO_2$ ). Teknik lapisan pemendapan digunakan untuk menyediakan nanopartikel/MWCNTs/kitosan(CHIT)-modifikasi elektrod karbon berkaca (GCE) dan DNA dipegunkan di atas GCE tersebut. Proses pemegungan DNA pada elektrod dipantau oleh voltametri siklik (CV) dengan mengukur perubahan arus puncak menggunakan metilen biru (MB) yang elektroaktif sebagai penunjuk.

Dibandingkan dengan sensor DNA sebelumnya dengan DNA yang dipegunkan secara langsung pada elektrod karbon, nanotub karbon diuji berasaskan ciri-ciri luas permukaan yang besar dan cas-pengangkutan yang baik yang meningkatkan pengikatan DNA. Parameter yang digunakan pada kajian ini termasuk pencirian elektrokimia, kadar imbasan yang berbeza dan pengoptimuman pH serta kronoamperometri (CA) dan

kronokoloumetri (CC). Penurunan dan pengoksidaan elektrokimia dari pasangan redoks MB (sebagai penunjuk DNA) boleh dikenali dengan mudah oleh voltametri fasa pepejal oleh nanopartikel. Siklik voltamogram untuk tiga modifikasi elektrod yang berbeza, nanopartikel/CHIT, MWCNTs/CHIT dan nanopartikel/ MWCNTs/CHIT, menunjukkan dua puncak utama redoks MB. Pencirian elektrokimia bagi dua modifikasi elektrod, nanopartikel/MWCNTs/CHIT, menunjukkan kedua-dua modifikasi elektrod ini memberikan arus puncak yang tertinggi membuktikan bahawa campuran komposit ini menyebabkan peningkatan arus puncak bagi MB.

Untuk kajian pengacukan, perbandingan peningkatan arus diamati dalam tiga DNA sensor yang berbeza, DNA/TiO<sub>2</sub>/CHIT/GCE, DNA/MWCNTs/CHIT/GCE dan DNA/TiO<sub>2</sub>/MWCNTs/CHIT/GCE, berdasarkan pasangan redoks dari MB tersebut. DNA/TiO<sub>2</sub>/MWCNTs/CHIT/GCE sensor didapati paling peka terhadap pengacukan DNA. Parameter yang digunakan dalam kajian ini termasuk tempoh pengacukan, suhu pengacukan, masa pengumpulan, kesan perbezaan kepekatan prob, lengkung kalibrasi, selektiviti DNA sensor, kebolehlungan dan kebolehasilan. Dari kajian, keadaan optimum bagi pengacukan untuk ssDNA sasaran mencapai ssDNA prob adalah 30 min pada 30 °C. Masa pengumpulan MB, iaitu masa yang diperlukan untuk MB terikat pada dsDNA adalah 150 saat dan didapati 100 µM ssDNA prob adalah dos yang sesuai untuk fabrikasi sensor.



## ACKNOWLEDEMENTS

Assalamualaikum.....

First and foremost, I would like to convey my utmost gratitude to my project supervisor, Assoc. Prof. Dr Tan Wee Tee and my co-supervisor, Assoc. Prof. Dr. Azah Yusof, whose had guided me throughout the course of my laboratory work with patience and support. Not only has been a great deal of help to me by giving advises and sharing invaluable experience, but instead, they also managed to open my eyes and make me see the wonderful side of electrochemistry. Their continuous encouragement and belief in me was inspired me to give more than my best in completing this project.

Sincere thanks to my fellow lab mates, Huda Erina, Yaw, Farhan, Zidan, Gana and Radhi who was always more than willing to share their knowledge and helping me when I encountered any problems during the lab work. Their guidance and support are very much appreciated. Financial support from Universiti Putra Malaysia through Graduate Research Fellowship (GRF) is gratefully acknowledged.

Last but not least, to my family members, and friends who has always there to listen to my problem and giving me moral supports, your time and advises have motivated me to more forward and makes me realize that nothing is impossible. With this, I express my highest appreciation and gratefulness to you.

I certify that a Thesis Examination Committee has met on **3 May 2011** to conduct the final examination of Nor Amirah Binti Mohd Maamor on her thesis entitled “**Fabrication and Characterization of DNA Sensors from Metal Oxides Nanoparticles and Chitosan Modified Glassy Carbon Electrode**” in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the degree of Master of Science.

Members of the Examination Committee were follows:

**Aspollah Hj. Md Sukari, PhD**

Professor  
Faculty of Science  
Universiti Putra Malaysia  
(Chairman)

**Anuar Kassim, PhD**

Professor  
Faculty of Science  
Universiti Putra Malaysia  
(Internal Examiner)

**Tan Wee Siang, PhD**

Professor  
Faculty of Biotechnology and Biomolecular Sciences  
Universiti Putra Malaysia  
(Internal Examiner)

**Lee Yook Heng, PhD**

Professor  
Faculty of Science and Technology  
Universiti Kebangsaan Malaysia  
(External Examiner)

---

**NORITAH OMAR, PhD**

Associate Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 23August 2011


This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the Supervisor Committee were as follows:

**Tan Wee Tee, PhD**

Associate Professor  
Faculty of Science  
Universiti Putra Malaysia  
(Chairman)

**Nor Azah Yusof, PhD**

Associate Professor  
Faculty of Science  
Universiti Putra Malaysia  
(Member)

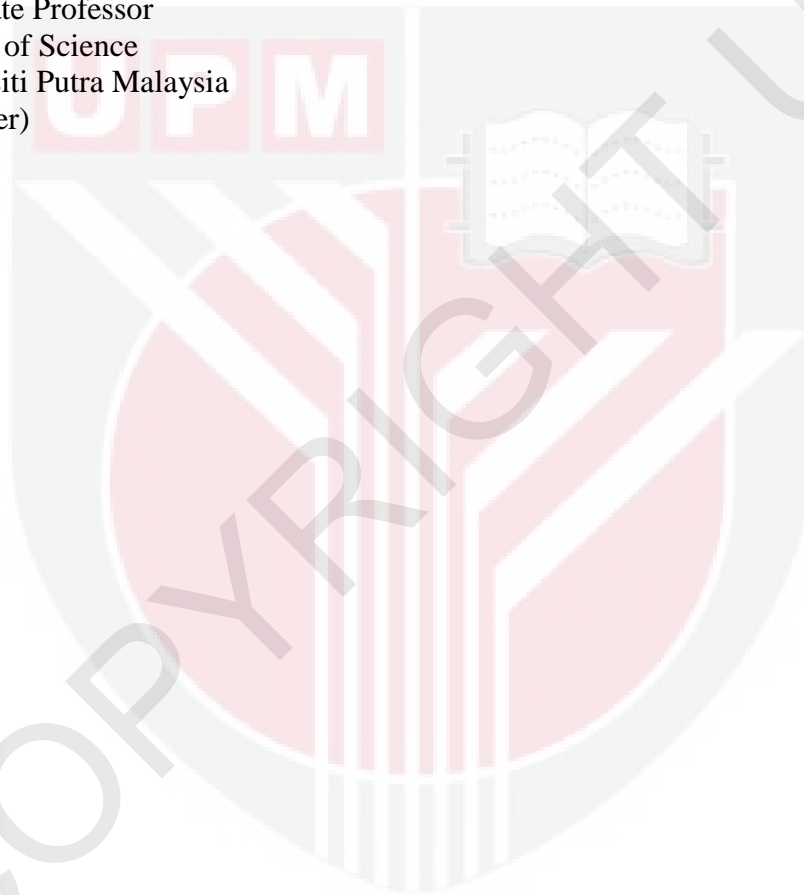

---


**HASANAH MOHD. GHAZALI, PhD**

Professor and Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

## DECLARATION

I declare that the thesis is my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not previously, and is not concurrently, submitted for any other degree at Universiti Putra Malaysia or at any other institution.

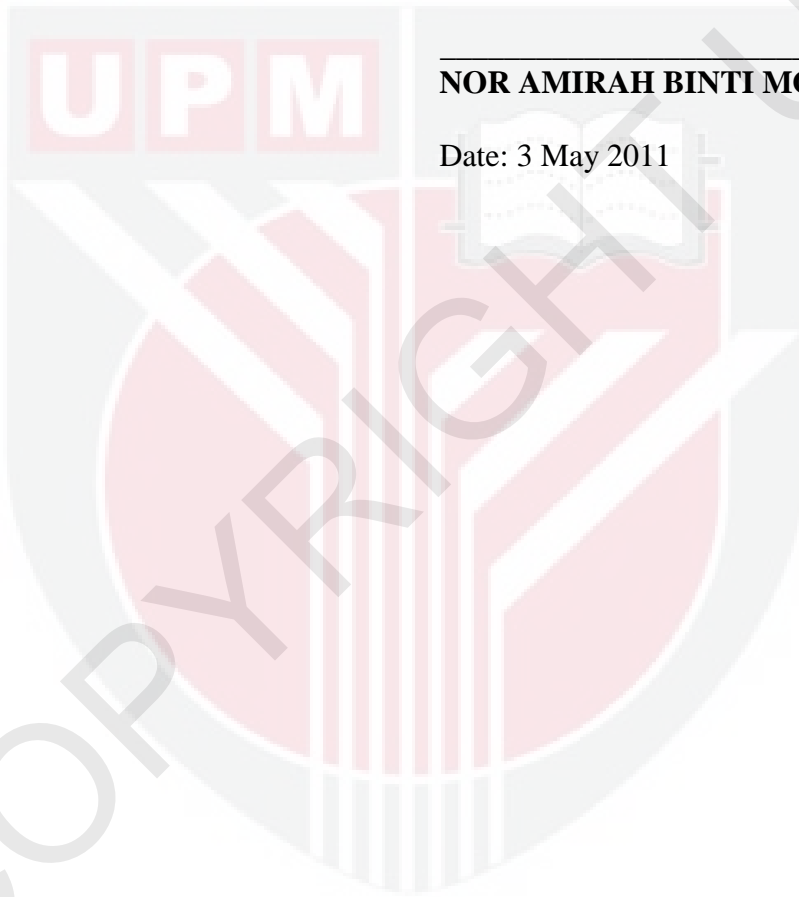

**NOR AMIRAH BINTI MOHD MAAMOR**

Date: 3 May 2011



## TABLE OF CONTENT

	<b>Page</b>
<b>ABSTRACT</b>	i
<b>ABSTRAK</b>	iii
<b>ACKNOWLEDGEMENTS</b>	v
<b>APPROVAL</b>	vi
<b>DECLARATION</b>	viii
<b>LIST OF TABLES</b>	xiii
<b>LIST OF FIGURES</b>	xiv
<b>LIST OF ABBREVIATIONS</b>	xviii
<b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	
1.1 Biosensor	1
1.2 Chemically Modified Electrodes	2
1.3 Electroanalysis	3
1.4 Fundamental of Voltammetry Technique	4
1.4.1 Cyclic Voltammetry	6
1.5 Fundamental of Chronoamperometry	9
1.6 Fundamental of Chronocoulometry	11
1.7 Zirconium Dioxide	13
1.8 Titanium Dioxide	14
1.9 Multi Walled Carbon Nanotubes	14
1.10 Chitosan	17
1.11 Deoxyribonucleic Acid	17
1.12 Methylene Blue	18
1.13 Problem Statement	19
1.14 Objectives	20
<b>2 LITERATURE REVIEW</b>	
2.1 Biosensor	21
2.2 Electrochemical Study	22
2.3 Nanoparticles	23
2.4 Multi Walled Carbon Nanotubes	26
2.5 Methylene Blue and Chitosan	28
<b>3 MATERIALS AND METHODS</b>	
3.1 Instrumentation and Apparatus	30
3.1.1 CV50W Voltammetry Analyzer	30

3.1.2	Working Electrode (WE)	30
3.1.3	Counter Electrode (CE)	31
3.1.4	Reference Electrode (RE)	32
3.1.5	Voltammetric Cell	32
3.1.6	Scanning Electron Microscopy (SEM)	33
3.2	Materials and Reagents	34
3.3	Preparation of Chemically Modified Electrodes	35
3.3.1	Solvent Casting (SC)	34
3.3.1.1	Preparation of Nanoparticles/MWCNTs/CHIT Modified Electrodes via Solvent Casting (SC)	35
3.3.1.2	Immobilization of ssDNA Probe on Nanoparticles/MWCNTs/CHIT-Modified GC Electrode	36
3.3.1.3	Determination of target ssDNA	36
3.3.2	General Procedures for Electrochemical Measurement	37
3.4	Characterization of Nanoparticles/MWCNTs/CHIT Modified Electrode	37
3.4.1	Electrochemical Characterization of Different Modified Electrode	37
3.4.2	Effect of Multiple Cycling	38
3.4.3	Effect of Varying pH	38
3.4.4	Effect of Varying Scan Rate	38
3.4.5	Chronoamperometry of Nanoparticles/MWCNTs/CHIT Modified Electrode	39
3.4.6	Chronocoulometry of Nanoparticles/MWCNTs/CHIT Modified Electrode	39
3.4.7	Scanning Electron Microscopy (SEM)	39
3.5	Characterization of ssDNA/Nanoparticles/MWCNTs/CHIT Modified Electrode	40
3.5.1	Electrochemical Characterization of Different Modified Electrode	40
3.5.2	Effect of Varying pH	40
3.5.3	Effect of Varying Scan Rate	41
3.5.4	Chronoamperometry of ssDNA/Nanoparticles/MWCNTs/CHIT Modified Electrode	41
3.5.5	Chronocoulometry of ssDNA/Nanoparticles/MWCNTs/CHIT Modified Electrode	41
3.6	Characterization on Application of ssDNA/TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode for Hybridization	42
3.6.1	Hybridization Time	42
3.6.2	Hybridization Temperature	43
3.6.3	Accumulation Time	43
3.6.4	Effect of Varying Concentration of Probe	43
3.6.5	Calibration Curve	44
3.6.6	The Selectivity of dsDNA Sensor	44
3.6.7	Reproducibility and Repeatability of dsDNA Sensor	44

<b>4</b>	<b>RESULTS AND DISCUSSION</b>	
4.1	Characterization of ZrO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	45
4.1.1	Electrochemical Characterization of Different Modified Electrode	45
4.1.2	Effect of Multiple Cycling	49
4.1.3	Effect of Varying pH	50
4.1.4	Effect of Varying Scan Rate	51
4.1.5	Chronoamperometry of ZrO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	53
4.1.6	Chronocoulometry of ZrO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	54
4.1.7	Scanning Electron Microscopy (SEM)	58
4.2	Characterization of ssDNA/ZrO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	59
4.2.1	Electrochemical Characterization of Different Modified Electrode	59
4.2.2	Effect of Varying pH	62
4.2.3	Effect of Varying Scan Rate	63
4.2.4	Chronoamperometry of ssDNA/ZrO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	65
4.2.5	Chronocoulometry of ssDNA/ZrO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	66
4.3	Characterization of TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	68
4.3.1	Electrochemical Characterization of Different Modified Electrode	68
4.3.2	Effect of Multiple Cycling	71
4.3.3	Effect of Varying pH	72
4.3.4	Effect of Varying Scan Rate	73
4.3.5	Chronoamperometry of TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	75
4.3.6	Chronocoulometry of TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	76
4.3.7	Scanning Electron Microscopy (SEM)	77
4.4	Characterization of ssDNA/TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	78
4.4.1	Electrochemical Characterization of Different Modified Electrode	78
4.4.2	Effect of Varying pH	81
4.4.3	Effect of Varying Scan Rate	81
4.4.4	Chronoamperometry of ssDNA/TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	84
4.4.5	Chronocoulometry of ssDNA/TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode	85
4.5	Application of ssDNA/TiO <sub>2</sub> /MWCNTs/CHIT Modified Electrode for Hybridization	86

4.5.1	Hybridization Time	86
4.5.2	Hybridization Temperature	87
4.5.3	Accumulation Time	88
4.5.4	Effect of Varying Concentration of Probe	89
4.5.5	Calibration Curve	90
4.5.6	The Selectivity of dsDNA Sensor	91
4.5.7	Reproducibility and Repeatability of dsDNA Sensor	95
<b>5</b>	<b>CONCLUSION AND RECOMANDATIONS FOR FUTURE RESEARCH</b>	<b>96</b>
	<b>REFERENCES</b>	<b>100</b>
	<b>APPENDICES</b>	<b>105</b>
	<b>BIODATA OF STUDENT</b>	<b>109</b>
	<b>THESIS, PUBLICATIONS, CONFERENCES AND AWARDS</b>	<b>110</b>