



UNIVERSITI PUTRA MALAYSIA

**SYNTHESIS AND THERMAL PROPERTIES INVESTIGATION OF COLLOIDAL
NANOPARTICLES AND THEIR APPLICATIONS**

MONIR NOROOZI

FS 2013 31



**SYNTHESIS AND THERMAL PROPERTIES INVESTIGATION OF
COLLOIDAL NANOPARTICLES AND THEIR APPLICATIONS**

By

MONIR NOROOZI

**Thesis submitted to the School of Graduates Studies, Universiti Putra Malaysia,
in Fulfillment of the Requirement for the Degree of Doctor of Philosophy**

May 2013


COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs, and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright© Universiti Putra Malaysia



DEDICATION

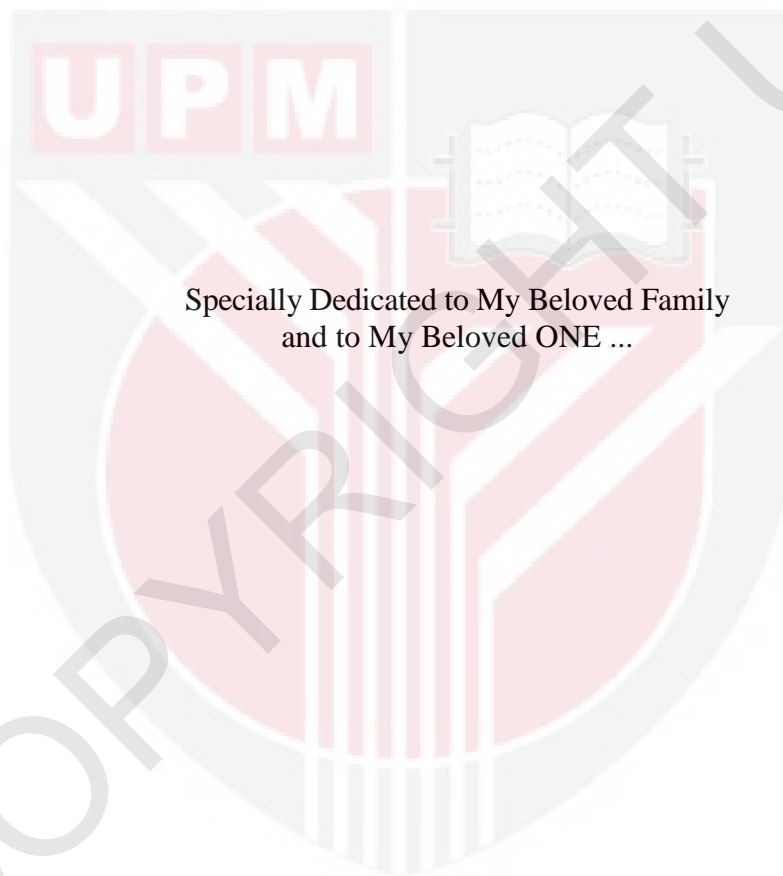

Specially Dedicated to My Beloved Family
and to My Beloved ONE ...

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in
Fulfilment of the requirement for the degree of Doctor of Philosophy

**SYNTHESIS AND THERMAL PROPERTIES INVESTIGATION OF
COLLOIDAL NANOPARTICLES AND THEIR APPLICATIONS**

By

MONIR NOROOZI

May 2013

Chairman: Professor Azmi Zakaria, PhD

Faculty: Science

Colloidal nanoparticles (NPs) have unique thermal, optical, electronic, and chemical properties that are extremely different from bulk materials due to their size. The central concerns in their preparation are the control of particle size, shape and the prevention of NPs agglomeration. In this relation, the objectives of the study are firstly, to green synthesize of silver nanoparticles (Ag NPs) in narrow distribution using green solvent and microwave (MW) irradiation as a cheap and fast method; secondly, to investigate the thermal diffusivity and the thermal effusivity of nanofluids by using PE technique; and thirdly, to increase the PE signal in optical fiber-thermal wave cavity (OF-TWC) technique by using Ag NPs film due to its strong optical absorption. In the first study, the fabrications of Ag NPs in water and ethylene-glycol as solvents at various MW reaction times were carried out. In the second study, a mathematical model of the multilayer samples by using thermal wave (TW) interferometry approach was developed and both Back- and Front-PE configurations were derived from it as special cases, the thermal diffusivity and thermal effusivity of nanofluids and the PE sensor were evaluated. In the third

study, the optical fiber tip was coated by Ag NPs to increase the PE signal in OF-TWC technique.

By increasing the MW irradiation time from 20 to 90 s the concentration of Ag NPs slightly increased and the NPs size increased from 7 to 12 nm. The Ag NPs prepared in ethylene glycol were more dispersed, more concentrated and more stable than those prepared in water. The observed difference may be ascribed to the high boiling points, molecular weight and dielectric loss of the ethylene glycol. The thermal diffusivity of nanofluids was investigated by using the Back-PE configuration in OF-TWC set-up. The linear increase in thermal diffusivity with Ag NPs volume fractions in nanofluids from 0 to 0.5 vol% has been observed, the highest value was $1.571 \times 10^{-3} \text{ cm}^2/\text{s}$. However, the highest value of thermal diffusivity reduced to $1.456 \times 10^{-3} \text{ cm}^2/\text{s}$ after 3 h time of leave, due to the NPs agglomeration in solution. The higher thermal diffusivity of Al_2O_3 nanofluid prepared by probe sonication than by bath sonication is due to higher dispersion of NPs in water. The fragmentation by laser irradiation at low concentration reduced the agglomerated size of NPs and increased the thermal diffusivity values, e.g., from 1.444×10^{-3} to $1.498 \times 10^{-3} \text{ cm}^2/\text{s}$ for Al_2O_3 and from 1.477×10^{-3} to $1.537 \times 10^{-3} \text{ cm}^2/\text{s}$ for CuO nanofluid from 0 to 90 min irradiation. The Front-PE configuration was designed by using a PVDF film sensor to measure thermal effusivity of the sensor itself in Thermally Thick regime, and of the nanofluids for both Thermally Thick and Thermally Very Thick regimes. The thermal effusivities of the sensor obtained from the normalized amplitude, $464.5 \text{ W s}^{1/2} \text{ m}^{-2} \text{ K}^{-1}$, and phase $479.1 \text{ W s}^{1/2} \text{ m}^{-2} \text{ K}^{-1}$ are close to each other, and the experimental error is less than 0.3 % and differs by less than 4 % to literature. The thermal effusivity of the solvents such as deionized water, ethylene glycol and olive

oil obtained from the methods showed good agreement with literatures but reduced in the presence of NPs. The TW generator comprised of Ag NPs-coated onto an optical fiber end surface, showed a significant enhancement of PE signal in OF-TWC setup owing to surface Plasmon resonance and to strong optical absorption in Ag NPs. Laser irradiation to the surface melts the NPs and connects them together to form a continuous smooth Ag film on the optical fiber end surface.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

**SINTESIS DAN KAJIAN CIRI-CIRI TERMA KOLOID NANOZARAH DAN
APLIKASINYA**

Oleh

MONIR NOROOZI

Mei 2013

Pengerusi: Professor Azmi Zakaria, PhD

Fakulti: Sains

Nanozarah (NP) koloid mempunyai ciri-ciri unik terma, optik, elektronik dan kimia yang sangat berbeza daripada bahan pukal disebabkan oleh saiz mereka. Fokus utama dalam penyediaannya adalah kawalan saiz zarah, bentuk dan pencegahan aglomerasi NP. Dalam kaitan ini, objektif kajian adalah pertamanya, untuk melakukan sintesis hijau keatas nanozarah perak (Ag NPs) dalam taburan sempit menggunakan pelarut hijau dan penyinaran mikro-gelombang (MW) sebagai kaedah murah dan cepat; keduanya, untuk menyelidik keresapan terma dan efusiviti terma nanobendalir menggunakan teknik PE; dan ketiganya, untuk menambahkan signal PE dalam kaedah Serabut Optik-Rongga Gelombang Terma (OF-TWC) dengan menggunakan sapat Ag NPs bersabit dari penyerapan optik tingginya. Dalam kajian pertama, fabrikasi Ag NPs dalam air dan etilena glikol sebagai pelarut pada pelbagai masa tindakan MW telah dilakukan. Dalam kajian kedua, model matematik dari

sampel multi-lapisan menggunakan pendekatan interferometri gelombang terma (TW) telah dibangunkan dan kedua-dua konfigurasi “PE-Belakang” dan “-Depan” telah diterbitkan daripadanya sebagai kes-kes khusus, keresapan terma dan effusiviti terma nanobendalir dan sensor PE telah diukur. Dalam kajian ketiga, hujung serabut optik telah disalut dengan Ag NPs untuk meninggikan signal PE dalam teknik OF-TWC.

Dengan meninggikan masa iradiasi MW dari 20 ke 90 s, kepekatan Ag NPs bertambah sedikit dan saiz NPs bertambah dari 7 ke 12 nm. Ag NPs disediakan dalam etilena glikol adalah lebih terserak, lebih pekat dan lebih stabil berbanding yang disediakan dalam air. Perbezaan pemerhatian boleh disabitkan dengan takat didih, berat molekul dan kehilangan dielektrik tinggi dari etilena glikol. Keresapan terma nanobendalir telah dikaji dengan menggunakan konfigurasi PE-Belakang dalam setup OF-TWC. Pertambahan linear dalam keresapan terma dengan pecahan-pecahan isipadu Ag NPs dalam nanobendalir daripada 0 to 0.5 vol% telah diperhatikan, nilai tertinggi adalah $1.571 \times 10^{-3} \text{ cm}^2/\text{s}$. Walau bagaimana pun, nilai tertinggi keresapan terma menurun ke $1.456 \times 10^{-3} \text{ cm}^2/\text{s}$ setelah 3 j dibiarkan, disebabkan oleh aglomerasi NPs dalam larutan. Keresapan terma lebih tinggi bendalir Al₂O₃ disediakan secara pensonifikasi prob berbanding oleh pensonifikasi mandian adalah disebabkan oleh serakan lebih tinggi NPs dalam air. Fragmentasi oleh iradiasi laser pada kepekatan rendah merendahkan saiz aglomerasi NPs dan menambahkan nilai-nilai keresapan terma, e.g. 1.444×10^{-3} ke $1.498 \times 10^{-3} \text{ cm}^2/\text{s}$ untuk bendalir Al₂O₃ dan 1.477×10^{-3} ke $1.537 \times 10^{-3} \text{ cm}^2/\text{s}$ untuk bendalir CuO pada iradiasi 90 min. Konfigurasi PE-Depan telah direka-bentuk dengan menggunakan sensor filem PVDF untuk mengukur keresapan terma dari sensor itu sendiri dalam

kawasan TEBAL secara-terma, dan dari nanobendalir untuk kedua-dua kawasan TEBAL secara-terma dan AMAT TEBAL secara-terma. Efusiviti-efusiviti terma sensor didapatkan daripada amplitud ternormal, $464.5 \text{ W s}^{1/2} \text{ m}^{-2} \text{ K}^{-1}$, dan fasa $479.1 \text{ W s}^{1/2} \text{ m}^{-2} \text{ K}^{-1}$ adalah rapat diantara satu sama lain, dan ketidakpastian eksperimen adalah kurang dari 0.3% dan berbeza kurang dari 4% berbanding literatur. Efusiviti terma pelarut-pelarut seperti air ternyah-ion, etilena glikol dan minyak zaitun didapatkan dari kaedah ini menunjukkan persetujuan baik dengan literatur tetapi berkurangan dengan adanya NPs. Generator TW terdiri dari Ag NPs-tersalut diatas permukaan hujung serabut optik menunjukkan peningkatan signifikan signal PE dalam setup OF-TWC disebabkan resonans Plasmon permukaan dan penyerapan optik tinggi dalam Ag NPs. Iradiasi laser kepermukaan meleburkan NPs dan menghubungkan mereka bersama untuk membentuk filem Ag licin selanjat diatas permukaan hujung serabut optik.

ACKNOWLEDGEMENTS

First and foremost, I would like to extend my praise to Allah s.w.t. that gives me the patience, strength, determination, and courage to produce this thesis.

It is a great pleasure to acknowledge my supervisor, Prof. Dr. Azmi Zakaria for his guidance, suggestion, assistance, patient, tremendous support and invaluable advice throughout the duration of this project. I would also like to extend my sincere appreciation to my co-supervisors Prof. Dr. Mohd Maarof Moxsin and Assoc. Prof. Dr. Zaidan Abdul Wahab for their advice and helpful discussion during this period of study.

I would like to thank the staff in Department of Physics and the Institute of Bioscience UPM for their co-operation throughout my work. I would also like to give my gratitude to Mohd Shahril Husin and my dear friends Sepideh Soltaninejad and Aiza Masyati Masut for all their personal and professional help. My sincere thanks to all my friends, and to my lab-mates in the Photoacoustic Laboratory who have directly or indirectly contributed towards the success of this study. In fact, all the students in the faculty of science were friendly and helpful, thank you for making my study a memorable and enjoyable one.

Especially, I dedicate this humble effort to my affectionate father (late), Houshang Noroozi, and my beloved mother, Kobra Motalebbi, who inspired me to higher ideals of life. Finally, I am greatly pleased to acknowledge all the supports and encouragements of my beloved family; my husband, Mohammad Golestan, my sons, AliReza, Mehrdad, Adib, and my siblings throughout my studies.

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as partial fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were follows:

Azmi Zakaria, PhD

Professor
Faculty of Science
Universiti Putra Malaysia
(Chairman)

Mohd Maarof Moksini, PhD

Professor
Faculty of Science
Universiti Putra Malaysia
(Member)

Zaidan Abdul Wahab, PhD

Associate Professor
Faculty of Science
Universiti Putra Malaysia
(Member)

BUJANG BIN KIM HUAT, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 2 AUGUST 2013

DECLARATION

I declare that the thesis is my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously, and is not concurrently, submitted for any other degree at Universiti Putra Malaysia or other institutions.

MONIR NOROOZI

Date: 28 May 2013

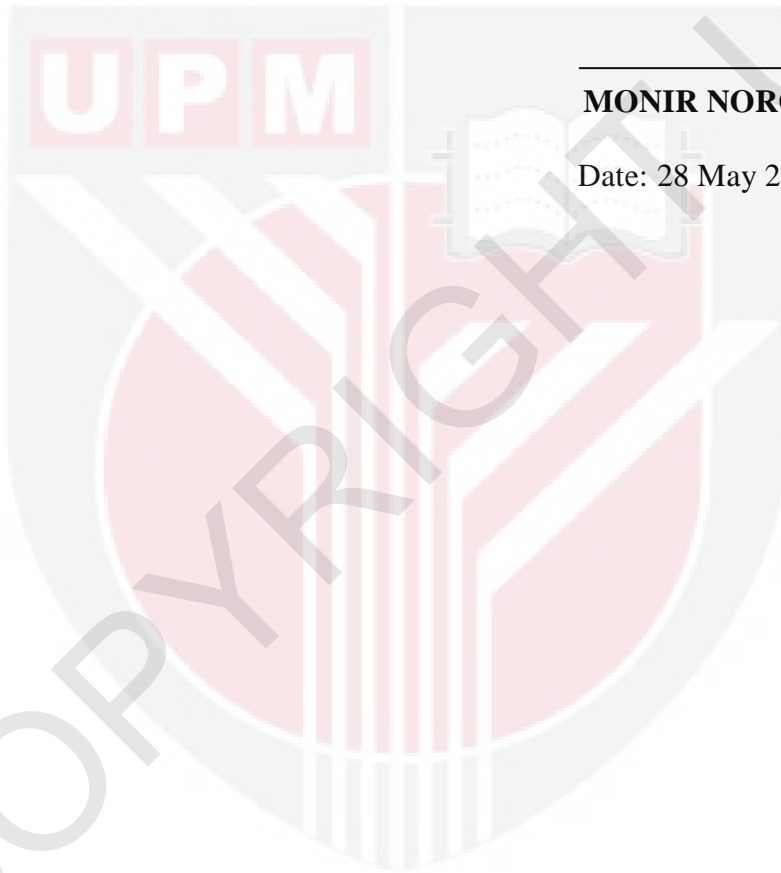


TABLE OF CONTENTS

| | |
|------------------------------|-------------|
| ABSTRACT | Page |
| | ii |
| ABSTRAK | v |
| ACKNOWLEDGEMENTS | ix |
| APPROVAL | x |
| DECLARATION | xii |
| LIST OF TABLES | xvii |
| LIST OF FIGURES | xix |
| LIST OF ABBREVIATIONS | xxvii |

CHAPTER

| | | |
|----------|---|----|
| 1 | INTRODUCTION | |
| 1.1 | Introduction | 1 |
| 1.2 | Photothermal Effect | 3 |
| 1.3 | Pyroelectric Thermal Wave Technique | 4 |
| 1.3.1 | Back -Pyroelectric Configuration | 4 |
| 1.3.2 | Front-Pyroelectric Configuration | 5 |
| 1.4 | Thermal Properties of Materials | 6 |
| 1.5 | Nanofluids and Heat Transfer | 7 |
| 1.6 | Nanoparticle Material and bulk Material | 8 |
| 1.7 | Surface Plasmon Resonance of Metallic Nanoparticles | 9 |
| 1.8 | Green Synthesis of the Metallic Colloidal Ag NPs using Microwave Technology | 9 |
| 1.9 | Metal Nanoparticles and Photothermal Effect and its Application | 11 |
| 1.10 | Problem Statement | 12 |
| 1.11 | Objective of Research | 13 |
| 1.12 | Organization of the Dissertation | 15 |
| 2 | LITERATURE REVIEW | |
| 2.1 | Introduction | 16 |
| 2.2 | Nanoparticles Material | 16 |
| 2.3 | Synthesis of Metallic Nanoparticles using Microwave Method | 17 |
| 2.4 | Surface Enhanced Plasmon of Metal Nanoparticles | 17 |
| 2.5 | Photothermal Effect of Metal Nanoparticles | 18 |
| 2.6 | Potential Application of Metal Nanoparticles (NP) as Thermal Generator | 19 |
| 2.7 | Suspension of Nanoparticles (Nanofluids) | 21 |

| | | |
|----------|--|----|
| 2.7.1 | Potential Applications of Nanofluids as Heat Transfer Fluids | 23 |
| 2.7.2 | Nanofluids Thermal Properties | 24 |
| 2.7.3 | Synthesis and Stability of Nanofluids | 24 |
| 2.8 | Pyroelectric Detection Technique | 26 |
| 2.8.1 | Back- Pyroelectric Technique | 27 |
| 2.8.2 | Front- Pyroelectric Technique | 29 |
| 2.9 | Application of Thermal Wave Interferometry in Pyroelectric Technique | 30 |
| 2.10 | Thermal Properties of Nanofluids using Other Method | 31 |
| 3 | THEORY AND BACKGROUND | |
| 3.1 | Detection of Thermal-Wave Pyroelectric | 33 |
| 3.2 | Three-Dimensional Thermal Wave Field | 34 |
| 3.2.1 | The Comparison of Temperature Filed In 1-D and 3-D | 37 |
| 3.3 | Application of Thermal Wave Interferometry for PE System in 1-D | 38 |
| 3.3.1 | Pyroelectric Effect in a Multilayer Sample | 38 |
| 3.3.2 | Temperature Distribution in PVDF Film in Multilayer Samples | 44 |
| 3.4 | Monitoring of Back and Front Configuration as Special Cases | 48 |
| 3.4.1 | Back-PE Configuration (TWC technique) Theory | 48 |
| 3.4.2 | Front-PE Configuration | 53 |
| 3.4.3 | Thermal Effusivity of the Amplitude in Thermally Very Thick Regime | 56 |
| 4 | METHODOLOGY | |
| 4.1 | Introduction | 59 |
| 4.2 | Green Synthesis of Ag Nanoparticles by using Microwave Irradiation | 59 |
| 4.2.1 | Synthesis of Ag NPs/ DW or Ag NPs/EG Nanofluid | 60 |
| 4.2.2 | Comparison between Microwave and Conventional Heating | 61 |
| 4.2.3 | Ag NPs in Olive Oil | 61 |
| 4.3 | Ag-NPs in Clay Suspension by Chemical Method | 62 |
| 4.4 | Preparation of Metal Oxide Nanofluids | 62 |
| 4.5 | Methods of Stability of Nanofluids, Dispersion/Aggregation State | 63 |
| 4.5.1 | Ultrasonication Dispersion Process | 64 |
| 4.5.2 | Laser Fragmentation Process | 65 |
| 4.6 | Sample Characterizations | 67 |
| 4.7 | Pyroelectric Methods Experimental Set Up | 67 |
| 4.7.1 | Back- PE Configuration (Optical Fiber - TWC Setup) | 68 |

| | | |
|----------|--|-----|
| | and Experimental Conditions | |
| 4.7.2 | Front Pyroelectric Configuration | 77 |
| 4.7.3 | Experimental Setup for Front-PE Configuration in Thermally Very Thick Regime | 82 |
| 4.8 | Designing the Ag NPs-Coated Optical Fiber as TW Generator | 84 |
| 4.8.1 | Synthesis of Colloidal Ag NPs | 85 |
| 4.8.2 | Modification of Optical Fiber (Thermal Wave Generator) | 85 |
| 4.8.3 | Experimental Setup with Ag NPs-Coated Optical Fiber | 86 |
| 5 | RESULTS AND DISCUSSION | |
| 5.1 | Introduction | 89 |
| 5.2 | Green Synthesis of Ag Nanoparticles without Reducing Agent at Different Microwave Irradiation Time | 90 |
| 5.2.1 | Dendritic Nanostructures of Ag Nanoparticles | 93 |
| 5.2.2 | Formation of Ag NPs under Conventional Heating | 96 |
| 5.3 | Synthesis of Ag NPs in Ethylene-Glycol at Different MW Irradiation Time | 98 |
| 5.3.1 | Self-Assembling of Ag NPs | 103 |
| 5.3.2 | Comparison between Ag NPs in Water and Ethylene-Glycol as a Solvent | 104 |
| 5.4 | Back Pyroelectric Configuration Technique and its Applications | 106 |
| 5.4.1 | Preliminary Work (Optimization and Calibration of System) | 106 |
| 5.4.2 | Thermal Diffusivity and Conductivity Determination of Clay Containing Ag-NPs; Volume Fractions Effect | 111 |
| 5.4.3 | Agglomeration Effect on Thermal Diffusivity of Ag/Clay | 120 |
| 5.4.4 | Dispersion and Fragmentation Effect on Thermal Diffusivity of Nanofluids | 122 |
| 5.4.5 | Effect of Ultrasonication on Thermal Diffusivity of Al ₂ O ₃ Nanofluids | 123 |
| 5.4.6 | Effect of Laser Irradiation on Thermal Diffusivity of Al ₂ O ₃ and CuO Nanofluids | 129 |
| 5.5 | Front Pyroelectric Configuration Technique by Using PVDF as a Sensor | 148 |
| 5.5.1 | Thermal Effusivity Measurements of Pyroelectric Sensor and Sample | 148 |
| 5.5.2 | Thermal Effusivity of Nanofluids Containing Al ₂ O ₃ and CuO Nanoparticles in Different Base Fluid | 153 |

| | | |
|----------|--|-----|
| 5.5.3 | Thermal Effusivity Measurement Using Combined the Amplitude and Phase | 158 |
| 5.6 | Thermal Effusivity of Ag NPs in Different Solvent Using Front-PE in Thermally Very Thick Regime | 162 |
| 5.6.1 | A Comparison between Combining the Amplitude and Phase Signal and Front-PE in Thermally Very Thick Regime Method | 165 |
| 5.7 | Application of Ag NPs-Coated Optical Fiber to Enhance Thermal-Wave Generation in OF-TWC Technique | 167 |
| 5.7.1 | Surface Plasmon Resonance of Ag Nanoparticles | 167 |
| 5.7.2 | The Effect of Laser Irradiation on Morphology of Ag NPs Film | 171 |
| 5.7.3 | Ag NPs-Coated Optical Fiber to Enhancement PE Signal | 174 |
| 5.7.4 | Thermal Diffusivity Measurement of Air Using Ag NPs-Coated Optical Fiber | 178 |
| 6 | CONCLUSION AND FUTURE DIRECTION | |
| | Introduction | 182 |
| | Conclusion | 182 |
| | Suggestions for Future Work | 188 |
| | REFERENCES | 190 |
| | BIODATA OF STUDENT | 206 |
| | LIST OF PUBLICATIONS | 207 |