



**UNIVERSITI PUTRA MALAYSIA**

***KNOWLEDGE- AND DATA-DRIVEN APPROACH TO GIS MODELLING  
TECHNIQUE FOR GROUNDWATER POTENTIAL MAPPING AT THE UPPER  
LANGAT BASIN, MALAYSIA***

**MOHAMAD BIN ABD MANAP**

**FPAS 2013 9**



**UPM**  
UNIVERSITI PUTRA MALAYSIA  
BERILMU BERBAKTI

**KNOWLEDGE- AND DATA-DRIVEN APPROACH TO GIS MODELLING  
TECHNIQUE FOR GROUNDWATER POTENTIAL MAPPING AT THE  
UPPER LANGAT BASIN, MALAYSIA**

By

**MOHAMAD BIN ABD MANAP**


**Thesis Submitted to the School of Graduates,  
Universiti Putra Malaysia, in Fulfilment of the  
Requirements for the Degree of Doctor of Philosophy**

**April 2013**

## **COPYRIGHT**

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia

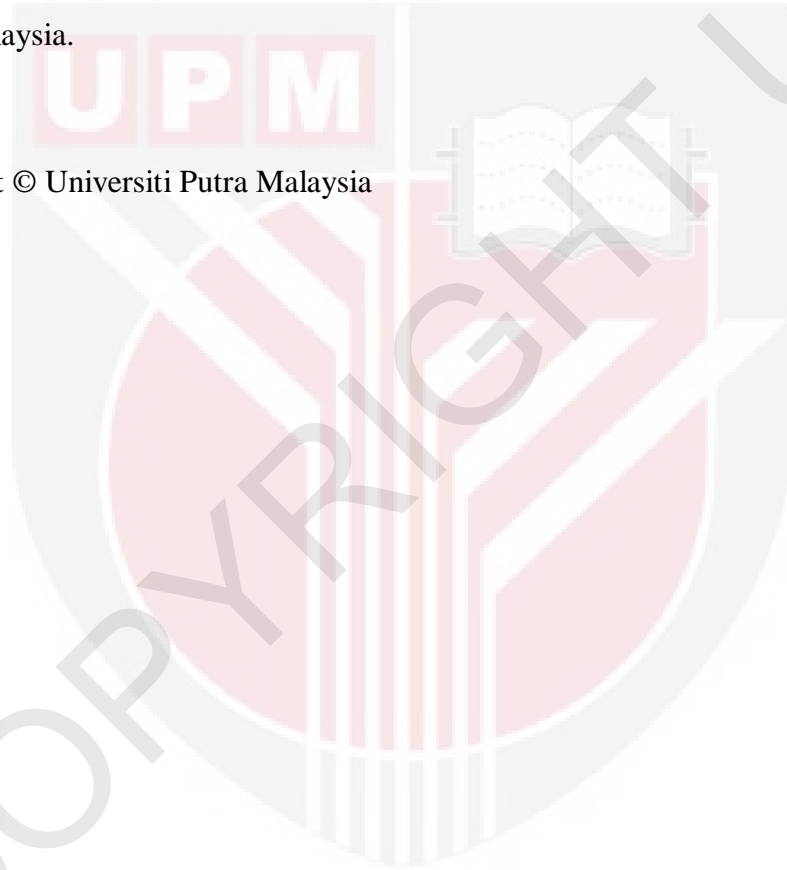

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Doctor of Philosophy

**KNOWLEDGE- AND DATA-DRIVEN APPROACH TO GIS MODELLING  
TECHNIQUE FOR GROUNDWATER POTENTIAL MAPPING AT THE  
UPPER LANGAT BASIN, MALAYSIA**

By

**MOHAMAD BIN ABD MANAP**

**April 2013**

**Chairman: Wan Nor Azmin Sulaiman, PhD**

**Faculty: Environmental Studies**

The traditional way of groundwater assessment for alluvial and fractured rock aquifers in Malaysia was found to be not so systematic and sometimes improper. In some circumstances groundwater exploration within hard rock aquifer had been carried out using wild cat methods. The study area is the Upper Langat Basin which is located in the south eastern part of Selangor State, Malaysia. The area coverage is about 492 km<sup>2</sup> and approximately 27 km from the city center of Kuala Lumpur. In this study, nine groundwater controlling factors that affect groundwater occurrences are derived from remotely sensed imagery, available maps, and associated databases. Those factors are: lithology, slope, lineament, land use, soil, rainfall, drainage density, elevation, and geomorphology. Next the parameter layers were integrated and modeled by using a knowledge-driven Geographical Information System (GIS)

technique. The generation of groundwater potential map was performed using four different types of GIS modelling techniques. The models were weighted linear combination (WLC), weighted aggregation method (WAM), weighted index overlay analysis (WIOA) and pairwise comparison of Analytical Hierarchical Process (AHP). The weightage and score for each parameter and their classes are based on the surveys of Malaysian groundwater expert opinion. The predicted groundwater potential map was classified into four distinct zones based on the classification scheme designed by Department of Minerals and Geoscience Malaysia (JMG). The analysis and comparison of these results show that: (1) the weightage values for groundwater controlling factors based on groundwater expert opinion indicated that the lineament length density is the most important controlling factor, followed by lithology, geomorphology, rainfall, slope, elevation, soil, drainage density, and land use, (2) the WLC classification method is considered as the best result for the knowledge-driven GIS approach with prediction accuracy of 76%, (3) the frequency ratio approach indicated that slopes between 0 and 5 degree, river density less than 0.0010 km/km<sup>2</sup>, geomorphology of floodplain and land use type of rubber have the high probability of groundwater occurrences, and (4) The WLC model also had a slightly better prediction accuracy compared to the probability approach of frequency ratio (75%) and a much better prediction accuracy compare to the existing groundwater potential map which have only 25% accurate precision. Therefore the map based on the WLC method is selected as the final map of this study. The final groundwater potential map of the study area showed that about 85.11 km<sup>2</sup> (14.78%) of the study area falls under low potential zone, with 327.13 km<sup>2</sup> (67.68%) on moderate potential zone, 78.37 km<sup>2</sup> (16.90%) with high potential zone, and only 2.16 km<sup>2</sup> (0.62%) falls under very high potential zone. The high and very high

groundwater potential zones are characterized by: (1) Slope degree ranging from 0 to 5, (2) Low density of drainage systems, (3) High density of lineament, and (4) The geomorphology unit is floodplain. In addition statistical analysis indicated that the hard rock aquifer dominant of the study area is better controlled by fracture system rather than well depth. Proximity analysis of the groundwater borehole wells indicated that higher yields are located near to the lineament. Further evaluation revealed a low correlation (correlation coefficient = -0.36 and  $R^2 = 0.13$ ) between well yield and well depth. However there is high correlations (correlation coefficient = 0.755) between area percentage for groundwater potential zones of the final map and groundwater well yield. Results obtained from this study can be use for future planning of groundwater exploration, planning and development by related agencies in Malaysia which provide a rapid method and reduce cost as well as less time consuming. The modeling technique may also be used in other areas of similar hydrological characteristics and climate conditions.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

**PENDEKATAN PENGETAHUAN DAN DATA BERPANDU BAGI  
PEMODELAN GIS UNTUK PEMETAAN POTENSI AIR BAWAH TANAH  
DI BAHAGIAN HULU LEMBANGAN LANGAT, SELANGOR, MALAYSIA**

Oleh

**MOHAMAD BIN ABD MANAP**

**April 2013**

**Pengerusi: Wan Nor Azmin Sulaiman, PhD**

**Fakulti: Pengajian Alam Sekitar**

Kaedah tradisi penilaian air bawah tanah untuk akuifer alluvium dan batuan keras di Malaysia, adalah tidak begitu sistematik dan teratur. Lebih-lebih lagi eksplorasi air bawah tanah pada akuifer batuan keras yang menggunakan kaedah rawak. Kawasan kajian adalah di Bahagian Hulu Lembangan Langat yang terletak di bahagian tenggara negeri Selangor, Malaysia. Ianya meliputi kawasan seluas 492 km<sup>2</sup> dan terletak lebih kurang 27 km daripada pusat bandar Kuala Lumpur. Dalam kajian ini, sembilan faktor mengawal simpanan air bawah tanah yang mempunyai pengaruh keatas kewujudan air bawah tanah dihasilkan daripada imej penderiaan jauh, peta sedia ada dan pangkalan data yang berkaitan. Faktor tersebut adalah litologi, cerun, tanah, lineamen, guna tanah, hujan, kepadatan saliran, ketinggian dan geomorfologi. Seterusnya lapisan parameter ditindan dan dimodelkan menggunakan teknik

pengetahuan berpandu Sistem Maklumat Geografi (GIS). Penghasilan peta potensi air bawah tanah dilakukan dengan menggunakan empat jenis teknik permodelan GIS yang berbeza. Jenis pemodelan tersebut adalah *weighted linear combination* (WLC), *weighted aggregation method* (WAM), *weighted index overlay analysis* (WIOA) dan *pairwise comparison of Analytical Hierarchical Process* (AHP). Pemberat dan skor bagi setiap parameter dan kelas masing-masing adalah berdasarkan kepada survei pendapat pakar air bawah tanah di Malaysia. Peta ramalan potensi air bawah tanah dikelaskan kepada empat zon berbeza berasaskan kepada skim pengkelasan yang telah dibangunkan oleh Jabatan Mineral dan Geosains Malaysia (JMG). Analisis dan hasil perbandingan menunjukkan: (1) nilai pemberat bagi faktor mengawal air bawah tanah berdasarkan kepada pendapat pakar air bawah tanah menunjukkan kepadatan lineamen merupakan faktor pengawal yang paling penting, diikuti oleh litologi, geomorfologi, hujan, cerun, ketinggian, tanah, kepadatan saluran, dan guna tanah, (2) Kaedah pengkelasan WLC dianggap sebagai hasil terbaik bagi pendekatan pengetahuan berpandu GIS dengan ketepatan ramalan sebanyak 76%, (3) pendekatan *frequency ratio* menunjukkan cerun yang bersudut di antara 0 hingga 5, kepadatan saluran kurang daripada 0.0010 km/km<sup>2</sup>, geomorfologi jenis *floodplain* dan guna tanah jenis getah mempunyai kebarangkalian yang tinggi terhadap kewujudan air bawah tanah, dan (4) model WLC juga mempunyai ketepatan ramalan sedikit berbeza dan jauh lebih baik berbanding dengan pendekatan kebarangkalian *frequency ratio* (75%) dan peta terdahulu potensi kawasan air bawah tanah yang mempunyai ketepatan sekadar 25%. Justeru itu peta berasaskan kaedah WLC dipilih sebagai peta akhir untuk kajian. Peta akhir potensi air bawah tanah untuk kawasan kajian menunjukkan bahawa sebanyak 85.11 km<sup>2</sup> (14.78%) mewakili zon potensi rendah, 327.13 km<sup>2</sup> (67.68%) untuk zon potensi sederhana, 78.37 km<sup>2</sup> (16.90%) dengan zon



potensi tinggi, dan hanya 2.16 km<sup>2</sup> (0.62%) termasuk dalam zon potensi sangat tinggi. Kawasan zon potensi tinggi dan sangat tinggi dicirikan oleh: (1) Darjah kecerunan di antara 0 hingga 5, (2) Kepadatan rendah sistem saliran, (3) Kepadatan tinggi lineamen, dan (4) geomorfologi jenis *floodplain*. Sebagai tambahan analisis statistik menunjukkan kawasan kajian yang didominasi oleh batuan keras yang dikawal oleh *secondary porosity* seperti sistem rekahan berbanding dengan kedalaman telaga. Analisis *proximity* telaga gerudian air bawah tanah menunjukkan luahan yang tinggi di kawasan yang berdekatan dengan lineamen. Penilaian seterusnya mendedahkan korelasi yang rendah (*correlation coefficient* = -0.36 dan  $R^2 = 0.13$ ) di antara luahan dan kedalaman telaga. Bagaimanapun, terdapat korelasi yang tinggi (*correlation coefficient* = 0.755) di antara peratusan kawasan zon potensi air bawah tanah bagi peta akhir dengan luahan telaga air bawah tanah. Hasil yang diperoleh daripada kajian ini sangat berguna bagi tujuan eksplorasi perancangan dan pembangunan air bawah tanah oleh agensi berkaitan di Malaysia yang mana ianya menyediakan kaedah cepat, mengurangkan kos serta menjimatkan masa. Kaedah ini juga boleh digunakan di kawasan yang mempunyai kesamaan dari segi ciri hidrogeologi dan iklim.

## ACKNOWLEDGEMENTS

First of all praise to Allah the Almighty for His blessings that gives me strength which enable me to complete this PhD thesis. Honestly, I face many obstacles to complete this study within the time period given of three years by the financial sponsor. So I would like to take the opportunity to thank my supervisor, Associate Prof. Dr. Wan Nor Azmin Sulaiman for checking and editing the draft of my thesis. He also gives many valuable suggestions as well as continuous encouragement during the preparation of this thesis.

I also want to thank other members of supervisor committee Associate Prof. Dr. Muhammad Firuz Ramli and Dr. Nooraini Surip who have helped and give me a lot of invaluable advices. Thousands of thanks to Associate Prof Habil Dr. Biswajeet Pradhan and Prof Dr. Saro Lee for being co authors and their constructive reviews during the preparation for international journals publication. Sincere thanks go to the several groundwater experts from various agencies and universities all over Malaysia especially Tn. Hj. Hatta, En. Ismail C. Mohd, En. Nazan, En. Abdul Rashid Bachik, En. Saffeen, Pn. Habibah, Pn. Asminah, En. Yusop Imbun, En. Yusuff Bujang, En. Ismail Tawnie, En. Shari and Dr. Tamer who give cooperation and suggestion during the questionnaire survey of ranking and weightage assessment.

Besides that, I would like to thank my current employer the Department of Minerals and Geoscience (JMG) and others government department/agency such as Agency of Remote Sensing (Remote Sensing Malaysia), Department of National Mapping and Survey (JUPEM), Department of Agriculture (DOA), Malaysian Meteorological

Department, Department of Town and Country Planning Peninsular Malaysia (JPBD), Department of Public Works (JKR), Department of National Hydraulic Research Institute of Malaysia (NAHRIM), and Secretary of Selangor State Office (SUK Selangor) for providing the necessary data and information to undertake during this study.

Not to forget to acknowledge the JMG for selecting me to pursue my study at the PhD level. I would like to express my gratitude to the Government of Malaysia through the Public Services Department (JPA) for providing the financial support such as tuition fees, allowances and overseas training attachment to Korean Institute of Mineral and Geosciences (KIGAM) during my full paid study leaves. Sincere thanks to the Graduate School Office (GSO) of Universiti Putra Malaysia (UPM) for giving financial aid to attend an international conference in Hanoi, Vietnam.

To my colleagues and friends (too many to name each of the persons) particularly in the JMG headquarters in Kuala Lumpur, JMG state office, Universiti Putra Malaysia (UPM), Universiti Kebangsaan Malaysia (UKM), Universiti Malaya (UM) and Suakasih Zone 3 Bandar Tun Hussien Onn Cheras, many thanks to all of you for your supports and assistances. Last but not least, my warmest thanks to my family members especially my beloved wife Cikgu Azlina Taib, my four charming prince and princesses namely Hajar Aisyah, Muhammad Haziq Akmal, Hadirah Arifah and Husna Aliyah, my mother Hajjah Khamsiah Sidek, my late father in law Hj Taib, mother in law Hajjah Mejallah, my siblings as well as my in laws who have been very supportive and faithfully praying all the time for my success.

I certify that a Thesis Examination Committee has met on 2 April 2013 to conduct the final examination of Mohamad bin Abd Manap on his thesis entitled “Knowledge- and data-driven approach to GIS modelling technique for groundwater potential mapping at the Upper Langat Basin, Malaysia” in accordance with the Universities and University Colleges Act 1971 and Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The committee recommends that the student be awarded the degree of Doctor of Philosophy

Members of the Thesis Examination Committee were as follows:

**Mohamad Pauzi bin Zakaria, PhD**

Professor  
Faculty of Environmental Studies  
Universiti Putra Malaysia  
(Chairman)

**Shaharin bin Ibrahim, PhD**

Associate Professor  
Faculty of Environmental Studies  
Universiti Putra Malaysia  
(Internal Examiner)

**Mohd Hasmadi bin Ismail, PhD**

Associate Professor  
Faculty of Forestry  
Universiti Putra Malaysia  
(Internal Examiner)

**Arun K Saraf, PhD**

Professor  
Department of Earth Science  
Indian Institute of Technology Roorkee  
India  
(External Examiner)

---

**NORITAH OMAR, PhD**

Assoc. Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy.

The members of the Supervisory Committee were as follows:

**Wan Nor Azmin bin Sulaiman, PhD**

Associate Professor

Faculty of Environmental Studies

Universiti Putra Malaysia

(Chairman)

**Mohammad Firuz bin Ramli, PhD**

Associate Professor

Faculty of Environmental Studies

Universiti Putra Malaysia

(Member)

**Noraini binti Surip, PhD**

Research Officer

Agency of Remote Sensing Malaysia

(Member)

---

**BUJANG BIN KIM HUAT, PhD**

Professor and Dean

School of Graduate Studies

Universiti Putra Malaysia

Date:

## DECLARATION

I declare that the thesis is based on my original work except for quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at Universiti Putra Malaysia or other institutions.



.....  
**MOHAMAD BIN ABD MANAP**

Date: 2 April 2013

## TABLE OF CONTENTS

	<b>Page</b>
<b>ABSTRACT</b>	ii
<b>ABSTRAK</b>	v
<b>ACKNOWLEDGEMENTS</b>	viii
<b>APPROVAL</b>	x
<b>DECLARATION</b>	xii
<b>LIST OF TABLES</b>	xvi
<b>LIST OF FIGURES</b>	xix
<b>LIST OF ABBREVIATIONS</b>	xxiii
<b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	
1.1 Background to the research	1
1.2 Problem statement	2
1.3 Goal of study	3
1.4 Objectives	4
1.5 Research questions	4
1.6 Scope of the study	6
1.7 Significant contribution to new knowledge	7
1.8 The structure of the thesis	9
<b>2 LITERATURE REVIEW</b>	
2.1 Introduction	11
2.2 Groundwater status in Malaysia	11
2.3 Previous work of using remote sensing and GIS for groundwater potential mapping	14
2.4 Remote sensing in groundwater potential mapping	20
2.5 Groundwater controlling factors used in groundwater potential mapping	36
2.6 GIS modelling techniques for groundwater potential mapping	42
2.6.1 Knowledge-driven method	43
2.6.1.1 Index model	44
2.6.1.1.1 Weighted Linear Combination (WLC)	44
2.6.1.1.2 Weighted Aggregation Method (WAM)	45
2.6.1.1.3 Weighted Index Overlay Analysis (WIOA)	46
2.6.1.1.4 Modified DRASTIC model	47
2.6.1.2 Multi Criteria Decision Method	47
2.6.1.2.1 Pairwise Comparison of Analytical Hierarchical Process (AHP)	48
2.6.2 Data-driven method	49
2.6.2.1 Frequency ratio model	50
2.6.2.2 Fuzzy logic model	52
2.6.2.3 Weights of evidence model	53
2.6.2.4 Logistic regression model	53

2.7	Model validation	54
2.8	Summary	56
<b>3</b>	<b>METHODOLOGY</b>	
3.1	Introduction	58
3.2	Description of study area	58
3.2.1	Geography and study area selection	58
3.2.2	Climate	61
3.2.3	Topography	63
3.2.4	Geology	63
3.2.5	Geomorphology	66
3.2.6	Drainage systems	67
3.2.7	Summary of the study area	67
3.3	Data sources	69
3.4	Methodology	71
3.4.1	Methodology flowchart	71
3.4.2	Study area delineation	74
3.4.3	Digital Elevation Model (DEM)	74
3.4.4	Groundwater expert opinion survey	77
3.4.5	Extraction of groundwater controlling factors and their map preparations	78
3.4.5.1	Lineament	78
3.4.5.2	Lithology	84
3.4.5.3	Rainfall	87
3.4.5.4	Land use	89
3.4.5.5	Soil	92
3.4.5.6	Geomorphology	94
3.4.5.7	Drainage	97
3.4.5.8	Slope	100
3.4.5.9	Elevation	102
3.4.6	GIS Modelling	104
3.4.6.1	Weighted Linear Combination (WLC)	105
3.4.6.2	Weighted Aggregation Method (WAM)	105
3.4.6.3	Weighted Index Overlay Analysis (WIOA)	106
3.4.6.4	Pairwise comparison of analytical hierarchy process	107
3.4.7	Model validation	111
3.4.8	Statistical analysis for correlation and significant of groundwater controlling factor to groundwater occurrences	113
3.5	Summary	115
<b>4</b>	<b>RESULTS AND DISCUSSION</b>	
4.1	Introduction	118
4.2	Results for knowledge-driven method	118
4.2.1	Groundwater expert opinion	118
4.2.2	Weighted Linear Combination (WLC)	122
4.2.2.1	Predicted groundwater potential map	122
4.2.2.2	Model validation	125
4.2.2.3	Statistical analysis for correlation coefficient	131



4.2.3	Weighted Aggregation Method (WAM)	131
4.2.3.1	Predicted groundwater potential map	131
4.2.3.2	Model validation	135
4.2.3.3	Statistical analysis for correlation coefficient	135
4.2.4	Weighted Index Overlay Analysis (WIOA)	136
4.2.4.1	Predicted groundwater potential map	136
4.2.4.2	Model validation	140
4.2.4.3	Statistical analysis for correlation coefficient	140
4.2.5	Pairwise comparison of Analytical Hierarchy Process (AHP)	141
4.2.5.1	Predicted groundwater potential map	141
4.2.5.2	Model validation	144
4.2.5.3	Statistical analysis for correlation coefficient	145
4.3	Discussion and comparison of groundwater potential map	146
4.3.1	Comparisons of the predicted maps obtained by different knowledge-driven method	146
4.3.2	Comparisons of maps obtained by knowledge-driven method and data-driven method of frequency ratio	149
4.3.3	Comparisons of maps obtained by knowledge-driven method and JMG existing groundwater potential map	161
4.3.4	Selection of the final map of groundwater potential zones for the study area	166
4.4	Statistical analysis for correlation and significant of groundwater controlling factor to groundwater occurrences	169
4.5	Summary	174
<b>5</b>	<b>SUMMARY, CONCLUSIONS AND RECOMMENDATIONS FOR FUTURE RESEARCH</b>	
5.1	Summary and main conclusions	177
5.2	Recommendations	180
5.3	Future research	182
	<b>REFERENCES</b>	184
	<b>APPENDICES</b>	201
	<b>BIODATA OF STUDENT</b>	204
	<b>LIST OF PUBLICATIONS</b>	206