



**UNIVERSITI PUTRA MALAYSIA**

***ENERGY BALANCING MECHANISMS FOR DECENTRALIZED  
ROUTING PROTOCOLS IN WIRELESS SENSOR NETWORKS***

**AHMED MOHAMMED SHAMSAN SALEH**

**FK 2012 78**

**ENERGY BALANCING MECHANISMS FOR DECENTRALIZED ROUTING  
PROTOCOLS IN WIRELESS SENSOR NETWORKS**

**By**

**AHMED MOHAMMED SHAMSAN SALEH**

**Thesis Submitted to the School Graduate Studies, Universiti Putra Malaysia, in  
Fulfilment of the Requirements for the Degree of Doctor of Philosophy**

**November 2012**


## DEDICATIONS

*To my late father Mohammed Shamsan,*

*To my late mother Shafiqah,*

*To my lovely wife Enas,*

*To my brothers, my sisters, and my wonderful Kids.*

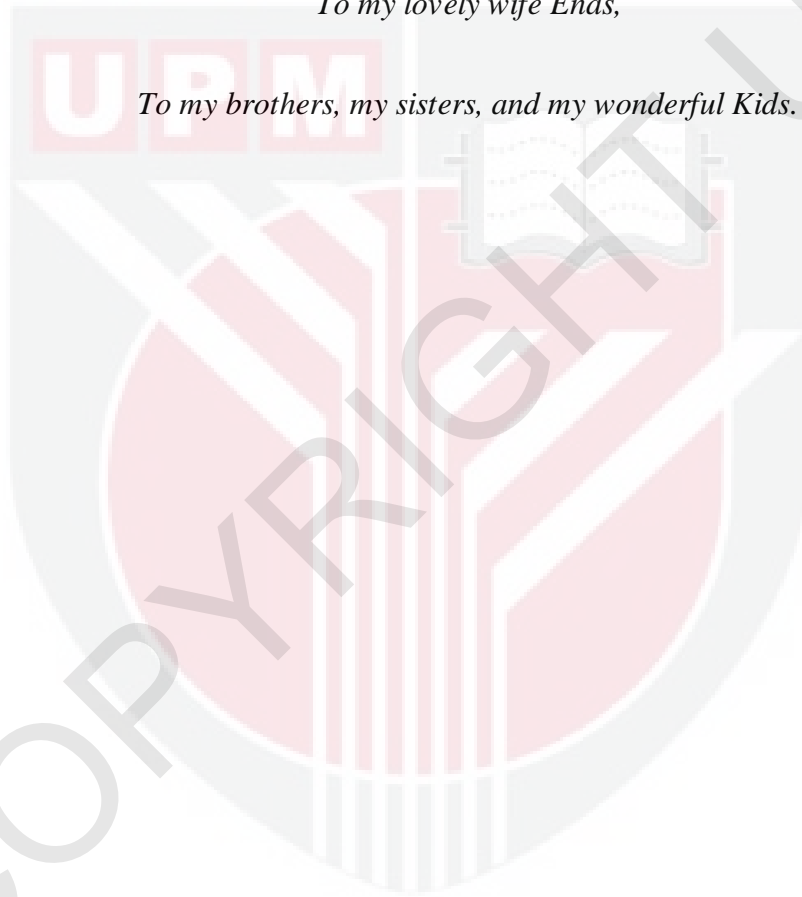

Abstract of thesis presented to the Senate of University Putra Malaysia in fulfilment of the requirement for the degree of Doctor of Philosophy

**ENERGY BALANCING MECHANISMS FOR DECENTRALIZED ROUTING  
PROTOCOLS IN WIRELESS SENSOR NETWORKS**

By

**AHMED MOHAMMED SHAMSAN SALEH**

**November 2012**

**Chairman: Professor Borhanuddin Mohd Ali, PhD**

**Faculty: Engineering**

In Wireless Sensor Networks (WSNs), the sudden “death” of critical nodes can cause an entire network to malfunction. This is usually caused by uneven depletion of battery power of the individual nodes. In an unbalanced network, while critical nodes experience heavy traffic load which depletes their energy fast and die out, nodes in sparse regions in terms of data traffic continue to enjoy high energy levels. Therefore, this thesis investigates a method to balance and minimize usage of energy in sensor nodes, especially during routing. This is because network activities start to be challenged when the first sensor node exhausts its battery. Hence the proposed routing protocols in this thesis balances the rate of energy dissipation of the sensor nodes across the network and prevents sensor nodes from directly transmitting to far-off nodes, in most cases, when forwarding data to the sink, as this will cost unnecessarily high-energy expense. Thus, our main goal in this thesis is to develop a decentralized energy balancing and

locally managed schemes to prolong the lifetime of WSNs and increase its reliability to network dynamics. This thesis presents three decentralized algorithms that are robust, scalable, and can be successfully executed in sensor networks. The first scheme is a SensorAnt, which is a self-optimization mechanism for WSN. It is able to utilize and optimize the sensor nodes' resources, especially the batteries, to achieve balanced energy consumption across all sensor nodes. It is based on Ant Colony Optimization (ACO) meta heuristic, which is adopted to enhance the paths with the best-quality function. The assessment of this function depends on multi-criteria metrics such as the minimum residual battery power, hop count, average energy of the route and average energy of the network. The second one is a Reliable Routing Scheme for Energy-Balancing (RRSEB), which is a self-adaptive scheme to ensure the high routing reliability in WSNs, if the failures occur due to the movement of the sensor nodes or due to sensor node's energy depletion. The RRSEB operations focus on enhancement of the path recovery process, this is done by introducing proactively route mechanism to create alternative paths together with the data routing obtained by path discovery stage in order to reduce the packet drops. The goal of these operations is to update and offer new routing information in order to construct the multiple paths resulting in an increased reliability of the system. Finally, we propose Self-Decision Route Selection scheme which is an improvement of the Hop-based Spanning Tree (HST) algorithm that is used in some routing protocols such as AODV and DSR. This scheme utilizes the control packets of HST to advertise the residual energies of the sensors to their respective neighbors in order to make a self-decision routing. By this means sensor nodes transmit the data either to next hop neighbors or directly to the sink node. This load balancing scheme distributes the traffic load regularly and slowly over the sensor nodes during

routing, such that the overall network life time is optimized, and the sensors die almost at the same time.

The performance of the proposed algorithms has been studied through simulations and a significant improvement in terms of energy consumption, energy efficiency, energy balancing and packet delivery ratio has been achieved. SensorAnt shows superior performance compared to Energy Efficient Ant Based Routing (EEABR). It reduces total energy consumption by 71%, while performance improves by 76% in terms of energy-efficiency. Whereas the RRSEB reduces the packet drops by up to 54% and the energy efficiency improves by up to 22%. Finally, the proposed Self-decision Route Selection scheme reduces the transmission energy usage by up to 64%, while the reception energy usage is reduced by up to 67%.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

**MEKANISMA PENGIMBANGAN TENAGA UNTUK PROTOKOL LALUAN  
TERAGIH DALAM RANGKAIAN PENGESAN TANPA WAYAR**

Oleh

**AHMED MOHAMMED SHAMSAN SALEH**

**November 2012**

**Pengerusi: Professor Borhanuddin Mohd Ali, PhD**

**Fakulti: Kejuruteraan**

Di dalam sistem rangkaian pengesan tanpa wayar (*Wireless Sensor Networks, WSNs*), nod kritikal yang tidak berfungsi secara tiba-tiba boleh menyebabkan gangguan terhadap seluruh rangkaian *WSN*. Masalah ini berlaku akibat daripada pengurangan kuasa bateri oleh nod individu. Di dalam sistem rangkaian yang tidak seimbang, ketika nod kritikal mengalami beban trafik yang tinggi yang juga telah mengurangkan tenaga secara pantas, nod yang berada di kawasan yang tidak padat dari segi trafik data terus menggunakan tenaga pada kadar yang tinggi. Oleh yang sedemikian, tesis ini dilaksanakan bagi mengkaji kaedah untuk mengimbangkan dan mengurangkan penggunaan tenaga di dalam nod pengesan (*sensor node*), terutamanya ketika proses penghalaan laluan (*routing*). Cabaran bagi rangkaian *WSN* bermula ketika nod pengesan pertama kehabisan tenaga bateri. Berdasarkan cabaran tersebut, tesis ini mencadangkan satu kaedah penghalaan laluan (*routing*) dengan mengimbangkan kadar kehilangan tenaga oleh nod pengesan sepanjang rangkaian *WSN*. Selain itu, cadangan bagi kaedah penghalaan laluan

ini juga dicipta untuk mengelak nod pengesan daripada menghantar isyarat ke nod yang jauh kerana ini boleh menyebabkan pembaziran penggunaan tenaga yang tinggi. Matlamat utama tesis ini adalah untuk menghasilkan rangkaian pengimbang tenaga secara teragih dan kaedah pengurusan tersendiri untuk memanjangkan jangka hayat *WSNs* dan meningkatkan keutuhannya ke rangkaian dinamik. Tesis ini membincangkan tiga algoritma teragih yang teguh, berskala dan boleh dilaksanakan dalam di dalam rangkaian *WSN*. Algoritma yang pertama ialah *SensorAnt*, dimana sistem ini menggunakan mekanisme pengoptimuman tersendiri (*Self-optimization*) bagi *WSN*. Kaedah ini mampu untuk mengoptimumkan sumber nod pengesan, terutamanya bateri, untuk mencapai keseimbangan penggunaan tenaga ke atas semua nod pengesan. *SensorAnt* dihasilkan berdasarkan *Ant Colony Optimization (ACO) meta heuristic* yang digunakan untuk menambahbaik laluan dengan fungsi kualiti yang terbaik. Penilaian terhadap fungsi ini bergantung kepada beberapa kriteria antaranya, sisa kuasa bateri yang minimum, kiraan lompatan (*Hop count*), purata tenaga bagi laluan (*average energy to route*) dan purata tenaga bagi rangkaian (*average energy to network*). Algoritma kedua pula dicipta bagi memastikan penghalaan laluan yang lebih dipercayai (*High routing reliability*) dalam rangkaian *WSNs* apabila rangkaian *WSNs* gagal berfungsi akibat dari pergerakan nod pengesan atau kekurangan tenaga dari nod pengesan. Kaedah ini dikenali sebagai *Reliable Routing Scheme for Energy-Balancing (RRSEB)*. *RRSEB* lebih fokus kepada penambahbaikan dalam proses pemulihan laluan (*Path Recovery*) dengan memperkenalkan mekanisme laluan secara proaktif untuk membentuk laluan alternatif dengan menggunakan maklumat penghalaan laluan yang telah diperolehi pada peringkat pencarian laluan (*path discovery*) untuk mengurangkan kehilangan paket yang dihantar. Matlamat algoritma *RRSEB* adalah untuk mengemas kini dan menawarkan



maklumat penghalaan laluan yang baru bagi membentuk pelbagai laluan yang dapat meningkatkan kebolehpercayaan sistem ini. Algoritma terakhir yang dicadangkan ialah *Self-Decision Route Selection*, dimana kaedah ini merupakan satu teknik penambahbaikan terhadap algoritma *Hop-based Spanning tree (HST)* yang digunakan dalam beberapa protokol penghalaan laluan seperti AODV dan DSR. Skim ini menggunakan paket kawalan HST untuk mengiklankan tenaga sisa (*residual energies*) pengesan kepada jiran (*neighbors*) masing-masing untuk membuat keputusan pemilihan penghalaan laluan sendiri. Ini bermakna, nod pengesan menghantar data sama ada kepada jiran sebelah (*Next Hop Neighbors*) atau secara terus ke nod penerima (*Sink node*). Skim pengimbang beban ini mengagihkan beban trafik secara kerap dan secara perlahan ke seluruh nod pengesan semasa penghalaan laluan, dimana keseluruhan masa rangkaian dioptimumkan dan nod–nod pengesan gagal berfungsi pada waktu yang sama.

Prestasi algoritma yang dicadangkan telah dikaji menerusi simulasi dan peningkatan yang ketara dari segi penggunaan tenaga (*energy consumption*), kecekapan tenaga (*energy efficiency*), keseimbangan tenaga (*energy balancing*) dan nisbah paket penghantaran (*packet delivery ratio*) yang telah dicapai. *SensorAnt* menunjukkan prestasi unggul berbanding dengan EEABR. Ia mengurangkan jumlah penggunaan tenaga sebanyak 71%, manakala prestasi bertambah baik sebanyak 76% dari segi kecekapan tenaga. Manakala RRSEB mengurangkan kehilangan paket (*packet drop*) sehingga 54% dan kecekapan tenaga meningkat sehingga 22%. Secara kesimpulannya, cadangan bagi *Self-Decision Route Selection* mengurangkan penggunaan penghantaran tenaga sehingga 64%, manakala penerimaan penggunaan tenaga dikurangkan sehingga 67%.

## ACKNOWLEDGEMENTS

First and foremost, my sincere praise and thankfulness should be dedicated to Allah Subhanahu Wa Taala who supported me with the willingness, moral strength, guidance and patience to accomplish writing this thesis. May blessing and peace be upon Prophet Muhammad Sallallahu Alaihi Wasallam, who was sent for mercy to the world.

I should also admit the fact that PhD cannot be achieved without the help, support and guidance of my supervisors, colleagues, family and other lovely people. Therefore, I wish to express my deepest gratitude to Professor Borhanuddin Mohd Ali, my advisor. He has always been of great support for me through his theoretical insight, technical awareness, great sense of responsibility, and not least, his relentless enthusiasm that he has always proved to me during my journey. It should be admitted that all these have been my sources of motivation, inspiration and eagerness to undertake this particular research area and finally, to succeed in this study.

Furthermore, my sincere thankfulness should be expressed to Associate Professor Dr. Mohd. Fadlee A.Rasid and Associate Professor Dr. Alyani Ismail for serving as members of my thesis committee and for constantly encouraging me and providing me with their valuable comments throughout the entire thesis process. Their support has guided me to the right path and their cooperation has inspired me to consider a myriad of wonderful ways in which I have been able to accomplish this work successfully.

There are also other people who really have been of great to help to me and my gratefulness should be granted to the Faculty of Engineering and the staff of

postgraduate office, Library and Universiti Putra Malaysia, for providing the research environment. Thanks to every person who has supported me to finish my thesis.

It is undeniable that love and support given by my family have motivated me to pursue this challenging journey in my life, and therefore, I should express my sincere gratitude and love to my lovely, caring and supportive family members including my late father, Mohammed, my late mother, Shafiqah, my brothers and my sisters for their unlimited love, cooperation, understanding and sacrifices throughout my life. What I can say is that I love you all. Furthermore, words might fail to exactly express how I am deeply appreciative of my lovely wife Enas who has provided me with love, dedicated her time and life for me and inspired me with her persistent confidence in me and hopefulness which all together have taken the load off my shoulder. I owe her for being unselfishly let her intelligence, passions, and ambitions collide with mine. Special thanks should go to my kids Maram and Mohammed, who have been my joy and guiding lights. Thanks for giving me your valuable time through all this long process. I promise I will never let you alone anymore.

Finally, I am really grateful to everyone who has supported me and for everything great and small that they have given me during this journey. All of you have made me immensely proud.

I certify that a Thesis Examination Committee has met on 30 November 2012 to conduct the final examination of Ahmed Mohammed Shamsan Saleh on his Doctor of Philosophy thesis entitled “Energy Balancing Mechanisms for Decentralized Routing Protocols in Wireless Sensor Networks” in accordance with the Universities and University Colleges Act 1971 and the Constitution of the University Putra Malaysia [P. U. (A) 106] 15 March 1998. The Committee recommends that the student be awarded the degree of Doctor of Philosophy

Members of the Thesis Examination Committee were as follows:

**Abd Rahman Ramli, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Nor Kamariah bt Noordin, PhD**

Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**M. Iqbal bin Saripan, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Abbas Jamalipour, PhD**

Professor  
Faculty of Electrical and Information Engineering  
University of Sydney  
(External Examiner)

---

**Seow Heng Fong, Ph.D.**

Professor and Deputy Dean  
School of Graduate Studies  
University Putra Malaysia

Date:

This thesis was submitted to the Senate of University Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

**Borhanuddin Mohd Ali, PhD**

Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Mohd. Fadlee A. Rasid, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**Alyani Ismail, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

---

**BUJANG BIN KIM HUAT, PhD**

Professor and Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

## DECLARATION

I declare that the thesis is my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously, and is not concurrently, submitted for any other degree at University Putra Malaysia or at any other institution.

The logo of the University of Putra Malaysia (UPM) is centered in the background. It features a shield with a red and white design, including a book and the letters 'UPM' in a red box at the top. A large, light gray watermark reading 'COPYRIGHT UPM' is overlaid diagonally across the page.

---

**AHMED MOHAMMED SHAMSAN SALEH**

Date: 30 November 2012

## TABLE OF CONTENTS

	<b>Page</b>
<b>DEDICATIONS</b>	<b>ii</b>
<b>ABSTRACT</b>	<b>iii</b>
<b>ABSTRAK</b>	<b>vi</b>
<b>ACKNOWLEDGEMENTS</b>	<b>ix</b>
<b>APPROVAL</b>	<b>xi</b>
<b>LIST OF TABLES</b>	<b>xviii</b>
<b>LIST OF FIGURES</b>	<b>xix</b>
<b>LIST OF ABBREVIATIONS</b>	<b>xxiii</b>
<b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	<b>1</b>
1.1 Background	1
1.1.1 Challenges of WSNs	4
1.1.2 Control and Optimization in Swarm Intelligence	5
1.2 Problem Statement	6
1.3 Research Objectives	12
1.4 Research Contributions	13
1.5 Thesis Scope	14
1.6 Thesis Organization	15
<b>2 LITERATURE REVIEW</b>	<b>18</b>
2.1 Introduction	18
2.2 Categories of Energy-Aware Protocols in WSNs	20
2.3 Passive Energy Awareness Schemes	20
2.3.1 Physical layer Energy-aware Schemes	21
2.4 Active Energy Awareness Schemes	21
2.4.1 MAC layer Energy-aware Schemes	21
2.4.2 Network layer Energy-aware Schemes	23
2.4.3 Transport layer Energy-aware Schemes	23
2.5 Energy Awareness in Non-Swarm Intelligence Schemes	24
2.6 Energy Awareness in Swarm Intelligence (SI) Schemes	29

2.6.1	Bee Colony Optimization (BCO) Based Schemes	30
2.6.2	Particle Swarm Optimization (PSO) Based Schemes	33
2.6.3	Ant Colony Optimization (ACO) Based Schemes	35
2.7	Ant Colony Optimization for Routing Protocols in WSNs	36
2.8	Comparison of the Ant-based Routing Schemes	62
2.9	Summary	66
<b>3</b>	<b>RESEARCH METHODOLOGY</b>	<b>67</b>
3.1	Introduction	67
3.2	Research Framework	68
3.2.1	Problem Formulation	68
3.2.2	Previous Schemes Analysis and Implementation	70
3.2.3	The Proposed Schemes	70
3.2.4	Experimented Arrangement	74
3.2.5	Performance Metrics Evaluation	74
3.3	System Models	74
3.3.1	Energy Consumption Model	74
3.3.2	Lifetime Model	76
3.3.3	Traffic Generation Model	76
3.3.4	Network Model	77
3.3.5	Sensor Node Model	77
3.4	Experimental Environments	80
3.5	Performance Metrics Evaluation	80
3.6	Empirical Assessment Structure	82
3.7	Summary	85
<b>4</b>	<b>SENSORANT: AN OPTIMIZATION SCHEME FOR ENERGY-BALANCED ROUTING IN WIRELESS SENSOR NETWORKS</b>	<b>86</b>
4.1	Introduction	86
4.2	The Proposed SensorAnt Protocol	87
4.3	The SensorAnt Architecture	88
4.3.1	Ant Types	89
4.3.2	Pheromone Tables	89
4.3.3	Path Discovery Steps	90
4.3.4	Path Recovery Steps	92



4.4	Performance Evaluation	93
4.4.1	Simulation Environment	93
4.4.2	Experimental Results and Discussions	94
4.4.2.1	The Impact of Network Size	95
4.4.2.2	The Impact of Mobility in Sensor Nodes	105
4.5	Summary	114
<b>5</b>	<b>RRSEB: A RELIABLE ROUTING SCHEME FOR ENERGY-BALANCING IN WIRELESS SENSOR NETWORKS</b>	<b>115</b>
5.1	Introduction	115
5.2	The Proposed RRSEB Scheme	116
5.3	The RRSEB Structure	119
5.3.1	The Dissemination of Pheromone Operation	121
5.3.1.1	An Example of the of Real and non-Real Pheromone	124
5.3.2	The Ant Gathering Operation	127
5.3.3	Detection and Correction of Failures	129
5.3.3.1	Broadcasting the Packet Notification Error	130
5.3.3.2	Localized Path Correction Approach	130
5.4	Performance Evaluation	131
5.4.1	Simulation Environment	132
5.4.2	Discussion of the Experimental Results	133
5.4.2.1	The Impact of the Number of Packets Sent	133
5.4.2.2	The Impact of Different Time Periods	139
5.5	Summary	142
<b>6</b>	<b>SELF-DECISION ROUTE SELECTION FOR ENERGY BALANCING IN WIRELESS SENSOR NETWORKS</b>	<b>144</b>
6.1	Introduction	144
6.2	Proposed Energy Balance Routing Protocol	144
6.2.1	The Fundamental Steps of the Proposed Algorithm	146
6.3	Performance Evaluation	147
6.3.1	Simulation Environment	148
6.3.2	Experimental Results	148
6.4	Summary	155

<b>7</b>	<b>CONCLUSION AND FUTURE RESEARCH DIRECTIONS</b>	<b>157</b>
7.1	Conclusion	157
7.2	Future Research Directions	160
	<b>REFERENCES</b>	<b>162</b>
	<b>BIODATA OF STUDENT</b>	<b>171</b>
	<b>LIST OF PUBLICATIONS</b>	<b>172</b>

