



UNIVERSITI PUTRA MALAYSIA

***DESIGN, FABRICATION, AND PERFORMANCE
EVALUATION OF A HOT AIR HEATING
SYSTEM FOR PROCESSING OF
MALAYSIAN COCKLES
(Anadara Granosa L.)***

IRAJ YAVARI

FK 2014 88



UPM
UNIVERSITI PUTRA MALAYSIA
BERILMU BERBAKTI

**DESIGN, FABRICATION, AND PERFORMANCE
EVALUATION OF A HOT AIR HEATING
SYSTEM FOR PROCESSING OF
MALAYSIAN COCKLES
(*Anadara Granosa L.*)**

IRAJ YAVARI

**DOCTOR OF PHILOSOPHY
UNIVERSITI PUTRA MALAYSIA**

2014



**DESIGN, FABRICATION, AND PERFORMANCE EVALUATION OF A
HOT AIR HEATING SYSTEM FOR PROCESSING OF MALAYSIAN
COCKLES**

(Anadara Granosa L.)

BY

Iraj Yavari

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfillment of the Requirement for the Degree of Doctor of Philosophy**

July 2014

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Dedicated To

To all my teachers and, my family members, especially

my beloved wife, Leila and my dear son, Hima

and my ever-encouraging parents for their

love, and my brothers and sisters

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Doctor of Philosophy

**DESIGN, FABRICATION, AND PERFORMANCE EVALUATION OF A
HOT AIR HEATING SYSTEM FOR PROCESSING OF MALAYSIAN
COCKLES**

(Anadara Granosa L.)

By

IRAJ YAVARI

July 2014

Chairman: Associate Professor Johari Bin Endan, PhD. Ir
Faculty: Faculty of Engineering

Heat and the heating process are of the most widespread and the most important activities in the post-harvest operations for food products in the world. Such activities are usually expected to decrease the moisture content for crop preservation; the heating process is also used for modifying the mouthfeel of a product in order to raise the food's market values. Likewise, recovery and storage of the energy, environmental protection alongside the climate effect are considered as notable issues.

Nowadays different types of heating system such as the hot air heating machines are being used for heating the food products. Mostly, fossil fuel has been used by machines for this purpose, making the heat energy in the direct combustion. The heat from burning fuels is supplied directly by the airflow through the blower housing and harmful gases directed to enter the food chamber and the environment. , It must also kept in mind that in a direct in- line burner using natural gas, 3.5 lb. of water is add to the air for every cubic meter of natural gas consumed .

This action leaves undesirable and unintended effects on the product quality. Regarding these cases, such as non-constancy of the temperature in the compartment space of the products, lack of a precise temperature control, food contamination through contact with invisible gases from the burning fuel, more pollution and other environmental issues are among the disadvantages of these types of machines. Currently, the same actions are being used in Malaysia.

Therefore, a new hot air heating system was required for heating the food and it's products having high capacity and satisfactory heating quality with no damage to the food quality and the environment.

Air distribution in the machine reservoir and the flow rate were calibrated to achieve good results and outcomes in the construction phase as well as in the procedural steps to create the machine. To conserve energy, a closed circuit system and series was added to the machine.

In this research work first, the parts of the machine were designed using CATIA software then new heating system based on a hot water recirculation technique and effective air velocity has been fabricated.

An adjustable system was used to provide hot water with a high setting range of adjustment and high precision for different temperatures up to ninety degrees at the constant pressure.

In order to avoid energy losses and prevent pollution of the environment A Newly Developed and Extra-Enclosed System was designed, fabricated and add to the machine. For this purpose two extra devices of heat exchanger mounted on the machine, one located at the blower fan inlet and other situated at the air outlet final channel of machine. Both energy saving heat exchangers have been connected by connecting series and insulated tubes.

The new machine was tested in the Agricultural Process and Instrument Laboratory (APIL) of the faculty of engineering in UPM. The tests were performed based on the Randomized Complete Block Design (RCBD) experimental design was with three replications and the means were being compared using the Duncan's Multiple Range Test (DMRT). The parameters included the air temperature at three levels, the air velocity at three levels, and the hot air heating time duration at five levels. The data measured included the energy consumption, the opening force of the cockle shells, the moisture content, the cutting force, the compression force, the penetration force, the meat volume, the length, the height, the inflation, and the air and water temperature profiles. The Malaysian cockle (*Anadara Granosa L.*) was used as the experimental material.

The results revealed that the best and lowest cockle's opening force [N] belonged to the hot air heating parameters (air velocity: 2 m/s, air temperature: 70 °C) in the first hours of process, $[M=(111\pm 6.4) \times 10^{-2}]$ [N]. For the volume of the cockle's, the best result was observed at (air velocity: 2 m/s, air temperature: 70 °C) in the first hours of the air heating time $[M=(3.47\pm 0.19)]$ [cm³]. Results also showed that the lowest Δ MC- % happened at (air velocity:1 m/s, air temperature: 50 °C) after 1hour ($M=0.26\% \pm 0.01$). The best treatment on the cutting stress (τ , N/m²) was at the air parameter of (air velocity: 1 m/s, air temperature: 60 °C) in the first hours of the experiment $[M=(1.08\pm 0.02) \times 10^5]$ [N/ m²]. The lowest penetration force [N], was also observed for the air parameter of (air velocity:1m/s, air temperature: 50 °C) in the first hours of time duration $[M=(52\pm 0.58) \times 10^{-2}]$ [N]. The lowest compression stress (σ , N/m²) was observed for the air parameter of (air velocity: 1 m/s, air temperature: 50 °C) in the first hours $[M=(0.7887\pm 0.004) \times 10^5]$ [N/m²]. For the boiling experiment, it was found that the opened cockle, the cutting stress, the penetration force, and the compression stress increased significantly by having an increase in the boiling time. In this test, by increasing the boiling time, the cockle's volume decreased significantly and the lowest volume was for 15 min of boiling $[M=(2.033\pm 0.033)]$ [cm³].

This result showed that the volume increased in air heating system and shrinkage was $M=1.186\pm 0.09$ compared to two traditional systems, volume decreased in boiling system ($M=0.966\pm 0.042$) [cm^3] and in steaming was $M=(1.042\pm 0.067)[\text{cm}^3]$ which showed a little increase in volume.

For the steaming condition, a similar behavior happened with the boiling process with the difference that the cutting stress for more than 6 min was significantly different from the control.

The result of the lump system analysis on the cockles indicated that the center temperature of the cockle in the air heating system, steaming, and boiling methods after 35, 7 and 4 minutes respectively reached a thermal equilibrium state with the surrounding environment temperature. Furthermore, by using the Matlab fitting application and an exponential function, three different heating processes were formalized by equation $\theta(t)=Ce^{-mt}$ finding the coefficients, C and m with 95% , confidence bounds ($C= 41.63$, $m= 0.002792$, $R^2= 0.8453$), ($C=76.09$, $m= 0.02206$, $R^2=0.902$) and ($C= 74.44$, $m= 0.014$, $R^2= 0.9993$) respectively for the air heating, boiling, and steaming processes.

Utilizing the data logger output and control volume testing on the machine indicated that 25% of the energy leaving the exhaust compartment of the machine has been returned to the product by using the extra system mounted on the machine.

As a result, after having compared the machine treatments and the traditional experiments by considering the expenditure of the production and the product quality, the new technique with treatment of (air velocity: 2 m/s, air temperature: 70 °C and first hour of air heating time) has been presented as the best method in this research work.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

**REKABENTUK, FABRIKESI DAN PENILAIAN PRESTASI BAGI SISTEM
PERMANASAN UDARA PANAS BAGI KERANG MALAYSIA**
(*Anadara Granosa L.*)

Oleh

IRAJ YAVARI

July 2014

Pengerusi: Assosiat Profesor Johari Bin Endan, PhD. Ir
Fakulti: Kejuruteraan

Haba dan proses pemanasan adalah salah satu aktiviti yang paling penting dalam operasi lepas-tuaian bagi produk pertanian di seluruh dunia. Selalunya, ia akan mengurangkan kelembapan bagi penyimpanan tanaman; ia juga mampu mengubah rasa produk dan meningkatkan nilai pasarannya. Selain itu, pemulihan dan penyimpanan tenaga, perlindungan alam sekitar serta perubahan iklim adalah isu yang besar.

Kini, pelbagai jenis sistem pemanasan seperti mesin pengering digunakan untuk pengeringan tanaman pertanian. Kebanyakannya, bahan api fosil digunakan dalam mesin untuk tujuan ini. Bahan api fosil menjana tenaga melalui pembakaran langsung. Haba daripada bahan api terbakar dibekalkan secara langsung dengan aliran udara yang melalui rumah tiupan dan gas berbahaya diarahkan ke ruang tanaman dan alam sekitar.

Tindakan ini meninggalkan kesan buruk kepada kualiti produk. Mengenai perkara seperti perbezaan suhu dalam ruang tanaman, kekurangan kawalan suhu yang tepat, pencemaran tanaman melalui gas yang tidak dapat dilihat akibat pembakaran bahan api, pencemaran dan isu-isu alam sekitar adalah antara kelemahan mesin jenis ini. Pada masa ini cara yang sama telah digunakan di Malaysia.

Oleh itu, mesin pemanas udara panas yang diperlukan bagi memanaskan produk pertanian perlu mempunyai kapasiti yang tinggi dan kualiti pemanasan yang memuaskan, serta tidak membawa kerosakan kepada kualiti tanaman dan alam sekitar. Dalam kajian ini, mesin pemanasan baru berdasarkan teknik edaran air panas dan halaju udara yang berkesan telah direka, dirumuskan dan dinilai.

Mesin teknik baru, telah diuji dalam (APIL) fakulti kejuruteraan UPM. Ujian telah dijalankan berdasarkan (RCBD) reka bentuk eksperimen dengan tiga replikasi dan dibanding menggunakan (DMRT). Parameter termasuk suhu udara pada tiga

peringkat, halaju udara pada tiga peringkat dan tempoh masa pada lima peringkat. Data yang diukur ialah penggunaan tenaga, tenaga pembukaan, kelembapan, daya permotongan, daya mampatan, daya penembusan, isipadu daging, panjang, tinggi, inflasi, dan profil suhu udara dan air bagi setiap keadaan telah ditafsirkan. Kerang darah Malaysia (*Anadara granosa* L.) telah digunakan sebagai bahan eksperimen.

Keputusan menunjukkan bahawa kuasa pembukaan kerang terendah adalah berdasarkan parameter pemanasan udara (2 m/s, 70 °C) dalam jam pertama [$M=(111\pm 6.4) \times 10^{-2}$][N]. Untuk isipadu kerang, keputusan terbaik yang diperhatikan adalah pada 2 m/s, 70°C dalam jam pertama [$M=(3.47\pm 0.19)$] [cm^3]. Keputusan juga menunjukkan bahawa DMC yang paling rendah berlaku pada 1m/s, 50 °C selepas 1 jam ($M=0.26\pm 0.01$). Cara terbaik untuk daya pemotongan (τ , kg/cm²) adalah pada parameter udara 1m/s, 60 °C pada jam pertama eksperimen [$M=(1.08\pm 0.02) \times 10^5$] [N/ m²]. Kuasa penembusan terendah [N] diperhatikan pada parameter udara 1m/s dan 50°C dalam jam pertama [$M=(52\pm 0.58) \times 10^{-2}$] [N]. Daya mampatan terendah (σ , N/m²) diperhatikan untuk parameter udara 1 m/s, 50 °C dalam jam pertama [$M=(0.7887\pm 0.004) \times 10^5$][N/m²]. Untuk eksperimen pendidihan: kerang yang bukan, daya pemotongan, daya penembusan dan daya perbandingan meningkat secara ketara dengan peningkatan dalam masa pendidihan dalam ujian ini. Isipadu kerang menurun dengan ketara semasa masa pendidihan meningkat dengan isipadu terendah selama 15 min mendidih [$M=(2.033\pm 0.033)$] [cm^3]. Untuk keadaan pengukusan, tingkah laku yang serupa juga berlaku pada proses pendidihan dengan perbezaan bahawa daya pemotongan selama lebih daripada 6 min adalah jauh berbeza daripada kawalan.

Hasil analisis sistem ketulan pada kerang yang menunjukkan bahawa suhu pusat kerang dalam pemanasan udara, pengukusan dan kaedah mendidih selepas 35, 7 dan 4 minit masing-masing telah mencapai keadaan keseimbangan haba dengan suhu sekitar alam sekitar. Tambahan pula, dengan menggunakan Matlab fungsi penyesuaian dan eksponen, tiga proses pemanasan yang berbeza dibentuk melalui persamaan dan mendapati pekali, C dan m dengan 95 %, sempadan keyakinan ($C=41.63$, $m=0.002792$, $R^2=0.8453$), ($C=76.09$, $m=0.02206$, $R^2=0.902$) and ($C=74.44$, $m=0.014$, $R^2=0.9993$) masing-masing untuk pemanasan udara, merebus dan pengukusan.

Penggunaan keputusan Logger data, dan kawalan nilai pada mesin menunjukkan bahawa 25% daripada tenaga yang meninggalkan petak ekzos mesin, dengan menggunakan penjimatan tenaga dalam teknik ini, telah kembali ke produk.

Hasilnya, selepas dibandingkan antara mesin rawatan dan eksperimen tradisional daripada segi perbelanjaan pengeluaran dan kualiti produk, teknik baru dengan sebatian rawatan (2 m/s, 70 °C dan 1 jam) telah dibentangkan sebagai kaedah terbaik dalam kajian ini.

ACKNOWLEDGMENTS

First, my utmost gratitude goes to Allah. An effort such as undertaking postgraduate studies for a Ph.D. needs the direct and indirect help of several people. This is an opportunity to remember their help and acknowledge their contributions to enlighten, educate, and enable me to complete this piece of work.

My deepest appreciation is extended to my academic advisor Associate Professor Dr. Johari Bin Endan for exquisite scientific guidance and unfailing essential support to the successful completion of this research work.

I would like to give special thanks to my supervisory committee members, Associate Professor Dr. Yus Aniza Yusof head of the Department of Process and Food Engineering, and Professor Dr. Desa Bin Ahmad, and Associate Professor Dr. Mohd Nordin Ibrahim for their time, support, expertise, encouragement, advice and confidence while I worked towards my doctorate degree.

I wish to thank Associate Professor Dr. Chin Nyuk Ling and Associate Professor Dr. Farah Salina Tap for allowing me to use the laboratory facilities, and Professor Dr. Suhas P. Sukhatme (Department of Mechanical Engineering University Press INDIA) and Associate Professor Dr. Kaumars Mansori (Department of Physics Razi University IRAN) for his helpful advice in the mechanical design of the heat exchanger.

I wish to express my gratitude to Universiti Putra Malaysia for the financial support. Also, I would like to acknowledge the Faculty of Engineering and School of Graduate Studies, Universiti Putra Malaysia (UPM), and administrative staff of the laboratories at the Department of Process and Food Engineering for providing the facilities and their assistance for my study, especially Mr. Kamarulzaman Dahlin, Mr. Zamzuri Zabidin, Mr. Mohd. Zahiruddin Daud, Mr. Raman Morat, Mr. Shahrulrizal Zakaria, Mr. Hairul Anuar b. Abd Mubin, the office personnel for answering all my questions, Mrs. Juliana Abdul Hak, Mrs. Azizah Abdullah and Mrs. Rosnita Abdul Rashid, and Mrs Nordiyana bt. Abd. Razak.

I wish to express my deepest gratitude to the numerous people who have walked with me along the journey of my study. First and foremost I would like to express my deep gratefulness to Dr. Abbas Keshavarz, the Former Deputy Minister and Dean of AREEO, Dr. Mohammad Reza Jahansoz, the Former Deputy Minister of Agriculture of Iran for his kind assistance, Dr. Jahangir Porhemmat, the Former Deputy Minister and Head of AREEO, Dr. Abdolali Ghaffari, the Head of DARI, and Dr. Seyed Saeid Pordad, the Deputy dean of DARI, also Mr. Maghsoud Hassanpour Hosni the Deputy dean of DARI, and Dr. Mostafa Aghaee, the Deputy Dean of AREEO for approving my study leave and financial support.

I would like to express my deepest gratitude to the Dr. Mohmoud Danaee also Dr. Daryush Talei for helping me in the statistical analyses. Thank you for always being there when I needed you.

I would also like to express my sincere appreciation to Dr. Dariush Saberi, Mr. Koresh Nadermahmodi, Dr. Reza Haghparast, Dr. Mohammad Reza Bakhtiari, Mr. Addel Jahangiri, Dr. Reza Mohammadi, Dr. Mehrzad Javadi and Dr. Ali Arab for their invaluable help and generous contributions to my research during difficult times.

I would also like to express my gratitude towards the administrative staff of the DARI and DDARI of Kermanshah Iran, Mr. Siros Omidi, Mr. Iraj Hossainabadi, Mr. Ali Moradi, Mr. Behdosh Mohammadi, and Mr. Aliabbas Mohammadi. I would also like to thank Mr. Mohammad Gholami, and Mr. Samad Gholaminaserkhani.

The last but not least, I owe my loving thanks to my beloved wife Leila and my dear son Nima, my father Zeinolabedin and my mother Nimtaj, and all my siblings for their support, understanding, help, and encouragement.



I certify that a Thesis Examination Committee has met on 24th July 2014 to conduct the final examination of IRAJ YAVARI on his thesis entitled “Design, Fabrication and Performance Evaluation of a Hot Air Heating System for Processing of Malaysian Cockles (*Anadara Granosa L.*)” in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Wan Ishak b. Wan Ismail, PhD

Professor
Faculty of Engineering,
Universiti Putra Malaysia
(Chairman)

Chin Nyuk Ling, PhD

Associate Professor
Faculty of Engineering,
Universiti Putra Malaysia
(Internal Examiner)

Mohd Shamsul Anuar, PhD

Senior Lecturer
Faculty of Engineering,
Universiti Putra Malaysia
(Internal Examiner)

Sundaram Gunasekaran, PhD

Professor
Faculty of Engineering,
University Wisconsin Madison
United States of America
(External Examiner)

NORITAH OMAR, PhD

Associate Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

This thesis submitted to the Senate of Universiti Putra Malaysia has been accepted as fulfillment for the requirement for the degree of **Doctor of Philosophy**. The members of the Supervisory committee are as follows:

Johari Bin Endan, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Desa Bin Ahmad, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Yus Aniza Yusof, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Mohd Nordin Ibrahim, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

BUJANG KIM HUAT, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

TABLE OF CONTENTS

COPYRIGHT	ii
DEDICATION	iii
ABSTRACT	iv
ACKNOWLEDGMENTS	ix
TABLE OF CONTENTS	xv
LIST OF TABLES	xxi
LIST OF FIGURES	xxiii
LIST OF ABBREVIATIONS	xxvii
1 GENERAL INTROUCTION	1
1.1 Background of the study	1
1.2 Statement of the Problem	3
1.3 Contributions	4
1.4 Objective	4
1.5 Scope of Study	4
1.6 The Research Framework	5
1.7 Outline of the Thesis	6
2 LITERATURE REVIEW	7
2.1 Cockle " <i>Anadara Granosa L.</i> "	7
2.1.1 Introduction	7
2.1.2 Taxonomy	8
2.1.3 Anatomy of the Shell	8
2.2 Existing Method	9
2.3 Heating Process Development	10
2.4 Mechanical Characterization of Solid Foods	11
2.4.1 Basic Concepts	11
2.4.1.1 Destructive Measurements	14
2.4.1.2 Penetrate	14
2.4.1.3 Compression Stress	17
2.4.1.4 Cutting Stress	19
2.4.1.5 Shrinkage	20
2.4.1.6 The Texture Profile Analysis	22
3 DESIGN AND FABRICATION	25
3.1 Heat Transfer	25

3.1.1	Heat Transfer Model	25
3.1.1.1	Conduction	25
3.1.1.2	Convection	26
3.1.1.3	Radiation	26
3.1.2	Heat Transfer By Conduction	27
3.1.2.1	Fundamental Equations In Heat Conduction	27
3.1.2.2	Rectangular Coordinates	27
3.1.2.3	Cylindrical Coordinates	30
3.1.2.4	Spherical Coordinates	31
3.1.3	Heat Transfer by Convection	32
3.1.3.1	Introduction	32
3.1.3.2	Heat Transfer Coefficients	33
3.1.3.2.1	Individual Coefficients	33
3.1.3.2.2	Natural Convection	35
3.1.3.2.3	Forced Convection	36
3.1.3.3	Fluids Flowing on the Exterior of Solids	37
3.1.3.4	Heating or Cooling of Flat Surfaces	38
3.2	Heat Exchangers	39
3.2.1	Compact Heat Exchangers	39
3.3	Designing	42
3.3.1	Detail of Drawing of Machine	42
3.3.2	Materials and equipment that were used to fabricate the hot air heating system, Main part of the machine, are listed as follows,(Figure 3.11):	59
3.3.2.1	Chassis (the Main Frame)	59
3.3.2.2	Centrifugal Blower (Fan)	60
3.3.2.3	The Centrifugal Blower Speed Control	61
3.3.2.4	Air Inlet Channel to the Secondary Heat Exchanger	61
3.3.2.5	The Air Inlet Channel To The Main Heat Exchanger	61
3.3.2.6	The Air Inlet Channel to the Crop Box	62
3.3.2.7	The Air Exhaust Channel of The Crop Box	63
3.3.2.8	The Perforated Thermocouple Protector	64
3.3.2.9	The Air Exhaust Channel of the Crop Box, and Inlet Channel to the Exhaust Heat Exchanger	64
3.3.2.10	Power Measuring Devices (kWh Meter)	65
3.3.2.11	Water Measuring Devices	65
3.3.2.12	The Pressure Indicator	66

3.3.2.13	Connecting Tubes	66
3.3.2.14	The one-Way Valve	67
3.3.2.15	The Pressure Reduction Valve	67
3.3.2.16	The Air Bleeder Valve	67
3.3.2.17	Insulation of Conductor Tubes	68
3.3.2.18	The Water Heater	68
3.3.2.19	The Three-Speed Transferring Water Pump	69
3.3.2.20	Main Heat Exchangers	69
3.3.2.21	The Secondary Heat Exchanger	70
3.3.2.22	Energy Saving, Heat Exchangers	71
3.3.3	General Description of the Machine	72
3.3.3.1	A Detailed Description of Drawing of the New Hot Air Heating System	75
3.3.4	Piping Systems	78
3.3.4.1	Mass Balance	78
3.3.4.2	Calculation of Velocity and Circulation Flow Rate	79
3.3.4.3	Calculation of Minimum Diameter of Piping	81
3.3.4.4	Piping Systems (parallel and Series)	82
3.3.4.4.1	Parallel Piping Systems	83
3.3.4.4.2	Piping in Series	84
3.4	The Control Volume of Machine	85
3.5	The Practical Thermal Analysis of Heat Exchanger Used in this Mechanism	91
3.5.1	Calculating the Heat Transfer Coefficients h_a For the Air and Water Side of the Heat Exchanger	91
3.5.1.1	The Heat Transfer Coefficient (Air Side)	94
3.5.1.2	The Heat Transfer Coefficient (Water Side)	95
3.5.1.3	The Overall Heat Transfer Coefficient U_a Based on the Air Side Surface	97
3.5.1.4	Total Heat Transfer Rate Q	98
3.5.1.5	Air Outlet Temperature.	100
3.5.1.6	Water Outlet Temperature.	100
3.6	Transient Conduction And Use of Temperature Charts	101
3.6.1	Introduction	101
3.6.2	Lumped System Analysis	101
3.7	Advantage and Novelty of the Present Hot Air Heating Machine	106
3.7.1	Advantages and Novelty of the New Heating System	106

4	MATERIALS AND METHODS	107
4.1	Introduction	107
4.2	Determination of Physical, and Mechanical Properties of Cockle	107
4.3	Physical Properties	107
4.3.1	Moisture Content	107
4.3.2	Principle Dimensions	108
4.3.3	The Geometric Mean Diameter	109
4.3.4	The Arithmetic Mean Diameter	109
4.3.5	The Aspect Ratio	110
4.3.6	The Sphericity	110
4.3.7	The Surface Area	111
4.3.8	The Real Volume of Each Cockle, and True Density	111
4.3.9	The Bulk Density	112
4.3.10	The Porosity of Solid Food	113
4.3.11	Mechanical (Frictional) Properties	114
4.3.11.1	The Static Coefficient of Friction	114
4.3.11.2	The Filling (Static) Angle of Repose	115
4.3.11.3	The Emptying (Dynamic or Funnelling) Angle of Repose	116
4.3.12	Techniques For Measuring Real Volume of Each Cockle	117
4.4	Techniques For Measuring Texture	118
4.4.1	Compression Stress Test	118
4.4.2	Cutting Stress Test	118
4.4.3	Penetration Test	119
4.5	Experimental of Process	120
4.5.1	Material and Equipment	120
4.5.1.1	Experimental Material	120
4.5.1.2	Sampling	121
4.5.1.3	Tap Water	122
4.5.1.4	The Circular Stainless Steel Strainer	122
4.5.1.5	The Pot and Closed Container	123
4.5.1.6	The Data logger (Midi Logger G800) and Anemometer (Testo 425)	123
4.5.1.7	The Caliper	124
4.5.1.8	The Texture Analyzer	125
4.5.2	The Heating Process and Experimental Tests	125

4.5.2.1	Preparation of Sample	125
4.5.2.2	The Boiling Processing Procedure	126
4.5.2.3	The Steaming Processing Procedure	127
4.6	The New Dryer Processes Procedure	127
4.6.1	Design Procedure of Laboratory Machine	127
4.6.2	Human Sensory Test of Cockle Meat Based on Time and Hot Air Heating Parameter	128
4.6.3	The Experimental Design	128
4.6.4	The Processes Procedure	129
4.7	Texture Analyzing Process	129
4.7.1	The Force Required for the Opening of the Cockle Shell's	130
4.8	Lumped System Analysis Method for Cockles	131
4.8.1	Introduction	131
4.8.2	Thermal Equilibrium of Cockle Center and Surrounding Environments in the Three Modes of Heating Process (Air Heating, Boiling And Steaming)	132
4.8.3	The Hot Air Heating Method	133
4.8.4	The Boiling Method	133
4.8.5	The Steaming Method	133
4.9	Summary	134
5	RESULTS AND DISCUSSION	135
5.1	Hot Air Heating Process Evaluation of the Cockle's Characteristics	135
5.1.1	The Homogeneity Test of the Experimental Samples	135
5.1.2	Descriptive Statistics of the Physical Properties of the Cockle's	138
5.2	Effect of Hot Air Performance on the Cockle Characteristics	139
5.2.1	Effect of Hot Air Parameters and Time Duration on the Force Required to Open The Cockles' Shells	139
5.2.2	Effect of Hot air Parameters and Time Duration on Cockle Volume	142
5.2.3	Effect of the Hot Air Parameters on the Cockle's Moisture Content Changes	146
5.2.4	Effect of the Air Parameters on the Cockle Meat Cutting Stress [N/m^2]	149
5.2.5	Effect of the Hot Air Parameters on the Cockle Meat Penetration Force (N)	153
5.2.6	Effect of Hot Air Parameters on the Cockle Meat Compression Stress (N/m^2)	156

4.1.1	Cost Analysis of Hot Air Parameters	160
5.3	Effect of Physical Parameters of the Cockles on the Predicted Opening Force of Cockles shells	161
5.4	Evaluation of the Boiling and Steaming Methods on the Cockle Characteristics	165
5.4.1	Effect of Boiling on the Opening and Texture of the Cockles	165
5.4.2	Effect of Steaming on the Opening and Texture of Cockles	168
5.5	Comparing of Shrinkage among different methods	171
5.6	Using Lump System Analysis to Find C and m Constant Coefficients, of the equation $\theta(t) = Ce^{-mt}$ at Different Heating Condition on the Malaysia Cockle	173
5.6.1	Finding C and m for the Air Heating Method	176
5.6.2	Finding C and m for the Steaming Process	176
5.6.3	Finding C and m for Boiling Process	177
5.6.4	Assessment of the computed constant coefficients (C and m in the equation $\theta(t) = Ce^{-mt}$)	178
5.7	Duration time to reach the thermal equilibrium state	180
5.7.1	General Out line	181
5.8	Evaluation of the Hot Air Heating Machine Performance	182
5.8.1	Thermocouples Positioned Within the Chamber	182
5.8.2	Air Temperature Distribution Within the Crop Chamber of The Hot Air Heating Machine	183
5.8.3	The Temperature Profile of the Water Recirculation Within the Heat Exchanges and the Airflow Through the Heat Exchangers Tubes and Pores.	189
5.9	Summary	193
6	Conclusion and Recommendation	195
6.1	Conclusion	195
6.2	Recommendations	197
	REFERENCES	198
	BIODATA OF STUDENT	246
	LIST OF PUBLICATIONS AND PATENT	247

LIST OF TABLES

Table	Page	
3.1	Values of parameters <i>a</i> and <i>b</i>	35
3.2	Physical properties of Air at atmospheric Pressure	92
3.3	Physical properties of water	92
3.4	physical properties of Brass	92
5.1	Summary of the ANOVA for the cockle characteristics	135
5.2	The descriptive statistics of the cockles' physical properties	138
5.3	Results of analysis of variance on the cockles opening force	139
5.4	The Effect of the air velocity, air temperature and time on the cockle opening force (N) of the cockles	142
5.5	Results of the analysis of covariance on the cockle volume	143
5.6	Effect of the air velocity, air temperature and time on the volume(cc) of cockles	145
5.7	The results of analysis of variance on DMC	146
5.8	Effect of air velocities, air temperatures and time duration on the cockle's moisture content changes	149
5.9	Results of the analysis of variance on the cutting force[N/m ²]	150
5.10	Effect of the air velocity, air temperature and time duration on cutting force(N/m ²) of cockles	152
5.11	Results of analysis of variance on the penetration force[N]	153
5.12	Effect of air velocity, air temperature and time duration on the penetration force(N) of the cockle meat	156
5.13	Results of the analysis of variance on the cockle compression force (N/m ²)	157
5.14	Effect of air velocity, air temperature and time duration on compression force (N/m ²) of the cockles	159
5.15	Correlation Coefficients among Physical Characteristics with the Opening Force	163
5.16	ANOVA of Multiple Linear Regression Model	164
5.17	Summary of Simultaneous Multiple Regression Analysis for the Physical Characteristics Predicting Opening Force	164
5.18	Summary of ANOVA results for the effects of boiling	165
5.19	Effect of boiling times on cockles characteristics	166
5.20	Comparison of the number of open cockles before and after shaking	167
5.21	Summary of ANOVA results on effects of boiling on the texture	167
5.22	Effect of the boiling time on the cockle texture	168
5.23	Summary of ANOVA results on effects of steaming	168
5.24	Effect of the steaming time on the cockles characteristics	169
5.25	Comparison between opened cockles before, and after shaking	170
5.26	Summary of ANOVA results for effects of steaming on the texture	170
5.27	Effect of the steaming time on cockle texture	171
5.28	Summary of ANOVA results for effects of heating methods on the shrinkage	172
5.29	Center temperature of the cockles, (average of 4 samples taken by the midi logger G800)	173
5.30	The dimensionless temperature $\theta(t) = T(t) - T_{\infty}$ of the air heating, steaming. and the boiling methods as a function of time	174
5.31	$\ln\theta(t) = T_{\infty} \cdot T_t$ (for air heating, steaming. and boiling method)	178
5.32	Slop and interception of linear function at different conditions (the air heating, boiling and steaming conditions)	180
5.33	Dimensions of location of the thermocouples probe	182
A.1	Questions related to the quality of the samples in the sensory test with coding	212
A.2	Raw data for evaluation different air velocity in sensory test	213
A.3	Raw data for evaluation different time in sensory test	214
A.4	Raw data for evaluation different temperature in sensory test	215

A.5	ANOVA results of stepwise Multiple regression analysis on physical characteristics	220
A.6	Coefficients ^a	220
A.7	Available energy and heat conversion efficiency for fuels commonly used for grain drying Source: (Maier, 2002)	221
A.8	Cost Analyze Data	222



© COPYRIGHT UPM

LIST OF FIGURES

Figure		Page
1.1	Framework of Study	5
2.1	The two valves of a closed Cockle. The broad ribs, the ligament and the hinge are conspicuous	8
2.2	Continuous methods	9
2.3	Continuous methods	10
2.4	Uniaxial Compression of A Specimen With An Original Length L_0 And Area A_0 And The Young's Modulus E (A) And Shear Stress T Acting on Opposite Planes Causing The Distortion of The Specimen With Shear Modulus G And Area A_0 (B)	12
2.5	Classification of Solid Foods Based on Their Mechanical Properties	13
2.6	Different Probe Tips Used In Puncture Tests. The Magness-Taylor Probe, Represented By (b) Is Popular For Fruits And Vegetables	16
2.7	Three Magness-Taylor (MT) firmness testers: (a) a handheld mechanical MT tester based on a calibrated spring that may be helical or spiral; (b) a portable MT tester with an electronic gauge; and (c) a MT probe mounted on a standard laboratory testing machine	16
2.8	Two Types Of Compression Tests: (a) Uniaxial Compression Test Between Two Plates and (b) Simple Compression–Back Extrusion Test	18
2.9	Schematic of The Warner–Bratzler Shear Tester For Measuring The Tenderness Of Meat	19
2.10	Illustration of Penetrometer, from Van Vliet, T. Rheological Classification of Foods and Instrumental Techniques for Their Study. In A.J. Rosenthal (Ed.), Food Texture Measurement and Perception (pp.65-98). New York: Aspen 1999.	22
2.11	The Generalized Texture Profile	23
3.1	Heat Transfer Model	26
3.2	Volume of a solid in rectangular coordinates, Albert Ibarz, et al., (2003)	28
3.3	Cylindrical Coordinate System, Albert Ibarz, et al., (2003)	31
3.4	Spherical Coordinates System, Albert Ibarz, et al., (2003)	32
3.5	Heat Exchangers	33
3.6	Heat Transfer By convection	33
3.7	Typical heat transfer matrices for compact heat exchangers. (a) Circular finned – tube matrix; (b) plain plate-fin matrix; (c) finned flat-tube matrix. Source: (Necati 1985).	39
3.8	Heat transfer and friction factor for flow across finned flat- tube matrix. Source: (Kays, et al., 1964; Necati Özişik M. 1985; J. P. Holman. 2010).	40
3.9	Hot Air Heating Machine	42
3.10	Hot Air Heating Machine Has Been Drawing by CATIA Software	43
3.11	Exploded Hot Air Heating Machine	43
3.12	The Exploded Machine Designed By Catia Software R5-V19	59
3.13	Chassis (front and back views)	60
3.14	The Centrifugal Blower (a) and the Blower Speed Control (b)	60
3.15	The Air Inlet Channel to the Secondary Heat Exchanger	61
3.16	The Air Inlet Channel to the Main Heat Exchanger	62
3.17	The Air Inlet Channel and the air Divider to the Crop Chamber	62
3.18	The Air Exhaust Channels of the Chamber of Crop	63
3.19	The Perforated Thermocouple Protector	64
3.20	The Air Exhaust channel of the Crop Box, and Inlet Channel to the Exhaust Heat Exchanger	64
3.21	Power Measuring Devices (kWh meter)	65
3.22	Water Measuring Devices	65
3.23	The Pressure Indicator	66

3.23	Connecting Tubes	66
3.24	The One- Way Valve	67
3.25	The Pressure Reduction Valve	67
3.26	Air Bleeder Valve	68
3.27	Insulation Conductor Tubes	68
3.28	The Water Heater	69
3.29	The Three -Speed Transferring Water Pump	69
3.30	Various finned	70
3.31	Main Heat Exchangers	70
3.32	The Secondary Heat Exchangers	71
3.33	The Extra Inlet and Final Outlet Saving Energy Heat Exchanger	71
3.34	Heating Machine (Front View)	73
3.35	Heating Machine (Back View)	74
3.36	Heating Machine (Exhaust Air View)	74
3.37	Heating Machine (Air Inlet and Outlet View)	75
3.38	A Detailed Description of Drawing of the New Hot Air Heating System	77
3.39	Pipe Section	78
3.40	Kármán's graphic	81
3.41	Parallel piping	83
3.42	Schematic Diagram of A Control Volume of Machine	85
3.43	Effectiveness for Cross-Flow Exchanger With Fluids Unmixed Source	91
3.44	The Heat transfer and friction factor for flow across the finned flat-tube matrix.	94
3.45	Nomenclature for the lumped system analysis of the transient heat flow	102
3.46	Dimensionless Temperature $\Theta_{(t)}/\Theta_{(0)}$ As a Function of Time. Source	103
4.1	Measurement of the moisture content of cockles' meat	108
4.2	Illustration of the digital caliper used in this study	109
4.3	Three Principle Perpendicular Dimensions of the Cockle: L, Length, H, Height and I, Inflation	110
4.4	The Container to Measure the Bulk Density of the Cockles Source (Bakhtyari, M.R. 2012)	113
4.5	Equipment to Measure the Static Coefficient of the Friction Source (Bakhtyari, M.R. 2012)	114
4.6	Side View of Equipment to Measuring Static Coefficient of Friction Source (Bakhtyari, M.R. 2012)	115
4.7	Diagram and Position of The Angle of Repose	116
4.8	The Schematic View of The Step Taken to Measure the volume of the	117
4.9	Compression Stress Distribution	118
4.10	Cutting Force Area	119
4.11	Real Stress Line in Cutting the Meat	119
4.12	Transfer of the Tip of Nail in Penetration test	120
4.13	The sampling site In Kuala Selangor, Malaysia	121
4.14	Raw Cockles	122
4.15	The Circular stainless steel strainer and cockles	123
4.16	The Pot and closed container	123
4.17	Left: Data logger (Midi Logger G800),Right: Anemometer (Testo 425)	124
4.18	Electronic Digital Caliper (Percision of Sensitivity Set to ± 0.001)	124
4.19	The Texture Analyzer Used to Measure the Mechanical Properties of the Cockles' Meat	125
4.20	The Cockles Meat and Shells after Each Boiling Experiment	126
4.21	The Cockles Meat and Shells after Steaming Experiment	127
4.22	Preparing Samples for Texture Analyzer Test	130
4.23	The Fresh and Heated Samples Under the Force Measurement	130
4.24	Nomenclature for lumped system analysis	131
4.25	The Schematic View of The Step Taken to Measure the Time for Reaching the Temperature Equilibrium State	132

5.1	Mean of the Length, Height and Inflation of the Cockles at Different Times of Sampling	136
5.2	Mean of the Moisture Content of the Cockles in Different Times of Sampling	136
5.3	Mean of the Compression Force of the cockles in Different Days of sampling	136
5.4	Mean of the Penetration Force of the Cockles in Different Days of Sampling	137
5.5	Mean of the Cutting Force of the Cockles in Different Days of Sampling	137
5.6	Mean of the Opening Force of Cockles in Different Days of Sampling	138
5.7	Cockle Opening Force under Different Air Velocities. [Mean with the Same Letter are not Significantly Different at $p < 0.01$]	140
5.8	Cockle Opening Force under Different Air Temperatures [Mean with the Same Letter are not Significantly Different at $p < 0.01$]	140
5.9	Cockle Opening Force under Different Times [Means with the Same Letter are not Significantly Different at $p < 0.01$ Level]	141
5.10	Mean Cockle Opening Force under Different Treatments	141
5.11	Cockle Volumes at Different Air Velocities [Means with the Same Letters are not Significantly Different at $p < 0.01$]	143
5.12	Cockle Volumes at Different Air Temperatures [Means with the Same Letters are not Significantly Different at $p < 0.01$]	144
5.13	Cockle Volumes at Different Times [Means with the Same Letters are not Significantly Different at $p < 0.01$]	144
5.14	Means of the Cockle Volumes under Different Treatments	145
5.15	Cockle Moisture Content Changes at Different Air velocities [Means with the Same Letters are not Significantly Different at $p < 0.01$ Level]	147
4.16	Cockle Moisture Content Changes at Different air Temperatures [Means with the Same Letters are not Significantly Different at $p < 0.01$]	147
5.17	Cockle Moisture Content Changes at Different Times [Means with the Same Letters are not Significantly Different at $p < 0.01$]	148
5.18	Mean Cockle Moisture Content Changes under Different Treatments.	148
5.19	Cockle Cutting Force under Different air Velocities [Means with the Same Letters are not Significantly Different at $p < 0.01$]	150
5.20	Cockle Cutting Force under Different air Temperatures [Means with the Same Letters are not Significantly Different at $p < 0.01$]	151
5.21	Cockle Cutting Force under Different Time Duration [Means with the Same Letters are not Significantly Different at $p < 0.01$]	151
5.22	Means of the Cockle Cutting Force under Different Treatments	152
5.23	Cockle Penetration Force under Different air Velocities [Means with the Same Letters are not Significantly Different at $p < 0.01$]	154
5.24	Cockle Penetration Force under Different air Temperatures [Means with the Same Letters are not Significantly Different at $p < 0.01$]	154
5.25	Cockle Penetration Force under Different Time Duration [Means with the Same Letters are not Significantly Different at $p < 0.01$]	155
5.26	Means of the Cockle Penetration Force(N) under Different Treatments	155
5.27	Cockle Compression Force under Different Air Velocities Means with the Same Letters are not Significantly Different at $p < 0.01$]	157
5.28	Cockle Compression Force under Different Air Temperatures [Means with the Same Letters are not Significantly Different at $p < 0.01$]	158
5.29	Cockle Compression Force under Different Time Duration [Means with the Same Letters are not Significantly Different at $p < 0.01$]	158
5.30	Means of the Cockle Compression Force under Different Treatments	159
5.31	Total Cost of Treatments Based on Different Hot Air Parameters	160
5.32	Mean Comparison Cost, Between Different Methods of Heating	161
5.33	Physical Properties for Predicting the Opening Force	162
5.34	Effect of Boiling Time of on Cockle Characteristics	166
5.35	Effect of time duration of steaming on the cockle characteristics	169
536	Mean Comparison Among Different Methods of Heating.	171

5.37	The dimensionless Temperature $\theta_{(t)}$ as a Function of Time	175
5.38	The dimensionless Temperature $\theta_{(t)}$ as a Function of Time	176
5.39	The Dimensionless Temperature $\theta_{(t)}$ as a Function of Time	177
5.40	The dimensionless Temperature $\theta_{(t)}$ As a Function of Time	177
5.41	Chart of the Linear Functions of $(Ln\theta(t) = -mt + Ln(C))$ At Different Conditions (the Air Heating, Boiling and Steaming conditions)	179
5.42	The time required for the center temperature of the cockle to reach the thermal equilibrium state.[Note: ATL: Laboratory temperature, B: Boiling, S: Steaming, A: Air,CO: Cockle, T: Temperature, RH: Relative Humidity]	181
5.43	Distribution Thermocouple Probe Inside the Crop Chamber	183
5.44	Temperature Profiles Within the Crop Chamber for air Heating Machine (the Heating Air Temperature= 50 °C, Air Velocity = 1 m/s)	184
5.45	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 50 °C, air Velocity = 1.5 m/s)	184
5.46	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 50 °C, Air Velocity = 2 m/s)	185
5.47	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 60 °C, Air Velocity = 1 m/s)	186
5.48	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 60 °C, Air Velocity = 1.5 m/s)	186
5.49	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 60 °C, Air Velocity = 2 m/s)	187
5.50	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 70 °C, Air Velocity = 1 m/s)	187
5.51	Temperature Profiles Within the the Crop Chamber For the air Heating Machine (Heating Air Temperature= 70 °C, Air Velocity = 1.5 m/s)	188
5.52	Temperature Profiles Within the Crop Chamber for the air Heating Machine (Heating Air Temperature= 70 °C, Air Velocity = 2 m/s)	188
5.53	Drawing the hot air heating machine with CATIA software	189
5.54	Temperature Profiles of the Water Inside the Main Heat Exchanger, and the air Temperature Passing Through its Pores (Water Temperature= 80 °C, Air Velocity = 2 m/s)	190
5.55	Temperature Profiles of the Water Inside the Secondary Heat Exchanger, and the air Temperature Passing Through its Pores (Water Temperature= 80 °C, Air Velocity = 2 m/s)	191
5.56	Temperature Profiles Of the Water Inside the Exhaust Heat Exchanger, and the air Temperature Passing Through its Pores (Water Temperature= 80 °C, Air Velocity = 2 m/s)	192
5.57	Temperature Profiles of the Water Inside the Blower Fan Heat Exchanger, and the air Temperature Passing Through its Pores (Water Temperature= 80 °C, Air Velocity = 2 m/s)	193

LIST OF ABBREVIATIONS

<i>ANOVA</i>	Analysis Of Variance	ΔMC	Moisture Changes [%]
<i>DMRT</i>	Duncan's Multiple Range Test	<i>V</i>	Air velocity [m/s]
<i>CRD</i>	Completely Randomized Design	<i>T</i>	Temperature [°C]
<i>RCBD</i>	Randomized Complete Block Design	<i>t</i>	Time [min]
<i>LSD</i>	Least Significant Difference test	<i>L</i>	Length [mm]
<i>SD</i>	Standard Deviation	<i>H</i>	Height [mm]
<i>Df</i>	Degree of Freedom	<i>I</i>	Inflation [mm]
<i>CV</i>	Coefficient of Variation	<i>h</i>	hour
<i>SAS</i>	Statistical Analysis System	<i>cfm</i>	Cubic foot per minute
<i>d.b.</i>	Dry Basis (moisture content)	<i>ns</i>	Not Significant
<i>w.b.</i>	Wet Basis (moisture content)	<i>Re</i>	Reynolds Number
<i>APIL</i>	Agricultural Process and Instrument Laboratory	<i>St</i>	Stanton Number
<i>FE</i>	Faculty of Engineering	<i>M</i>	Mean of Data
V_s	Volume of sample [cm ³]	\dot{Q}	Rat of Heat Transfer
V_{wafs}	Volume of water after falling the sample [cm ³]	\dot{m}	Mass flow Rat
V_{wbfs}	Volume of water before falling the sample [cm ³]	<i>q</i>	Heat Transfer Per Unit Mass
<i>Pr</i>	Prandtl Number	<i>m</i>	Mass
<i>G</i>	Mas Velocity	<i>z</i>	Elevation
D_h	Hydraulic diameter	<i>t</i>	Time (h)
h_a	Heat Transfer Coefficients Air Side	$T1, T2, T3$	Air Temperature
h_w	Heat Transfer Coefficients Water Side	$V1, 2, 3$	Air Velocity
U_a	Overall Heat Transfer	<i>W</i>	Total Work
<i>Q</i>	Total Heat Transfer rate	\dot{W}	Rat of Work
ϵ	Effectvnes, percent	<i>h</i>	Specific Enthalpy
ϵ_{NTU}	Method for Heat Exchanger analyses	<i>H</i>	Total Enthalpy
η	The fin efficiency	<i>k</i>	Specific Heat Ratio
<i>B</i>	Ratio heat transfer area for the fin to the total area	<i>F</i>	Force
<i>MHEWI</i>	Main Heat Exchanger Water Inlet	E_{ff}	Conversion efficiency (%)
<i>MHEWO</i>	Main Heat Exchanger, Water Outlet	<i>K</i>	Equilibrium Constant
<i>MHEAI</i>	Main Heat Exchanger Air Inlet	<i>RM</i>	Malaysian Ringit
<i>MHEAO</i>	Main Heat Exchanger Air Outlet		
<i>SHEWI</i>	Secondary Heat Exchanger, Water Inlet		
<i>SHEWO</i>	Secondary Heat Exchanger, Water Outlet		
<i>SHEAI</i>	Secondary Heat Exchanger Air Inlet		
<i>SHEAO</i>	Secondary Exchanger Air Outlet		
<i>EHEWI</i>	Exhaust Heat Exchanger, Water Inlet		
<i>EHEWO</i>	Exhaust Heat Exchanger, Water Outlet		
<i>EHEAI</i>	Exhaust Heat Exchanger Air Inlet		
<i>EHEAO</i>	Exhaust Heat Exchanger Air Outlet		
<i>FHEWI</i>	Fan Heat Exchanger, Water Inlet		
<i>FHEWO</i>	Fan Heat Exchanger, Water Outlet		
<i>FHEAI</i>	Fan Heat Exchanger Air Inlet		
<i>FHEAO</i>	Fan Heat Exchanger Air Outlet		

CHAPTER 1

GENERAL INTROUCTION

1.1 Background of the study

Cockle (*Anadara Granosa L.*) is one of the important aquatic products and crustaceans in Malaysia. With an annual production of over 100,000 tons per year, their place in the export industry today is of particular importance in the country's national income Narasimham, 1968. Also, it plays an important role in job creation of harvest, transportation, processing and other manufacturing steps to reach the consumer market (Narasimham, 1968 and Shahidi, 1998).

Cockle meat as a protein source is considerable in the diet of many important food groups are low- income cockle role in the diet of pregnant women is of very high importance Narasimham, 1968. Cockles filter one third of the salt-water, which comes into estuaries, also they are as a food for different species of birds plays an important role. Cockle is prepared in different ways in the meat market. According to (Liewa, et al.,1998) In Malaysia, the cockle is popular as an ingredient in several types of local foods. Distribution can be fresh, canned, frozen, or cooked and direct sales and consumption in restaurants are ways through which the consumer's desired method is achieved.

Heating methods of boiling and steaming cockle are traditional methods which are used to separate the meat from the shells. The results may include meat shrinkage, reduce quality and meat marketable (Haniza, 2010). Design have been with regard to content, and not forgetting the environment and nature friendly methods, such as normal heat as hot air heating, indirect water heating systems based on heat transfer. This machine solves all the problems caused by boiling and steaming on the food but also improves its quality.

The physical and mechanical properties of Malaysia cockle were investigated and the design and construction of configurable machine fully adjustable to produce hot air heating system started. At first, the parts were designed by Catia software (Cozzens, 2002). Air distribution in the machine reservoir and flow rate were done to get good results to achieve satisfactory outcomes in the construction phase as well as in the procedural steps to make the machine.

Heat transfer in cockle meat, time and transfer rate are quality factors that have a direct effect on the texture of the meat since heat transfer in cockle meat and reaching thermal equilibrium state in the heating process is important. The foundation of this study was to investigate the changes in body temperature of cockle to reach the equilibrium temperature, the three conditions were analyzed by the Lumped system analysis method (Necati,1985). They include air heating method, boiling and steaming of the cockle. These methods were tested and compared.

Energy is considered as one of the pillars of life. Humans have always been searching to find a way to convert, transfer, and utilize the energy. One of the most important forms of the energy is heat. Actually, the heat change into other types of energy has made significant advances in various fields of human life including the heat transfer which is a significant sector of the human industry (Sukhatme, 2005). The heat transfer has a role in various industries including the food process industries, automotive, aerospace and electronics. Furthermore, it is one of the essential mechanisms in the design considerations and system performance.

A precise temperature control needed during the operation, reduction of fuel consumption and energy conservation, preservation of physicochemical features of food and thus reduction of soil and air pollution are among the significant objectives of this research. Nowadays different types of hot air heating system are used for heating the food products ranging from seeds to the meat. Most fuels used in this machines are fossil fuels and the heat energy is from their direct combustion (Pierre B.1998).

The heat from burning fuels is supplied directly by the airflow through the fan chamber and directly enters the foods. Moreover, the amount of moisture in the food is discharged as the heating process of the foods is along with the direct contact of the produced heat and harmful gases. This action leaves undesirable and unintended effects on the physicochemical properties of the products (Pierre B.1998). Some of the drawbacks of these types of machines include non-constancy of the temperature in the food products compartment space, having no accurate temperature control, contaminating the crop by contacting invisible gases resulted from burning the fuel, more pollution, as well as other environmental issues (Benny,1985.Sylvester ,1989 and Pierre 1998). Irrespective of related shortages, the proposed design for the dryer machine has the subsequent merits:

In this machine, the thermal energy from the hot water is used for heating the food. The main energy source for heating is the hot water, not the heat from the fossil fuels. By using this method, not only the direct contact with harmful gases is cut but also a precise temperature control is maintained resulting in fuel storage. Constant hot water from the water heater is pumped into a close circuit including the heat exchangers.

The heated water is divided after exiting the water heater and passes through the heat exchanger tubes to release its heat with the help of the air circulation and heat converters around the ambient atmosphere of the products; meanwhile, it returns to the water heater to renew its heat energy. In other words, the heat transfer from the hot water results in energy storage, less fuel consumption, and reduced environmental pollution.

Since changes in temperature are less, the food products are less affected by the environmental temperature fluctuations. Furthermore, a quality crop with its original physical and chemical features will be produced for the warehouse and storage to provide a constant temperature and to improve and accelerate the transfer of heat. To provide a constant temperature, as well as improving and accelerating the heat transfer of the heat exchangers and transferring the evaporated moisture to outdoor, a centrifugal blower was used.

Finally the foods of the air velocity, air temperature and flow rate of water within the system at different levels will be carried out on the moisture content of the material, its

physical and mechanical properties also texture, and food quality in completely randomized block design in three replication. The results of the evaluation parameters of the machines and their effects on the food and crop characteristic have been statistically analyzed using RCBD. Furthermore, the means of the measured characteristic of cockle have been compared using the Duncan's multiple range tests.

1.2 Statement of the Problem

Heating is one of the most important process operations for the food products which is mostly expected to reduce the moisture content for the food conservation. For some, food product such as cockle (*Anadara Granosa L.*), and so on, the heating is used not only for conservation purposes, but also for modifying the tastes and flavors in order to increase their market values. Nowadays, different types of hot air heating system are used for different products. Mostly, fuel is used by the machines for air heating the food products (Benny1985, Steffen 1989 and Pierre 1998). The fossil fuel makes the heat energy in the direct combustion (Pierre 1998). The heat from the burning fuels is supplied directly by the airflow through the fan chamber and directed to enter the foods (Pierre 1998). The amount of the moisture content in the foods is discharged during the heating process of the products, along with the direct contact of producing heat and harmful gases (Pierre 1998). This action leaves undesirable and unintended effects on the physicochemical properties of the foods (Pierre 1998).

Cases such as non-constancy of the temperature in the compartment space of the products, lack of precise temperature control, food contamination through contact with invisible gases from burning fuel, more pollution and other environmental issues are considered as the drawbacks of these types of machines.

Existing problems of the current trial hot air heating system can clearly demonstrate the requirement of a specific food and crop heating machine. Therefore, a heating system must able to dry the material without damage having a high capacity and satisfactory heating quality, which is more suitable for agriculture industry. In this thesis, considering the fact that there is no suitable dryer for food product, an attempt is made to design and develop a wide range food and crop heating machine. Then a precise temperature control is needed during the operation, reduction of fuel consumption and energy conservation, preservation of texture features of products and thus reduction of soil and air pollution are among significant objectives of this research.

1.3 Contributions

The main contribution of this research is to improve the existing air heating methods to reduce the energy consumption, minimize the environmental pollution, and enhance the quality of the cockle (*Anadara Granosa L.*).

1.4 Objective

General Objective

- To design, fabricate and evaluate the performance of an efficient hot air heating method.

Specific Objectives

- To save energy and reduce environmental pollution by decreasing the fossil fuel consumption by way of applying hot water heat recirculation
- To provide a closed system for heating the food material independent from the open air conditions.
- To provide a precise temperature control and uniform temperature in the chamber of the product.
- To study the effect of the different heating system on texture and physical characteristics of the cockles
- To compare the texture and physical characteristics, of the cockles between the traditional methods and the new dryer machine

1.5 Scope of Study

This study focuses on two important aspects of food processing:

1. designing, development, and evaluation of a new hot air heating system for energy issues with extra mounted system on a newly and fabricated machine.
2. Food quality

1.6 The Research Framework

The summary of the general steps taken in this thesis are shown in Figure 1.1.

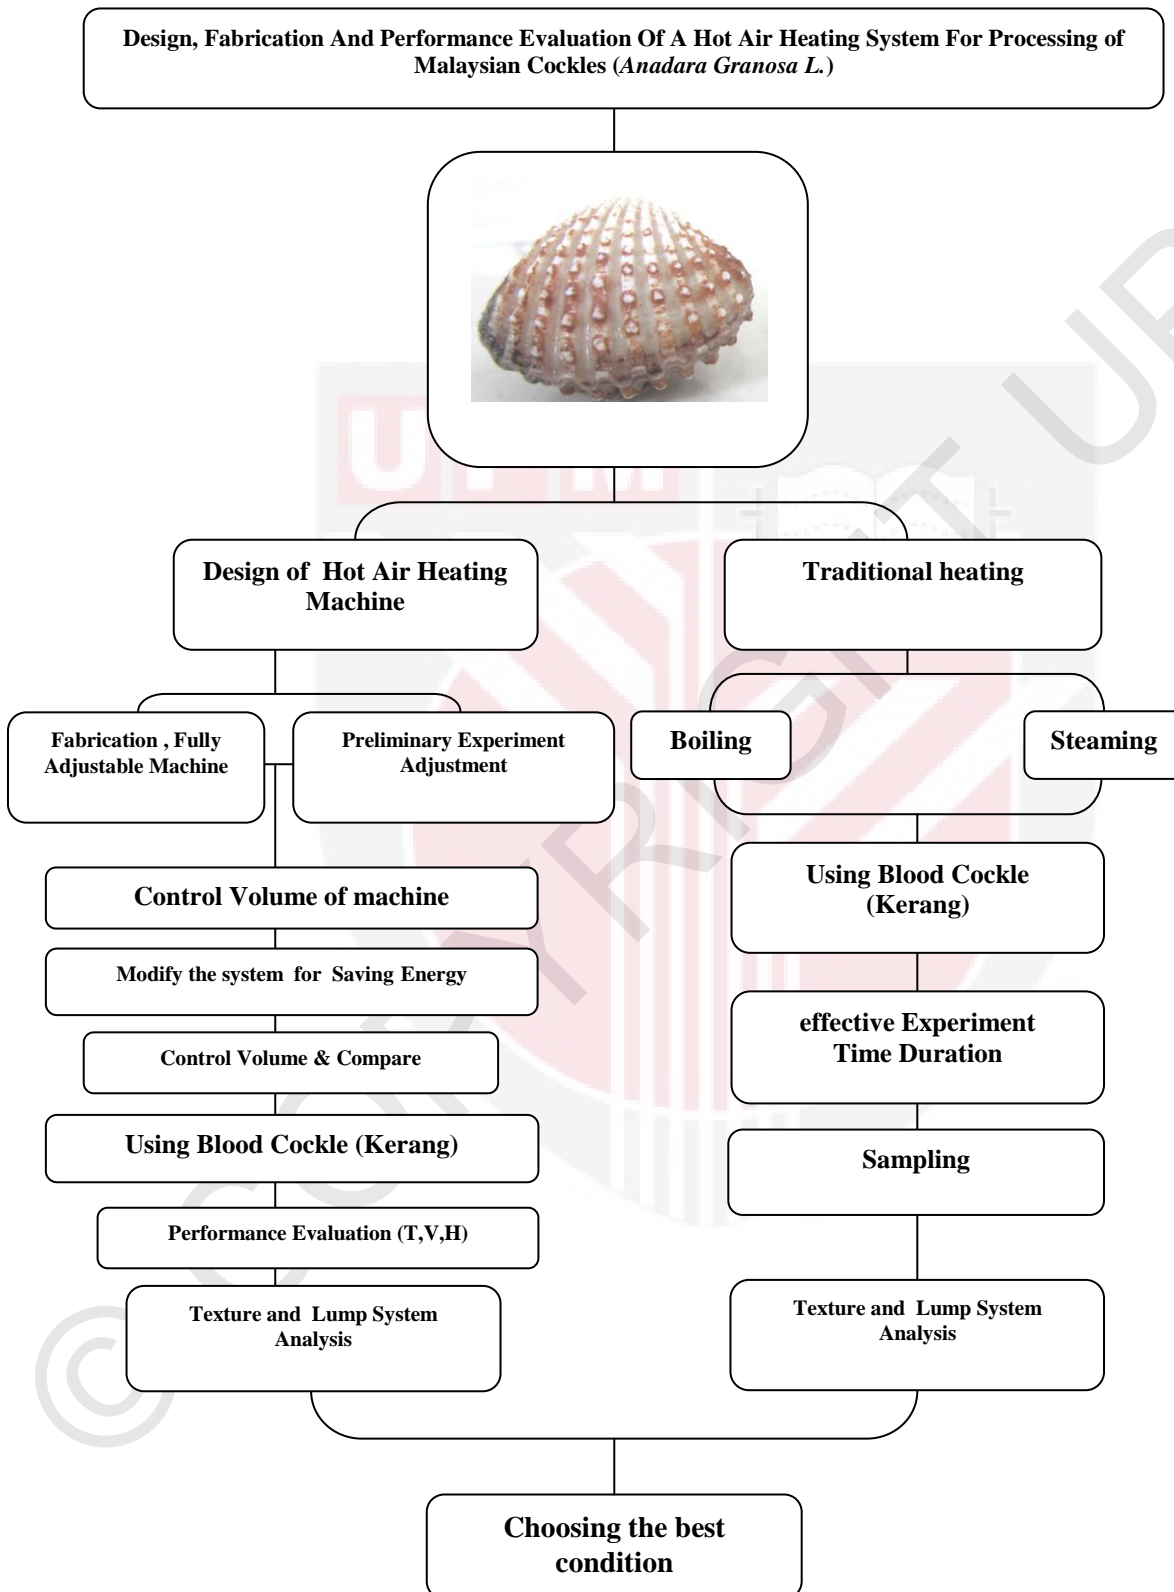


Figure 1.1. Framework of Study

1.7 Outline of the Thesis

The thesis will be organized as follows: Chapter one describes the overview of hot air heating system and objectives of the study. Related literatures will be reviewed and presented in Chapter two. The heat transfer characteristics and factors considered in the design and the development of the hot air heating system have been reported in Chapter three. Materials and methodology used in this research work for evaluation the hot air parameter of machine through the hot water heat transfer and testing of the material, has been illustrated in Chapter four. Comprehensive results has been presented and discussed accordingly in Chapter five. Conclusions have been drawn at the end of the study and lastly suggestions for future work has been illustrated and reported in Chapter six.



REFERENCES

- Abalone, R., A. Cassinera, A. Gastón, & M. A. Lara. (2004). Some physical properties of amaranth seeds. *Biosystems Engineering*, 89(1), 109-117. doi: 10.1016 / j. biosystemseng. 2004.06.012.
- Abbott J A (1999) Quality measurement of fruits and vegetables, *Postharvest Bio Tech*, 15(3), 207–25.
- Abbott J A and BUTA J G (2002) Effect of antibrowning treatment on color and firmness of fresh-cut pears, *J Food Qual*, 25(4), 333–41.
- Abbott J A and LU R (1996) Anisotropic mechanical properties of apples, *Trans Am Soc Agri Eng*, 39(4), 1451–9.
- Albert Ibarz, Gustavo V. Barbosa-Cánovas., 2003. Unit operations in food engineering, CRC Press LLC.
- Abbott J A and MASSIE D R (1993) Nondestructive firmness measurement of apples, *Am Soc Agri Eng Paper* 93-6025, St Joseph, Michigan, ASAE.
- Albert Ibarz, Gustavo V. Barbosa-Cánovas., (2003) Unit Operations in Food Engineering, CRC Press LLC.
- Abbott J A and MASSIE D R (1995) Nondestructive dynamic force/deformation easurement of kiwifruit firmness (*Actinidia deliciosa*), *Trans Am Soc Agri Eng*, 38(6), 1809–12.
- Abbott J A, Massie D R and Watada A E (1982) The use of a computer with an Instron for textural measurements, *J Texture Stud*, 13(4), 413–22.
- Abbott J A, Watada A E and Massie D R (1984) Sensory and instrument measurement of apple texture, *J Am Soc Hort Sci*, 109(2), 221–8.
- Abbott J A, LU R, Upchurch B L and Stroshine R L (1997) Technologies for nondestructive quality evaluation of fruits and vegetables. In *Horticultural Reviews*, Volume 20. Ed. J Janick, New York, John Wiley and Sons Inc, 1–121.
- Alvarez M D and CANET W (2000) Storage time effect on the rheology of refrigerated potatotissue (cv. Monalisa), *Eur Food Res Technol*, 212(1), 48–56.
- Alvarez M D, Saunders D E J, Vincent J F V and Jeronimidis G (2000) An engineering method to evaluate the crisp texture of fruit and vegetables, *J Texture Stud*, 31(4), 457–73.
- ASAE (2000) Compression test of food materials of convex shape, *ASAE Standard: ASAE S368.4*, Am Soc Agri Eng, St Joseph, Michigan, ASAE.

- Bakhtyari, M.R. (2012). Design, Development And Evaluation of A Kenaf Pneumatic Seeding Machine, Universiti Putra Malaysia, Malaysia.
- Benny R., Isbell, (1985). Method And Apparatus For Equilibrium Drying Of Grain United States Patent
- Bleier, F. P. 1998. Fan handbook, selection, application and design. New York: Mcgraw-Hill Publisher
- Bourne M C (1966) Measurement of shear and compression components of puncture tests, *J Food Sci*, 31, 282–91.
- Bourne M C (1968) Texture profile of ripening pears, *J Food Sci*, 33(2), 223–6.
- Berghel, J., & Renstrom, R. (2002). Basic design criteria and corresponding results performance of a pilot-scale fluidized superheated atmospheric condition steam dryer. *Biomass and Bioenergy*, 23, 103–112.
- Bourne M C (1974) Textural changes in ripening peaches, *J Can Inst Food Sci Tech*, 7(1), 11–15.
- Bourne M C (2002) *Food Texture and Viscosity (Second Edition)*. San Diego, Academic Press.
- Beukema J. J. & Dekker R. , 2006. Annual cockle *Cerastoderma edule* production in the Wadden Sea usually fails to sustain both wintering birds and a commercial fishery *Marine ecology. Progress series*. 309, 189-204.
- Bratzler L J (1949) Determining the tenderness of meat by use of the Warner-Bratzler method, *Proc Recip Meat Conf*, 2, 117–21.
- Brusewitz G H, Mccollum T G and Zhang X (1991) Impact bruise resistance of peaches, *Trans Am Soc Agri Eng*, 34(3), 962–5.
- Brusewitz G H, Rigney M P and Anzaldua-Morales A (1997) Fast Fourier transformation analysis of the force-displacement curve as a texture method related to fruit morphology, *J Texture Stud*, 28(5), 503–16.
- Bamgboye, A. I., & O. I. Adejumo. (2009). Physical properties of roselle (*Hibiscus sabdariffa* L) seed. *Agricultural Engineering International: The CIGR EJournal. Manuscript 1154, XI*.
- Chakraverty, A. and Paul Singh, P. 2001. Postharvest technology cereals, pulses, fruits and vegetables. USA: Science Publishers, Inc.

- Chen H and Marks B P (1998) Visible/near-infrared spectroscopy for physical characteristics of cooked chicken patties, *J Food Sci*, 63(2), 279–82.
- Chen P and TJAN Y (1996) A low-mass impact sensor for high-speed firmness sensing of fruits, *AgEng 96 Paper 96F-003*, Madrid, Spain, September 23–26.
- Chen C M and Trout G R (1991) Sensory, instrumental texture profile and cooking properties of restructured beef steaks made with various binders, *J Food Sci*, 56(6), 1457–60.
- David K., 2004. *Texture in food Volume 2: Solid foods*, Boca Raton Boston New York Washington, DC.
- Dabouineau, L. & Ponsero, A., 2009. *Synthesis on biology of Common European Cockle Cerastoderma edule*. Second edition Université Catholique de l'Ouest - Réserve Naturelle Nationale Baie de St-Brieuc, 23 pages.
- Diehl K C, Hamann D D and Whitfield J K (1980) Structural failure in selected raw fruits and vegetables, *J Texture Stud*, 10(4), 371–400.
- Dransfield E, Lockyer D K and Prabhakaran P (1986) Changes in extensibility of raw beef muscle during storage, *Meat Science*, 16(2), 127–42.
- Desprez M., Ducrotoy C.R. & Rybarczyk H., 1989. *Fonctionnement biologique des gisements de coques de la baie de Sommes (France) à la suite du recrutement massif de 1987 : recrutement de 1988 et 1989, environnement bio-sédimentaire*. Picardie R. GEMEL, 42p+annexes
- Dobraszczyk, B. J., & Vincent, J. F.V. (1999). Measurement of mechanical properties of food materials in relation to texture: The materials approach. In A.J. Rosenthal (Ed.), *Food Texture: Measurement and Perception* (pp. 99–151). New York: Aspen.
- Eckhoff S R, SUPAK W A and DAVIS A B (1988) A rapid single-kernel wheat hardness tester, *Cereal Chem*, 65(6), 503–8.
- Egan H, Kirk R. S, and Sawyer R., (1981) *Pearson's Chemical Analysis of Foods* 8th edition. Longman Scientific and Technical.
- Ferry J D (1980) *Viscoelastic Properties of Polymers (Third Edition)*. New York, John Wiley and Sons Inc.
- Fitzpatrick, J. (1998). Sludge processing by anaerobic digestion and superheated steam drying. *Water Research*, 32, 2897–2902.
- Furlong A.M., Sampson H.A., Sicherer S.H. (2004): Prevalence of self-reported seafood allergy in the U.S. *Journal of Allergy and Clinical Immunology*, 113: 100.

- Gaines C S, Finney P F, Fleege L M and Andrews L C (1996) Predicting a hardness measurement using the single-kernel characterization system, *Cereal Chem*, 73(2), 278–9.
- Geankoplis, C. J. (2003) Transport processes and unit operations Fourth Edition. USA: Prentice Hall International, Inc.
- Guillou J., Bachelet G., Desprez M., Ducrotoy J.P., Madani I., Rybarczyk H., Sauriau P.G., Sylvand B., Elkaim B. & Glemarec M., 1990. Les modalités de la reproduction de la coque (*Cerastoderma edule*) sur le littoral français de la Manche et de l'Atlantique. *Aquatic Living resource*. 3, 29-41.
- Gyasi S G, Fridley R B and Chen P (1981) Elastic and viscoelastic Poisson's ratio determination for selected citrus fruits, *Trans Am Soc Agri Eng*, 24(3), 747–50.
- Garnayak, D. K., R. C. Pradhan, S. N. Naik, & N. Bhatnagar. (2008). Moisture-dependent physical properties of jatropha seed (*Jatropha curcas* L.). *Industrial Crops and Products*, 27(1), 123-129.
- Gupta, R. K., G. Arora, & R. Sharma. (2007). Aerodynamic properties of sunflower seed (*Helianthus annuus* L.). *Journal of food engineering*, 79(3), 899-904.
- Gupta, R. K., & S. K. Das. (1997). Physical properties of sunflower seeds. *Journal of Agricultural and Engineering Research*, 66(1), 1-8.
- Gupta, R. K., & S. K. Das. (2000). Fracture resistance of sunflower seed and kernel to compressive loading. *Journal of food engineering*, 46(1), 1-8.
- Hallett I C and Harker F R (1998) Microscopic investigations of fruit texture, *Acta Horticulturae*, 464, 411–16.
- Hansen L R (1972) Development of the Armour tenderometer for tenderness evaluation of beef carcasses, *J Texture Stud*, 3(3), 146–64.
- Haniza, H., Maskat, M. Y., Wan Aida, W. M. and Mamot, S.(2010) The effects of enzyme concentration, temperature and incubation time on nitrogen content and degree of hydrolysis of protein precipitate from cockle (*Anadara granosa*) meat wash water
- Harker F R and Hallett I C (1992) Physiological changes associated with development of mealiness of apple fruit during cooling storage, *HortScience*, 27(12), 1291–4.
- Harker F R and Hallett I C (1994) Physiological and mechanical properties of kiwifruit tissue associated with texture change during cold storage, *J Am Soc Hort Sci*, 119(5), 987–93.

Hancock D.A. & Franklin A., 1972. Seasonal changes in the condition of the edible cockle *Cardium edule* (L.). *Journal of Applied Ecology*. 9, 567-579.

Hensen, B. C., Flores, E. S., Tanksley, T. D., Jr., & Knabe, D. A.(1987). Effect of different heat treatments during processing of soybean meal on nursery and growing pig performance. *Journal of Animal Science*, 65, 1283–1291.

Huidobro F.R., Miguel E., Blazquez B., Onega E. (2005): A comparison between two methods (Warner-Bratzler and texture profile analysis) for testing either raw meat or cooked meat. *Meat Science*, **69**: 527–536.

Harker F R, Maindonald J H and Jackson P J (1996) Penetrometer measurement of apple and kiwifruit firmness: operator and instrument differences, *J Am Soc Hort Sci*, 121(5), 927–36.

Hopkirk G, Maindonald J H and White A (1996) Comparison of four new devices for measuring kiwifruit firmness, *N Z J Crop Hort Sci*, 24(3), 273–86.

IRRIa. 2011. Fixed bed batch dryer. International Rice Research Institute. Available at: www.knowledgebank.irri.org/postproductioncourse/factsheetsNReferences/Drying/Fixed%20bed%20batch%20dryer.doc. Accessed 29 August 2011.

IRRIb. 2011. Paddy drying. International Rice Research Institute. Available at: www.knowledgebank.irri.org/postproductioncourse/factsheetsNReferences/DryingTraining%20Manual%20Paddy%20Drying.doc. Accessed 28 September 2011.

Isik, E. (2007). Some physical and mechanical properties of round red lentil grains. *Applied Engineering in Agriculture*, 23(4), 503-508.

Isik, E. (2008). Effect of moisture content on some physical and mechanical properties of sira bean grains. *Transactions of the ASABE*, 51(2), 573-579.

Isik, E., & N. Izli. (2007). Moisture dependent physical and mechanical properties of dent corn (*Zea mays var. indentata* Sturt.) seeds (Ada-523). *American Journal of Food Technology*, 2(5), 342-353.

Ixtaina, V. Y., S. M. Nolasco, & M. C. Tomás. (2008). Physical properties of chia (*Salvia hispanica* L.) seeds. *Industrial Crops and Products*, 28(3), 286-293.

Izura, S.N.; and Hooi, T.K. (2008). Shaping the future of cockle industry in Malaysia; Maritime Institute of Malaysia. <http://www.seafdec.org.my>. (Accessed: 22nd Feb 2009).

Jack P. Holman. 2010. Heat Transfer, Tenth Edition, New York: McGraw-Hill Book Company.

- Jindal, V.K. and Siebenmorgen, T.J. 1987. Effect of oven drying temperature and drying time on rough rice moisture content determination. *Transactions of the ASAE.*, 30: 1185-1192.
- Johanna G. Baretta-Bekker, Egbert K. Duursma, Bouwe R. Kuipers - Science - 1998 - 357 pages; Encyclopedia of marine sciences
- Karakaya, M. and Ockerman, H. W. 2002. The effects of NaCl-K₂HPO₄, some plant enzymes and oils on the emulsion and water holding capacities in beef. *Gida* 27(1): 21–26.
- Khan A and Vincent J F V (1993) Compressive stiffness and fracture properties of apple and potato paranchyma, *J Texture Stud*, 24(4), 423–35.
- Kabas, O., E. Yilmaz, A. Ozmerzi, & İ. Akinci. (2007). Some physical and nutritional properties of cowpea seed (*Vigna sinensis* L.). *Journal of Food Engineering*, 79(4), 1405-1409.
- Karayel, D. (2009). Performance of a modified precision vacuum seeder for no-till sowing of maize and soybean. *Soil and Tillage Research*, 104(1), 121-125.
- Karayel, D., Z. B. Barut, & A. Özmerzi. (2004). Mathematical modelling of vacuum pressure on a precision seeder. *Biosystems Engineering*, 87(4), 437-444.
- Karayel, D., & A. Özmerzi. (2008). Evaluation of three depth-control components on seed placement accuracy and emergence for a precision planter. *Applied Engineering in Agriculture*, 24(3), 271-276.
- Kays, W.M. and London, A.L. 1964. Compact Heat exchangers. New York: McGraw Hill Book Company.
- Karayel, D., M. Wiesehoff, A. Özmerzi, & J. Müller. (2006). Laboratory measurement of seed drill seed spacing and velocity of fall of seeds using high-speed camera system. *Computers and Electronics in Agriculture*, 50(2), 89-96.
- Koocheki, A., S. M. A. Razavi, E. Milani, T. M. Moghadam, M. Abedini, S. Alamatian, & S. Izadkhah. (2007). Physical properties of watermelon seed as a function of moisture content and variety. *International Agrophysics*, 21(4), 349-359.
- Kramer A (1951) Objective testing of vegetable quality, *Food Technol*, 5(7), 265–9.
- Kristensen I., 1957. Differences in density and growth in a cockle population in the Dutch Wadden Sea. *Arch. Neerl .Zool.* 12, 351-453.
- K. A. Narasimham., 1968. Studies on Some Aspects of Biology And Ushery of the Cockle, *Anadara Granosa* (Linnaeus).

Kerajaan sasar hasil 130000 tan metric kerang. Utusan Malaysia. 15 December 2007. <http://www.seafdec.org.my>. (Accessed: 16th Feb 2009).

Lakhani S, Gullett E A, Ferrier L K and Hill A R (1991) Texture analysis of Cheddar cheese made from ultrafiltered milk, *J Food Qual*, 14(3), 257–71.

Li X.Y., Li Z.-X., Lin H., Samee H. (2011): Effect of power ultrasound on the immunoactivity and texture changes of shrimp (*Penaeus vannamei*). *Czech J. Food Sci.*, 29: 508–514.

Lehman-Salada L (1996) Instrument and operator effects on apple firmness readings, *HortScience*, 31(6), 994–7.

Lemoigne M., Desprez M. & Ducrotoy J.P., 1988. *Exploitation des ressources en bivalves de la baie de Somme. Aménagement de la pêche à pied et état de la ressource en coques*. IFERMER, 177p. 22

Lepetit J and Culioli J (1994) Mechanical properties of meat, *Meat Science*, 36(1/2), 203–37.

L.Dabouineau and A. Ponsero (2010) Synthesis on biology of Common European Cockle *Cerastoderma edule*. Laboratoire de Biologie et Ecologie, Université U.C.O. Bretagne Nord BP 90431 F-22200 Guingamp-France Réserve Naturelle Nationale de la baie de Saint-Brieuc - Site de l'étoile F-22120 Hillion- France

LU R and Abbott J A (1995) A transient method for determining dynamic viscoelastic properties of solid foods, *Trans Am Soc Agri Eng*, 39(4), 1461–7.

LU R and Siebenmorgen T J (1995) Correlation of head rice yield to selected physical and mechanical properties of rice kernels, *Trans Am Soc Agri Eng*, 38(3), 889–94.

LU R, Chen Y R, Solomon M B and Berry B W (1998) Tensile properties and Warner-Bratzler tenderness measurement of raw and cooked beef, *Trans Am Soc Agri Eng*, 41(5), 1431–9.

Maehashi, K., Matsuzaki, M., Yamamoto, Y. and Udaka, S. 1999. Isolation of peptides from an enzymatic hydrolysate of food proteins and characterization of their taste properties. *Bioscience Biotechnology and Biochemistry* 63(3): 555–559.

Maier, D.E. and Bakker-Arkema, F.W. Grain drying systems. Facility Design Conference of the Grain Elevator and Processing Society. Illinois. July 2002.

Mayor L., & Sereno, A.M. (2004). Modelling shrinkage during convective drying of food material: A review. *Journal of Food Engineering*, 61, 373–386.

Mohsenin, N. N. (1970). *Physical properties of plant and animal materials* (Vol. Volume I): Gordon and Breach Science Publishers.

Mohsenin, N. N. (1986). *Physical properties of plant and animal materials* (2nd ed.): Gordon and Breach Science Publishers, New York.

Measurement of Moisture Content in meat and meat Products., (1997) (Australian Meat Technology) and (*Meat Research Corporatio*)

Mafuleka M M, Ott D B, Hosfield G L and Uebersax M A (1991) Dry bean (*Phaseolus vulgaris*) hardening and the consequences of pectin methylensterase activity in storage, *J Food Proc Preservation*, 15(1), 1–18.

Martin C R, Rousser R And Brabec D L (1993) Development Of A Single-Kernel Wheat Characterization System, *Trans Am Soc Agri Eng*, 36(5), 1399–404.

Mcfarlane P G and Marer J M (1966) An apparatus for determining the tenderness of meat, *Food Technol*, 20(6), 838–9.

Mulet, A., Tarrazo, J., Garcia-Reverter, J., & Berna A. (1997). Shrinkage of cauliflower florets and stems during drying. In R. Jowitt (Ed.), *Engineering of Food at ICEF 7* (pp. 97–100). Sheffield, UK: Sheffield Academic Press.

Mohsenin N N (1989) *Physical Properties of Plant and Animal Materials*, (*Second Edition*). New York, Gordon and Breach Science Publisher.

Mohsenin N N, Cooper H E, Hammerle J R, Fletcher S W and Tukey L D (1965) “Readiness for harvest” of apples as affected by physical and mechanical properties of the fruit, *Penn State Univ Agri Exp Sta Bul*, 721.

Mohsenin N N, Jindal V K and Manor A N (1978) Mechanics of impact of a falling fruit on a cushioned surface, *Trans Am Soc Agri Eng*, 21(3), 594–600.

Moiny V, Meullenet J F and Xiong R (2002) Uniaxial compression of Cheddar cheese at various loading rates and its correlation to sensory texture profiles, *J Texture Stud*, 33(3), 237–54.

Mutungi G, Purslow P and Warkup C (1995) Structural and mechanical changes in raw and cooked single porcine muscle fibers extended to fracture, *Meat Science*, 40(2), 217–34.

Necati Özişik M. 1985. Heat Transfer A Basic Approach. New York: McGraw Hill Book Company.

Official methods of Analysis of the Association of Official Analytical Chemists' (1984) 14th edition. Edited by S. Williams AOAC: Arlington, Virginia.

Osella, C. A., Gordo, N. A., Gonza´lez, R. J., Tosi, E., & Re´, E. (1997). Soybean heat-treated using a fluidized bed. *Lebensmittel- Wissenschaft und-Technology*, 30, 676–680.

- Özgülven, F., & K. Vursavuş. (2005). Some physical, mechanical and aerodynamic properties of pine (*Pinus pinea*) nuts. *Journal of Food Engineering*, 68(2), 191-196.
- Pliestic, S., N. Dobricevic, D. Filipovic, & Z. Gospodaric. (2008). Influence of moisture content on physical and mechanical properties of almond (*Prunus dulcis* CV. *FRA GIULIO GRANDE*). *Transactions of the ASABE*, 51(2), 653-659.
- Pierre B. (1998). Grain Drying System And Method, United States Patent
- P. A. Ayres. 1979, Heat Processing of cockle, Lab. Leaflet, MAFF Direct. Fish. Res., Lowestoft (46) 14 pp, Burnham-on-Crouch.
- Penfield M P, Barker C L and Meyer B H (1976) Tensile properties of beef semitendinosus muscle as affected by heating rate and end point temperature, *J Texture Stud*,7(1),77– 85.
- Prachayawarakorn, S., Soponronnarit, S., Wetchagama, S., & Jaisut, D. (2002). Desorption isotherms and drying characteristics of shrimp in superheated steam and hot air. *Drying Technology*, 20, 669–684.
- Petrell R J, Mohsenin N N and WALINER S (1980) Dynamic mechanical properties of the apple cortex in relation to sample location and ripening, *J Texture Stud*, 10(3), 217–29.
- Perez, M.G.R., & Calvelo, A. (1984). Modeling the thermal conductivity of cooked meat. *Journal of Food Science*, 49, 152–156.
- Pelan induk pembangunan Malaysia 2005, www.bernama.com, selangor maju pembangunan pertanian.htm. (Accessed: 14th Feb 2009).
- Potter, N.N. (1986). *Food Science*. AVI Publication, CT, USA. Phillips D M (1992) A new technique for measuring meat texture and tenderness. In *Proceedings of the 38th ICoMST*, Clermont-Ferrand, France, 959–62.
- Purslow P P (1991) Measuring meat texture and understanding its structural basis. In *Feeding and the Texture of Food*, Eds J F V Vincent and P J Lillford Cambridge, Cambridge University Press, 35–56.
- Radha, C., Kumar, P.R. and Prakash, V. 2007. Preparation and characterization of a protein hydrolysate from an oilseed flour mixture. *Food Chemistry* 106: 1166-1174.
- Raghavan, G.S. V., Rennie, T.J., Sunjka, P.S., Orsat, V., Phaphuangwittayakul, W. and Terdtoon, P. 2005. Overview of new techniques for drying of biological materials with emphasis on energy aspects. *Brazilian Journal of Chemical Engineering*, 22: 195–201.

- Ramon M., 2003. Population dynamics and secondary production of the cockle *Cerastoderma edule* (L.) in backbarrier tidal flat of the Wadden. *Sea. Sci.Mar.*, 67(4), 429-443.
- Rahman, M.S., Perera, C.O., Chen, X.D., Driscoll, R.H., & Potluri, P.L. (1996) Density, shrinkage and porosity of calamari mantle meat during air drying in a cabinet dryer as a function of water content. *Journal of Food Engineering*, 30, 135–145.
- Rao M A and Steffe J F (1992) *Viscoelastic Properties of Foods*. New York, Elsevier Applied Science.
- Raghavan, G. S. V., & Harper, J. M. (1974). Nutritive value of salt-bed roasted soybean for broiler chicks. *Poultry Science*, 53, 547–553.
- R,Cozzens. B, Griffiths. 2002, CATIA V5 Basic WorkbookSouthern Utah University
- Rodrigo C, Rodrigo M, Fizman S and Sanchez T (1997) Thermal degradation of green asparagus texture, *J Food Protection*, 60(3), 315–20.
- Rich, E. C., & A. A. Teixeira. (2005). Physical properties of mucuna (velvet) bean. *Applied Engineering in Agriculture* 21(3), 437-443.
- Rechard E. Sonntag, Claus Borgnakke, and Gordon J. Van Wylen. 2002. Fundamentals of Termodinamics, Sixth Edition, United States of America: WILEY.
- Reise K., 1985. *Tidal Flat Ecology: An Experimental Approach to Species Interactions*. Springer-Verlag, Berlin.
- Siamak, Kazemzadeh. et al, 2005. An Introduction to Heat Transfer Sharif University (IRAN)
- Sukhatme, S. P. 2005. A Textbook on Heat transfer, University Press (INDIA).
- Soponronnarit, S., Swasdisevi, T., Wetchacama, S., & Wutiwiwatchai, W. (2001). Fluidised bed drying of soybean. *Journal of Stored Products Research*, 37, 133–151.
- Shahidi, F. 1998. Flavor of meat, meat products and seafoods. 2nd Ed. Blackie Academic and Professional,UK.
- Stewart, O. J., Raghavan, G. S. V., Orsat, V., & Golden, K. D. (2003) The effect of drying on unsaturated fatty acids and trypsin inhibitor activity in soybean. *Process Biochemistry*, 39, 483–489.
- Sacilik, K., R. Öztürk, & R. Keskin. (2003). Some physical properties of hemp seed. *Biosystems Engineering*, 86(2), 191-198. doi: doi: 10.1016 / S1537-5110 (03) 00130-2.

- Sánchez-Mendoza, J., A. Domínguez-López, S. Navarro-Galindo, & J. A. López-Sandoval. (2008). Some physical properties of roselle (*Hibiscus sabdariffa* L.) seeds as a function of moisture content. *Journal of Food Engineering*, 87(3), 391-397.
- Seed R. & Brown R.A., 1978. Growth as a strategy for survival in two marine bivalves, *Cerastoderma edule* and *Moiolus modiolus*. *J.Anim.Ecol.* 47, 283-292.
- Seed R. & Brown R.A., 1977. A comparison of the reproductive cycles of *Modiolus modiolus* (L.), *Cerastoderma (=Cardium) edule* (L.), and *Mytilus edulis* L. in Strangford Lough, Northern Ireland. *Oecologia.* 30, 177-188.
- Singh, H., H. L. Kushwaha, & D. Mishra. (2007). Development of seed drill for sowing on furrow slants to increase the productivity and sustainability of arid crops. *Biosystems Engineering*, 98(2), 176-184.
- Schoorl D and Holt J E (1983) A practical method for tensile testing of apple tissue, *J Texture Stud* 14(2), 155–64.
- Stanley, D.W. (1983) Relation of structure to physical properties of animal material. In: *Physical Properties of Foods* (eds M. Peleg and E.B. Bagley). AVI Publishing Co. Inc., CT, USA, p. 157.
- Stadnik J., Dolatowski Z.J., Baranowska H.M. (2008): Effect of ultrasound treatment on water holding properties and microstructure of beef (*m. semimembranosus*) during ageing. *Food Science and Technology*, 41: 2151–2158.
- Sicherer S.H., Munoz–Furlong A., Sampson H.A. (2004): Prevalence of seafood allergy in the united states determined by a random telephone survey. *Journal of Allergy and Clinical Immunology*, 114: 159–165.
- Sathe S.K., Teuber S.S., Roux K.H. (2005): Effects of food processing on the stability of food allergens. *Biotechnology Advances*, 23: 423–429.
- Sherman P (1970) *Industrial Rheology with Particular Reference to Foods, Pharmaceuticals, and Cosmetics*. New York, Academic Press.
- Smith G C and Carpenter Z L (1973) Mechanical measurements of meat tenderness using the NIP Tenderometer, *J Texture Stud*, 4(2), 196–203.
- Strange E D and Whiting R C (1998) Effect of temperature on collagen extractability and Kramer shear force of restructured beef, *J Food Sci*, 53(4), 1224–5, 1233.
- Studman C J and Yuwana (1992) Twist test for measuring fruit firmness, *J Texture Stud*, 23(2), 215–27.
- Suhendro E L, Almeida-Dominguez H D, Rooney L W, Waniska R D and Moreira R G (1998) Tortilla bending technique: an objective method for corn tortilla texture measurement, *Cereal Chem*, 75(6), 854–8.

- Singh, K. K., & T. K. Goswami. (1996). Physical properties of cumin seed. *Journal of Agricultural and Engineering Research*, 64(2), 93-98.
- Singh, K. K., B. S. Reddy, A. C. Varshney, & S. Mangraj. (2004). Physical and frictional properties of orange and sweet lemon. *Applied Engineering in Agriculture*, 20(6), 821-825.
- Singh, R. C., G. Singh, & D. C. Saraswat. (2005). Optimisation of design and operational parameters of a pneumatic seed metering device for planting cottonseeds. *Biosystems Engineering*, 92(4), 429-438.
- Somkiat, P. & Paveena, P. & Somchart, S. 2005 Heating process of soybean using hot-air and superheated-steam fluidized-bed dryers. , *LWT* 39 (2006) 770–778
- Sylvester L. Steffen, (1989). Method And Apparatus For Controlling The Drying And Cooling Of Field-Harvested Seeds In Storage, United States Patent
- Tajaddodi Talab, K. (2012). Fixed-Bed Drying of Rice With Airflow Reversal For Product Quality And Drying Performance, Universiti Putra Malaysia, Malaysia.
- Thomas K., Guicheney C.H., Ladics G., Bannon G., Cockburn A., Crevel R., Fitzpatrick J., Mills C., Privalle L., Vieths S. (2007): Evaluating the effect of food processing on the potential human allergenicity of novel proteins: International workshop report. *Food and Chemical Toxicology*, 45: 1116–1122.
- Tabilo G., Flores M., Fiszman S.M., Toldra F. (1999): Postmortem meat quality and sex affect textural properties and protein breakdown of dry-cured ham. *Meat Science*, 51: 255–260.
- Taechapiroj, C., Prachayawarakorn, S., & Soponronnarit, S. (2004). Characteristics of rice dried in superheated-steam fluidized bed. *Drying Technology*, 22, 719–743.
- Tang, Z., & Cenkowski, S. (2000). Dehydration dynamics of potatoes in superheated steam and hot air. *Canadian Agricultural Engineering*, 42, 6.1–6.12.
- Topin, F., & Tadrist, L. (1997). Analysis of transport phenomena during the convective drying in superheated steam. *Drying Technology*, 15, 2239–2261.
- Van Hecke E, Alla K and Bouvier J M (1995) Texture and structure of crisp-puffed food products. I. Mechanical properties in bending, *J Texture Stud*, 26(1), 1–25.
- Vincent J F V, Jeronimidis G, Khan A A and Luyten H (1991) The wedge fracture test: a new method for measurement of food texture, *J Texture Stud*, 22, 45–57.
- Voisey P W (1971) The Ottawa texture measuring system, *Can Inst Food Technol J*, 4(3), 91–103.

- Voisey P W (1976) Engineering assessment and critique of instruments used for meat tenderness evaluations, *J Texture Stud*, 7(1), 11–48.
- Volodkevich N N (1938) Apparatus for measurement of chewing resistance or tenderness of foodstuff, *Food Res*, 3, 221–5.
- West A. D., Yates M. G., McGrorty S. & Stillman R. A., 2007. Predicting site quality for shorebird communities: A case study on the Wash embayment, UK. *Ecological Modelling*. 202, 527-539.
- Wouters A and DE Baerdemaeker J G (1988) Effect of moisture content on mechanical properties of rice kernels under quasi-static compressive loading, *J Food Eng*, 7(2) 83–111.
- Wut and Abbott J A (2002) Firmness and force relaxation characteristics of tomatoes stored intact or as slices, *Postharvest Bio Tech*, 24(1), 59–68.
- Warrenl. McCabe, Juiian C. Smitll, Peter Harriott. (1993) Unit Operations of Chemical Engineering Fifth Edition. McGraw-Hill Book Company.
- W.S. Liewa, J.J. Leisnera ,b ,G. Rusula, S. Raduc, A. Rassipd,1998. Survival of *Vibrio* spp. including inoculated *V. cholerae* 0139 during heat-treatment of cockles (*Anadara granosa*), *International Journal of Food Microbiology*.
- Zewdu, A. D. (2007). Aerodynamic properties of tef grain and straw material. *Biosystems Engineering*, 98(3), 304-309.
- Zewdu, A. D., & W. K. Solomon. (2007). Moisture-dependent physical properties of tef seed. *Biosystems Engineering*, 96(1), 57-63.
- Zhang M and Mittal G S (1993) Measuring tenderness of meat products by Warner-Bratzler shear press, *J Food Processing and Preservation*, 17(5), 351–67.
- Zhang X and Brusewitz G H (1991) Impact force model related to peach firmness, *Trans Am Soc Agri Eng*, 34 (5), 2094–8.
- Zhang X, Stone M L, Chen D, Maness N O and Brusewitz G H (1994) Peach firmness determination of puncture resistance, drop impact, and sonic impulse, *Trans Am Soc Agri Eng*, 37 (2), 495–500.
- Yang X.M., Liu Q.M., Luo H.B., Yang L.M., Yu Z.F. (2006): Tenderizing effect of ultrasonic wave combined with tenderizer on dried prawns. *Transactions of the CSAE*, 22: 267–269.