

## **UNIVERSITI PUTRA MALAYSIA**

## MATHEMATICAL MODELING FOR BOUNDARY LAYER FLOW OVER A STRETCHING OR SHRINKING CYLINDER

## **NAJWA BINTI MOHD NAJIB**

IPM 2014 7



# MATHEMATICAL MODELING FOR BOUNDARY LAYER FLOW OVER A STRETCHING OR SHRINKING CYLINDER


By

NAJWA BINTI MOHD NAJIB

Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia, in Fulfillment of the Requirements for the Degree of Master of Science All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



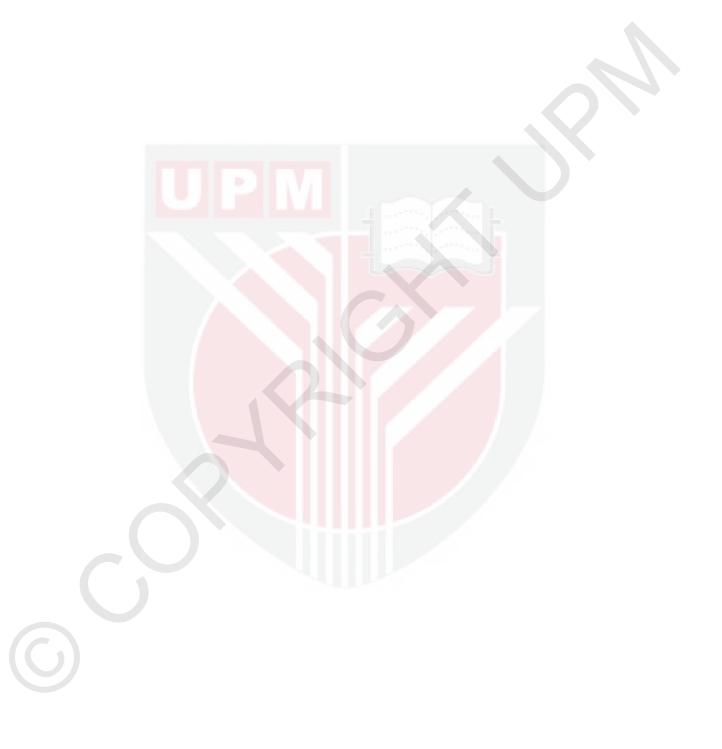

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

## MATHEMATICAL MODELING FOR BOUNDARY LAYER FLOW OVER A STRETCHING OR SHRINKING CYLINDER

By

#### NAJWA BINTI MOHD NAJIB

August 2014

Chair: Norfifah bt Bachok@Lati, PhD Faculty: Institute for Mathematical Research

In this study, the steady boundary layer flow, mass transfer and heat transfer of a cylinder near the stagnation point over a stretching or shrinking sheet are investigated numerically. The governing nonlinear partial differential equations are transformed into a system of nonlinear ordinary differential equations using a similarity transformation which is then solved numerically using a shooting method. The numerical results are presented in tables or graphs for the skin friction coefficient, the local Nusselt number and the local Sherwood number as well as the velocity, temperature and concentration profiles for a range of various parameters such as stretching or shrinking parameter  $\varepsilon$ , curvature parameter  $\gamma$ , Prandtl number Pr, Schmidt number Sc, reaction rate parameter  $\beta$  and suction or injection parameter  $f_0$ . It is observed that the skin friction coefficient, the local Nusselt number which represents the heat transfer rate at the surface and the local Sherwood number are significantly influenced by these parameters. The results indicate that dual solutions exist for a shrinking cylinder. The results also indicate that suction increases the range in which the solution exists, while injection acts in the opposite manner. On the other hand, the increase of the curvature parameter cause the skin friction coefficient, the heat and mass transfer rate at the surface to increase.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

#### PEMODELAN BERMATEMATIK BAGI ALIRAN LAPISAN SEMPADAN MELALUI SILINDER YANG MEREGANG ATAU MENGECUT

Oleh

#### NAJWA BINTI MOHD NAJIB

**Ogos 2014** 

Pengerusi: Norfifah bt Bachok@Lati, PhD Fakulti: Institut Penyelidikan Matematik

Dalam kajian ini, aliran lapisan sempadan mantap, pemindahan jisim dan pemindahan haba bagi silinder berdekatan titik genangan pada permukaan meregang atau mengecut dikaji secara berangka. Persamaan pembezaan separa tak linear dijelmakan kepada sistem persamaan pembezaan biasa tak linear menggunakan penjelmaan keserupaan yang seterusnya diselesaikan secara berangka dengan menggunakan kaedah tembakan. Keputusan berangka dipersembahkan dalam bentuk jadual atau graf bagi pekali geseran kulit, nombor Nusselt setempat dan nombor Sherwood setempat serta profil halaju, suhu dan kepekatan dalam julat tertentu pelbagai parameter, seperti parameter regangan atau mengecut  $\varepsilon$ , parameter kelengkungan  $\gamma$ , nombor Prandtl Pr, nombor Schmidt Sc, parameter kadar tindak balas  $\beta$  dan parameter sedutan atau semburan  $f_0$ . Didapati bahawa pekali geseran kulit, nombor Nusselt setempat yang mewakili kadar pemindahan haba pada permukaan dan nombor Sherwood oleh parameter-parameter tersebut. dipengaruhi menunjukkan bahawa wujudnya penyelesaian dual bagi silinder yang mengecut. Keputusan juga menunjukkan sedutan meningkatkan julat kewujudan penyelesaian mengecut, manakala semburan bertindak balas sebaliknya. Selain itu, peningkatan parameter kelengkungan menyebabkan pekali geseran kulit, kadar pemindahan haba dan jisim pada permukaan adalah meningkat.

#### **ACKNOWLEDGEMENTS**

In the name of Allah, the Most Gracious, the Most Merciful. Salam and salawat upon Prophet Muhammad S.A.W. Alhamdulillah, thanks to Allah for blessing me with the will power and dedication to complete this thesis.

First and foremost I wish to express my deepest gratitude to my supervisor, Dr. Norfifah Bachok, my co-supervisor, Assoc. Prof. Dr. Norihan Md. Arifin who taught me how to conduct a good research and encouraged me throughout the course of this study.

Nevertheless, I also want to extend my sincere thanks to the staff and lecturers of the Institute for Mathematical Research (INSPEM), Universiti Putra Malaysia, for their great assistance and continuous help.

For my beloved family; I thank my husband, Mohd Hafizi for the unconditional love and encouragement throughout the entire period of my study. To my son, Muhammad Hami thanks for being a good son and sorry because of the lack time together. To my parents and siblings, thank you for all the support during my study.

Last but not least, I would like to thank all for their helping in completing my thesis. May God bless all. Thank you.

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

## Norfifah Bachok@Lati, PhD

Senior Lecturer Faculty of Science Universiti Putra Malaysia (Chairman)

### Norihan Md. Arifin, PhD

Associate Professor Faculty of Science Universiti Putra Malaysia (Member)

## **BUJANG BIN KIM HUAT, PhD**

Professor and Dean School of Graduate Studies Universiti Putra Malaysia

Date:

#### **Declaration by graduate student**

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature:	Date:	
Name and Matric No.: Najwa binti Mohd Najib		

## **Declaration by Members of Supervisory Committee**

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature:	Signature:	
Name of	Name of Member	
Chairman of	of Supervisory	
Supervisory	Committee:	
Committee:		

## TABLE OF CONTENTS

			Page
APPRO DECLA LIST O LIST O	<i>AK</i> OWLEDGE	S	i ii iii iv vi x xi xiv
CHAPT			
1	1.3 1.4 1.5 1.6	Introduction Research Background 1.2.1 Stagnation Point Flow 1.2.2 Stretching or Shrinking Sheet 1.2.3 Cylinder Problem Statements Objectives and Scope of the Thesis Significance of Study Outline of the Thesis	1 2 2 2 3 3 3 4 4
2	LITE	RATURE REVIEW	
_	2.1	Introduction	6
	2.2	Stagnation Point Flow	6
	2.3	Chemical Reaction Effects on Boundary	
		Layer Flow	7
	2.4	Suction or Injection Effects on Boundary	
		Layer Flow	8
	2.5	Effects of Prescribed Surface Heat Flux on	
		Boundary Layer Flow	8
	2.6	Boundary Layer Flow over a Cylinder Surface	9
	2.7	Numerical Method	10
3	GOV	ERNING EQUATIONS AND METHODOLOG	V
	3.1	Introduction	11
	3.2	Governing Equations	11
	3.3	Similarity Transformation	13
	3.4	Boundary Conditions	21
	3.5	Numerical method: Shooting Technique	22

4	STAGNATION POINT FLOW AND MASS TRANSFER WITH CHEMICAL REACTION PAST A STRETCHING OR SHRINKING CYLINDE	CR CR
	4.1 Introduction	24
	4.2 Mathematical Formulation	24
	4.3 Result and Discussion	25
	4.4 Conclusion	33
5	STAGNATION POINT FLOW OVER A STRETCHING OR SHRINKING CYLINDER WITH PRESCRIBED SURFACE HEAT FLUX	
	5.1 Introduction	34
	5.2 Mathematical Formulation	34
	5.3 Result and Discussion	35
	5.4 Conclusion	40
7	STAGNATION POINT FLOW AND HEAT TRANSFER OVER AN EXPONENTIALLY SHRINKING CYLINDER 6.1 Introduction 6.2 Mathematical Formulation 6.3 Result and Discussion 6.4 Conclusion  STAGNATION POINT FLOW AND HEAT TRANSFER OVER AN EXPONENTIALLY SHRINKING CYLINDER WITH SUCTION OR INJECTION 7.1 Introduction 7.2 Mathematical Formulation 7.3 Result and Discussion 7.4 Conclusion	41 42 48 49 49 50 57
0		57
8	CONCLUSION	<b>50</b>
	8.1 Summary of Research	58
	8.2 Future Work	59
		60 67 94 95

## LIST OF TABLES

Table		Page
4.1	Comparison of the values of skin friction coefficient $f''(0)$ for several values of $\varepsilon$ and $\gamma$	26
4.2	Variations of $\varepsilon_c$ with curvature parameter $\gamma$	26
5.1	Variations of $\varepsilon_c$ with curvature parameter $\gamma$	35
5.2	Values of $f$ "(0) for different values of $\gamma$ and $\varepsilon$ when $Pr = 1$ .	35
5.3	Values of $1/\theta(0)$ for different values of $\gamma$ and $\varepsilon$ when $Pr = 1$ .	35
6.1	Variations of $\varepsilon_c$ with curvature parameter $\gamma$	43
7.1	Variations of $\varepsilon_c$ for different values of $f_0$ and $\gamma$	50

## LIST OF FIGURES

Figure		Page
3.1	Physical model and coordinate system for a) stretching cylinder and b) shrinking cylinder	12
4.1	Skin friction coefficient $f''(0)$ as a function of $\varepsilon$ for various values of $\gamma$	28
4.2	Variation of $-\phi'(0)$ with $\varepsilon$ for various values of $\gamma$ when Sc = 1 and $\beta$ = 1	28
4.3	Variation of $-\phi'(0)$ with $\varepsilon$ for various values of $Sc$ when $\beta = 0$ and $\gamma = 0.2$	29
4.4	Variation of $-\phi'(0)$ with $\varepsilon$ for various values of $\beta$ when $Sc = 0.5$ and $\gamma = 0.2$	29
4.5	Velocity profiles $f'(\eta)$ for various of $\gamma$ when $\beta = 1$ and $\varepsilon = -1.2$	30
4.6	Concentration profiles $\phi(\eta)$ for various of $\gamma$ when $\beta = 1, \varepsilon = -1.2$ and $Sc = 0.5$	30
4.7	Concentration profiles $\phi(\eta)$ for various of $Sc$ when $\beta = 1$ , $\varepsilon = -1.2$ and $\gamma = 0.2$	31
4.8	Concentration profiles $\phi(\eta)$ for various of $\beta$ when $\varepsilon = -1.2$ , $\gamma = 0.2$ and $Sc = 0.5$	31
4.9	Velocity profiles $f'(\eta)$ for various of $\varepsilon$ when $\beta = 1$ and $\gamma = 0.2$	32
4.10	Concentration profiles $\phi(\eta)$ for various of $\varepsilon$ when $\beta = 1, \gamma = 0.2$ and $Sc = 1$	32
5.1	Skin friction coefficient $f''(0)$ as a function of $\varepsilon$ for various values of $\gamma$	r 37
5.2	Variation of the surface temperature $\theta(0)$ with $\varepsilon$ for values of $\gamma$ when $Pr=1$	r 37

5.3	Variations of $f$ "(0) and $\theta$ (0) with $\gamma$ for $Pr = 0.7$ and $Pr = 7$	38
5.4	Velocity profiles $f'(\eta)$ for different values of $\gamma$ when $\varepsilon = -1.2$	38
5.5	Temperature profiles $\theta(\eta)$ for different values of $\gamma$ when $Pr = 1$ and $\varepsilon = -1.2$	39
5.6	Temperature profiles $\theta(\eta)$ for different values of $\gamma$ when $Pr = 0.7$ and $\varepsilon = -1.2$	39
5.7	Temperature profiles $\theta(\eta)$ for different values of $Pr$ when $\gamma = 0.2$ and $\varepsilon = 0.4$	40
6.1	Skin friction coefficient $f''(0)$ as a function of $\varepsilon$ for various values of $\gamma$	44
6.2	Wall temperature gradient $-\theta'(0)$ as a function of $\varepsilon$ for various values of $\gamma$	44
6.3	Dual velocity profiles $f'(\eta)$ for various values of $\varepsilon$	45
6.4	Dual temperature profiles $\theta(\eta)$ for several values of $\varepsilon$	45
6.5	Unique velocity profiles $f'(\eta)$ for various values of $\varepsilon$	46
6.6	Unique temperature profiles $\theta(\eta)$ for various values of $\varepsilon$	46
6.7	Dual temperature profiles $\theta(\eta)$ for several values of $Pr$	47
6.8	Velocityprofiles $f'(\eta)$ for various of $\gamma$ when $\varepsilon = -1.4$	47
6.9	Temperature profiles $\theta(\eta)$ for various of $\gamma$ when $\varepsilon = -1.4$ and $Pr = 1$	48
7.1	Skin friction coefficient $f''(0)$ as a function of $\varepsilon$ for various values of $f_0$	52

7.2	Wall temperature gradient $-\theta'(0)$ as a function of $\varepsilon$ for various values of $f_0$	52
7.3	Variation of the skin friction coefficient $f''(0)$ with $f_0$ for $\varepsilon = -1.1$ , $Pr = 1$ and $\gamma = 0.2$ , 0.4	53
7.4	Variation of $-\theta'(0)$ with $f_0$ for $\varepsilon = -1.1$ , $Pr = 1$ and $\gamma = 0.2$ , 0.4	53
7.5	Velocity profiles $f'(\eta)$ for several values of $f_0$	54
7.6	Temperature profiles $\theta(\eta)$ for several values of $f_0$	54
7.7	Velocity profiles $f'(\eta)$ for various of $\gamma$ when $f_0 = -0.2$ and $\varepsilon = -1.2$	55
7.8	Temperature profiles $\theta(\eta)$ for various of $\gamma$ when $f_0 = -0.2$ , $\varepsilon = -1.2$ and $Pr = 1$	55
7.9	Velocity profiles $f'(\eta)$ for various of $\gamma$ when $f_0 = 0.2$ and $\varepsilon = -1.2$	56
7.10	Temperature profiles $\theta(\eta)$ for various of $\gamma$ when $f_0 = 0.2$ , $\varepsilon = -1.2$ and $Pr = 1$	56

#### LIST OF ABBREVIATIONS

Cconcentration coefficient  $C_{\infty}$ constant concentration in the free stream skin friction coefficient  $C_f$ Ddiffusion coefficient exponential function non-dimensional stream function f  $f_0$ constant mass transfer parameter k thermal conductivity Lcharacteristics length local Nusselt number coefficient  $Nu_x$ Prandtl number PrR radius of cylinder reaction-rate of the solute  $R_r$ Reynolds number Re Schmidt number ScSh Sherwood number fluid temperature in the boundary layer T $T_0$ ambient temperature at the leading edge  $T_{\rm w}$ surface temperature free-stream temperature  $T_{\infty}$ velocity component in the x direction free-stream fluid velocity  $u_e$ ,  $u_w$ U,  $U_e$ ,  $U_\infty$ constant velocity component in the r direction non-dimensional Cartesian coordinate along the surface  $\boldsymbol{x}$ non-dimensional Cartesian coordinate normal to the surface

#### **Greek symbols**

thermal diffusivity α coefficient of thermal expansion β similarity variable η θ non-dimensional temperature kinematic viscosity ν dynamic viscosity  $\mu$ fluid density ρ shear stress at the surface  $\tau_w$ heat flux at the surface  $q_{w}$ stream function ψ stretching or shrinking parameter 3 curvature parameter non-dimensional mass

#### **Subscripts**

c critical value w condition at the surface  $\infty$  free-stream condition



#### **CHAPTER 1**

#### INTRODUCTION

#### 1.1 Introduction

In this thesis, we consider the research theoretically without making the experiment. This thesis is focusing on the mathematical model, which models resemble reality by using mathematical language. Moreover, for example a model can be fixed, modified or sometimes might be use in research or being a reference to build a good model.

Boundary layer is the layer of fluid in the immediate vicinity of the bounding surface where the effects of viscosity cannot be ignored. The theory of viscosity was introduced by Ludwig Prandtl in 1904. Prandtl says that the flow can be divided by two which are inviscid flow at the main section and thin layers adjacent to body surface (boundary layer). In the thin layers, friction force need to be considered but for the outer thin layers, the friction forced can be neglected (Schlichting, 1979).

Heat is the thermal energy that flows between two samples of matter due to their difference in temperature. Heat transfer is the energy transfer caused by the difference temperature in a medium or across a medium. The heat transfer between two objects must be from higher temperature to lower temperature. Heat transfer occurs in three different phenomenon which are conduction, convection and radiation (Özisik, 1985). Heat conduction happened through solid, liquid and gas. The heat conduction happens when direct collision between higher and lower molecular kinetics energy. Heat convection involved heat transfer affected by fluid flow. On the other hand, radiation is the transfer of heat through the air (space) in wave electromagnet. However, this thesis only considered the heat transfer in free convection.

Mass transfer is the net movement of mass from one location to another location. This type of movement usually called a stream, phase, fraction or component. Mass transfer occurs in many processes, such as evaporation, drying, precipitation, adsorption, membrane filtration and distillation. Nonetheless, mass transfer is being used for different processes and mechanisms. For example, the phrase is commonly used in engineering processes while membrane filtration and distillation is used by the biologist. Some common examples of mass transfer processes are the evaporation of water from a pond to the atmosphere, the distillation of alcohol and the purification of blood in the kidneys and liver. On the other hand, the engineering processes that involves mass transfer operation such as separation of chemical components in distillation columns, absorbers i.e scrubbers, activated carbon beds and liquid extraction.

Prandtl number, Pr is a dimensionless number represented the ratio of momentum diffusivity (kinematic viscosity) to thermal diffusivity. It was proposed by Ludwig Prandtl in 1904. Pr is defined as

$$Pr = \frac{\mu c_{\rho}}{k} = \frac{v}{\alpha} = \frac{\text{viscous diffusion rate}}{\text{thermal diffusion rate}},$$

where  $\nu$  is the kinematic viscosity,  $\alpha$  is thermal diffusivity,  $\mu$  is the dynamic viscosity, k is the thermal conductivity,  $c_{\rho}$  is the specific heat and  $\rho$  is the density. If the fluid is more viscous, the Pr is greater and the heat transfer will be less convective. Pr is directly influenced the boundary layer thickness and velocity. Specifically, the values of Pr = 0.7,1 and 7 are representing the air, electrolyte fluid and water respectively. The mass transfer of Pr is called Schmidt number, Sc.

#### 1.2 Research Background

Fluid dynamics is about an object that travel or moving along the fluid. The fluid is either a liquid or a gas. A fluid will be deformed continuously under a shear stress. There are two types of fluid flow which are laminar flow and turbulent flow. However, in this thesis only laminar flow will be taken into consideration. In laminar flow the particles in the fluid will follow the streamlines, and the motion of the particles in the fluid will be predicted.

#### 1.2.1 Stagnation Point Flow

Stagnation point is a point in a flow field where the local velocity of the fluid is zero. At the surface of the plate there exist stagnation points, where the fluids come to the rest by the plate.

Stagnation flow, describing the motion of fluid near the stagnation point where the fluid pressure, heat transfer and rates of mass deposition are highest. There is one streamline that divides the flow by half which are above and below the streamline. Above this streamline, all the flow goes over the plate while below this streamline the flow goes under the plate. Along the dividing streamline, the fluid motion is towards the plate.

#### 1.2.2 Stretching or Shrinking Sheet

Crane (1970) was pioneering the research about boundary layer flow over a stretching sheet. This research is being investigated from many aspects such as stagnation point flow, the slip flow, effects of suction and injection that involved vertical and horizontal surface. Stretching sheet occurs when velocity at the boundary is away from a fixed point. The application of stretching sheet in engineering processes such as paper production and glass blowing. The final quality of the product is depending on rates of heat transfer at the stretching surface.

Recently, the flow over a shrinking sheet has attracted many researchers due to its applications in processes. Apart from that, Wang (2008) studied the viscous flow over a shrinking sheet. Shrinking sheet occurs when velocity at the boundary is moving towards a fixed point. The shrinking sheet problem is very important to the agriculture field. Some of the applications are the effects of capillary in small pores, behaviour of shrinking or stretching and hydraulic characteristics of clay for agriculture purposes.

#### 1.2.3 Cylinder

The flow of an incompressible fluid past a cylinder is one of the mathematical models that exist in fluid dynamics. This concept of flow can be found in mathematical physics such as vector fields, coordinate transformations and the most important, the physical interpretations of mathematical results.

The potential flow around a circular cylinder is a solution for the flow of an inviscid, incompressible fluid around a cylinder that is transverse to the flow. A viscous flow past a cylinder will acquire vorticity in a thin boundary layer adjacent to the cylinder. Boundary layer separation can occur behind the cylinder and cause the lower pressure to drag the flow to the downstream of the cylinder.

#### 1.3 Problem Statements

There are many researches that have been done about boundary layer flow in cylindrical case. Some of the issues about the cylinder are:

- i. How the effects of chemical reaction on the stagnation point and mass transfer flow in stretching or shrinking cylinder?
- ii. What are the effects of the stagnation point and heat transfer if surface heat flux is prescribed?
- What are the effects of cylinder parameter on the wall shear stress (skin friction) and surface heat flux (heat transfer from surface) as well as fluid velocity and temperature profiles when we use exponential similarity?
- iv. How does the suction or injection affect the flow and heat transfer characteristics?

#### 1.4 Objectives and Scope of the Thesis

To analyse the boundary layer and heat transfer flows over a stretching or shrinking cylinder near the stagnation point by solving the mathematical models for the following problems:

- i. Stagnation point flow and mass transfer with chemical reaction past a stretching or shrinking cylinder
- ii. Stagnation point flow and heat transfer over a stretching or shrinking cylinder with prescribed surface heat flux
- iii. Stagnation point flow and heat transfer over an exponentially shrinking cylinder
- iv. Stagnation point flow and heat transfer over an exponentially shrinking cylinder with suction and injection

#### 1.5 Significance of Study

The stretching and shrinking cylinder have significant impact on the technology applications in fluid dynamics. The technological applications due to the flow and heat transfer along a stretching cylinder included hot rolling, wire drawing, drawing of plastic films, paper and glass fibre production. Process of manufacturing in the polymer industries such as a polymer is extruded continuously from a die with a tacit assumption that the fibre is inextensible. The cooling of a long metallic wire in a bath (an electrolyte) is another physical application to the stretching sheet cases. On the other hand, the situation towards a shrinking sheet occurs on a rising or shrinking balloon.

The mass transfer problems have great importance in extending the theory of separation processes and chemical reaction. Also, the addition of mass transfer phenomenon to the heat transfer has received various attentions of new researchers for its enormous applications in chemical industries, reservoir engineering and many other technological processes. There are some transport processes with surface mass transfer for example injection or suction in industry where the buoyancy force arises from thermal diffusion caused by the temperature gradient, such as polymer fibre coating or the coating of wires.

Due to the growing use of the boundary layer in stretching or shrinking sheet in manufacturing and processing industries, we attempt to understand the friction and heat transfer characteristics itself. This is very important for the engineers and researchers to understand and be familiar with the flow behaviour and properties of such fluids. The nature of the flow and heat transfer of stretching or shrinking cylinder near stagnation point is use to predict the flow behaviour in the equipment process. Lastly, the kinematics of both stretching or shrinking and the simultaneous heating and cooling during such processes has a decisive influence on the quality of the final products.

#### 1.6 Outline of the Thesis

Overall this thesis is divided into seven chapters. Chapter 1 contains the introduction, research background, problem statements, objectives and scope of the study, significance of study and lastly the outline of the thesis. Chapter 2 consists of the literature review regarding the problems stated in the thesis and the numerical method that had been used to solve the problems numerically. This thesis is based on Ishak (2009)'s where we are using the similarity transformations of this problem since we are dealing with the cylindrical case. Therefore, the general formulation for Ishak (2009) was shown in detail in Chapter 3. Meanwhile, Chapter 4 until 7 will be discussed further about the four problems that had been done in this study.

In Chapter 4, we studied the stagnation point flow and mass transfer with chemical reaction past a stretching or shrinking cylinder. Chapter 5 discusses on the stagnation point flow over a stretching or shrinking cylinder with prescribed surface heat flux. In Chapter 6, we investigate the stagnation point flow and heat transfer over an exponentially stretching or shrinking cylinder while in Chapter 7

we extend the work in Chapter 6 to the case where the cylinder is permeable, i.e. when there is suction or injection (blowing) through the cylinder surface.

Lastly, Chapter 8 contains the summary of the study as well as possible further research that can be carried out.



#### REFERENCES

- Aleng, N. L., Bachok, N., and Ishak, A. (2013). The Effects of Suction and Injection on a Moving Plate in a Nanofluid: Alumina-Water. *Proceedings of the 20<sup>th</sup> National Symposium on Mathematical Sciences*, 1522: 405-412.
- Aman, F., Ishak, A., and Pop, I. (2011). Heat Transfer at a Stretching/Shrinking Surface Beneath an External Uniform Shear Flow with a Convective Boundary Condition. *Sains Malaysiana*, 40(12): 1369-1374.
- Attia, H. A. (2006). Stagnation Point Flow and Heat Transfer of a Micropolar Fluid in a Porous Medium. *Turkish Journal of Physics*, 30: 57-65.
- Bachok, N., and Ishak, A. (2009). Mixed Convection Boundary Layer Flow over a Permeable Vertical Cylinder with Prescribed Surface Heat Flux. *European Journal of Scientific Research*, 34(1): 46-54.
- Bachok, N., and Ishak, A. (2010a). Flow and Heat Transfer over a Stretching Cylinder with Prescribed Surface Heat Flux. *Malaysian Journal of Mathematical Sciences*, 4(2): 159-169.
- Bachok, N., and Ishak, A. (2010b). Flow and Heat Transfer Characteristics on a Moving Flat Plate in a Parallel Stream with Prescribed Surface Heat Flux. *Proceedings of the 9<sup>th</sup> WSEAS International Conference on Applications of Computer Engineering*, 115-118.
- Bachok, N., Ishak, A., and Nazar, R. (2010a). Flow and Heat Transfer over an Unsteady Stretching Sheet in a Micropolar Fluid with Prescribed Surface Heat Flux. *International Journal of Mathematical Models and Methods in Applied Sciences*, 4(3): 167-176.
- Bachok, N., Ishak, A., and Pop, I. (2010b). Melting Heat Transfer in Boundary Layer Stagnation-Point Flow towards a Stretching/Shrinking Sheet. *Physics Letters A*, 374: 4075-4079.
- Bachok, N., Ishak, A., and Pop, I. (2010c). Mixed Convection Boundary Layer Flow over a Permeable Vertical Flat Plate Embedded in an Anisotropic Porous Medium. *Mathematical Problems in Engineering*, 2010: 659023.
- Bachok, N., Ishak, A., and Pop, I. (2011). Stagnation-Point Flow over a Stretching/Shrinking Sheet in a Nanofluid. *Nanoscale Research Letters*, 6: 623.
- Bachok, N., Ishak, A., and Pop, I. (2012a). Boundary Layer Flow over a Moving Surface in a Nanofluid with Suction or Injection. *Acta Mechanica*, 28(1): 34-40.
- Bachok, N., Ishak, A., and Pop, I. (2012b). Flow and Heat Transfer Characteristics on a Moving Plate in a Nanofluid. *International Journal of Heat and Mass Transfer*, 55: 642-648.

- Bachok, N., Ishak, A., and Pop, I. (2012c). Unsteady Boundary-Layer Flow and Heat Transfer of a Nanofluid over a Permeable Stretching/Shrinking Sheet. *International Journal of Heat and Mass Transfer*, 55: 2102-2109.
- Bachok, N., Ishak, A., and Pop, I, (2013a). Boundary Layer Stagnation-Point Flow toward a Stretching/Shrinking Sheet in a Nanofluid. *ASME Journal of Heat Transfer*, 135: 054501.
- Bachok, N., Ishak, A., Nazar, R., and Senu, N. (2013b). Stagnation-Point Flow over a Permeable Stretching/Shrinking Sheet in a Copper-Water Nanofluid. *Boundary Value Problems*, 2013: 39.
- Bhattacharyya, K. (2011). Dual Solutions in Boundary Layer Stagnation-Point Flow and Mass Transfer with Chemical Reaction past a Stretching/Shrinking Sheet. *International Communications in Heat and Mass Transfer*, 38: 917-922.
- Bhattacharyya, K. (2012). Mass Transfer on a Continuous Flat Plate Moving in Parallel or Reversely to a Free Stream in the Presence of a Chemical Reaction. *International Journal of Heat and Mass Transfer*, 55: 3482-3487.
- Bhattacharyya, K. (2013). Heat Transfer in Boundary Layer Stagnation-Point Flow towards a Shrinking Sheet with Non-Uniform Heat Flux. *Chinese Physics B*, 22(7): 074705.
- Bhattacharyya, K., and Layek, G. C. (2010). Chemically Reactive Solute Distribution in MHD Boundary Layer Flow over a Permeable Stretching Sheet with Suction or Blowing. *Chemical Engineering Communications*, 197(12): 1527-1540.
- Bhattacharyya, K., and Vajravelu, K. (2012). Stagnation-Point Flow and Heat Transfer over an Exponentially Shrinking Sheet. *Commun Nonlinear Sci Number Simulat*, 17: 2728-2734.
- Chaudhary, M. A., and Merkin, J. H. (1993). The Effects of Blowing and Suction on Free Convection Boundary Layers on Vertical Surfaces with Prescribed Heat Flux. *Journal of Engineering Mathematics*, 27: 265-292.
- Chen, T. S. and Mucoglu, A. (1975). Bouyancy Effects on Forced Convection along a Vertical Cylinder. *ASME Journal of Heat Transfer*, 97: 198-203.
- Choi, I. G. (1982). The Effects of Variable Properties of Air on the Boundary Layer for a Moving Continuous Cylinder. *International Journal of Heat and Mass Transfer*, 25: 597-602.
- Cortell, R. (2007). Toward an Understanding of the Motion and Mass Transfer with Chemically Reactive Species for Two Classes of Viscoelastic Fluid over a Porous Stretching Sheet. *Chemical Engineering and Processing*, 46: 982-989.

- Crane, L. J. (1970). Flow past a Stretching Plane. *Journal of Applied Mathematics and Physics*, 21: 645-647.
- Das, U. N., Deka, R., and Soundalgekar, V. M. (1994). Effects of Mass Transfer on Flow Past an Impulsively Started Infinite Vertical Plate with Constant Heat Flux and Chemical Reaction. *Engineering Research Bd.*, 60(10): 284-287.
- Datta, P., Anilkumar, D., Roy, S., and Mahanti, N.C. (2006). Effects of Non-uniform Slot Injection (Suction) on a Forced Flow over a Slender Cylinder. *International Journal of Heat and Mass Transfer*, 49: 2366-2371.
- Elbashbeshy, E.M.A. (1998). Heat Transfer over a Stretching Surface with Variable Surface Heat Flux. *Journal of Physics D: Applied Physics*, 31: 1951-1954.
- Fan, J. R., Shi, J. M., and Xu, X. Z. (1998). Similarity Solution of Mixed Convection with Diffusion and Chemical Reaction over a Horizontal Moving Plate. *Acta-Mechanica*, 126: 59-69.
- Hayat, T., Awais, M., and Sajid, M. (2010). Similar Solutions of Stretching Flow with Mass Transfer. *International Journal for Numerical Methods in Fluids*, 64: 908-921.
- Hayat, T., Shehzad, S. A., and Qasim, M. (2011). Mixed Convection Flow of a Micropolar Fluid with Radiation and Chemical Reaction. *International Journal for Numerical Methods in Fluids*, 67: 1418-1436.
- Hiemenz, K. (1911). Die Grenzschicht an einem in den gleichformingen Flussigkeitsstrom eingetauchten graden Kreiszylinder. *Dinglers Polytechnic Journal*, 326: 321-324.
- Homann, F. (1936). Der Einfluss grosser Zahigkeitbei der Stromung um den Zylinder und um die Kugel. Z. Angew Mathematical and Mechanical, 16: 153-164.
- Ishak, A. (2009). Mixed Convection Boundary Layer Flow over a Vertical Cylinder with Prescribed Surface Heat Flux. *Journal of Physics A: Mathematical and Theoretical*, 42: 195501.
- Ishak, A., Nazar, R., and Pop, I. (2006). Mixed Convection Boundary Layers in the Stagnation-Point Flow towards a Stretching Vertical Sheet. *Meccanica*, 41: 509-518.
- Ishak, A., Nazar, R., and Pop, I. (2007). Boundary Layer on a Moving Wall with Suction and Injection. *Chinese Physics Letters*, 24(8): 2274.
- Ishak, A., Nazar, R., and Pop, I. (2008a). Magnetohydrodynamic (MHD) Flow and Heat Transfer due to a Stretching Cylinder. *Energy Conversion and Management*, 49: 3265-3269.

- Ishak, A., Merkin, J. H., Nazar, R., and Pop, I. (2008b). Mixed Convection Boundary Layer Flow over a Permeable Vertical Surface with Prescribed Wall Heat Flux. *Zeitschrift für angewandte Mathematik und Physik ZAMP*, 59: 100-123.
- Ishak, A., Jafar, K., Nazar, R., and Pop, I. (2009). MHD Stagnation Point Flow towards a Stretching Sheet. *Physics A*, 388: 3377-3383.
- Ishak, A., Nazar, R., Arifin, M. N., Ali, M. F., and Pop, I. (2011). MHD Stagnation-Point Flow towards a Stretching Sheet with Prescribed Surface Heat Flux. *Sains Malaysiana*, 40(10): 1193-1199.
- Khan, W. A., and Pop, I. (2010). Flow Near the Two-Dimensional Stagnation-Point on an Infinite Permeable Wall with a Homogeneous-Heterogeneous Reaction. *Commun Nonlinear Sci Numer Simulat*, 15: 3435-3443.
- Kishan, N., and Jagadha, S. (2013). MHD Effects on Non-Newtonian Micro Polar Fluid with Uniform Suction/Blowing and Heat Generation in the Presence of Chemical Reaction and Thermophoresis. *International Journal of Research in Engineering and Technology*, 2(9): 350-358.
- Kleinstreuer, C., and Wang, T. Y. (1989). Mixed Convection Heat and Surface Mass Transfer between Power-Law Fluids and Rotating Permeable Bodies. *Chemical Engineering Science*, 44(12): 2987-2994.
- Kumari, M., Bercea, C., and Pop, I. (2007). Effect of Non-uniform Suction or Injection on Mixed Convection Flow over a Vertical Cylinder Embedded in a Porous Medium. *Malaysian Journal of Mathematical Sciences*, 1(2): 193-204.
- Kumari, M., and Nath, G. (2004). Mixed Convection Boundary Layer Flow over a Thin Vertical Cylinder with Localized Injection/Suction and Cooling/Heating. *International Journal of Heat and Mass Transfer*, 47: 969-976.
- Liao, S. J. (2003). Beyond Perturbation: Introduction to Homotopy Analysis Method. *Chapman & Hall, CRC Press: Boca Raton*.
- Lin, H. T., and Yu, W. S. (1988). Free Convection from a Vertical Plate with Concentrated and Distributed Thermal Sources. *Wärme und Stoffübertragung*, 22: 231-238.
- Liu, I.C. (2005). A Note on Heat and Mass Transfer for a Hydromagnetic Flow over a Stretching Sheet. *International Communications of Heat and Mass Transfer*, 32: 1075-1084.
- Magyari, E., Pop, I., and Keller, B. (2002). Mixed Convection Boundary Layer Flow past a Horizontal Permeable Flat Plate. *Fluid Dynamics Research*, 31: 215-225.

- Mahapatra, T. R., and Gupta, A. S. (2001). Magnetohydrodynamic Stagnation-Point Flow towards a Stretching Sheet. *Acta Mechanica*, 152: 191-196.
- Mahapatra, T. R., and Nandy, S. K. (2013). Slip Effects on Unsteady Stagnation-Point Flow and Heat Transfer over a Shrinking Sheet. *Meccanica*, 48: 1599-1606.
- Mahmood, T., and Merkin, J. H. (1988). Similarity Solutions in Axisymmetric Mixed-Convection Boundary Layer Flow. *Journal of Engineering Mathematics*, 22: 73-92.
- Meade, D. B., Haran, B. S., and White, R. E. (1996). The Shooting Technique for the Solution of Two-Point Boundary Value Problems. *Mapletech*, 3(1): 85-93.
- Merkin, J. H. (1985a). A note on the Similarity Solutions for Free Convection on a Vertical Plate. *Journal of Engineering Mathematics*, 19: 189-201.
- Merkin, J. H. (1985b). On Dual Solutions Occurring in Mixed Convection in a Porous Medium. *Journal of Engineering Mathematics*, 20: 171-179.
- Mohamed, M. K. A., Salleh, M. Z., Nazar, R., and Ishak, A. (2013). Numerical Investigation of Stagnation Point Flow over a Stretching Sheet with Convective Boundary Conditions. *Boundary Value Problems*, 2013: 4.
- Mucoglu, A., and Chen, T. S. (1976). Buoyancy Effects on Forced Convection along a Vertical Cylinder with Uniform Surface Heat Flux. *Journal of Heat Transfer*, 98(3): 523-525.
- Mukhopadhyay, S. (2013). MHD Boundary Layer Slip Flow along a Stretching Cylinder. *Ain Shams Engineering Journal*, 4: 317-324.
- Mukhopadhyay, S., and Gorla, R. S. R. (2013). Slip Effects on Boundary Layer Flow and Heat Transfer along a Stretching Cylinder. *International Journal of Applied Mechanics and Engineering*, 18: 447-459.
- Muthucumaraswamy, R. (2003). Effects of Chemical Reaction on Moving Isothermal Vertical Plate with Variable Mass Diffusion. *Journal of Theoretical and Applied Mechanics*, 30(3): 209-220.
- Na, T. Y., and Pop, I. (1996). Flow and Heat Transfer over a Longitudinal Circular Cylinder Moving in Parallel or Reversely to a Free Stream. *Acta-Mechanica*, 118: 185-195.
- Na, T. Y., and Pop, I. (1999). Axisymmetric Compressible Boundary Layer on a Long Thin Moving Cylinder. *Acta-Mechanica*, 138: 255-260.
- Özisik, M. N. (1985). Heat Transfer. New York: McGraw-Hill Inc.

- Patil, P. M., and Pop, I. (2011). Unsteady Mixed Convection Flow from a Slender Cylinder due to Impulsive Change in Wall Velocity and Temperature. *Thermal Science*, 1: 121-139.
- Patil, P. M., Roy, S., and Chamkha, A. J. (2009). Double Diffusive Mixed Convection Flow over a Moving Vertical Plate in the Presence of Internal Heat Generation and a Chemical Reaction. *Turkish Journal of Engineering & Environmental Sciences*, 33: 193-205.
- Postelnicu, A., and Pop, I. (2011). Falkner-Skan Boundary Layer Flow of a Power-Law Fluid past a Stretching Wedge. *Applied Mathematics and Computation*, 217: 4359-4368.
- Ramanaiah, G., and Malaryizhi, G. (1991). A Unified Treatment of Mixed Convection on a Permeable Horizontal Plate. *Wfirme- und Stoff/ibertragung*, 26: 187-192.
- Roy, S. (2001). Non-uniform Mass Transfer or Wall Enthalpy into a Compressible Flow over Yawed Cylinder. *International Journal of Heat and Mass Transfer*, 44: 3017-3024.
- Roy, S., and Anilkumar, D. (2006). Unsteady Mixed Convection from a Moving Vertical Slender Cylinder. *Journal of Heat Transfer*, 128(4): 368-373.
- Schlichting, H. (1979). *Boundary Layer Theory*. Volume 7, New York: McGraw-Hill Inc.
- Seddeek, M. A., and Almushigeh, A. A. (2010). Effects of Radiation and Variable Viscosity on MHD Free Convective Flow and Mass Transfer over a Stretching Sheet with Chemical Reaction. *An International Journal: Applications and Applied Mathematics*, 5(9): 181-197.
- Takhar, H. S., Chamkha, A. J., and Nath, G. (2000). Combined Heat and Mass Transfer along a Vertical Moving a Free Stream. *International Journal of Heat and Mass Transfer*, 36: 237-246.
- Tutty, O. R., and Price, W. G. (2002). Boundary Layer Flow on a Long Thin Cylinder. *Physics of Fluids*, 14(2): 628-637.
- Wang, C. Y., (2008). Stagnation Flow towards a Shrinking Sheet. *International Journal of Non-Linear Mechanics*, 43: 377-382.
- Weidman, P. D., Kubitschek, D.G., and Davis, A.M.J. (2006). The Effect of Transpiration on Self-Similar Boundary Layer Flow over Moving Surface. *International Journal of Engineering Science*, 44: 730-737.
- Yasin, M. H. M., Arifin, N. M., Nazar, R., Ismail, F., and Pop, I. (2013). Mixed Convection Boundary Layer Flow on a Vertical Surface in a Porous Medium Saturated by a Nanofluid with Suction or Injection. *Journal of Mathematics and Statistics*, 9(2): 119-128.

Yazdi, M. H., Abdullah, S., Hashim, I., and Sopian, K. (2011). Slip MHD Liquid Flow and Heat Transfer over Non-linear Permeable Stretching Surface with Chemical Reaction. *International Journal of Heat and Mass Transfer*, 54: 3214-3225.

Zueco, J., and Hernandez, V. R. (2012). Effects of Heat Generation-Absorption and Chemical Reaction on Magnetohydrodynamic Flow in a Permeable Moving Plate: Network Numerical Study. *Chemical Engineering Communications*, 199: 1205-1224.

