



UNIVERSITI PUTRA MALAYSIA

***OPTIMAL SIZING OF HYBRID TIDAL, PHOTOVOLTAIC AND BATTERY
SOURCES OF ENERGY***

OMID SARRAFAN SADEGHI

FK 2015 58



**OPTIMAL SIZING OF HYBRID TIDAL, PHOTOVOLTAIC AND BATTERY
SOURCES OF ENERGY**

By

OMID SARRAFAN SADEGHI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra
Malaysia, in Fulfilment of the Requirements for the Degree of Master of
Science**

March 2014

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs, and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright© Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

OPTIMAL SIZING OF HYBRID TIDAL, PHOTOVOLTAIC AND BATTERY SOURCES OF ENERGY

By

OMID SARRAFAN SADEGHI

March 2015

Chairman : Norman Bin Mariun, PhD
Faculty : Engineering

A methodology for calculating the optimum size of the hybrid tidal, photovoltaic and battery by considering the uncertainty of renewable sources is proposed. In the method the uncertainty is investigated using the water velocity and sun irradiation probability functions. The numbers of solar arrays, tidal turbines and battery were considered as optimization variables which have been determined by the particle swarm optimization algorithm.

In the sizing problem, cost is proposed as the objective function of the algorithm, which is calculated by the Net Present Cost method. The cost function includes capital, replacement, and operation and maintenance costs for each unit of renewable source for a hybrid with 20 years life time. One of the constraints that is considered in the sizing problem is, maintaining the reliability in a specific value. The Equivalent Loss Factor index is considered as reliability index which should be in the range $[0, 0.1]$ as ideal reliability for the system. In the proposed method sequential Monte Carlo method is used to consider the uncertainty in renewable sources. In order to compare the previous methods and proposed method, cost and reliability indices are regarded as comparison factors. The cost that is calculated in the sizing problem with the hourly data of sun radiation and water velocity is considered as the reference of comparison. In addition the reliability factor that is proposed with the Monte Carlo method is regarded as the ideal reliability index.

Moreover, the sizing problem is also investigated without considering the uncertainty with the average data of sun irradiation and water velocity. The results of simulation with average data reveals that the total cost is 21% less than the cost which uncertainty is taken into account in renewable sources with Monte Carlo method, however the reliability index for the simulation with the average data calculated with the Monte Carlo method, shows that the system reliability in this case is, 177% less than ideal reliability index.

In fact, using the average data of water velocity and solar irradiation leads to lower cost, but it gives wrong design for the system as it cannot supply the load

completely. Therefore considering the uncertainty in renewable sources give more realistic view to the sizing problem.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
Sebagai memenuhi keperluan untuk ijazah Master Sains

**OPTIMAL SAIZ AIR PASANG SURUT HIBRID, FOTOVOLTA
DAN BATERIMEMANDANGKAN KETIDAKPASTIAN
PASANG SURUT DAN FOTOVOLTA KUASA**

Oleh

OMID SARRAFAN SADEGHI

Mac 2014

Pengerusi : Norman Bin Mariun, PhD
Fakulti : Kejuruteraan

Dengan kaedah Monte Carlo. Bagaimanapun boleh percayaan bagi simulasi.

Dengan data purata dikira dengan kaedah Monte Carlo, menunjukkan bahawa ke boleh percayaan system dalam ke sini adalah, 177% kurang daripada indeks ke boleh percayaan ideal. Satu kaedah untuk mengira saiz optimum hybrid pasang surut, fotovolta dan bateri dengan mempertimbangkan ketidaktentuan sumber yang boleh diperbaharui dicadangkan. Dalam kaedah yang ketidakpastian itu disiasat menggunakan halaju air dan kebarangkalian penyinaran matahari. Bilangan array solar, turbin air dan bateri dianggap sebagai pembolehubah pengoptimuman yang telah ditentukan oleh algoritma penambahbaikan 'Particle Swarm Optimization'.

Dalam masalah saiz, kos adalah dicadangkan sebagai fungsi objektif algoritma, yang dikira dengan kaedah Kos bersih semasa. Fungsi kos termasuk modal, penggantian, dan operasi dan penyelenggaraan kos bagi setiap unit sumber yang boleh diperbaharui untuk hybrid dengan masa 20 tahun hidup. Salah satu kekangan yang dipertimbangkan dalam masalah saiz adalah mengekalkan kebolehpercayaan dalam nilai tertentu. Yang Indeks Faktor Kehilangan dianggap Setara sebagai indeks kebolehpercayaan yang sepatutnya dalam julat [0,0.1] sebagai kebolehpercayaan yang sesuai untuk sistem. Dalam kaedah yang dicadangkan berurutan kaedah Monte Carlo digunakan untuk mempertimbangkan ketidakpastian dalam sumber-sumber yang boleh diperbaharui. Bagi membandingkan kaedah terdahulu dan kaedah yang dicadangkan, kos dan kebolehpercayaan indeks dianggap sebagai faktor-faktor perbandingan. Kos yang dikira dalam masalah saiz dengan data setiap jam sinaran matahari dan halaju air dianggap sebagai rujukan perbandingan. Selain faktor kebolehpercayaan yang dicadangkan dengan kaedah Monte Carlo dianggap sebagai indeks kebolehpercayaan yang ideal.

Selain itu, masalah saiz juga disiasat tanpa mengambil kira ketidakpastian dengan data purata penyinaran matahari dan halaju air. Keputusan simulasi dengan data purata mendedahkan bahawa kos keseluruhan adalah 21%

kurang daripada kos yang tidak menentu diambilkira dalam sumber yang boleh diperbaharui

Malah, dengan menggunakan data purata halaju air dan sinaran suria membawa kepada mengurangkan kos, tetapi ia member rekabentuk salah bagi system ini kerana ia tidak boleh membekalkan beban sepenuhnya. Oleh itu memandangkan ketidaktentuan dalam sumber yang boleh diperbaharui memberikan gambaran yang lebih realistic kepada masalah saiz itu.



ACKNOWLEDGEMENTS

First of all, I am grateful to The Almighty God for his will, I have finally completed my Master of Science study.

I wish to express my sincere appreciation to my supervisor, Professor. Ir. Dr. Norman Bin Mariun, and also my co-supervisors, Dr. Jasronita Jasni, and Dr. Noor Izzri Abd Wahab for their guidance, pieces of advice and motivation during my research. Also, special thanks to my parents for their persuasion and help during my whole life.



I certify that a Thesis Examination Committee has met on 19 March 2015 to conduct the final examination of Omid Sarrafan Sadeghi on his thesis entitled "Optimal Sizing of Hybrid Tidal, Photovoltaic and Battery Sources of Energy" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

Hashim bin Hizam, PhD


Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Mohd Amran bin Mohd Radzi, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Soib Taib, PhD

Associate Professor
Universiti Sains Malaysia
Malaysia
(External Examiner)



ZULKARNAIN ZAINAL, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 13 May 2015

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science.

The members of the Supervisory Committee were as follows:

Norman Bin Mariun, PhD

Professor, Ir
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Jasronita Jasni, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Noor Izzri Abd Wahab, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

BUJANG BIN KIM HUAT, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work
- quotations, illustrations and citations have been duly referenced
- the thesis has not been submitted previously or concurrently for any other degree at any institutions
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be owned from supervisor and deputy vice – chancellor (Research and innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software


Signature: _____ Date: _____


Name and MatricNo.: Omid Sarrafan Sadeghi GS25783

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) were adhered to.

Signature: 
Name of _____
Chairman of _____
Supervisory _____
Committee: _____

Signature: 
Name of _____
Member of _____
Supervisory _____
Committee: _____


Signature: 
Name of _____
Member of _____
Supervisory _____
Committee: _____

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	vii
LIST OF TABLES	xii
LIST OF FIGURES	xiii
LIST OF ABBREVIATIONS	xiv
CHAPTER	
1 INTRODUCTION	1
1.1 Overview	1
1.2 Solar energy	1
1.3 Tidal energy	2
1.4 Research Motivation and Problem Statement	2
1.5 Aims and Objectives	3
1.6 Scope of Research	3
1.7 Outline of the thesis	5
2 LITERATURE REVIEW	6
2.1 Introduction	6
2.2 Capacity Determination	7
2.3 Solar Unit	8
2.4 Tidal Unit	11
2.5 Battery	14
2.6 Inverter	14
2.7 Review of Related Studies	16
2.8 Summary	34
3 MATERIALS AND METHODS / METHODOLOGY	35
3.1 Introduction	35
3.2 Design of Hybrid Distributed Generation Sources	35
3.2.1 Proposed Algorithm	37
3.2.2 Cost Analysis	42
3.2.3 Reliability Index	43
3.2.4 Power Management Strategy	44
3.2.5 Optimization Algorithm	46
3.2.5.1 Particle Swarm Optimization	47
3.2.6 Probability Density Function Model for Water Velocity and Solar Radiation	49
4 RESULTS AND DISCUSSION	52
4.1 Introduction	52
4.2 Simulation	52
4.3 Analysis of the Proposed Method	60

4.3.1	Study the Effect of ELF on the sizing problem	60
4.3.2	Study the Sensitivity of Sizing Case to the PD	61
4.4	Summary	63
5	SUMMARY, CONCLUSION AND RECOMMENDATIONS FOR FUTURE RESEARCH	64
5.1	Introduction	64
5.2	Conclusion	64
5.3	Future Work	65
	REFERENCES/BIBLIOGRAPHY	66
	APPENDICES	71
	BIODATA OF STUDENT PUBLICATION	72

LIST OF TABLES

Table	Page
4.1 Parameters and costs of tidal turbine	54
4.2 Parameters and costs of solar array	56
4.3 Parameters and costs of battery	56
4.4 Parameters of the improved particle swarm optimization	57
4.5 Optimized parameters of hybrid tidal, solar and battery with considering uncertainty by Monte Carlo method	58
4.6 Optimized parameters of hybrid tidal, solar and battery without considering uncertainty in renewable sources	59
4.7 Optimum number of tidal, photovoltaic and battery in different standard deviation of water and sun PDF	60
4.8 Costs and optimum numbers of tidal turbine and solar arrays in different ELF with Monte Carlo	61
4.9 Cost and optimum numbers of tidal turbine, solar array and battery by increasing the coefficient in PDF of water velocity	62
4.10 Cost and optimum numbers of tidal turbine, solar array and battery by increasing the coefficient in PDF of the sun irradiation	62
4.11 Cost and optimum numbers of tidal turbine, solar array and battery by increasing the coefficient in both PDFs of sun and water	63

LIST OF FIGURES

Figure	Page
1.1 Location of the Medford	4
1.2 United States map based on the different climate	4
2.1 View of a solar plant	9
2.2 I-V Characteristic Curves of PV model at different irradiances	10
2.3 P-V Characteristic curves of the PV model at different operational temperature	10
2.4 Exploitation of tidal energy in different parts of the world	11
2.5 Voltage- discharging time	16
2.6 Result of LPSP simulation for FC/electrolyzer [20]	21
2.7 Flow chart of hybrid solar-wind system optimization	22
2.8 Flow chart of case 1 [23]	24
2.9 Flow chart of case 2 [23]	24
2.10 Logical block diagram for PMS1 [24]	26
2.11 Logical block diagram for PMS2 [24]	27
2.12 Logical block diagram for PMS3 [24]	28
3.1 Hybrid solar-tidal-battery	36
3.2 Flow chart for the optimization sizing algorithm with utilizing Monte-Carlo	38
3.3 Difference between the average proportion of loss of load to the load demand for a time step in several iterations	41
3.4 Difference between the average of battery charge in a time step in several iterations	41
3.5 Updating the particle position	47
3.6 PDF of a time step water velocity	50
3.7 PDF of a time step solar irradiation	51
4.1 Average data of water velocity for a year	52
4.2 Average data of solar irradiation for a year	53
4.3 Consumed electrical power for a year	53
4.4 Convergence of the PSO algorithm by MC method	58

LIST OF ABBREVIATIONS

BBO	Biogeography Based Optimization
CC	Capital Cost
CDF	Cumulative Distribution Function
DOD	Depth of Discharge
EENS	Energy Expected Not supplied
ELF	Equivalent Loss Factor
FC	Fuel Cell
GA	Genetic Algorithm
GAMS	Generalized Algebra Modeling System
LCC	Life Cycle Cost
LEC	Levelised Energy Cost
LOEE	Loss of Energy Expectation
LOLE	Loss of Load Expected
LPSP	Loss of Power Supply Probability
LUC	Life Cycle Unit Cost
MC	Maintenance Cost
MCDA	Multi-Criteria Decision Analysis
ML	Maximum Likelihood
NPC	Net Present Cost
PDF	Probability Density Function
PSO	Particle Swarm Optimization
PV	Photovoltaic
RC	Replacement Cost
REPG	Relative Excess Power Generation
SOC	State of Charge
UEP	Unutilized Energy Probability

CHAPTER 1

INTRODUCTION

1.1 Overview

Nowadays there is growing interest in green power generation systems which is due to surge in consumption of energy, increase in cost and limited remaining of fossil fuels. During the previous decades, because of expensive equipment which was required to generate electrical energy from renewable sources, this kind of energy at that time was not profitable and economical. However in the last years due to huge progress in different aspect of these sources, implementing of them has become not only practicable but also cost-effective. [1,2].

Hybrid tidal, photovoltaic and battery is proposed as a new combination of renewable sources that is utilized to produce electrical energy. The power that is generated by tidal turbines depends on water velocity while the power generation of the photovoltaic arrays depends on the solar radiation. Due to dependency of these sources to climate condition, it is necessary to consider the contribution of this factor in determining the capacity of these sources to supply the electrical demand.

In order to utilize solar and tidal energy resources efficiently and economically, the size optimization is very important for design of tidal and solar power generation systems with battery bank. The sizing optimization method can lead to have the lowest investment with a reasonable and full use of tidal system, photovoltaic system and battery bank, so that the system can work at optimum condition with optimal configuration in terms of investment and reliability requirement of the load demand.

In this study, a stand-alone hybrid of renewable energy system consisting of tidal, photovoltaic and battery is proposed. Tidal and PV are the primary power sources of the system to benefit the full advantage of renewable energy and the battery is also used in the system for short-time backup.

1.2 Solar Energy

Solar energy is the most enormous energy in the world and also a ubiquitous form of energy in the world. The total amount of solar energy that is absorbed by oceans, Earth atmosphere and lands is approximately 4 million exajoules (EJ) per year. The amount of energy that is beamed onto the Earth in each hour by the sun is more than adequate energy to satisfy the world energy needs for a whole year. Solar energy is the technology utilized to harness the sun's energy and make it useable. In order to harness this energy several technologies have been introduced like solar photovoltaics, solar architecture, solar heating and solar thermal electricity.

1.3 Tidal Energy

More than two-thirds of the earth is covered by the oceans and seas and immense extent of energy is stored in them. Hence tidal power has lots of potential to generate electricity in future. Predictability of tide can be an advantage compared with wind and solar powers. Recent technical developments both in design and turbine technology reveal that total energy which can be obtained from this sources is much higher than it is previously predicted, Moreover its related costs like economical cost may be decreased to competitive levels.

Tidal energy is the only energy in the world that its energy drawing depends on the Earth-Moon orbital specifications and in lower extent in the Earth-Sun system. Other natural sources that are utilized by human technology relate directly or indirectly to the sun such as, fossil fuel, conventional hydroelectric, wind, biofuel even nuclear energy makes use of mineral components in the Earth.

Regarding the fact that the Earth tides are finally due to gravitational action and reaction between the Moon and Sun and the Earth rotation, tidal power is considered practically inexhaustible and can be classified as a renewable energy resource. The average, seawater, is more than eight hundred times denser than air; in addition, the astronomic behavior of tides mechanism leads to an essentially predictable resource, however it can be subjected to climate fluctuations.

1.4 Research Motivation and Problem Statement

There has been soaring interest in utilizing renewable energy resources for many years which stems from ever increasing energy consumption all over the world. In the last decades generating electrical energy was not cost effective as the equipment prices was too high, however nowadays due to development in technology, implementing renewable energies is highly reasonable and beneficial.

Hybrid solar, tidal and battery is a new combination for renewable energy that is used to produce electrical energy in coastal areas where accessibility to the main power network may be hard. In this hybrid, solar and tidal sources are the main sources and battery acts as a backup source. The power generations of photovoltaic arrays are related to solar radiation and this issue for tidal turbines is associated with the water velocity. Therefore due to this dependency of these renewable sources to weather situations, it is necessary to ponder these factors in determining the needed capacity of these renewable sources to supply the electrical demand.

In this thesis electrical powers for photovoltaic and tidal units, which are based on solar radiation and water velocity respectively, are considered as uncertain values and have been calculated by real data. Moreover, by take uncertainty into account in electrical power generations, a more factual view of reliability index and cost can be achieved. In order to consider probability model of

electrical power for solar and tidal units in case of sizing determination, probability density function (PDF) of solar radiation and water velocity is used.

In case of determining the optimal size of photovoltaic and tidal units, the main aim is minimizing the cost and maximizing the reliability index by taking the uncertainty into account for tidal and photovoltaic power. The number of solar panels, tidal turbines and batteries are the unknown quantities of the aim function.

In case of estimating cost, Net Present Cost method is used that includes investing, transferring and maintenance costs by considering the project life. In addition, the reliability index that is utilized is Equivalent Load Factor. In fact the uncertainty of renewable sources in this study is presented by a method in reliability index. The method that is utilized to consider probability model for renewable sources in capacity determination calculation, is Monte Carlo. In the sizing optimization case as it has already mentioned the main aim is minimizing the costs by considering ideal reliability index. The unknown parameters for optimal sizing are calculated by an intelligent optimal algorithm which is Particle Swarm Optimization. By this algorithm the best capacity for the combination of power source will be achieved.

1.5 Aim And Objectives

This study is going to present a comprehensive method in order to calculate the optimum size of a hybrid of renewable sources by considering the uncertainty in renewable sources and maintaining the desirable reliability.

The objectives of this work are:

1. to determine the optimal number of tidal turbines, solar arrays and batteries by Particle Swarm Optimization algorithm,
2. to validate the standard reliability for the proposed system by considering the uncertainty with Monte Carlo Method and compare it with other methods, and
3. to determine the minimum cost for the hybrid tidal, solar and battery proportionate with satisfied reliability.

1.6 Scope of Research

The research is carried out based on the tidal and solar data in of Medford a city in Oregon State in the United State of America for 8 and 32 years respectively. This is a coastal city in the west of the US. Some reasons caused that this city is chosen as the scope of the research like, vicinity to the sea, suitable solar radiation during a year and having precise meteorology for sun radiation and water velocity for several years.

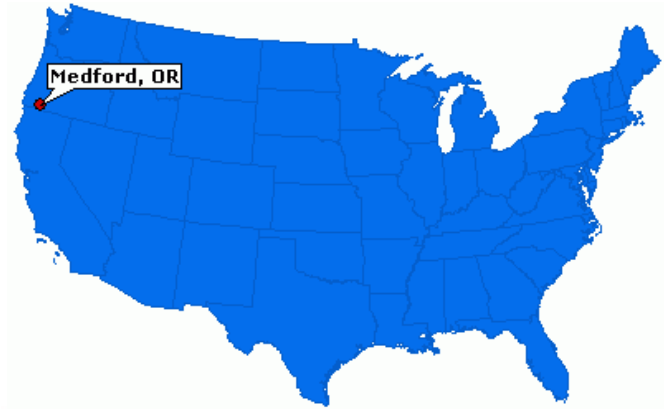


Figure 1-1: Location of the Medford

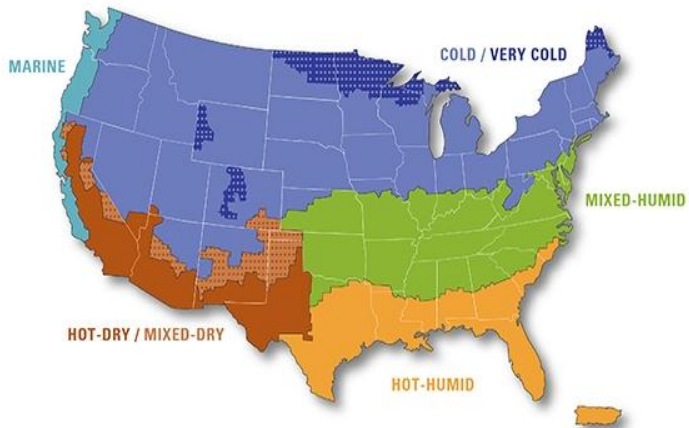


Figure 1-2: United States map based on the different climate [3]

Medford sits in a rain shadow between the Cascade Range and Siskiyou Mountains called the Rogue Valley. As such, most of the rain associated with the Pacific Northwest and Oregon in particular skips Medford, making it drier and sunnier than the Willamette Valley. Medford's climate is considerably warmer, both in summer and winter, than its latitude would suggest, with a Mediterranean climate. Summers are akin to Eastern Oregon, and winters resemble the coast. Here, summer sees an average of 57 days over 90 °F (32 °C) and 11 days over 00 °F(38 °C). Medford also experiences temperature in the winter that fog is so thick that visibility could be reduced to less than five feet. These inversions can last for weeks; some suggest this is because the metropolitan area has one of the lowest average wind speeds of all American metropolitan areas. The heavy fog returns nearly every winter with the inversions lowering air quality for several months without relief [4]. By considering these meteorological facts we conclude that Medford is a city that

is located in the marine area with suitable solar radiation and low average wind speed.

1.7 Outline of the Thesis

The structure of this thesis is as follows:

Chapter 1 provides the overview of the research where the kind of hybrid that is defined and also some information about solar and tidal energy is briefly explained. Research motivation and problem statement, aim and objectives and scope of the research are set out as the guideline of completing this thesis.

Chapter 2 includes the summary of related studies in this issue and also the methods are compared with each other by mentioning their advantages and disadvantages.

Chapter 3 provides some necessary information regarding hybrid systems; moreover, the suggested method is presented and it illustrates how to achieve the optimal size of the hybrid tidal-photovoltaic and battery which is a stand-alone system. In this chapter also power strategy management and also a method for calculating and minimizing the cost are presented.

Chapter 4, simulation result is demonstrated, both new and old methods are simulated to compare the suggested method and old methods. This is due to the fact that there no reference is available that has investigated this hybrid yet. Therefore by this comparison we can ascertain the precision of our new suggested method.

Chapter 5, conclusion and some suggestions are presented for further studies.

REFERENCES

- [1] Haghdadi, N., Asaei, B., & Gandomkar, Z. (2012). Clustering-based optimal sizing and siting of photovoltaic power plant in distribution network. *2012 11th International Conference on Environment and Electrical Engineering*, 266–271. doi: 10.1109/EEEIC.2012.6221586
- [2] Wang, C., & Nehrir, M. (2008). Power management of a stand-alone wind/photovoltaic/fuel cell energy system. *Energy Conversion, IEEE Transactions on*, 23(3), 957–967. Retrieved from http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4603068
- [3] U.S Energy Administration. <http://www.eia.gov/state/data.cfm?sid=OR>
- [4] Medford City, <http://www.ci.medford.or.us/>
- [5] KL(Nehrir, 2006)Nehrir, M. (2006). A course on alternative energy wind/PV/fuel cell power generation. *Power Engineering Society General Meeting, 2006. ...*, 1–6. Retrieved from http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=1708968
- [6] Bernal-Agustín, J. L., & Dufo-López, R. (2009). Simulation and optimization of stand-alone hybrid renewable energy systems. *Renewable and Sustainable Energy Reviews*, 13(8), 2111–2118. doi:10.1016/j.rser.2009.01.010
- [7] Aki, H. (2010).Independent hybrid renewable energy systems:Example applications around the world. *IEEE PES General Meeting*, 1–4. doi:10.1109/PES.2010.5589565
- [8] Agarwal, V. (2008). An Integrated Hybrid Power Supply for Distributed Generation Applications Fed by Nonconventional Energy Sources. *IEEE Transactions on Energy Conversion*, 23(2), 622–631. doi:10.1109/TEC.2008.918631
- [9] nellis.jpg (800×544). (n.d.). Retrieved September 01, 2014, from <http://www.energybc.ca/images/profiles/solar/nellis.jpg>
- [10] M.Bashir and J. Sadeh, Size Optimization Of New Hybrid Stand-Alone Renewable Energy System Considering A Reliability Index, Environment and Electrical Engineering (EEEIC), 2012 11th International Conference on, pp.989-994, 18-25 May 2012.
- [11] F. Jahanbani Ardakani, G. Riahy and M. Abedi, Design of an Optimum Hybrid Renewable Energy System Considered International Conference on Electrical Engineering (ICEE), pp. 842-847, May 2010.

- [12] S.E.B. Elghali, R. Balme, K.L. Saux, M.E.H. Benbouzid, J.F. Charpentier and F. Hauville. A Simulation Model for the Evaluation of the Electrical Power Potential Harnessed by a Marine Current. *Oceanic Engineering*, Vol. 32, No. 4, pp. 786-797, Oct. 2007.
- [13] L.B. Bernshtein, Tidal Power Development - A Realistic, Justifiable and Topical Problem of Today", *IEEE Trans.* No. 3, pp. 591-599, Sept. 1995.
- [14] Marine turbines, from <http://marineturbines.com/tidal-Energy>
- [15] S.E.B. Elghali, M.E.H. Benbouzid and J.F. Charpentier. Marine Tidal Current Electric Power Generation Technology: State of the Art and Current Status", *IEEE International Conference (IEMDC)*, Vol. 2, pp. 1407-1412, 3-5, May 2007.
- [16] R.H. Clark, *Element of Tidal Electronic Engineering*, Wiley-IEEE Press, 1st Edition, Mar. 2007.
- [17] Zhou, Yang, & Fang, (2008) Zhou, W., Yang, H., & Fang, Z. Battery behavior prediction and battery working states analysis of a hybrid solar-wind power generation system. *Renewable Energy*, 33(6), 1413-1423.2008.
- [18] Lu, X., Sun, K., Ma, Y., Huang, L., & Igarashi, S. (2011). High performance hybrid cascaded inverter for renewable energy system. In *2011 Twenty-Sixth Annual IEEE Applied Power Electronics Conference and Exposition (APEC)* (pp. 970-975).
- [19] Kellogg, W. (1998). Generation unit sizing and cost analysis for stand-alone wind, photovoltaic, and hybrid systems. *IEEE Transactions on Energy Conversion*, 13(1), 70-75. Retrieved from http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=658206.
- [20] Khan, M. J., & Iqbal, M. T. (2005). Pre-feasibility study of stand-alone hybrid energy systems for applications in Newfoundland. *Renewable Energy*, 30(6), 835-854. doi:10.1016/j.renene.2004.09.001.
- [21] Grimsø, L., & Korpås, M. (2004). A probabilistic method for sizing of isolated wind-electrolyzer systems. *4th Nordic Workshop ...* Retrieved from [http://www.elkraft.ntnu.no/norpie/10956873/Final_Papers/064 - NORDPIE 2004 wind-hydrogen.pdf](http://www.elkraft.ntnu.no/norpie/10956873/Final_Papers/064_NORDPIE_2004_wind-hydrogen.pdf).
- [22] Prasad, a, & Natarajan, E. (2006). Optimization of integrated photovoltaic-wind power generation systems with battery storage. *Energy*, 31(12), 1943-1954. doi:10.1016/j.energy.2005.10.032.

- [23] Nelson, D. B., Nehrir, M. H., & Wang, C. (2006). Unit sizing and cost analysis of stand-alone hybrid wind/PV/fuel cell power generation systems. *Renewable Energy*, 31(10), 1641–1656. doi:10.1016/j.renene.2005.08.031.
- [24] Yang, H., Lu, L., & Zhou, W. (2007). A novel optimization sizing model for hybrid solar-wind power generation system. *Solar Energy*, 81(1), 76–84. doi:10.1016/j.solener.2006.06.010.
- [25] Koutroulis, E., Kolokotsa, D., Potirakis, A., & Kalaitzakis, K. (2006). Methodology for optimal sizing of stand-alone photovoltaic/wind-generator systems using genetic algorithms. *Solar Energy*, 80(9), 1072–1088. doi:10.1016/j.solener.2005.11.002.
- [26] Senjyu, T., Hayashi, D., Urasaki, N., & Funabashi, T. (2006). Optimum Configuration for Renewable Generating Systems in Residence Using Genetic Algorithm. *IEEE Transactions on Energy Conversion*, 21(2), 459–466. doi:10.1109/TEC.2006.874250.
- [27] Ipsakis, D., Voutetakis, S., Seferlis, P., Stergiopoulos, F., & Elmasides, C. (2009). Power management strategies for a stand-alone power system using renewable energy sources and hydrogen storage. *International Journal of Hydrogen Energy*, 34(16), 7081–7095. doi:10.1016/j.ijhydene.2008.06.051.
- [28] Ekren, B. Y., & Ekren, O. (2009). Simulation based size optimization of a PV/wind hybrid energy conversion system with battery storage under various load and auxiliary energy conditions. *Applied Energy*, 86(9), 1387–1394. doi:10.1016/j.apenergy.2008.12.015.
- [29] Singh, C. (2009). Multicriteria Design of Hybrid Power Generation Systems Based on a Modified Particle Swarm Optimization Algorithm. *IEEE Transactions on Energy Conversion*, 24(1), 163–172. doi:10.1109/TEC.2008.2005280.
- [30] M o u s a , K . , A l Z u ' b i , H . , & D i a b a - w i n d A . (2 0 power plant using optimization. ... *Systems Management and Its* Retrieved from http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5542695.
- [31] Ould Bilal, B., Sambou, V., Ndiaye, P. a., Kébé, C. M. F., & Ndongo, M. (2010). Optimal design of a hybrid solar-wind-battery system using the minimization of the annualized cost system and the minimization of the loss of power supply probability (LPSP). *Renewable Energy*, 35(10), 2388–2390. doi:10.1016/j.renene.2010.03.004
- [32] Roy, A., Kedare, S. B., & Bandyopadhyay, S. (2010). Optimum sizing of wind-battery systems incorporating resource uncertainty. *Applied Energy*, 87(8), 2712–2727. doi:10.1016/j.apenergy.2010.03.027.

- [33] Haghi, H. V., Hakimi, S. M., & Tafreshi, S. M. M. (2010). Optimal sizing of a hybrid power system considering wind power uncertainty using PSO-embedded stochastic simulation. 2010 IEEE 11th International Conference on Probabilistic Methods Applied to Power Systems, 722–727. doi:10.1109/PMAPS.2010.5528402.
- [34] Belfkira, R., Zhang, L., & Barakat, G. (2011). Optimal sizing study of hybrid wind/PV/diesel power generation unit. *Solar Energy*, 85(1), 100–110. doi:10.1016/j.solener.2010.10.018.
- [35] Kaabeche, a., Belhamel, M., & Ibtouen, R. (2011). Sizing optimization of grid-independent hybrid photovoltaic/wind power generation system. *Energy*, 36(2), 1214–1222. doi:10.1016/j.energy.2010.11.024.
- [36] Alsayed, M., Cacciato, M., Scarcella, G., & Scelba, G. (2013). Multicriteria Optimal Sizing of Photovoltaic-Wind Turbine Grid Connected Systems. *IEEE Transactions on Energy Conversion*, 28(2), 370–379. doi:10.1109/TEC.2013.2245669.
- [37] Kumar, R., Gupta, R. a., & Bansal, A. K. (2013). Economic analysis and power management of a stand-alone wind/photovoltaic hybrid energy system using biogeography based optimization algorithm. *Swarm and Evolutionary Computation*, 8, 33–43. doi:10.1016/j.swevo.2012.08.002.
- [38] R.Y. Rubinstein, D.P. Kroese. (2007). Simulation and the Monte Carlo Method. Wiley Interscience, 2nd Edition.
- [39] Open Energy Information
http://en.openei.org/wiki/File:Building_Characteristics_for_Residential_Hourly_Load_Data.pdf
- [40] R. Bilinton and R.N. Allan.(1984). Reliability Evaluation of Power System. Plenum Press, 2nd Edition, New York.
- [41] R. Karki and R. Bilinnton. (2001). Reliability/Cost Implication of PV and Wind Energy Utilization in Small Isolated Power System, IEEE Trans. on Energy Conversion, Vol. 16, No. 4, pp. 368-373.
- [42] Abouzahr, I., & Ramakumar, R. (1991). Loss of power supply probability of stand-alone photovoltaic systems: a closed form solution approach. *IEEE Transactions on Energy Conversion*, 6(1), 1–11. doi:10.1109/60.73783.
- [43] Wang, C., & Nehrir, M. (2008). Power management of a stand-alone wind/photovoltaic/fuel cell energy system. *Energy Conversion, IEEE Transactions on*, 23(3), 957–967.

- [44] H. Sasaki, M. Nakashima and Y. Tamaru. (1978). A Bad Data Detection Algorithm in Power System State Estimation, Electrical Engineering in Japan, Vol. 98, No. 5, pp. 108–115.
- [45] L.J. Bain, M. Engelhardt. (2000). Introduction to Probability and Mathematical Statistics. Duxbury Press, 2nd Edition.
- [46] S.M. Ross. (2004). Introduction to Probability and Statistics for Engineers and Scientists. Academic Press, 3rd Edition.
- [47] P.H. Kvam and B. Vidakovic. (2007). Nonparametric Statistics with Applications to Science and Engineering. Wiley-Interscience, 1st Edition.
- [48] AgriMet Historical Hourly (Dayfile) Data Access -- Bureau of Reclamation. (n.d.), from <http://www.usbr.gov/pn/agrimet/webaghrread.html>
- [49] National Solar Radiation Data Base. (n.d.), from http://rredc.nrel.gov/solar/old_data/nsrdb/
- [50] Sea Gen. from <http://www.seageneration.co.uk/downloads.asp>
- [51] CO-OPS Current Station Data. (n.d.). Center for Operational Oceanographic Products and Services.
from <http://co-ops.nos.noaa.gov/cdata/StationInfo?id=t01010>
- [52] Marine Energy - Martin Wright, Managing Director, Marine Current Turbine Ltd.
Online: www.iwea.com/.../Outlook%20for%20Marine%20Energy%20.
- [53] Siemens Business ,Marine Current Turbines. (n.d.).
from <http://www.marineturbines.com/>
- [54] A. Navaeefard, S.M.M. Tafreshi, M. Barzegari and A.J. Shahrood. (2010). Optimal Sizing of Distributed Energy Resources in Microgrid Considering Wind Energy Uncertainty with Respect to Reliability. IEEE International Energy Conference and Exhibition, pp. 820-825, 18-22.
- [54] Surrette Battery Company Limited.
f r o <http://www.rollsbattery.com/content/battery-user-manual>
- [56] J.A. Duffie and W.A. Beckman. (2005) .Solar Engineering of Thermal Processes. Solar Energy Laboratory University of Wasconsin-madison, 3rd Edition.