



UNIVERSITI PUTRA MALAYSIA

***CRASHWORTHINESS ANALYSIS OF ELLIPTICAL AUTOMATIVE SIDE
DOOR BEAM FOR LIGHTWEIGHT DESIGN***

EHSAN RASOOLIAZDI

FK 2014 66



**CRASHWORTHINESS ANALYSIS OF ELLPTICAL AUTOMATIVE SIDE
DOOR BEAM FOR LIGHTWEIGHT DESIGN**

By

EHSAN RASOOLIAZDI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia.
In Fulfillment of the Requirements for the Degree of Master of Science
January 2014**

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia

ABSTRACT

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

CRASHWORTHINESS ANALYSIS OF ELLIPTICAL AUTOMATIVE SIDE DOOR BEAM FOR LIGHTWEIGHT DESIGN

By

EHSAN RASOOLIAZDI

January 2014

Chairman: Assoc. Prof. Rizal.Bin.Zahari, PhD

Faculty: Engineering

Side door beam (SDB) is one of the most important components in a vehicle to protect the passengers from the side impact. Side impact is the second type of common accident after frontal impact. The limited physical space between the car body and the occupants lead to severe injury due to high deformation of the car body. The weight reduction and crashworthiness improvement of the SDB are two problems that must be solved. In this study, the main objective is to optimize the crashworthiness behavior of different SDBs under impact test. Reducing the weight of SDB as well as the maximum impact load are two significant targets which are investigated simultaneously. In this respect, the specific energy absorption (SEA) and the peak load (PL) are two parameters which play the role key to develop the aforementioned goals. To investigate the crashworthiness of an SDB, two cross-sectional configurations of SDB which are elliptical and rectangular are selected. Three material alloys of magnesium, aluminum and steel as a reference material are assigned to the elliptical and rectangular SDB. In addition, these simulations are conducted with three orientation angles which are 0,45 and 90 degree with respect to the rigid wall impactor. For each case of studies, the elliptical and rectangular cross section of the SDB under each orientation angle is taken into account by considering two variables of geometrical parameters; thickness for both design beam and minor to major radii ratio for elliptical and ratio of sizes for rectangular shape. All the aforementioned steps are performed by LS-DYNA software which are used widely for impact problems. The multi-objective optimization framework is used to find the optimum geometrical characteristics in each series of simulations. Consequently, the optimization process of the SDB is performed using response surface method (RSM) in terms of the weight average method and the geometrical average method. The series of results are presented in a Pareto Frontier graph to show a group of solutions with optimal points and to meet both mentioned objectives at the same time. The optimization steps are performed by MATLAB software. The results show magnesium alloy has good ability to absorb more energy compare with the aluminium and steel alloys. On the other hand, elliptical cross section cause to lower

PL respect to rectangular design. Also, the orientation angle of 90 degrees lead to decrease the PL compare with the 0 and 45 degree. Consequently, elliptical SDB made by magnesium material with the angle of 90 degrees with respect to the rigid wall became the best solution in order to achieve the highest energy absorption (SEA) and the lowest peak load (PL). The selected SDB is optimized to get the optimal design which shows it has 0.5mm thickness and the ratio of radii is 0.284. The SEA and PL of optimized SDB are equal to 1203.74 (J/Kg) and 8.477 (KN) respectively.

ABSTRAK

Abstrak tesis yang dikemukakan kepada Seant Universiti Putra Malaysia sebagai memenuhi keperluan untuk Ijazah Sarjana Sains

ANALISA KEBOLEH TAHANAN HENTAMAN RASUK PINTU SISI ELIPTIC DENGAN REKAAN RINGAN

Oleh

EHSAN RASOOLIAZDI

Januari 2014

Pengerusi: Assoc. Prof. Rizal Bin Zahari, PhD
Faculti: Kejuruteraan

SDB adalah salah satu komponen penting dalam kenderaan untuk melindungi penumpang daripada kecederaan sisi. Kesan sisi la merupakan kecederaan jenis kedua selepas kecederaan hadapan. Ruang fizikal terhad antara badan kereta dan penumpang menjurus kearah kecederaan parah disebabkan kecacatan tinggi badan kereta. Pengurangan berat badan dan peningkatan crashworthiness SDB ialah dua masalah yang mesti diselesaikan. Dalam kajian ini, objektif utama ialah untuk mengoptimumkan tingkah lack crashworthiness SDBs berbeza di bawah ujian hentaman. Mengurangkan berat SDB serta beban kesan maksimum ialah dua sasaran penting yang mana disiasat serentak. Dalam hubungan ini, penyerapan tenaga (SEA) tertentu dan beban puncak (PL) ialah dua parameter yang memainkan peranan utama menghasilkan matlamat-matlamat tersebut sebelumnya. Untuk menyiasat crashworthiness SDB, dua konfigurasi berkereta rentas SDB yang mana bujur dan segi empat tepat lelak dipilih. Tiga pancalogam bahan magnesium, aluminium dan keluli sebagai satu bahan rujukan ditugaskan kepada SDB yang bujur dan segi empat tepat. Sebagai tambahan, simulasi-simulasi ini dikendalikan dengan tiga setiap iaitu 0, 45 dan 90 darjah seiring dengan dinding tegar. Untuk kes kajian, kereta rentas bujur dan segi empat tempat SDB di bawah setiap sudut orientasi diambil kira dengan mengambil kira dua pembolehubah geometri, ketebalan untuk kedua-dua. Reka cipta alur dan nisbah jejari minima ke maksima untuk bujur dan nisbah saiz untuk bentuk segi empat tepat. Semua langkah-langkah tersebut dilakukan dengan bantuan perisian LS-DYNA yang mana digunakan secara meluas untuk masalah-masalah kesan. Rangka kerjapeng optimuman yang pelbagai objektif digunakan untuk mencari ciri-ciri geometri yang optimum di setiap siri simulasi. Akibatnya, proses pengoptimuman SDB dijalankan menggunakan kaedah permukaan (RSM) gerak balas yang kaedah berat menggunakan purata dan kaedah purata geometri. Siri keputusan dibentangkan menggunakan Pareto graf menunjukkan beberapa jalan penyelesaian dengan mata optimum dan untuk mencapai kedua-dua objektif tersebut secara serentak. Langkah-langkah pengoptimuman dilakukan menggunakan perisian MATLAB. Keputusan menunjukkan magnesium mempunyai kebolehan yang baik untuk meresap lebih banyak tenaga berbanding aluminium dan keluli. Sebaliknya, keratan rentas bujur. Mengurangkan PL seiring dengan reka

bentuk segi empat tepat. Juga, sudut orientasi 90 darjah menjurus pengurangan PL berbanding kesannya pada 0 dan 45 darjah. Akibatnya, SDB bujur yang diperbuat menggunakan magnesium dengan sudut 90 darjah terhadap dinding tegar menjadi penyelesaian terbaik untuk mencapai penyerapan tenaga (SEA) tertinggi dan bedah puncak (PL) terendah. SDB terpilih dioptimumkan untuk mendapat reka bentuk optimum yang menunjukkan ia mempunyai ketebalan 0.5mm dan nisbah jejari 0.284. value untuk SEA dan PL kepada SDB yang optimum adalah 1203.74 (J/kg) dan 8.477 (kN)masing-masing.

ACKNOWLEDGEMENT

"In the name of Allah, Most gracious, Most merciful"

First of all, great thanks and praises are due to Allah, the Lord of all that exist. May Allah's peace and blessing be upon his final prophet and messenger, Muhammad, his family and his companions.

I would like to thank my supervisor, Assoc.Prof.Rizal. Bin. Zahari, for guidance in my master research. I would like to appreciate from my supervisory committee, Prof. Barkawi. Bin.Shari and Assoc.Prof.Faieza.Abdul.Aziz for their suggestion and assistance throughout the years. Also thanks to Mrs.Salwani for help me to learn LS-DYNA software. Special thanks to my parents for their support and blessing during my hardest time in completing this research.

I certify that a Thesis Examination Committee has met on 15th of January to conduct the final examination of Ehsan Rasooliyazdi on his thesis entitled "Crashworthiness Analysis Of Ellptical Automative Side Door Beam For Lightweight Design " in accordance with the University College Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The committee recommends that the student be awarded the Master of Science.

Member of the Thesis Examination Committee were as follows:

Mohd Sapuan b.Salit, PhD

Professor
Faculty of engineering
Universiti Putra Malaysia
(chairman)

Mohd Khairol Anuar b.Mohd Ariffin, PhD

Associate Professor
Faculty of engineering
Universiti Putra Malaysia
(Internal Examiner)

Nawal Aswan b.Abdul Jalil, PhD

Associate Professor
Faculty of engineering
Universiti Putra Malaysia
(Internal Examiner)

Ahmad Kamal Ariffin Mohd. Ihsan, PhD

Professor
Faculty of engineering
Universiti Kebangsaan Malaysia
(External Examiner)

NORITAH OMAR, PhD

Associate Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 21 April 2014

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the supervisory committee were as follows:

Rizal Bin Zahari, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Barkawi Bin Sahari, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Faieza Abdul Aziz, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

BUJANG BIN KIM HUAT, PhD

Professor and Dean
Scholl of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.


Signature: _____ Date: _____

Name and Matric No.: _____


Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Grad Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: 
Name of **PROF. IR. DR. BARKAWI SAHARI**
Chairman of Department of Mechanical and
Supervisory Manufacturing Engineering
Committee: Faculty of Engineering
ASSOC. PROF. DR. RIZAL ZAHARI
University Putra Malaysia

Signature _____
Name of _____
Member of _____
Supervisory _____
Committee: _____

Signature: 
Name of _____
Member of _____
Supervisory _____
Committee: **ASSOC. PROF. DR. FAIEZA ABDUL AZIZ**

Signature _____
Name of _____
Member of _____
Supervisory _____
Committee: _____

Lecturer
Department of Mechanical and Manufacturing Engineering
Faculty of Engineering
Universiti Putra Malaysia
43400 UPM Serdang, Selangor, MALAYSIA
dr.faeiza.upm@gmail.com, H/P: +6012 9416 700

TABLE OF CONTENTS

	Page
ABSTRACT	iii
ABSTRAK	v
ACKNOWLEDGEMENTS	vii
APPROVAL	viii
DECLARATION	ix
LIST OF TABLES	xiv
LIST OF FIGURES	xv
LIST OF ABBREVIATIONS	xviii
CHAPTER	
1	
INTRODUCTION	1
1.1 Background	1
1.2 Problem Statement	2
1.3 Research Objective	2
1.4 Research Scope	3
1.5 Thesis Structures	3
2	
LITERATURE REVIEW	4
2.1 Crash characteristic	4
2.1.1 Impact Theory	4
2.1.2 Types of impact test	6
2.2 Modeling vehicle structure	7
2.2.1 Lumped Mass-Spring (LMS) model	7
2.2.2 Finite Element (FE) models	8
2.2.3 Multi Bodies Dynamic (MBD) models	10
2.2.4 Hybrid models	10
2.3 Overview of several materials for crashworthiness	11
2.3.1 Steel	11
2.3.2 Aluminum	11
2.3.3 Magnesium	11
2.4 Nonlinear FE for crashworthiness	12
2.4.1 Methods' integration of governing equation	12
2.4.2 Contact Algorithm	14
2.4.3 Shell Element	15
2.5 Application of the Nonlinear FE Analysis	17
2.6 Optimization for Crashworthiness	18
2.7 Summary	20
3	
METHODOLOGY	21
3.1 Introduction	21
3.2 Validation	23
3.2.1 Validation of Square Beam	23
3.2.2 Finite Element of Square Beam	23
3.3 Finite Element Modeling	24

3.4	Side Door Beam Material	27
3.5	Orientation Angle of SDB Respect to Rigid Wall	28
3.6	Performance of The Changing Geometry of SDB	29
3.7	Description of Optimization Problem	29
4	RESULTS AND DISCUSSION	31
4.1	Introduction	31
4.2	Results of validation	31
4.2.1	Mesh Sensitivity Analysis	33
4.2.2	The effect of imperfection	35
4.3	Multi-objective optimization of SDB	36
4.3.1	Performance of elliptical steel SDB with 0, 45 and 90 degree angle of impact	36
4.3.2	Performance of elliptical magnesium SDB with 0, 45 and 90 degree angle of impact	44
4.3.3	Performance of elliptical aluminum SDB with 0, 45 and 90 degree angle of impact	52
4.3.4	Comparison of peak load (PL) and specific energy absorption (SEA) for three materials and three angles of elliptical SDB	60
4.3.5	Performance of rectangular steel SDB with 0, 45 and 90 degree angle of impact	62
4.3.6	Performance of rectangular magnesium SDB with 0, 45 and 90 degree angle of impact	69
4.3.7	Performance of rectangular aluminum SDB with 0, 45 and 90 degree angle of impact	77
4.3.8	Comparison of peak load (PL) and specific energy absorption (SEA) for three materials and three angles of rectangular SDB	85
4.3.9	Comparison of peak load (PL) and specific energy absorption (SEA) for three materials and three angles of elliptical and rectangular SDB	87
5	CONCLUSION AND FUTURE WORKS	89
5.1	Conclusion	89
5.2	Future works	89
	REFERENCES	90
	APPENDIX	97
	BIODATA OF STUDENT	106
	LIST OF PUBLICATIONS	107

LIST OF TABLES

Table		Page
2.1	Types of Accident	6
2.2	Overview of shell elements	15
2.3	Overview of four basic techniques	19
3.1	Results of various length of rigid wall	27
3.2	Material properties of the side door beams	28
4.1	The results for steel SDB and angles of 0, 45 and 90 degree	37
4.2	The results of geometrical average method for 0, 45 and 90 degree	42
4.3	The results for magnesium SDB and angles of 0, 45 and 90 degree	45
4.4	The results of geometrical average method for 0, 45 and 90 degree	50
4.5	The results for aluminum SDB and angles of 0, 45 and 90 degree	53
4.6	The results of geometrical average method for 0, 45 and 90 degree	58
4.7	The results for steel SDB and angles of 0, 45 and 90 degree	62
4.8	The results of geometrical average method for 0, 45 and 90 degree	67
4.9	The results for magnesium SDB and angles of 0, 45 and 90 degree	70
4.10	The results of geometrical average method for 0, 45 and 90 degree	75
4.11	The results for aluminum SDB and angles of 0, 45 and 90 degree	78
4.12	The results of geometrical average method for 0, 45 and 90 degree	83

LIST OF FIGURES

Figure		Page
1.1	Side door beam of frontal vehicle door	2
2.1	Kamal's Lumped Mass-Spring model	7
2.2	A Lumped Mass-Spring model for frontal impact	8
2.3	The Volkswagen Polo model	9
2.4	Multi Bodies Dynamic model	10
2.5	Hybrid model	11
2.6	Shell element	17
3.1	Flowchart of Methodology	22
3.2	The Square beam	24
3.3	Side door beam location in the frontal vehicle door	24
3.4	Boundary condition of SDB (a) elliptical (b) rectangular	25
3.5	Resolution of element SDB (a) elliptical (b) rectangular	26
3.6	Isometric view of the rigid wall impact	27
3.7	The angle of the impact between SDB and rigid wall (a) elliptical (b) rectangular	28
3.8	The cross-section of the SDB (a) elliptical (b) rectangular	29
4.1	Square beam after impact (a) experimental test (b) FE simulation	32
4.2	Comparison between experimental and FE of square beam for displacement	33
4.3	Displacement vs Time for different number of elements	33
4.4	Deform shapes between different number of elements (a) 700 (b) 1008 (c) 1380 (d) 1938 (e) 2196 (f) 3634	34
4.5	The shape of beam with imperfection	35

4.6	Comparison between two deformation shapes (a) with imperfection (b) without imperfection	35
4.7	The RS for for SEA and PL (a-b) 0° (b-c) 45° (e-f) 90°	39
4.8	Pareto frontier graph for SEA and PL (a) 0° (b) 45° (c) 90°	41
4.9	The elliptical SDB after impact (a) 0° (b) 45° (c) 90°	43
4.10	SEA vs Time for elliptical SDB for 0, 45 and 90 degree	44
4.11	The RS for for SEA and PL (a-b) 0° (b-c) 45° (e-f) 90°	47
4.12	Pareto frontier graph for SEA and PL (a) 0° (b) 45° (c) 90°	49
4.13	The elliptical SDB after impact (a) 0° (b) 45° (c) 90°	51
4.14	SEA vs Time for elliptical SDB for 0, 45 and 90 degree	52
4.15	The RS for for SEA and PL (a-b) 0° (b-c) 45° (e-f) 90°	55
4.16	Pareto frontier graph for SEA and PL (a) 0° (b) 45° (c) 90°	57
4.17	The elliptical SDB after impact (a) 0° (b) 45° (c) 90°	59
4.18	SEA vs Time for elliptical SDB for 0, 45 and 90 degree	60
4.19	Comparison of PL between the three angles of three materials	61
4.20	Comparison of PL between the three angles of three materials	61
4.21	The RS for for SEA and PL (a-b) 0° (b-c) 45° (e-f) 90°	64
4.22	Pareto frontier graph for SEA and PL (a) 0° (b) 45° (c) 90°	66
4.23	The rectangular SDB after impact (a) 0° (b) 45° (c) 90°	68
4.24	SEA vs Time for rectangular SDB for 0, 45 and 90 degree	69
4.25	The RS for for SEA and PL (a-b) 0° (b-c) 45° (e-f) 90°	72
4.26	Pareto frontier graph for SEA and PL (a) 0° (b) 45° (c) 90°	74
4.27	The rectangular SDB after impact (a) 0° (b) 45° (c) 90°	76

4.28	SEA vs Time for elliptical SDB for 0, 45 and 90 degree	77
4.29	The RS for for SEA and PL (a-b) 0° (b-c) 45° (e-f) 90°	80
4.30	Pareto frontier graph for SEA and PL (a) 0° (b) 45° (c) 90°	82
4.31	The rectangular SDB after impact (a) 0° (b) 45° (c) 90°	84
4.32	SEA vs Time for rectangular SDB for 0, 45 and 90 degree	85
4.33	Comparison of PL between the three angles of three materials	86
4.34	Comparison of PL between the three angles of three materials	86
4.35	Comparison of SEA between the three angles of three materials for elliptical and rectangular shapes	87
4.36	Comparison of PL between the three angles of three materials for elliptical and rectangular shapes	88

LIST OF ABBREVIATIONS

SDB	Side Door Beam
SEA	Specific Energy Absorption
PL	Peak Load
LMS	Lumped Mass-Spring model
FE	Finite Element models
CAD	Computer Aided Design
MBD	Multi Bodies Dynamic models
DOE	Design of Experiments
NN	Neural Network
RBF	Radial Basis Fuction
RSM	Response Surface Method
CAE	Computer Aided Engineering

CHAPTER 1

INTRODUCTION

1.1 Background

Nowadays, the number of accidents has increased in the recent years dramatically. Considering to the last statistical which achieved from the research, more than 1 million people are dead in road accident each year (Murray *et al.*, 2006). Consequently, the safety of passenger requires more focus on the crashworthiness of vehicles.


Currently, most of companies in the world spend more money to improve the safety of cars because it is an essential parameter for customers and an important factor for competitions between companies productions. Companies perform the impact test on vehicles to find the best design for improving the crashworthiness. Side impact is one kind of test to assess the crashworthiness of vehicles. In the side impact, the crumple zone by accident is limited and occupants are very close to the car body. Side impact is the second type of common accident after frontal impact. Accordingly, development of safety for side impact is important. General Motors was the first company that evaluated the side impact with barrier in 1934 in Michigan (Raja, 2008).

In the past decades, the companies used a real car for experimental test and then, they had been analyzed the results which obtained from the test. These tests are too expensive and time consuming. This problem was solved by researcher when they used the nonlinear finite element method. Nonlinear finite element method is a tool to simulate the crash test with high accuracy. This method helps to designers to analyze the crash test relatively easily with high reliability.

Thin walled structures have more application in industry. In vehicles, thin walled structures are used because of their lightweight. These structures have a good ability to absorb the impact energy and resistance against the folding and bending. In this study, the elliptical and rectangular beams are examined in the impact test. This beam uses inside the car doors to protect the passengers subjected to the side impact.

In the automotive industry, several kinds of materials are used: steel, magnesium and aluminum. Due to their properties, steel is stiffer than others, but is heavier. On the other hand, magnesium is very interesting material, because it is so light. It is three times lighter than steel, so it is suitable in some part of structures which needs lighter material.

Response surface method (RSM) is one of the approximate methods that is widely used for impact problems. In impact problems, maximizing the specific energy absorption (SEA) and minimizing the peak load (PL) are two targets which have to obtain simultaneously. In this work, the multi - objective optimization is used to optimize the size of the beam. The results of multi-objective optimization are presented by the Pareto Frontier graph. All points in the graph are optimal points. It depends on designer that which parameter between SEA and PL is more important.

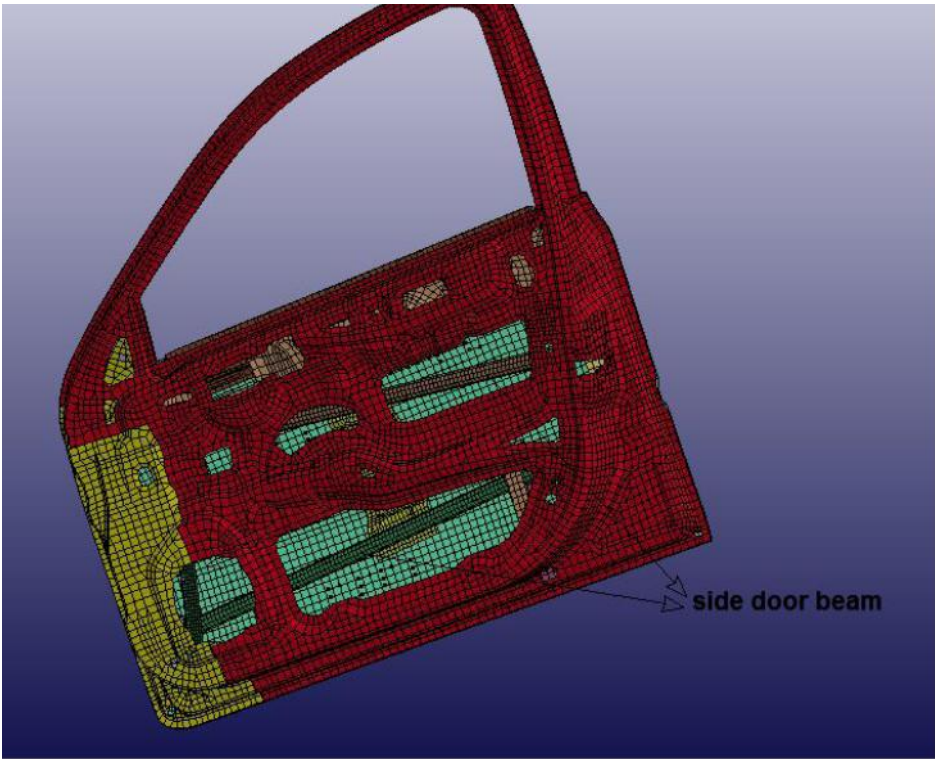

- 1- To investigate the effect of material and the orientation angle of impact loading on the structural behavior of elliptical and rectangular SDB subject to the side impact.
- 2- To obtain the optimal design of both the elliptical and rectangular section beams subjected to side impact loading using multi-objective optimization.

Based on the previous studied which are mentioned in chapter 2, changing the materials and the cross section of the beams can lead to the improvement of the SEA and have a positive effect to decrease the PL. Moreover, the position of the beam while it collides with the rigid wall can cause to change the PL. So, these are the research hypothesis which are investigated to be proved.

1.4 Research Scope

As it is mentioned, the goal of this research is improving the crashworthiness of SDB. To achieve this goal, elliptical and rectangular configuration of the SDBs are selected for impact analysis. The materials which are used for the SDBs are alloy steel AISI1006, alloy aluminum 3105-H18 and alloy magnesium AZ31B. These materials are selected because they are widely used in the automotive industry. The orientation angle of SDB to rigid wall is another item which investigated for all SDBs that have different materials. Three angles of 0,45 and 90 degrees are selected for investigation. To evaluate the impact tests, The CAD data of the SDBs are modelled, meshed and simulated in Ls-Dyna 3.1 Beta software. After that, multi-objective optimization is applied to achieve the optimal design. In this research, the results optimized by MATLAB software.

1.5 Thesis Structures

This thesis consists of five chapters. First chapter consists of problem statement, objectives, research scope and thesis organization. In the second chapter, literature review is written that it shows what works have been done with other researchers till yet. The third chapter is methodology which explains the way of working on this study. Chapter 4 consists of the results and discussion that shows the results of impact test on beam and also Optimization of the results is done for getting the optimal design. Finally the last chapter shows the recommendations and conclusions of this research.

REFERENCES

- Abbott, T., Easton, M., and Schmidt, R. (2003). Magnesium for crashworthy components. *Journal of the Minerals, Metals and Materials Society*: 227–230.
- Abramowicz, W., and Jones, N. (1984). Dynamic axial crushing of circular tubes. *International Journal of Impact Engineering*, 2 (3): 263–281.
- Abramowicz, W., and Jones, N. (1984). Dynamic axial crushing of square tubes. *International Journal of Impact Engineering*, 2(2): 179–208.
- Afshar, R., Ali, A., and Sahari, B. B. (2009). Auto generation of the center of gravity of tubular structures during crush. *International Journal of Computational Methods*, 06(02): 333–348.
- Alghamdi, A. A. (2001). Collapsible impact energy absorbers: an overview. *Thin-Walled Structures*, 39(2): 189–213.
- Allahbakhsh, H. R., and Saemi, J. (2011). Design optimization of square and circular aluminium extrusion damage columns with crashworthiness criteria. *Indian Journal of Engineering & Materials Sciences*, 18(5): 341–350.
- Andrews, K. R. F., England, G. L., and Ghani, E. (1983). Classification of the axial collapse of cylindrical tubes under quasi-static loading. *International Journal of Mechanical Sciences*, 25(9): 687–696.
- Argyris, J., Balmer, H. A., St. Doltsinis, J., and Kurz, A. (1986). Computer simulation of crash phenomena. *International Journal for Numerical Methods in Engineering*, 22(3): 497–519.
- Athan, T. W., and Papalambros, P. Y. (1996). A note on weighted criteria methods for compromise solutions in multi-objective. *Engineering Optimization*, 27(2): 155–176.
- Batoz, J.-L., Bathe, K.-Jür., and Ho, L.-W. (1980). A study of three-node triangular plate bending elements. *International Journal for Numerical Methods in Engineering*, 15(12): 1771–1812.
- Belytschko, T., and Bachrach, W. E. (1986). Efficient implementation of quadrilaterals with high coarse-mesh accuracy. *Computer Methods in Applied Mechanics and Engineering*, 54(3): 279–301.
- Belytschko, T., and Leviathan, I. (1994). Projection schemes for one-point quadrature shell elements. *Computer Methods in Applied Mechanics and Engineering*, 115(3-4): 277–286.
- Belytschko, T., Liu, W., and Moran, B. (2000). *Nonlinear finite elements for continua and structures*. John Wiley & Sons.

- Belytschko, T., Wong, B., and Chiang, H. (1989). Improvements in low-order shell elements for explicit transient analysis. *Analytical and Computational Models of Shells*: 383–398.
- Caliskan, A., Jeryan, R., Mees, H., and Iregbu, S. (2005). Experimental and analytical study of the crashworthiness for the 2005 Ford GT aluminum spaceframe. In *ASME International Mechanical Engineering Congress and Exposition , Orlando, PL, United States*: 427–438.
- Chen, C., and Usman, M. (2001). Design optimisation for automotive applications. *International Journal of Vehicle Design*, 25(1-2): 126–141.
- Cook, R. D. (2007). *Concepts and applications of finite element analysis*. John Wiley & Sons.
- Das, S. (2003). Magnesium for automotive applications: Primary production cost assessment. *Journal of the Minerals, Metals and Materials Society*, 55(11): 22–26.
- Das, S. (2008). Primary magnesium production costs for automotive applications. *JOM: : Journal of the Minerals, Metals and Materials Society*, 60(11): 63–69.
- Dong, G., Wang, D., Zhang, J., and Huang, S. (2007). Side structure sensitivity to passenger car crashworthiness during pole side impact. *Tsinghua Science & Technology*, 12(3): 290–295.
- Easton, M., Beer, A., Barnett, M., and Davies, C. (2008). Magnesium alloy applications in automotive structures. *Journal of the Minerals, Metals and Materials Society*, 60(11): 57–62.
- (ECE) Regulations. (2011). Retrieved January 26, 2014, from http://www.crash-network.com/Regulations/ECE_Regulations/ece_regulations.html
- Engelmann, B. E., Whirley, R. G., and Goudreau, G. L. (1989). *A simple shell element formulation for large-scale elastoplastic analysis* (No. UCRL-99677; CONF-891208--9). Lawrence Livermore National Lab., CA (USA).
- Fang, H., Raisrohani, M., Liu, Z., and Horstemeyer, M. (2005). A comparative study of metamodeling methods for multiobjective crashworthiness optimization. *Computers & Structures*, 83(25-26): 2121–2136.
- Fang, H., Rais-Rohani, M., Liu, Z., and Horstemeyer, M. F. (2005). A comparative study of metamodeling methods for multiobjective crashworthiness optimization. *Computers & Structures*, 83(25-26): 2121–2136.
- Farkas, L., Canadas, C., Donders, S., Van Langenhove, T., Tzannetakis, N., Tielens, J., and Schildermans, D. (2009). Optimization study of a parametric vehicle bumper subsystem under multiple load cases using LMS Virtual. Lab and OPTIMUS. In *Proceedings 7th European LS-DYNA conference, Salzburg*.

- Fayyad, U. M., Piatetsky-Shapiro, G., Smyth, P., and Uthurusamy, R. (1996). Advances in knowledge discovery and data mining. (FMVSS) Federal Motor Vehicle Safety Standards and Regulations. (1986). Retrieved January 26, 2014 from <http://www.nhtsa.gov/cars/rules/import/fmvss>
- Ferrer, B., Ivorra, S., Segovia, E., and Irlles, R. (2010). Tridimensional modelization of the impact of a vehicle against a metallic parking column at a low speed. *Engineering Structures*, 32(8): 1986–1992.
- Fildes, B., Bostrom, O., Haland, Y., and Sparke, L. (2003). Countermeasures to address far-side crashes: First results. In *Proceedings of the Nineteenth International Conference on Enhanced Safety of Vehicles*: 05-0447.
- Galganski, R. A. (1993). Crashworthiness design of HSGGT vehicles. In *Railroad Conference, 1993., Proceedings of the 1993 IEEE/ASME*: 121-130.
- Greene, J. E. (1977). *Computer simulation of car-to-car collisions* (No. SAE 770015).
- Happee, R., and Janssen, A. (2003). Application of MADYMO occupant models in LS-DYNA/MADYMO coupling. *4th European LS-DYNA conference*.
- Haug, E. (1983). Static and dynamic finite element analysis of structural crashworthiness in the automotive and aerospace industries . Structural crashworthiness: 175–217.
- Haug, E., Scharnhorst, T., and Bois, P. Du. (1986). FEM-Crash, Berechnung eines Fahrzeugfrontalaufpralls. *VDI Berichte*: 479–505.
- Hesham., K. I. (2009). *Design optimization of vehicle structures for crashworthiness improvement*, PhD Thesis, Concordia University
- Hosseini-pour, S. , and Daneshi, G. (2003). Energy absorption and mean crushing load of thin-walled grooved tubes under axial compression. *Thin-Walled Structures*, 41(1): 31–46.
- Hou, S., Li, Q., Long, S., Yang, X., and Li, W. (2008). Multiobjective optimization of multi-cell sections for the crashworthiness design. *International Journal of Impact Engineering*, 35(11): 1355–1367.
- Hou, S., Li, Q., Long, S., Yang, X., and Li, W. (2009). Crashworthiness design for foam filled thin-wall structures. *Materials & Design*, 30(6): 2024–2032.
- Hughes, T. J. R., and Liu, W. K. (1981). Nonlinear finite element analysis of shells: Part I. three-dimensional shells. *Computer Methods in Applied Mechanics and Engineering*, 26(3): 331–362.
- Hughes, T. J. R., and Liu, W. K. (1981). Nonlinear finite element analysis of shells-part II. two-dimensional shells. *Computer Methods in Applied Mechanics and Engineering*, 27(2): 167–181.

- Jin, R., Chen, W., and Sudjianto, A. (2002). On sequential sampling for global metamodeling in engineering design. *Proceedings of International Design Engineering Technical Conferences*. 539-548.
- Johnson, W., Soden, P. D., and Al-hassani, S. T. S. (1977). Inextensional collapse of thin-walled tubes under axial compression. *The Journal of Strain Analysis for Engineering Design*, 12(4): 317–330.
- Kamal, M. (1970). Analysis and Simulation of Vehicle to Barrier Impact. *SAE Technical Paper*.
- Kantardzic, M. (2011). *Data mining: concepts, models, methods, and algorithms*. John Wiley & Sons.
- Kecman, D. (1983). Bending collapse of rectangular and square section tubes. *International Journal of Mechanical Sciences*, 25(9-10): 623–636.
- Kennedy, J. M., Belytschko, T., and Lin, J. I. (1986). Recent developments in explicit finite element techniques and their application to reactor structures. *Nuclear Engineering and Design*, 97(1): 1–24.
- Khalil, T. B., and Du Bois, P. (2004). Finite element analytical techniques and applications to structural design. *Vehicle crashworthiness and occupant protection, Michigan: American Iron and Steel Institute*: 111-158.
- Kormi, K., Wijayathunga, V. N., Webb, D. C., and Al-Hassani, S. T. S. (2003). FE investigation of a spirally slotted tube under axially compressive static and dynamic impact loading. *International Journal of Crashworthiness*, 8(5): 421–432.
- Krauskopf, K. B., and Bird, D. K. (1967). *Introduction to geochemistry* (Vol. 721). New York: McGraw-Hill.
- Krige, D. G. (1951). *A Statistical Approach to Some Mine Valuation and Allied Problems on the Witwatersrand*. Doctoral dissertation, University of the Witwatersrand.
- Kurtaran, H., Eskandarian, A., Marzougui, D., and Bedewi, N. E. (2002). Crashworthiness design optimization using successive response surface approximations. *Computational Mechanics*, 29(4-5): 409–421.
- Langseth, M., Hopperstad, O. S., and Berstad, T. (1999). Crashworthiness of aluminium extrusions: validation of numerical simulation, effect of mass ratio and impact velocity. *International Journal of Impact Engineering*, 22(9-10): 829–854.

- Lilehkoohi, A. H., Faieza, A. A., Sahari, B. B., Nuraini, A. A., and Halali, M. (2013). Effect of material on crashworthiness for side doors and b pillar subjected to euro ncap side impact crash test. *Advanced Science Letters*, 19(2): 359–362.
- Lim, G., and Paluszny, A. (1988). Side impact research. *SAE Technical Paper*.
- Liu, Y. (2008). Optimum design of straight thin-walled box section beams for crashworthiness analysis. *Finite Elements in Analysis and Design*, 44(3): 139–147.
- Liu, Y., and Glass, G. (2011). Effects of wall thickness and geometric shape on thin-walled parts structural performance. *Thin-Walled Structures*, 49(1): 223–231.
- Lu, H., Setiono, R., and Liu, H. (1996). Effective data mining using neural networks. *IEEE Transactions on Knowledge and Data Engineering*: 957–961.
- Magee, C. (1988). Design for crash energy management present and future developments. In *Proceedings of the Seventh International Conference on vehicle structural*.
- Mahmood, H. F., and Paluszny, A. (1981). Design of thin walled columns for crash energy management-their strength and mode of collapse. *Training*.
- Mamalis, A. ., Manolakos, D. ., Ioannidis, M. ., Kostazos, P. ., and Dimitriou, C. (2003). Finite element simulation of the axial collapse of metallic thin-walled tubes with octagonal cross-section. *Thin-Walled Structures*, 41(10): 891–900.
- Manual, L. (1998). Livermore Software Technology Corporation. *Livermore, CA*.
- Marchertas, A., and Belytschko, T. (1974). Nonlinear finite-element formulation for transient analysis of three-dimensional thin structures. *Technical Report ,ANL-8104, Argonne National Laboratory*.
- Marzbanrad, J., Alijanpour, M., and Saeid, M. (2009). Thin-walled structures design and analysis of an automotive bumper beam in low-speed frontal crashes. *Analysis*, 47: 902–911.
- McHenry, R. (1963). Analysis of the dynamics of automobile passenger-restraint systems. *Proceedings: American Association for Automotive Medicine Annual Conference*, 7: 207–249.
- Meckesheimer, M., Barton, R. R., Simpson, T., Limayem, F., and Yannou, B. (2001). Metamodeling of Combined Discrete/Continuous Responses. *AIAA Journal*, 39(10): 1950–1959.
- (C.R.C) Motor Vehicle Safety Regulations - Transport Canada. (2009). Retrieved January 26, 2014 from <http://www.tc.gc.ca/eng/acts-regulations/regulations-crc-c1038.htm>

- Murray, C., Jamison, D., & Lopez, A. (2006). Global mortality, disability, and the contribution of risk factors: Global Burden of Disease Study. *The Lancet*. 343
- Myers, R. H., and Anderson-Cook, C. M. (2009). *Response surface methodology: process and product optimization using designed experiments* (Vol. 705). John Wiley & Sons.
- N.J.Mai., B.B.Sahari, and A.Nuraini. (2011). Parametric Study of Automotive Composite Bumper Beams Subjected to Frontal Impacts. *Key Engineering Materials*, 471: 484–489.
- Nehan, M., and Maloney, R. (1996). *Magnesium AM60B instrument panel structure for crashworthiness FMVSS 204 and 208 compliance* (No. 960419). SAE Technical Paper.
- Newland, C. A., and Murray, M. T. (1996). Strain Rate Dependent Behaviour of Magnesium-Based Alloys. In *Proceedings of the First Australasian Congress on Applied Mechanics: ACAM-96* (p. 73). Institution of Engineers, Australia.
- Otubushin, A. (1998). Detailed validation of a non-linear finite element code using dynamic axial crushing of a square tube. *International Journal of Impact Engineering*, 21(5): 349–368.
- Peixinho, N., and Pinho, A. (2007). Study of viscoplasticity models for the impact behavior of high-strength steels. *Computational and Nonlinear Dynamics*, 2(2): 114–123.
- Pifko, A. B., and Winter, R. (1981). Theory and application of finite element analysis to structural crash simulation. *Computers & Structures*, 13(1-3): 277–285.
- Qiao, J., Chen, J., and Che, H. (2006). Crashworthiness assessment of square aluminum extrusions considering the damage evolution. *Thin-Walled Structures*, 44(6): 692–700.
- Raja, A , Raja. Z. (2008). Analysis of Proton Persona side door (driver) using simulation tool, Undergraduates Thesis, Universiti Malaysia Pahang.
- Reddy, J. N. (2004). *Nonlinear finite element analysis*. Oxford University Press, New York.
- Sahari, B. ., Azni, M. M., Wong, S. V., Ahmad, M. F., Khalid, Y. A., and Hamouda, A. M. (2008). Finite element lateral crash analysis of front natural gas vehicle platform with tank mounting structure . *International Journal of Vehicle Safety*, 3(2): 135-148.
- Sahari, B. B., Norwazan, A. R., Hamouda, A. M., Khalid, Y. A., and Wong, S. V. (2007). The effect of bulge height and length on the lateral crash behaviour of front platform of a compressed natural gas vehicle. *International Journal of Vehicle Safety*, 2(3): 278–287.

- Salwani, M. S., Ali, A., Sahari, B. B., and Nuraini, A. A. (2011). Crash of automotive side member subjected to oblique loading. *International Journal of the Physical Sciences*, 6: 7125-7131.
- Simpson, T. W., Poplinski, J. D., Koch, P. N., and Allen, J. K. (2001). Metamodels for computer-based engineering design: survey and recommendations. *Engineering With Computers*, 17(2): 129–150.
- Singace, A. A., and Elsobky, H. (1996). Further experimental investigation on the eccentricity factor in the progressive crushing of tubes. *International Journal of Solids and Structures*, 33(24): 3517–3538.
- Slycken, J. Van, and Verleysen, P. (2006). Crashworthiness characterization and modelling of high-strength steels for automotive applications. *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, 220(4): 391–400.
- Taub, A. I., Krajewski, P. E., Luo, A. A., and Owens, J. N. (2007). The evolution of technology for materials processing over the last 50 years: The automotive example. *Journal of the Minerals, Metals and Materials Society*, 59(2): 48–57.
- Toksoy, a. K., and Güden, M. (2010). Partial Al foam filling of commercial 1050H14 Al crash boxes: The effect of box column thickness and foam relative density on energy absorption. *Thin-Walled Structures*, 48(7): 482–494.
- Winter, R., Mantus, M., and Pifko, A. B. (1981). Finite element crash analysis of a rear-engine automobile. *Safety*.
- Xiang, Y., Wang, Q., Fan, Z., and Fang, H. (2006). Optimal crashworthiness design of a spot-welded thin-walled hat section. *Finite Elements in Analysis and Design*, 42(10): 846–855.
- Yang, R. J., Wang, N., Tho, C. H., Bobineau, J. P., and Wang, B. P. (2005). Metamodeling Development for Vehicle Frontal Impact Simulation. *Journal of Mechanical Design*, 127(5): 1014-1020.
- Zarei, H. R., and Kröger, M. (2006). Multiobjective crashworthiness optimization of circular aluminum tubes. *Thin-Walled Structures*, 44(3): 301–308.
- Zhang, X., Jin, X., Li, Y., and Li, G. (2008). Improved design of the main energy-absorbing automotive parts based on traffic accident analysis. *Materials & Design*, 29(2): 403–410.