



UNIVERSITI PUTRA MALAYSIA

***ELECTROMYOGRAPHY SIGNAL PROCESSING BASED ON
TIME AND TIME-FREQUENCY REPRESENTATIONS FOR
PROSTHESIS APPLICATION***

FARZANEH AKHAVAN MAHDAVI

FK 2014 73



**ELECTROMYOGRAPHY SIGNAL PROCESSING BASED ON TIME AND
TIME-FREQUENCY REPRESENTATIONS FOR PROSTHESIS
APPLICATION**

By

FARZANEH AKHAVAN MAHDAVI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfilment of the Requirements for the Degree of Master of Science**

January 2014

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright©Universiti Putra Malaysia



© COPYRIGHT UPM

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Master of Science

ELECTROMYOGRAPHY SIGNAL PROCESSING BASED ON TIME AND TIME-FREQUENCY REPRESENTATIONS FOR PROSTHESIS APPLICATION

By

FARZANEH AKHAVAN MAHDAVI

January 2014

Chair: Siti Anom Ahmad, PhD

Faculty: Engineering

Electromyography (EMG) is a technique to acquire and study the signal of skeletal muscles. Skeletal muscles are attached to the bone responsible for the movements of the human body. Regarding the vast variety of EMG signal applications such as rehabilitation of people suffering from some mobility limitations, scientists have done much research on the EMG Control System (ECS). Accordingly, using EMG signal for controlling a prosthetic hand has been developed remarkably in recent years. The ECS based on pattern recognition has been improved by using new techniques in the EMG signal processing. Some of the main concerns of the ECS are the accuracy and complexity of the system. Consequently, the development of the ECS in term of accuracy and speed is the main challenge in prosthetic control.

This thesis investigates the necessity of the ECS improvements by processing the EMG signal through a pattern recognition-based control system for prosthesis application. To reach this goal, different techniques in two domains of study, time and time-frequency, had been utilized to find the optimum features for EMG analysis. Mean Absolute Value (MAV), Root Mean Square (RMS), Zero Crossing (ZC) and Waveform Length (WL) were employed as feature extraction techniques in time domain and Wavelet Transform (WT) was used in time-frequency domain. Furthermore, an optimization in wavelet analysis had been investigated using twenty mother wavelets which improved the results of the EMG feature extraction. Afterwards, two discriminant analysis classifiers, Linear Discriminant Analysis (LDA) and Quadratic Discriminant Analysis (QDA) had been utilized to differentiate the five hand movements. It is worth mentioning that eighteen healthy people had participated in EMG signal recording and different wrist motions (flexion, extension, abduction, adduction and rest) had been recorded.

As a result, the output of the proposed algorithm for EMG signal processing using various techniques presented an improvements in EMG signal classification in terms of accuracy. The highest classification accuracy obtained in this research was obtained by RMS feature in time domain as 98.06%. Also, the optimizing of wavelet features yielded 97.13% accuracy by applying WT+RMS (Root Mean Square of Wavelet coefficients) as the feature. On the other hand, an investigation on data segmentation before feature extraction had revealed the segment size of EMG

signal plays a significant role in EMG analysis. In this study, it was presented that the techniques of segmentation and segment size affect the classification accuracy. Based on the results of this thesis, the proposed algorithm for EMG signal processing can be applied to discriminate different hand grip postures efficiently. Overall, RMS feature was demonstrated as the optimum feature for EMG classification using QDA classifier.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah master sains.

SISTEM KAWALAN ELEKTROMIOGRAFI BERDASARKAN MASA DAN PERWAKILAN TIME-KEKERAPAN PERMOHONAN PROSTESIS

Oleh

FARZANEH AKHAVAN MAHDAVI

Januari 2014

Pengerusi: Siti Anom Ahmad, PhD

Fakulti: Kejuruteraan

Elektromiografi (EMG) juga dirujuk sebagai mioelektrik, adalah isyarat bioperubatan yang diambil dari rangka otot. Rangka otot yang bersambung kepada tulang bertanggungjawab untuk pergerakan badan. Oleh kerana penggunaan isyarat EMG sangat luas dan pelbagai sebagai contoh pemulihan pesakit yang menderita daripada pergerakan yang terhad, maka saintis telah membuat banyak kajian berkaitan sistem kawalan EMG (ECS). Disebabkan itu, beberapa tahun kebelakangan ini penggunaan isyarat EMG untuk mengawal tangan palsu telah dibangunkan. ECS berasaskan pengenpastian bentuk atau paten telah dipertingkatkan dengan menggunakan teknik baru dalam analisis isyarat EMG. Terdapat beberapa perkara berbangkit dalam ECS seperti ketepatan dan kesukaran sistem tersebut. Disebabkan itu, pembangunan ECS dalam kata erti ketepatan dan kelajuan adalah cabaran utama dalam pengawalan tangan palsu.

Tesis ini bertujuan untuk menyiasat keperluan untuk meningkatkan ECS dengan memproses isyarat EMG melalui pengenpastian paten berasaskan sistem kawalan untuk aplikasi prostesis. Untuk mencapai objektif tersebut, teknik berbeza dalam dua domain kajian iaitu masa dan masa-frekuensi telah dikaji bagi mendapatkan sifat optimum dalam analisis EMG. Mean Absolute Value (MAV), Root Mean Square (RMS), Zero Crossing (ZC) dan Waveform Length (WL) telah digunakan sebagai teknik pengekstrakan ciri atau sifat dalam domain masa dan 'Wavelet Transform' (WT) dalam domain masa-frekuensi. Tambahan lagi, pengoptimuman dalam analisis wavelet telah dikenalpasti menggunakan dua puluh ibu wavelet yang mana ia menambahbaik keputusan pengekstrakan ciri EMG. Kemudian, dua pengelas pembezaan analisis, LDA and QDA telah direkrut untuk membezakan lima pergerakan tangan. Seramai lapan belas orang terlibat dalam rakaman isyarat EMG dengan pergerakan pergelangan tangan yang berbeza (membengkok, meregang, membengkok ke kanan, membengkok ke kiri, rehat) telah direkodkan.

Hasil dari kajian ini, terdapat peningkatan ketepatan pengelasan isyarat EMG didalam ECS menggunakan pelbagai teknik yang diusulkan. Ketepatan pengkelas tertinggi yang didapati dari sistem ini telah dicapai melalui ciri RMS dalam domain masa sebanyak 98.06%. Pengoptimuman ciri wavelet mendapat 97.13% ketepatan dengan menggunakan WT+RMS sebagai ciri. Selain dari itu, satu kajian ke atas pembahagian data sebelum pengekstrakan ciri mendapati saiz pembahagian isyarat

EMG memainkan peranan penting dalam analisis EMG. Dalam kajian ini, ia membuktikan bahawa teknik pembahagian dan saiz bahagian mempengaruhi ketepatan pengelasan dan kelajuan sistem. Berdasarkan keputusan dari kajian ini, algoritma yang dicadangkan untuk memproses isyarat EMG boleh diaplikasi untuk membezakan postur gengaman tangan dengan cekap. Keseluruhannya, sifat RMS yang telah terbukti sebagai sifat optimum dalam pengelasan EMG menggunakan pengkelas QDA.



ACKNOWLEDGEMENTS

I would like to take this opportunity to express my profound gratitude and regards to all the people who had supported me to make the completion of my thesis. First and foremost, I thank my supervisor, Dr. Siti Anom Ahmad since without her exemplary guidance, monitoring and constant encouragement, I could not carry out this thesis. The patience and kindness given by her time to time carried me a long way in the journey of life and brought me valuable experience.

I would like to thank my co-supervisor, Associate Professor Dr. Mohd Hamiruce Marhaban for his help and precious advice which helped me in accomplishing my research. I am also thankful to my external co-supervisor, Professor Mohammad-R. Akbarzadeh-T since I have been blessed much with his supportive supervision.

Furthermore, my special gratitude goes to Dr. Mohammadreza Asghari Oskoei for his generosity to share with us the raw EMG signal that he had recorded at University of Essex, UK. Likewise, I would like to thank Mohammadreza shoorangiz for his helpful comments and aid. I am obliged to staff members of Universiti Putra Malaysia, for their cooperation during the period of my assignment.

Last but not least, my sincere thanks go to my family for their endless love, understanding and encouragement throughout my study.

I certify that a Thesis Examination Committee has met on 16 January 2014 to conduct the final examination of Farzaneh Akhavan Mahdavi on her thesis entitled "Electromyography Signal Processing Based on Time and Time-Frequency Representations for Prosthesis Application" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

Mohd Nizar bin Hamidon, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Samsul Bahari bin Mohd Noor, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

M. Iqbal bin Saripan, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Md. Mamun Ibne Reaz, PhD

Associate Professor
Universiti Kebangsaan Malaysia
Malaysia
(External Examiner)



NORITAH OMAR, PhD
Associate Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 21 April 2014

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Master of Science.

The members of the Supervisory Committee were as follows:

Siti Anom Ahmad, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Chairperson)

Mohammad Hamiruce Marhaban, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Mohammad-R Akbarzadeh-T, PhD

Professor
Faculty of Engineering
Ferdowsi University of Mashhad
(Member)

BUJANG BIN KIM HUAT, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

DECLARATION

Declaration by Graduate Student

I hereby confirm that:

- This thesis is my original work;
- Quotations, illustrations and citations have been duly referenced;
- This thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- Intellectual property of the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- Written permission must be obtained from the supervisor and the office of the Deputy Vice-Chancellor (Research and Innovation) before the thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- There is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: _____ Date: _____

Name and Matric No.: _____

Declaration by Members of Supervisory Committee

This is to confirm that:

- The research conducted and the writing of this thesis was under our supervision;
- Supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____
Name of
Chairman of
Supervisory
Committee: **Siti Anom Ahmad**

Signature: _____
Name of
Member of
Supervisory
Committee: **Mohammad Hamiruce
Marhaban**

Signature: _____
Name of
Member of
Supervisory
Committee: **Mohammad-R
Akbarzadeh-T**

TABLE OF CONTENTS

	Page
ABSTRACT	ii
ABSTRAK	iv
ACKNOWLEDGEMENT	vi
APPROVAL	vii
DECLARATION	ix
LIST OF TABLES	xiii
LIST OF FIGURES	xiv
LIST OF ABBREVIATIONS	xvii
CHAPTER	
1 INTRODUCTION	1
1.1 Background	1
1.2 Related Work	2
1.3 Problem Statement	2
1.4 Aims and Objectives	3
1.5 Scopes of Work	3
1.6 Thesis Contribution	4
1.7 Thesis Organization	4
2 LITERATURE REVIEW	6
2.1 Introduction	6
2.2 The Nature of Electromyography Signal	6
2.2.1 Muscle Physiology	7
2.2.2 Motor Unit Action Potential	7
2.3 EMG Recording	8
2.4 EMG Application	8
2.5 EMG Control System	10
2.6 Pattern Recognition-Based EMG Control System	10
2.6.1 Data segmentation	11
2.6.2 Feature Extraction Based on Time and Frequency Domain	12
2.6.3 Feature Extraction Based Time-frequency Domain	14
2.7 Wavelet Transform	16
2.8 Classification	20
2.9 Summary	24
3 METHODOLOGY	25
3.1 Introduction	25
3.2 Data Collection	26
3.3 Preprocessing	27
3.4 Feature Extraction	28
3.4.1 Time Domain Techniques	29
3.4.2 Time-frequency Domain: Selection of Wavelet Parameters	30
3.5 Linear and Quadratic Discriminant Analysis Classification	35

3.5.1	Mathematical of LDA and QDA	35
3.5.2	Training and testing Procedure	37
3.5.3	Cross Validation	37
3.6	Summary	38
4	RESULTS AND DISCUSSION	39
4.1	Introduction	39
4.2	Preprocessing Results	39
4.3	WT-based Feature Extraction Results	45
4.3.1	Selecting WT decomposition depth	45
4.3.2	Selecting MW	51
4.4	Classification results	55
4.4.1	LDA Classification of WT features in four levels	55
4.4.2	QDA classification Results	56
4.5	Discussion	61
4.6	Summary	62
5	CONCLUSION AND FUTUR WORK	64
5.1	Suggestion for future work	65
	REFERENCES	66
	BIODATA OF STUDENT	71
	LIST OF PUBLICATIONS	72

LIST OF TABLES

Table	Page
2.1. The average accuracy of EMG multi-features adapted from (Oskoei & Hu, 2008)	13
2.2. The classification accuracy of 36 features in time and frequency domains in terms of mean and standard deviation categorized in four groups adopted from (Angkoon Phinyomark, et al., 2012)	14
2.3. Average classification accuracy of four subjects (S1-S4) of self-enhancing EMG classification applying long term data adopted from (Zhang, 2013)	22
2.4. A summary of some reviewed studies of EMG control system	23
4.1. The segment sizes and techniques used in EMG preprocessing	41
4.2. The name of wavelet families and their members used in this study	52
4.3. The classification error of WT+MAV and WT+RMS features using different wavelet functions in one level decomposition with 200ms segment (A1: approximation coefficients of level one, D1: detail coefficients of level one)	52
4.4. The classification error of WT+MAV and WT+RMS features using different wavelet functions in one level decomposition with 300ms segment size. (A1: approximation coefficients of level one, D1: detail coefficients of level one)	54
4.5. Decomposition coefficients (Decomp. Coef) compared to reconstruction coefficients (Recons. Coef) in four levels, MW=d2 segment (A1: approximation coefficients of level one, D1: detail coefficients of level one)	55
4.6. Classification error of various MWs by LDA and QDA classifiers and coefficient A1	58
4.7. A summary of classification results in terms of mean and STD	60
4.8. The results of t-test for all EMG features in terms of p-value	61
4.9. The comparison between this research and two other studies.	62

LIST OF FIGURES

Figure	Page
1.1. The EMG control system based on pattern recognition adopted from (Asghari Oskoei & Hu, 2007)	4
2.1. Basic motor control mechanisms, 2.2. Basic structure of MU (Sale, 2003)	7
2.3. The EMG signal produced by four muscular fibres (C.J. De Luca, 1979)	8
2.4. EMG signal decomposition into its components MUAP (Carlo J De Luca, et al., 2006)	9
2.5. Block diagram demonstrates the relationship between normal and the EMG control system adopted from (Parker, Englehart, & Hudgins, 2006)	9
2.6. Block diagram of two types of EMG control system: (a) pattern recognition based and (b) non-pattern recognition based adopted from (Asghari Oskoei & Hu, 2007)	10
2.7. The effect of changing segment size on the classification error in transient and steady state emg signal adopted from (Kevin Englehart, et al., 2001)	11
2.8. An EMG control system using fuzzy c-mean and PCA to reduce high dimensions of WPT features adopted from (Khushaba Rami, 2007)	16
2.9. The partitioning way of some techniques in different domains of study (Misiti, Misiti, Oppenheim, & Poggi, 1996)	17
2.10. DWT decomposition in one level of a signal (S= signal, A= approximation, D= detail)	18
2.11. DWT decomposition of a signal in three levels. (S=signal, cA= coefficient of approximation, cD= coefficient of detail) (Misiti, et al., 1996)	19
2.12. EMG control system comparing various features and classifiers (K. Englehart, et al., 1999)	20
2.13. Self-enhancing EMG control system adopted from (Zhang, 2013)	22
3.1. The schematic diagram of the proposed EMG control system	25
3.2. Methodology flow chart of this thesis in details	26

3.3.	The biarticulate wrist flexor muscles. The information of muscle number 5 has been used in this study (adapted from ExRx.net with permission).	27
3.4.	The triarticulate and biarticulate wrist extensor muscles. The information of muscles number 3 has been used in this study (adapted from ExRx.net with permission).	27
3.5.	Adjacent windowing (Kevin Englehart & Hudgins, 2003)	28
3.6.	Overlapped windowing (Kevin Englehart & Hudgins, 2003)	28
3.7.	The flow chart of the feature extraction and evaluation of WT features based on using various Mwand evaluation criteria.	32
3.8.	Nine members of the Daubechies family (Misiti, et al., 1996)	33
3.9.	Five members of the Coiflet family (Misiti, et al., 1996)	33
3.10.	Seven members of a Symlet family (Misiti, et al., 1996)	33
3.11.	Fourteen members of the Biorthogonal family (Misiti, et al., 1996)	34
3.12.	LDA classification (a) and QDA classification (b) for two classes	35
3.13	K-FOLD CROSS VALIDATION FOR K=3 (Refaeilzadeh et al., 2009)	38
4.1.	Raw EMG signal of wrist flexion movement recorded from biarticulate flexor and extensor muscles (red: flexor & blue: extensor)	39
4.2	Raw EMG signal of wrist extension movement recorded from biarticulate flexor and extensor muscles (red: flexor & blue: extensor)	40
4.3.	Raw EMG signal of wrist abduction movement recorded from biarticulate flexor and extensor muscles (red: flexor & blue: extensor)	40
4.4.	Raw EMG signal of wrist adduction movement recorded from biarticulate flexor and extensor muscles (red: flexor & blue: extensor)	40
4.5.	Raw EMG signal of wrist rest movement recorded from biarticulate flexor and extensor muscles (red: flexor & blue: extensor)	41
4.6.	Classification error of MAV feature in different segment sizes (50,100 & 200: adjacent windowing, 256 & 300: overlapped windowing)	42
4.7.	Classification error of RMS feature in different segment sizes (50,100 & 200: adjacent windowing, 256 & 300: overlapped windowing)	43

4.8.	Classification error of ZC feature in different segment sizes (50,100 & 200: adjacent windowing, 256 & 300: overlapped windowing)	43
4.9.	Classification error of WL feature in different segment sizes (50,100 & 200: adjacent windowing, 256 & 300: overlapped windowing)	44
4.10.	The scatter plot of WT detail coefficients in level 1 decomposition for five wrist movements (mov1: rest, mov2: flexion, mov3: extension, mov4: abduction, mov5: adduction), CH1 & CH2: input channels of EMG recording.	46
4.11.	The scatter plot of WT detail coefficients of level 2 decomposition for five wrist movements (mov1: rest, mov2: flexion, mov3: extension, mov4: abduction, mov5: adduction), CH1 & CH2: input channels of EMG recording	47
4.12.	The scatter plot of WT detail coefficients of decomposition in level 3 for five wrist movements (mov1: rest, mov2: flexion, mov3: extension, mov4: abduction, mov5: adduction), CH1 & CH2: input channels of EMG recording	48
4.13.	The scatter plot of WT detail coefficients of decomposition in level 4 for five wrist movements (mov1: rest, mov2: flexion, mov3: extension, mov4: abduction, mov5: adduction), CH1 & CH2: input channels of EMG recording	49
4.14.	The scatter plot of WT approximation coefficients of decomposition in level 4 for five wrist movements (mov1: rest, mov2: flexion, mov3: extension, mov4: abduction, mov5: adduction), CH1 & CH2: input channels of EMG recording	50
4.15.	Bar plot of RES index of WT+MAV features in four levels	51
4.16.	The bar plot of classification error of wavelet decomposition and reconstruction coefficients in four levels	56
4.17.	The bar plot of classification error of time domain features, MAV, RMS, ZC and WL by two classifiers, LDA and QDA.	57
4.18.	Comparison diagram of classification error obtained by best features	59
4.19.	Comparison bar plot of classification accuracy of best features	59

LIST OF ABBREVIATIONS

AR	Autoregressive
bior	Biorthogonal
coif	Coiflet
CWT	Continous Wavelet Transform
db	Daubechies
DHWPT	Discrete Harmonic Wavelet Packet Transform
DWT	Discrete Wavelet Transform
ECS	Electromyography Control System
EMG	Electromyography
FCM	Fuzzy C-Mean
FL	Fuzzy Logic
FT	Fourier Transform
FWP	Fuzzy wavelet Packet
GA	Genetic Algorithm
IDWT	Inverse Discrete Wavelet Transform
LDA	Linear Discriminante Analysis
MAV	Mean Absolute Value
MAVS	Mean Absolute Value Slope
MLP	Multilayer Perceptron
MMDF	Median Frequency
MMNF	Mean Frequency
MUAP	Muscle Unit Action Potential
MV	Majority Voting
MW	Mother Wavelet
MWM	Mother Wavelet Matrix
NN	Neural Network
PCA	Principle Component Analysis

PSD	Power Spectrum Density
PWVD	Pseudo Wigner-ville Distribution
QDA	Quadratic Discriminant Analysis
RES	Ratio of Euclidean distance to Standard deviation
RMS	Root Mean Square
RWED	Running Windowed Exponential Distribution
RWPE	Relative Wavelet Packet Energy
SELDA	Self Enhancing Linear Discriminante Analysis
SEPCOR	Seprability and Correlation
SEQDA	Self Enhancing Quadratic Discriminante Analysis
SSC	Slope Sign Changes
STFT	Short Time Fourier Transform
SVM	Support Vector Machine
sym	Symlet
TD	Time Domain
VAR	Varriance
WAMP	William Amplitude
WT	Wavelet Transform
ZC	Zero Crossing

CHAPTER 1

INTRODUCTION

1.1 Background

Nowadays, limb loss issue has fascinated researchers remarkably and the approach of prosthesis development has been considered in many countries. There are 1.7 million people with limb loss in the United States while it is predicted that this value will double by the year 2050 (Ziegler-Graham, MacKenzie, Ephraim, Trivison, & Brookmeyer, 2008). Prosthetic hands have been designed as a replacement for upper limb amputees. Although the number of lower limb amputations is more than the upper limb amputations, the damage produced by upper limb loss is considerably more harmful (Baumgartner, 2001) because the proficiency of hand in accomplishing various activities in daily life is noticeable. Consequently, an appropriate designed of upper limb prosthetic device can improve the amputee's life physically and psychologically. There are two kinds of prosthetic hands, namely, passive prosthesis and active prosthesis. The passive form is a cosmetic type with excellent appearance provides a visual replacement of the amputation while the active prosthesis (also called a functional prosthesis) is used to imitate a natural hand to manipulate objects but its appearance is not attractive.

Electromyography (EMG) signal has been applied efficiently to control active prosthesis. One of the most significant advantages of EMG control is its property of hands-free control (Asghari Oskoei & Hu, 2007). The first clinically EMG prosthesis was presented by Russian expert in the 1960s (Plettenburg, 2006). In more than last 50 years, the EMG control system has been much improved. Overall, we can categorize all these improvements and achievements in three generations. First generation presents ON/OFF control system that uses a single rate of actuation. Second one comprises a state machine, large-scale threshold manipulation, signal amplification, the adjustment of the muscle contraction rate, and proportional control. Third generation includes programmable microprocessors allows an infinite range of adjustment of EMG characteristics (Asghari Oskoei & Hu, 2007).

On the other hand, applying microprocessor in the control system of EMG yields some proficiency such as using advanced signal processing techniques. In this way, it is probable to filter EMG signal by powerful techniques. Moreover, the robustness of EMG control system (ECS) can be improved by using pattern recognition control systems (Asghari Oskoei & Hu, 2007). In this Thesis, an improvement of EMG signal processing in the ECS based pattern recognition is investigated. ECS can be categorized into two groups: pattern recognition base control system and non-pattern recognition- based control system (B Hudgins, Parker, & Scott, 1994). Considering the various applications of ECS such as multifunction prosthesis (Kevin Englehart, Hudgin, & Parker, 2001; Kevin Englehart & Hudgins, 2003) wheelchairs (Han, Zenn Bien, Kim, Lee, & Kim, 2003), virtual keyboards and clinical application, the improvements of ECS shall provide outstanding services.

1.2 Related Work

Several techniques have been used to develop pattern recognition based ECS in recent years. Generally, EMG pattern recognition systems contain three major components, namely, preprocessing, feature extraction and classification. EMG feature extraction plays a critical role in improving the control system. Features characterize the raw EMG signal for classification, so even the strongest classifiers cannot perform well if they are not supported with good features. EMG features are categorized in three domains: time domain, frequency domain and time-frequency domain (Zecca, Micera, Carrozza, & Dario, 2002). A wide ranges of features (thirty seven features) in time and frequency domains had been presented and their properties on EMG signal processing had been studied in a research recently (Angkoon Phinyomark, Phukpattaranont, & Limsakul, 2012). Also, various time domain features were used to classify EMG signal by a support vector machine classifier (Oskoei & Hu, 2008). The most popular techniques in the EMG feature extraction are time domain features because of their computational simplicity (Asghari Oskoei & Hu, 2007). Mean Absolute Value (MAV) and Root Mean Square (RMS) are two famous time domain features (Clancy, Morin, & Merletti, 2002). Frequency domain features are generally applied to study muscle fatigue and Power Spectral Density (PSD) has been a main analysis in frequency domain (Asghari Oskoei & Hu, 2007).

Likewise, there are different techniques in time-frequency (also named time-scale) domain. The accuracy of some time-scale methods had been compared and it was concluded that continuous wavelet transform performed better than the other time-frequency analysis techniques (Karlsson, Yu, & Akay, 2000b). In another study different levels of wavelet functions were applied to find the best feature. Therefore, unwanted parts of the EMG signal were eliminated by selecting the suitable wavelet function (A. Phinyomark, Limsakul, & Phukpattaranont, 2011)

After feature extraction, features required to be classified into discriminant classes of hand movements. Some old and new techniques have been recruited as classifiers in EMG classification such as, Linear Discriminant Analysis (LDA), (Kevin Englehart, et al., 2001; Farrell & Weir, 2007; A Phinyomark, Hu, Phukpattaranont, & Limsakul, 2012; Zhang, 2013), Support Vector Machine (Kamavuako, et al., 2013; Oskoei & Hu, 2008; Shenoy, Miller, Crawford, & Rao, 2008), neural network (K. Englehart, Hudgins, Parker, & Stevenson, 1999; Kamavuako, et al., 2013), fuzzy logic (Ahmad & Chappell, 2008; Ajiboye & Weir, 2005; Park & Lee, 1998), and Neuro-fuzzy system (Chan, Yang, Lam, Zhang, & Parker, 2000; Karlik, Osman Tokhi, & Alci, 2003). Classifiers should be fast enough to recognize different muscle contraction patterns to actuate the prosthetic device in proper response time. Therefore, sometimes preprocessing and post-processing techniques may be required to speed up the control system too (Oskoei & Hu, 2008).

1.3 Problem Statement

EMG signal is a common input to control upper limb prostheses. Several research teams have recently tried to find the signal features with the best performance for optimizing the control system of the prosthesis (Asghari Oskoei & Hu, 2007; Angkoon Phinyomark, et al., 2012). To increase the accuracy of the EMG signal

analysis in the first stage, it is essentially required to preprocess the signal before feature extraction. Normally, huge amount of data is produced after preprocessing which is a limitation of the ECS. As the processing of these data may cause time delay, recruiting efficient methods can compensate the delay and increase the accuracy simultaneously. In the aspect of the controllability in ECS, the accuracy of the system plays an important role. Accordingly, choosing proper techniques in feature extraction can improve the performance of the classifier in terms of accuracy. In this way, the characteristics of EMG pattern are distinguished remarkably in less classification error. Overall, the aim of this study is to improve the ECS through investigating various techniques in EMG signal processing to discriminate different hand postures. In this viewpoint, improving the classification accuracy has been regarded considerably.

1.4 Aims and Objectives

The aim of this thesis is to improve EMG signal processing through the ECS based on pattern recognition for prosthesis application. To achieve this goal, specific objectives are as follows:

- To study and analyse the EMG preprocessing technique based on data segmentation, time domain features and discriminant analysis classifiers.
- To investigate and compare the behaviour of some time and time-frequency techniques in the EMG feature extraction.
- To optimize the performance of the time-frequency features (wavelet coefficients).
- To increase the accuracy of EMG classification by finding proper feature and classifier.

1.5 Scopes of Work

As mentioned in the last sections, ECS is categorized into two types, pattern recognition control system and non-pattern recognition system. Figure 1.1 demonstrates the EMG control system based on pattern recognition.

As can be seen in the Figure 1.1, the data are collected by electrodes in the beginning and then signals are filtered. In the next stage, a controller process the EMG signal which includes four components, data segmentation, feature extraction, classification and digital controller. In this thesis, the analysis of EMG pattern recognition system has been investigated focusing on three modules of this system; data segmentation, feature extraction and classification. In data segmentation, the signal is preprocessed to be ready for feature extraction. This step helps to improve the accuracy and response time of the signal (Asghari Oskoei & Hu, 2007). Afterward, the pre-defined features are extracted for classification. The aim of this step is to find the most suitable features which can represent the characteristics of the EMG signal.

Since the best classifier cannot achieve acceptable results if they are not fed with suitable features, feature extraction plays an important role in the ECS improvement. Hence, some different features are utilized in this study to analyse their performance and find the most efficient one. Ultimately, a classifier recognizes the signal patterns in the last step and classifies it into a specific class.

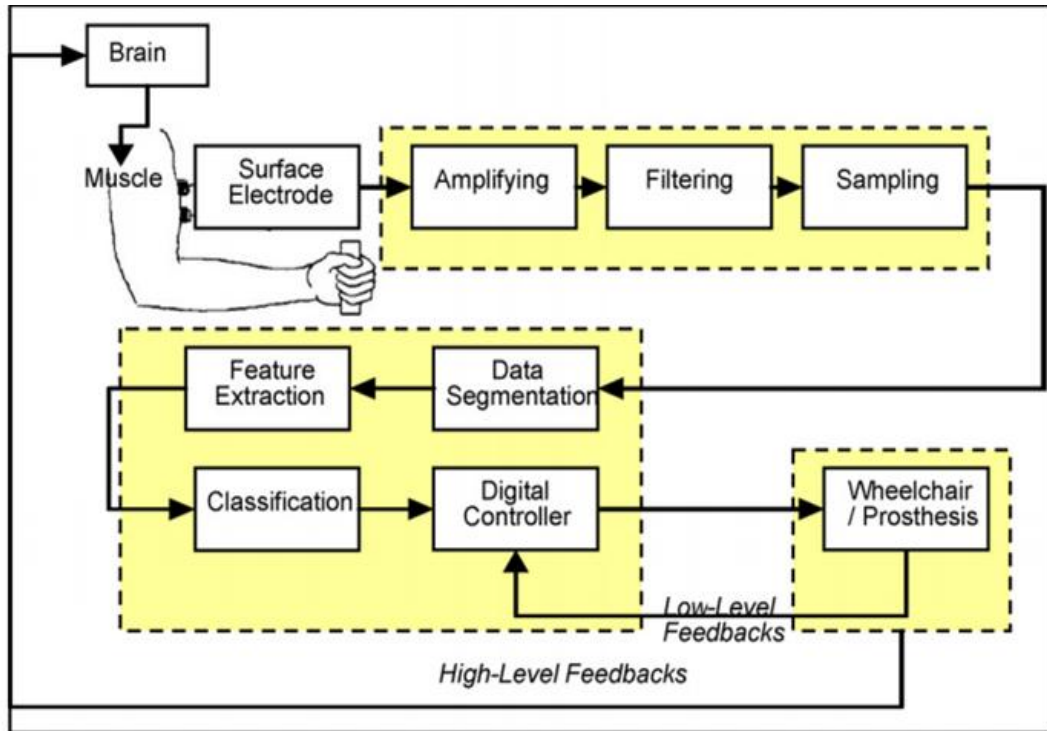


Figure 1.1. The EMG control system based on pattern recognition adopted from (Asghari Oskoei & Hu, 2007)

1.6 Thesis Contribution

The main contributions of this thesis in purpose of mentioned objectives are listed as follows:

- To find the optimum segment size for EMG signal processing.
- To calculate and extract EMG time domain features, namely, MAV, RMS, ZC, WL and use two classifiers to increase the accuracy.
- To calculate and extract EMG time-frequency domain features, (wavelet features) and optimize the wavelet analysis by finding the best mother wavelet and the depth of decomposition through applying 20 mother wavelets.
- To reduce the dimension of wavelet features by utilizing statistical information, MAV and RMS, of the wavelet coefficients as WT+MAV and WT+RMS.

1.7 Thesis Organization

The structure of this study reflects the sequence of improving the EMG signal processing in the pattern recognition based on ECS. The organization of this thesis is as follows:

Chapter 2 reviews some studies and publications on ECS for prosthesis application in the last years and highlights the significant achievements. Also, the theory of wavelet transform has been reviewed as one of the main technique of this research.

Chapter 3 introduces the methodology of this thesis and study the theories of different techniques applied in the proposed ECS. It is worth mentioning that in this chapter, the wavelet transform has been considered as a powerful technique for EMG analysis and multi-features are created from wavelet coefficients. Furthermore, an optimization of wavelet analysis has been done by finding the best mother wavelet between four families and 20 members of these families as wavelet functions. Ultimately, two evaluation criteria for defining the depth of wavelet decomposition are introduced in this chapter.

Chapter 4 describes the results of the proposed algorithm for EMG signal processing and analyses the achievements. The classification procedure of optimum features is evaluated in terms of accuracy and error and the performance of the various features are compared and discussed. In this chapter, the optimum features and classifier are revealed too.

Chapter 5 draws the conclusions from the results and the noteworthy points in each stage of the proposed EMG signal processing algorithm. Lastly, an outline of future work is presented to improve the ECS in other approaches.

REFERENCES

- Ahmad, S. A., & Chappell, P. H. (2008). Moving approximate entropy applied to surface electromyographic signals. *Biomedical Signal Processing and Control*, 3(1), 88-93.
- Ajiboye, A. B., & Weir, R. F. (2005). A heuristic fuzzy logic approach to EMG pattern recognition for multifunctional prosthesis control. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 13(3), 280-291.
- Alkan, A., & Günay, M. (2012). Identification of EMG signals using discriminant analysis and SVM classifier. *Expert Systems with Applications*, 39(1), 44-47.
- Asghari Oskoei, M., & Hu, H. (2007). Myoelectric control systems—A survey. *Biomedical Signal Processing and Control*, 2(4), 275-294.
- Baumgartner, R. F. (2001). Upper extremity amputation and prosthetics. *The Journal of Rehabilitation Research and Development*, 38(2).
- Boostani, R., & Moradi, M. H. (2003). Evaluation of the forearm EMG signal features for the control of a prosthetic hand. *Physiological measurement*, 24(2), 309.
- Chan, F. H., Yang, Y.-S., Lam, F., Zhang, Y.-T., & Parker, P. A. (2000). Fuzzy EMG classification for prosthesis control. *IEEE Transactions on Rehabilitation Engineering*, 8(3), 305-311.
- Clancy, E., Morin, E. L., & Merletti, R. (2002). Sampling, noise-reduction and amplitude estimation issues in surface electromyography. *Journal of electromyography and kinesiology*, 12(1), 1.
- Criswell, E. (2010). *Cram's introduction to surface electromyography*: Jones & Bartlett Publishers.
- De Luca, C. J. (1979). Physiology and mathematics of myoelectric signals. *IEEE Transactions on Biomedical Engineering*, 32(6), 313-325.
- De Luca, C. J., Adam, A., Wotiz, R., Gilmore, L. D., & Nawab, S. H. (2006). Decomposition of surface EMG signals. *Journal of neurophysiology*, 96(3), 1646-1657.
- Englehart, K. (1998). Signal representation for classification of the transient myoelectric signal. *University of New Brunswick, Doctoral thesis*.
- Englehart, K., Hudgin, B., & Parker, P. A. (2001). A wavelet-based continuous classification scheme for multifunction myoelectric control. *IEEE Transactions on Biomedical Engineering*, 48(3), 302-311.

- Englehart, K., & Hudgins, B. (2003). A robust, real-time control scheme for multifunction myoelectric control. *IEEE Transactions on Biomedical Engineering*, 50(7), 848-854.
- Englehart, K., Hudgins, B., & Parker, P. (2001). *Intelligent Systems and Technologies in Rehabilitation Engineering*: Boca Raton, FL: CRC Press.
- Englehart, K., Hudgins, B., Parker, P. A., & Stevenson, M. (1999). Classification of the myoelectric signal using time-frequency based representations. *Medical engineering & physics*, 21(6), 431-438.
- Farina, D., & Merletti, R. (2000). Comparison of algorithms for estimation of EMG variables during voluntary isometric contractions. *Journal of Electromyography and Kinesiology*, 10(5), 337-349.
- Farrell, T. R., & Weir, R. F. (2007). The optimal controller delay for myoelectric prostheses. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 15(1), 111-118.
- Fugal, D. L. (2009). *Conceptual wavelets in digital signal processing: an in-depth, practical approach for the non-mathematician*: Space & Signals Technical Pub.
- Fukunaga, K. (1990). *Introduction to statistical pattern recognition*: Academic Press.
- Han, J.-S., Zenn Bien, Z., Kim, D.-J., Lee, H.-E., & Kim, J.-S. (2003). *Human-machine interface for wheelchair control with EMG and its evaluation*. The Engineering in Medicine and Biology Society, 2003. Proceedings of the 25th Annual International Conference of the IEEE.EMBS
- Hastie, T., Tibshirani, R., & Friedman, J. J. H. (2001). *The elements of statistical learning* (Vol. 1): Springer New York.
- Hu, X., Wang, Z., & Ren, X. (2005). Classification of surface EMG signal using relative wavelet packet energy. *Computer methods and programs in biomedicine*, 79(3), 189-195.
- Huang, Y., Englehart, K. B., Hudgins, B., & Chan, A. D. (2005). A Gaussian mixture model based classification scheme for myoelectric control of powered upper limb prostheses. *IEEE Transactions on Biomedical Engineering*, 52(11), 1801-1811.
- Hudgins, B., Parker, P., & Scott, R. (1994). Control of artificial limbs using myoelectric pattern recognition. *Medical & Life Sciences Engineering*, 13(5), 21-38.
- Hudgins, B., Parker, P., & Scott, R. N. (1993). A new strategy for multifunction myoelectric control. *IEEE Transactions on Biomedical Engineering*, 40(1), 82-94.

- Kamavuako, E. N., Rosenvang, J. C., Horup, R., Jensen, W., Farina, D., & Englehart, K. (2013). Surface Versus Untargeted Intramuscular EMG Based Classification of Simultaneous and Dynamically Changing Movements. *IEEE*, 21(6), 992-998.
- Kamen, G., & Gabriel, D. A. (2010). *Essentials of electromyography*: Human Kinetics Publishers.
- Karlik, B., Osman Tokhi, M., & Alci, M. (2003). A fuzzy clustering neural network architecture for multifunction upper-limb prosthesis. *IEEE Transactions on Biomedical Engineering*, 50(11), 1255-1261.
- Karlsson, S., Yu, J., & Akay, M. (2000a). Time-frequency analysis of myoelectric signals during dynamic contractions: a comparative study. *IEEE Transactions on Biomedical Engineering*, 47(2), 228-238.
- Karlsson, S., Yu, J., & Akay, M. (2000b). Time-frequency analysis of myoelectric signals during dynamic contractions: a comparative study. *Biomedical Engineering, IEEE Transactions on*, 47(2), 228-238.
- Khezri, M., & Jahed, M. (2007). *Introducing a new multi-wavelet function suitable for sEMG signal to identify hand motion commands*. Paper presented at the Engineering in Medicine and Biology Society, 2007. EMBS 2007. 29th Annual International Conference of the IEEE.
- Khushaba Rami, N. (2007). Fuzzy wavelet packet based feature extraction method for multifunction myoelectric control. *International Journal of Biological and Life Sciences*, 2(3), 186-194.
- Konrad, P. (2005). *The ABC of EMG. A Practical Introduction to Kinesiological Electromyography*, 1(Noraxon INC. US).
- Kumar, D. K., Pah, N. D., & Bradley, A. (2003). Wavelet analysis of surface electromyography. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 11(4), 400-406.
- Li, D., Pedrycz, W., & Pizzi, N. J. (2005). Fuzzy wavelet packet based feature extraction method and its application to biomedical signal classification. *IEEE Transactions on Biomedical Engineering*, 52(6), 1132-1139.
- Li, G., Schultz, A. E., & Kuiken, T. A. (2010). Quantifying pattern recognition—Based myoelectric control of multifunctional transradial prostheses. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 18(2), 185-192.
- Mallat, S. G. (1989). A theory for multiresolution signal decomposition: the wavelet representation. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 11(7), 674-693.

- Merletti, R., & Parker, P. (2004). *Physiology, engineering, and noninvasive applications*: IEEE Press Series on Biomedical Engineering.
- Merletti, R., & Parker, P. (2005). *Electromyography: Physiology, engineering, and noninvasive applications*. IEEE Press.
- Misiti, M., Misiti, Y., Oppenheim, G., & Poggi, J. (1996). *Wavelet toolbox*. The MathWorks Inc., Natick, MA.
- Oskoei, M. A., & Hu, H. (2008). Support vector machine-based classification scheme for myoelectric control applied to upper limb. *IEEE Transactions on Biomedical Engineering*, 55(8), 1956-1965.
- Park, S.-H., & Lee, S.-P. (1998). EMG pattern recognition based on artificial intelligence techniques. *IEEE Transactions on Rehabilitation Engineering*, 6(4), 400-405.
- Parker, P., Englehart, K., & Hudgins, B. (2006). Myoelectric signal processing for control of powered limb prostheses. *Journal of Electromyography and Kinesiology*, 16(6), 541-548.
- Phinyomark, A., Hu, H., Phukpattaranont, P., & Limsakul, C. (2012). Application of Linear Discriminant Analysis in Dimensionality Reduction for Hand Motion Classification. *Measurement Science Review*, 12(3), 82-89.
- Phinyomark, A., Limsakul, C., & Phukpattaranont, P. (2009). A novel feature extraction for robust EMG pattern recognition. *Journal of Computing*, 1(1), 71-79.
- Phinyomark, A., Limsakul, C., & Phukpattaranont, P. (2010). Optimal wavelet functions in wavelet denoising for multifunction myoelectric control. *Transactions on Electrical Eng., Electronics, and Communications*, 8(1), 43-52.
- Phinyomark, A., Limsakul, C., & Phukpattaranont, P. (2011). Application of wavelet analysis in EMG feature extraction for pattern classification. *Measurement Science Review*, 11(2), 45-52.
- Phinyomark, A., Phukpattaranont, P., & Limsakul, C. (2012). Feature reduction and selection for EMG signal classification. *Expert Systems with Applications*, 39(8), 7420-7431.
- Plettenburg, D. (2006). *Upper extremity prosthetics: current status & evaluation*. 2006. VSSD.
- Polikar, R. (1996). *The wavelet tutorial*. Rowan University.
- Popoola, A., Ahmad, S., & Ahmad, K. (2004). *A fuzzy-wavelet method for analyzing non-stationary time series*. The Proc. of The 5th Int. Conf. on Recent Advances in Soft Computing.

- Rafiee, J., Rafiee, M., Prause, N., & Schoen, M. (2011). Wavelet basis functions in biomedical signal processing. *Expert Systems with Applications*, 38(5), 6190-6201.
- Refaeilzadeh, P., Tang, L., & Liu, H. (2009). *Cross-Validation*. Springer.
- Saladin, K. (2007). *Human Anatomy'2007 Ed*: McGraw-Hill.
- Sale, D. G. (2003). Neural adaptation to strength training. *Strength and Power in Sport, Second Edition*, 281-314.
- Shenoy, P., Miller, K. J., Crawford, B., & Rao, R. P. (2008). Online electromyographic control of a robotic prosthesis. *IEEE Transactions on Biomedical Engineering*, 55(3), 1128-1135.
- Stashuk, D. (2001). EMG signal decomposition: how can it be accomplished and used? *Journal of Electromyography and Kinesiology*, 11(3), 151-173.
- Tkach, D., Huang, H., & Kuiken, T. A. (2010). Research Study of stability of time-domain features for electromyographic pattern recognition. *Journal of NeuroEngineering and Rehabilitation* 2010, 7(21).
- Valls-Solé, J., Rothwell, J. C., Goulart, F., Cossu, G., & Muñoz, E. (1999). Patterned ballistic movements triggered by a startle in healthy humans. *The Journal of physiology*, 516(3), 931-938.
- Wang, G., Wang, Z., Chen, W., & Zhuang, J. (2006). Classification of surface EMG signals using optimal wavelet packet method based on Davies-Bouldin criterion. *Medical and Biological Engineering and Computing*, 44(10), 865-872.
- Xiao, H., Zhi-zhong, W., & Xiao-mei, R. (2005). Classification of surface EMG signal with fractal dimension. *Journal of Zhejiang University Science B*, 6(8), 844-848.
- Young, A., Smith, L., Rouse, E., & Hargrove, L. (2013). Classification of Simultaneous Movements using Surface EMG Pattern Recognition. *IEEE Transactions on Biomedical Engineering*, 60(5), 1250 - 1258.
- Zecca, M., Micera, S., Carrozza, M., & Dario, P. (2002). Control of multifunctional prosthetic hands by processing the electromyographic signal. *Critical reviews in biomedical engineering*, 30(4-6), 459.
- Zhang, D. (2013). Application of a self-enhancing classification method to electromyography pattern recognition for multifunctional prosthesis control. *Journal of neuroengineering and rehabilitation*, 10(1), 44.
- Ziegler-Graham, K., MacKenzie, E. J., Ephraim, P. L., Travison, T. G., & Brookmeyer, R. (2008). Estimating the prevalence of limb loss in the United States: 2005 to 2050. *Archives of physical medicine and rehabilitation*, 89(3), 422-429.