



**UNIVERSITI PUTRA MALAYSIA**

***CHARACTERIZATION OF OIL PALM FRUITLETS USING ARTIFICIAL  
NEURAL NETWORK***

***OJO ADEDAYO OLUKAYODE***

**FK 2014 121**



**CHARACTERIZATION OF OIL PALM FRUITLETS USING ARTIFICIAL  
NEURAL NETWORK**

By

**OJO ADEDAYO OLUKAYODE**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra  
Malaysia in Fulfillment of the Requirement for the Degree of Master of  
Science**

**June 2014**

## COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs, and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

## **CHARACTERIZATION OF OIL PALM FRUITLETS USING ARTIFICIAL NEURAL NETWORK**

By

**OJO ADEDAYO OLUKAYODE**

**June 2014**

**Chairperson: Maryam Binti Mohd Isa, PhD**

**Faculty: Engineering**

Accurate data of the dielectric properties of oil palm fruitlets and the development of appropriate models are central to the quest of quality sensing and characterization, and Artificial Neural Network (ANN) and Adaptive Neurofuzzy Inference Systems (ANFIS) are becoming increasingly relevant for this purpose owing to their excellent pattern matching and generalization ability. In this study, a Layer Sensitivity-Based Artificial Neural Network (LSB\_ANN) and a Multi-Adaptive Neurofuzzy Inference System (Multi-ANFIS) were designed to characterize oil palm fruitlets and to model the dielectric phenomena of microwave interacting with oil palm fruitlets within the frequency range of 2-4GHz. The LSB\_ANN has a unique weight update mechanism which employs network layer input-output sensitivity analysis. The inputs of the networks are the frequency, the magnitude of the reflection coefficient and the phase of the reflection coefficient while the outputs are the dielectric constant, the loss factor and the oil content. The training data for the models were obtained from dielectric and moisture content measurements and the obtained data were fitted into the quasi-static wave Equations and optimized using MATLAB complex root finding technique to obtain the normalized conductance, susceptance and the complex permittivity of the fruitlets. To further validate the generalization accuracy of the LSB\_ANN, its performance was compared with that of a Multi-ANFIS network as well as those of three different ANN training algorithms: Levenberg Marquardt (LM) algorithm, Resilient Backpropagation (RP) algorithm and Gradient Descent with Adaptive learning rate (GDA). Having a testing Variance-For (VAF) of 97.81 and Root Mean Square Error of 3.97, the LSB\_ANN was found to possess a better post training generalization ability than the LM, RP and GDA algorithms which had VAF of 93.57, 96.26 and 94.09 respectively, and RMSE of 4.14, 4.38, and 7.98 respectively. The results also showed that contrary to the

widely reported gap between the accuracy of the LM algorithm and other feed forward neural network training algorithms, the RP trained network performed as good as that of the LM algorithm for the range of data considered. A user friendly neural network based Graphical User Interface (GUI) was designed suitable for rapid determination of the dielectric constant and percentage oil content of oil palm fruitlets from measured magnitude and phase of reflection coefficient within a frequency range of 2-4GHz.



Abstrak tesis yang dibentangkan kepada Senat Universiti Putra Malaysia  
bagi memenuhi keperluan ijazah Master Sains

**PENCIRIAN BIJI KELAPA SAWIT MELALUI PENGGUNAAN  
RANGKAIAN NEURAL BUATAN**

Oleh

**OJO ADEDAYO OLUKAYODE**

**Jun 2014**

**Pengerusi: Maryam Binti Mohd Isa, PhD**

**Fakulti: Kejuruteraan**

Data tentang sifat-sifat dielektrik biji kelapa sawit yang tepat dan pembangunan model yang sesuai adalah asas kepada usaha penderiaan yang berkualiti dan pencirian bahan. Rangkaian Neural Buatan (ANN) dan Sistem Taabir Neurofuzzy (ANFIS) kian bertambah penting atas potensi kedua-dua sistem ini dalam pengetaraan corak dan generalisasi. Satu Rangkaian Neural Buatan Berasaskan Kepekaan Lapisan (LSB\_ANN) dan Sistem Taabir Neurofuzzy Berbilang-Suai (Multi-ANFIS) telah direkabentuk demi kajian ini, bagi tujuan mencirikan biji kelapa sawit serta membina model fenomena dielektrik gelombang mikro yang berinteraksi dengan biji-biji tersebut di dalam julat frekuensi 2-4GHz. Sistem LSB\_ANN mempunyai mekanisme yang unik, iaitu mekanisme pembaharuan berat. Mekanisme ini menjalankan Analisa Kepekaan Input-Output Lapisan Rangkaian. Input-input kepada rangkaian tersebut terdiri daripada frekuensi, magnitud pekali pantulan dan fasa pekali pantulan, manakala output-output terdiri daripada pekali dielektrik, faktor kehilangan, serta kandungan minyak. Data latihan model-model tersebut diperoleh melalui sukatan kandungan air dan sukatan. Berikutannya, data yang diperoleh telah dimasukkan ke dalam persamaan gelombang quasi-statik dan dioptimumkan dengan teknik carian akar kompleks MATLAB. Hasilnya ialah kebertelusan kompleks biji kelapa sawit, konduksi piawai, dan susceptance. Prestasi LSB\_ANN dibandingkan dengan rangkaian MULTI\_ANFIS serta rangkaian yang berasaskan algoritma latihan ANN yang lain bagi mengesahkan lagi kejutuan generalisasi LSB\_ANN: algoritma Levenberg Marquardt (LM), algoritma *Resilient Backpropagation* (RB), dan *Gradient Descent with Adaptive learning rate* (GDA).

Nilai Ujian *Variance-For* (VAF) iaitu 97.81 dan nilai ujian *Root Mean Square Error* (RMSE) iaitu 3.97 membuktikan bahawa LSB\_ANN ada kebolehan generalisasi pasca-latihan yang lebih baik berbanding algoritma LM, RP dan

GDA. Algoritma-algoritma tersebut mempunyai nilai VAF sebanyak 93.57, 96.26, dan 94.09 serta nilai RMSE sebanyak 4.14, 4.38, dan 7.98 masing-masing. Keputusan ini bertentangan dengan tanggapan am mengenai jurang besar di antara kejituan algoritma LM dan algoritma latihan rangkaian neural suapdepan yang lain, di mana rangkaian RP terlatih didapati mempunyai prestasi yang sama dengan algoritma LM bagi julat data tersebut. Lantaran itu, satu *Graphical User Interface* (GUI) berdasarkan rangkaian neural yang pro-pengguna telah direkabentuk agar menentukan pekali dielektrik serta peratus kandungan minyak biji kelapa sawit, berasakan magnitud dan fasa pekali pantulan 2-4GHz dengan cepat.



## ACKNOWLEDGEMENT

The efforts and all forms of support of my mother, Mrs S.F. Ojo and the entire family members throughout the course of this work are heartily appreciated.

My deep gratitude goes to the chairman of the supervisory committee, Dr Maryam Binti Mohd Isa, for her profound guidance, support and understanding.

I also wish to thank the members of the supervisory committee, Dr Azura Che Soh and Dr Zulkifly Abbas for their advice, earnest support and supervision.

Advice and encouragement from Dare Omolara Florence, Akinboye Abayomi, friends and all Ignite Community Centre members are heartily appreciated.





I certify that a Thesis Examination Committee has met on 27 June 2014 to conduct the final examination of Ojo Adedayo Olukayode on his thesis entitled "Characterization of Oil Palm Fruitlets using Artificial Neural Network" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

**Wan Zuha bin Wan Hasan, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Mohammad Hamiruce Marhaban, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Samsul Bahari bin Mohd Noor, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Momoh-Jimoh Eyiomika Salami, PhD**

Professor  
Universiti Islam Antarabangsa Malaysia  
Malaysia  
(External Examiner)



---

**NORITAH OMAR, PhD**

Associate Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 19 September 2014

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

**Maryam Binti Mohd Isa, PhD**

Faculty of Engineering,  
Universiti Putra Malaysia.  
(Chairman)

**Azura Che Soh, PhD**

Faculty of Engineering,  
Universiti Putra Malaysia.  
(Member)

**Zulkifly Abbas, PhD**

Associate Professor,  
Faculty of Science,  
University Putra Malaysia.  
(Member)

---

**BUJANG BIN KIM HUAT, PhD**

Professor and Dean  
School of Graduate Studies,  
Universiti Putra Malaysia

Date:

## DECLARATION

### Declaration by the student

I hereby confirm that:

- this thesis is my original work
- quotations, illustrations and citations have been duly referenced
- the thesis has not been submitted previously or concurrently for any other degree at any institutions
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be owned from supervisor and deputy vice – chancellor (Research and innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Name and Matric No.: Ojo Adedayo Olukayode GS32873

## Declaration by Members of Supervisory committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: \_\_\_\_\_  
Name of  
Member of  
Supervisory  
Committee: \_\_\_\_\_

Signature: \_\_\_\_\_  
Name of  
Member of  
Supervisory  
Committee: \_\_\_\_\_

Signature: \_\_\_\_\_  
Name of  
Member of  
Supervisory  
Committee: \_\_\_\_\_

## TABLE OF CONTENTS

		<b>Page</b>
	<b>ABSTRACT</b>	i
	<b>ABSTRAK</b>	iii
	<b>ACKNOWLEDGEMENT</b>	v
	<b>APPROVAL</b>	vi
	<b>DECLARATION</b>	viii
	<b>LIST OF TABLES</b>	xiii
	<b>LIST OF FIGURES</b>	xiv
	<b>LIST OF SYMBOLS</b>	xvi
	<b>LIST OF ABBREVIATIONS</b>	xx
<b>CHAPTER</b>		
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>6</b>
	2.0 Introduction	6
	2.1 The Oil Palm Fruitlets – Contents and Variation	6
	2.2 The Concept of Complex Permittivity	7
	2.2.1 Relevance and Applications of Complex Permittivity Information	8
	2.3 Overview of Techniques for Oil Palm Permittivity Measurement	8
	2.3.1 Open-Ended Coaxial Probe Technique	9
	2.3.2 Important Considerations for Open-Ended Coaxial Probe Technique	9
	2.3.3 Methods of Complex Permittivity Extraction from Open-Ended Coaxial Cable Measurements	10
	2.3.4 The Capacitance Model	11
	2.3.5 The Virtual Line Model	12
	2.3.6 The Rational Function Model	13
	2.3.7 The Admittance Model	13
	2.4 Resonant Cavity Technique	17
	2.5 Free-Space Technique	17
	2.6 Artificial Intelligence for Modeling and Characterization	19
	2.7 Overview of Artificial Neural Networks	19
	2.7.1 ANN Designs for Dielectric Measurements	22
	2.7.2 Input Selection Techniques in ANN Modeling	22
	2.7.3 ANN Architecture Optimization	23
	2.7.4 Challenges of Artificial Neural Network Modeling: Algorithms and Topologies	23
	2.8 Adaptive Neuro-Fuzzy Inference System (ANFIS)	24

	2.8.1 Modeling Physical Phenomena with ANFIS	26
	2.8.2 Comparison of the Performances of ANFIS and ANN for Different Applications	27
	2.9 Summary	27
<b>3</b>	<b>METHODOLOGY</b>	<b>28</b>
	3.1 Introduction	28
	3.2 Sample Preparation and Measurements	28
	3.3 Derivation of Dielectric Properties from Measured Reflection	30
	3.4 Computation of the Complex Permittivity	32
	3.5 Moisture Content Test Procedure and Derivation of Percentage Oil Content	33
	3.6 ANN Model Framework and Training Algorithms	34
	3.6.1 The ANN – Architecture Optimization and Training	34
	3.6.2 The Model Framework and LSB_ANN	36
	3.6.3 Data Normalization	40
	3.7 ANN Training Algorithms	40
	3.7.1 Gradient Descent with Adaptive Learning Rate (GDA)	41
	3.7.2 Levenberg-Marquardt (LM) Algorithm	42
	3.7.3 Resilient Backpropagation (RP)	44
	3.8 Multi Adaptive Neuro-Fuzzy Inference System (Multi-ANFIS)	46
	3.9 Network Performance Criteria	52
	3.10 Graphical User Interface Development	53
	3.11 Summary	55
<b>4</b>	<b>RESULTS AND DISCUSSION</b>	<b>56</b>
	4.1 Introduction	56
	4.2 Dielectric Properties of the Oil Palm Fruitlets	56
	4.3 Moisture Content, Oil Content and Electromagnetic Interaction	57
	4.4 LSB_ANN Network Performance	59
	4.5 Comparison of the Performances of LSB_ANN and ANFIS for Intelligent Characterization of Oil Palm Fruitlets by Microwave Technique.	64
	4.6 The Graphical User Interface	65
	4.7 Summary	66

<b>5</b>	<b>CONCLUSION AND RECOMMENDATION</b>	<b>67</b>
	5.1 Introduction	67
	5.2 Conclusion	67
	5.3 Major Findings	68
	5.4 Main Contributions	68
	5.5 Recommendation	68
	<b>REFERENCES</b>	<b>69</b>
	<b>APPENDICES</b>	<b>76</b>
	<b>BIODATA OF STUDENT</b>	<b>105</b>
	<b>LIST OF PUBLICATIONS</b>	<b>106</b>



## LIST OF TABLES

Table		Page
2.1	Summary of microwave techniques for material sensing	18
3.1	Dimensions and constants for the coaxial probe	29
3.2	Boundaries of the inputs and outputs of the ANNs	36
3.3	Properties of the Neural Network	38
3.4	Summary of the algorithms	46
3.5	Details of components of the ANFIS model.	48
3.6	Initial values of the parameters of the frequency membership function	50
3.7	Initial values of the parameters of the magnitude membership function	50
3.8	Initial values of the parameters of the phase membership function	50
3.9	Final values of the parameters of the Magnitude membership function	51
3.10	Final values of the parameters of the Frequency membership function	51
3.11	Final values of the parameters of the Phase membership function	51
4.1	Range of the values of dielectric constant obtained.	56
4.2	Dielectric constant compared to previous works	57
4.3	Performance indices of the algorithms for the training, validation and testing data	60
4.4	Comparison of selected samples of predicted and measured oil content	62
4.5	VAFs and R-values for the Multi-ANFIS and ANN for testing and training data	64



## LIST OF FIGURES

Figure		Page
1.1	Annual yield of selected vegetable oils per hectare (Tan <i>et al.</i> , 2009)	1
2.1	Progression of fiber content of fresh mesocarp for three fruitlets before and after optimal maturity (Van der, 1974)	6
2.2.	Virtual line model	12
2.3	Annular end of a coaxial probe showing H-field and E-field directions.	13
2.4	Comparison of the results of capacitive, virtual line and admittance models for porcine fat permittivity. (a) The real part (b) The imaginary part	16
2.5	Setup of free-space measurement technique.	17
2.6	Simple neural processing element	19
2.7	Basic structure of a biological neuron	20
2.8	Segmenting ANNs for real and complex parts of a permittivity function.	22
2.9	Basic structure of an ANFIS	25
3.1	Flowchart of the stages involved	28
3.2	Laboratory setup (a) Sample of the oil palm fruitlets (b) Coaxial sensor and its shorting block (c) Microwave measurement setup showing the sample, sensor, clamp and the Vector Network Analyzer (VNA) (d) Laboratory oven	30
3.3	ANN architecture search (a) Illustration of the $I_n-h_n-O_n$ network configuration (b) Training errors for different architectures (c) The performance of the selected network.	35
3.4	The ANN Model framework	37
3.5	Illustration of the gradient descent on 3D error surface	41

3.6	Model structure of each of the ANFIS models of the network	47
3.7	Multi-ANFIS network	48
3.8	Initial and final membership functions of the three ANFIS variables	49
3.9	Surface plot of the ANFIS showing the output (oil content) of the oil palm fruitlets rules after training for (a) the magnitude of the reflection coefficient (b) the phase of the reflection coefficient	52
3.10	The GUI development	53
4.1	Measured moisture contents for different values of dielectric constants	58
4.2	Measured oil contents for different values of (a) dielectric constants (b) Loss factor	58
4.3	Plots showing the convergence curves of the four algorithms for training the ANN for the dielectric constant (a) RP (b) GDA (c) LM (d) LSB_ANN	61
4.4	Comparison of the predicted dielectric constants by the four training algorithms with the measured values (a) LSB_ANN (b) RP (c) GDA (d) LM algorithm	63
4.5	Graphical User Interface	65

## LIST OF SYMBOLS

$\varepsilon$	Complex permittivity
$\varepsilon'$	Dielectric constant
$\varepsilon''$	Dielectric loss factor
$E(x)$	Electric field as a function of horizontal distance $x$ .
$\lambda_0$	Wavelength in vacuum
$E_0$	Electric field intensity
$d_p$	Penetration depth
$c$	Speed of light
$f$	Frequency (GHz)
$\Gamma$	Reflection coefficient
$V^-$	Reflected voltage
$V^+$	Incident voltage
$A_e$	Empirical coefficient
$\Gamma'$	Real part of the reflection coefficient
$\Gamma''$	Imaginary part of the reflection coefficient
$Y_0$	Characteristic admittance
$\Gamma_{Actual}$	Measured reflection coefficient
$C_T$	Aperture coefficient
$\omega$	Angular frequency
$\varepsilon_r$	Relative permittivity
$b$	Radius of the outer conductor

$a$	Radius of the inner conductor
$\mu_0$	Permeability of free space
$\epsilon_c$	Dielectric constant of coaxial sensor material
$\epsilon_0$	Permittivity of free space
$L$	Length of virtual line
$D$	Length of physical line
$Y_L$	Aperture admittance
$Y_d$	Characteristic admittance
$Y_E$	Terminating admittance
$\beta_d$	Propagation constant
$Y$	Admittance
$\phi$	Azimuthal angle of magnetic field component
$\rho$	Radial angle of the electric field component
$G$	Aperture conductance
$B$	Aperture susceptance
$Si$	Sine integral
$J_0$	Bessel function of order zero
$k_0$	Free space propagation constant
$\tilde{Y}_L$	Normalized admittance
$Q_0$	Quality factor of the of empty cavity
$Q_1$	Quality factor of the of loaded cavity

$V_c$	Cavity volume
$V_s$	Sample volume
$f_0$	Resonant frequency of empty cavity
$f_1$	Resonant cavity of loaded cavity
$T$	Total number of available training vectors
$C_f$	Absolute moment of Fourier magnitude distribution
$N_h$	Minimum number of hidden neurons
$M_c$	Percentage moisture content
$O_c$	Percentage oil content
$S'_m$	Mass of sample after drying
$S_m$	Mass of sample before drying
$J_\nu(x)$	Bessel function of order $\nu$
$k_1$	Wave number of the inner conductor
$k_2$	Wave number of the outer conductor
$f_h$	Hidden layer activation function
$w$	Connection weight
$P$	Input
$b_1$	bias
$y_{ij}$	Network output
$N$	Number of inputs
$J$	Number of training datapoints
$I$	Number of outputs

$f_i^{-1}$	Inverted activation function
$E$	Cost function
$E'$	Cost function due to first layer
$E''$	Cost function due to second layer
$var$	Variance
$P_i$	Actual input data
$P_{max}$	Maximum input
$P_{min}$	Minimum input
$P_{max}^t$	Maximum target
$P_{min}^t$	Minimum target
$J(w)$	Jacobian matrix
$e$	Error matrix
$\eta^-$	Step factor
$\Delta_{ij}$	Weight update value
$\alpha$	Learning rate
$\tau$	Learning step size
$\sigma$	Membership function parameter
H	Magnetic field
E	Electric field
$\theta$	Cylindrical coordinate

## LIST OF ABBREVIATIONS

M-File	MATLAB File
GUIDE	Graphical User Interface Development Environment
EM	Electromagnetic wave
RP	Resilient Backpropagation algorithm
LM	Levenberg-Marquardt
GDA	Gradient Descent with Adaptive Learning Rate
GUI	Graphical User Interface
RMSE	Root Mean Square Error
CMD	Coefficient of Multiple Determination
VAF	Variance Account-For
SSE	Sum of Squared Error
LSB_ANN	Layer sensitivity based Artificial Neural Network
ANFIS	Adaptive Neuro-Fuzzy Inference System
R	Regression coefficient

# CHAPTER ONE

## INTRODUCTION

### 1.1 Introduction

This thesis was designed to characterize oil palm fruitlets using a combination of microwave technique and intelligent softcomputing techniques. In order to achieve this, several neural network algorithms, network types and network architectures were compared including Adaptive Neurofuzzy Inference System (ANFIS). This chapter therefore introduces the concept and general background of the work, it also specifies the identified problem statements as well as the aims and objectives of the study. The scope and significance of the study are also presented.

### 1.2 Background

The oil palm is a perennial plant of the *arecaceae* family commonly grown in the tropical region of the world and its fruit is the most common source of edible oil with an annual yield of 4.2 tonnes per hectare and global annual yield of 45 million tonnes (shown in Figure 1.1) (Ong *et al.*, 2011). In recent years, oil palm has found more extensive use in oleochemicals, biofuels and numerous processed oil products, a study on a more accurate means of characterizing this productive fruit is therefore necessary.

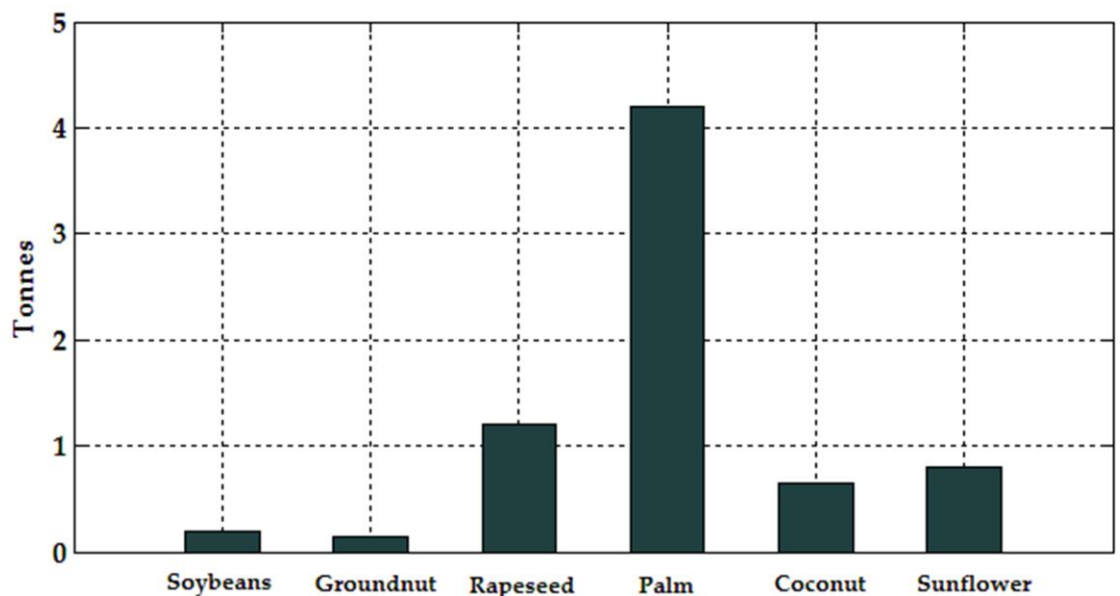


Figure 1.1 Annual Yield of Selected Vegetable Oils Per Hectare (Tan et al., 2009)



### 1.2.1 The Oil Palm – Constituents, Uses and Measurement Techniques

The oil palm fruit structure is made up of fiber and hundreds of oil rich fruitlets, each fruitlet consist of a fleshy mesocarp, a hard shell and a core of palm kernel. Due to recent research successes in the biotechnology industry, oil palm and its products are finding wider usage (other than the present huge collection of edible products) in biodiesel and fiberboard production (Tan *et al.*, 2009). These uses and many more applications have made progressive researches on oil palm quality improvement a journey worth taking.

On the sensing and determination of the quality of oil palm fruitlets in the last decade, the central attention of the researches has taken a shift from the more traditional destructive evaluation methods which involve crushing and grinding of the samples, to nondestructive evaluation. In view of this, several methods have been applied for grading the quality and maturity of oil palm fruits and fruitlets nondestructively (You *et al.*, 2010) and one of the more recent of these techniques is the inductive concept frequency technique (Harun *et al.*, 2013).

The knowledge of the dielectric properties of a material is of ultimate importance in the quest for accurate sensing and characterization. Several electronic and microwave techniques used in nondestructive evaluation therefore involves the extraction of the complex permittivity information. For example, a maturity and quality scale for peaches was proposed (Stuart *et al.*, 2008) based on the values of the dielectric constants and loss factor obtained from rigorous laboratory microwave measurement by coaxial sensor technique. This approach has been extended and combined with other methods such as dry oven method for the determination of crispness and ripeness (Soltani *et al.*, 2011), bacterial content, structure, concentration, moisture content, and bulk density of organic materials (Perez, 2012); Gao *et al.*, 2012). Similar works have also been done for oil palm fruits in which the determination of dielectric properties have been central to the quest of nondestructive measurement and grading (You, 2006; Abbas *et al.*, 2005).

### 1.2.2 Softcomputing Techniques for Characterization

Therefore, in order to further understand the details of the dielectric behaviour of oil palm fruitlets in the presence of electromagnetic field, accurate models need to be developed. To this extent, artificial intelligent models and soft computing techniques can be helpful. These include Artificial Neural Networks – a connection of processing elements that mimics biological learning, Fuzzy Logic Systems – a logic system which uses membership functions that vary over a range of total inclusion and complete exclusion, Genetic Algorithm (GA) – which employs the techniques similar to biological concept of mutation, crossover and offspring, Adaptive Neuro-Fuzzy

Inference System (ANFIS) – which combines the excellent learning capacity of ANNs with Fuzzy Inference System (FIS), and Swarm Computing. Generally, these models are relatively easier to implement when compared against the more traditional mathematical models because they are regarded as black or gray models; requiring only little or no *priori* knowledge of the system being modeled.

Artificial Neural Networks (ANNs) have particularly been used successfully because of their desirable qualities of being fast, ability to model nonlinear systems and their excellent predictive abilities. There are however numerous training algorithms, network architectures and neural configurations that can distinguish and characterize an ANN for a particular application. These depend on the structure of the data that describes the problem domain, the available processing resources, time, and the minimum expected performance of the network.

In order to improve the generalization accuracy of neural networks, researchers are concentrating efforts on layer-by-layer optimization procedures and Layer Sensitivity Based ANN (LSB\_ANN) is one of such in which the network learns and adapts its weights by analyzing the sensitivity function of its weight with respect to the input-output patterns.

In summary, with the increasing global demand for edible oil and other oil palm products, the unique advantages offered by quality sensing through artificial intelligent techniques must be readily usurped to stand as a handy, fast and intelligent tool to help researchers, quality control engineers as well as production managers in making rapid but well informed decisions concerning the quality of oil palm fruitlets.

### 1.3 Problem Statement

Information on the dielectric properties of oil palm fruitlets and their responses to electromagnetic energy is of great interest, especially for the purpose of nondestructive sensing, grading and characterization. The procedure involved in successfully obtaining this information through open-ended coaxial probe technique is in stages. Firstly, microwave propagating through the line at desired frequency range is made incident on the fruitlet, this results in reflection at the probe-sample interface. The observed reflection and transmission parameters are then fitted into appropriate models and dry oven moisture data to obtain the dielectric properties of the fruitlets.

Unfortunately, the procedure of extracting the desired dielectric properties from these reflection parameters by inverse solution is quite cumbersome; requiring intense computation of triple integrals, series expansions and optimization due to the complexity of the analytical probe admittance equations involved. This requirement substantially increases the time interval

between the end of measurements and the instance of obtaining the targeted dielectric values. Furthermore, questions have been raised over the individual relevance of the phase and the magnitude of the reflection coefficient in determination of the dielectric constants of oil palm fruits from open-ended coaxial sensor measurement, the development of a model which considers both variables is therefore necessary.

This thesis therefore attempts to proffer an Artificial Neural Network (ANN) model for these processes in order to solve the problem of computational requirements and eliminate the need for repeated stages of mathematical operations and optimization in the quest of obtaining dielectric properties and oil contents from measured reflection coefficients of the oil palm fruitlets.

#### **1.4 Aim and Objectives**

The aim of this thesis is to design and implement an artificial neural network for intelligent characterization of oil palm fruitlets. In order to achieve this, the following objectives are highlighted:

- (1) To derive the complex permittivities of oil palm fruitlet mesocarp within a frequency range of 2-4GHz from quasi static admittance analytical model.
- (2) To compare the accuracy of the performances of Artificial Neural Network and its associated algorithms with the accuracy of Adaptive Neurofuzzy Inference System for the characterization of oil palm fruitlets.
- (3) To design a Graphical User Interface (GUI) from observed results of the open-ended coaxial probe microwave measurements for the grading of the quality of oil palm fruitlets.

#### **1.5 Research Scope and Limitation**

There is a wide range of microwave techniques that can be successfully employed in material sensing: free-space measurement technique, open-ended coaxial probe (OCP) technique, and resonant cavity technique. The methodology for this work is however limited to the open-ended coaxial probe technique and the range of frequency considered is 2-4GHz. There are also a number of applicable extraction techniques available for use from literatures; however this work focuses mainly on the improved analytical approach which has recorded good success in the area of dielectric measurement in recent years. It is also worthy of note that the material under test for this thesis is the oil palm fruitlet (which is a single member of the aggregate oil palm fruit bunch). Additionally, the samples used in this work are fresh ripe oil palm fruitlets which were collected from the University farm within 48 hours of harvest. The fruitlets are all ripe and matured. This thesis

involves the training of softcomputing models with different algorithms to predict the quality of oil palm fruitlets.

## **1.6 Layout of Thesis**

Chapter one of this thesis contains sub-sections that provide a quick insight into the work as a whole. These include the background, the problem statement, and the research objectives. The scope and limitations in terms of methods, equipment, and frequency usage are also included in this chapter.

A review of relevant previous works in the line of this thesis is presented in chapter two, including current trends and overview of the important concepts for this work. Overviews of theories, backgrounds and applications of Artificial Neural Networks (ANNs), Adaptive Neurofuzzy Inference System (ANFIS), microwave measurement techniques, complex permittivity extraction, and the admittance model are particularly presented.

The steps and procedures employed in obtaining the results in different aspects of this work are described in chapter three. Here, the details of the models and their training algorithms, the basic architecture and neural configuration of the model frameworks including the input-output specifications are presented. The procedure and mathematical basis for extraction of the dielectric constants for the oil palm from open-ended coaxial probe microwave measurement technique are presented.

Chapter four contains the results obtained in the course of this work and the discussion of the results in relation to the available knowledge-base in soft computing and dielectric measurement.

In chapter five, the conclusion of the whole work and a summary of the results are presented, including recommendations and major findings.

## **1.7 Summary**

The importance of accurately and rapidly characterizing oil palm fruitlets cannot be overemphasized as it is crucial for good selection processes, quality control as well as improved percentage production yield. The general overview of oil palm as a productive plant and its other uses apart from mainstream oil production have been presented in this chapter. Applications of softcomputing techniques have also been briefly explored. Furthermore, the problem statement and aim and objectives of this work have been spelt out including the research scope and limitation.

## REFERENCES

- Abbas, Z., Shaari, A. H., Khalid, K., Hassan, J., & Saion, E. (2005). Complex permittivity and moisture measurements of oil palm fruits using an open-ended coaxial sensor. *IEEE Sensors Journal*, 5(6), 1281–1287.
- Al-Naima, F. M., & Al-Timemy, A. H. (2010). Resilient back propagation algorithm for breast biopsy classification based on Artificial Neural Networks. *Computational Intelligence and Modern Heuristics*, 28(2), 145–157.
- Ata, R., & Kocyigit, Y. (2010). An adaptive neuro-fuzzy inference system approach for prediction of tip speed ratio in wind turbines. *Expert Systems with Applications*, 37(7), 5454–5460.
- Baker-Jarvis, J., Vanzura, E. J., & Kissick W. A. (1990). Improved Technique for Determining Complex Permittivity with Transmission/Reflection Method. *IEEE Transactions on Microwave Theory and Techniques*, 38(8), 1096–1103.
- Bartley, P. G., & Begley, S. B. (2010). A new technique for the determination of the complex permittivity and permeability of materials. *IEEE Instrumentation & Measurement Technology*, 5(10), 54–57.
- Belič, I. (2011). Recurrent Neural Networks and Soft Computing. *Metals and Technology*, 4(1), 1–22.
- Blackham, D. V., & Pollard, R. D. (1997). An Improved Technique for Permittivity Measurements Using a Coaxial Probe. *IEEE Transaction on Instrumentation and Measurement*, 46(5), 1093–1099.
- California Test 226. (1999). Method for determining moisture content by oven drying. *Department of Transport Engineering Service Center, State of California-Business, Transportation and Housing Agency*, 1–2.
- Castillo, E., & Guijarro-berdi, B. (2006). A Very Fast Learning Method for Neural Networks Based on Sensitivity Analysis. *Journal of Machine Learning Research*, 7 (1), 1159–1182.
- Castro-Giráldez, M., Fito, P. J., Chenoll, C., & Fito, P. (2010). Development of a dielectric spectroscopy technique for the determination of apple (Granny Smith) maturity. *Innovative Food Science & Emerging Technologies*, 11(4), 749–754.

- Chen, L. F., Ong, C. K., Neo, C. P., Varadan, V. V, & Varadan, V. K. (2004). *Microwave Electronics Measurement and Materials Characterization* (pp. 84–213). John Wiley & Sons, Ltd.
- Devendra Mistra, Mohinder Chhabra, Benjamin R. Epstein, Mark Mitroznik, K. R. F. (1990). Noninvasive Electrical Characterization of Materials at Microwave Frequencies Using an Open-Ended Coaxial Line : Test of an Improved Calibration Technique. *IEEE Transactions on Microwave and Techniques*, 38(1), 8–14.
- Erzin, Y., Rao, B. H., Patel, a., Gumaste, S. D., & Singh, D. N. (2010). Artificial neural network models for predicting electrical resistivity of soils from their thermal resistivity. *International Journal of Thermal Sciences*, 49(1), 118–130.
- Erzin, Y., Rao, B. H., & Singh, D. N. (2008). Artificial neural network models for predicting soil thermal resistivity. *International Journal of Thermal Sciences*, 47(10), 1347–1358.
- Gao, M., Tang, J., Johnson, J. a., & Wang, S. (2012). Dielectric properties of ground almond shells in the development of radio frequency and microwave pasteurization. *Journal of Food Engineering*, 112(4), 282–287.
- Georgiou, G. M., & Koutsougeras, C. (1992). Complex Domain Backpropagation. *IEE Analog and Digital Signal Processing*, 39(5), 330–334.
- Gershon, D. L., Calame, J. P., Carmel, Y., Antonsen, T. M., & Hutcheon, R. M. (1999). Open-Ended Coaxial Probe for High-Temperature and Broad-Band Dielectric Measurements, *IEEE Transactions on Microwave Theory and Techniques* 47(9), 1640–1648.
- Gomez, I., Leonardo, F., & Jose, M. J. (2009). Neural Network Architecture Selection : Can function complexity help?, *Universidad de Malaga*, 17(15), 1–20.
- Güler, I., & Ubeyli, E. D. (2005). Adaptive neuro-fuzzy inference system for classification of EEG signals using wavelet coefficients. *Journal of neuroscience methods*, 148(2), 113–21.
- Hannan, J. M., & Bishop, J. M. (1997). Comparison of fast training algorithms over two real problems. *IEEE Transactions on Artificial Neural Networks*, Publication number 440, 7–9.

- Hartley, C. W. . (1977). The oil palm. 2nd Edition. London: Longman Group Limited.
- Harun, N. H., Misron, N., Sidek, R. M., Aris, I., Ahmad, D., Wakiwaka, H., & Tashiro, K. (2013). Investigations on a novel inductive concept frequency technique for the grading of oil palm fresh fruit bunches. *Sensors*, 13(2), 2254–66.
- Hasan, A., & Peterson, A. F. (2011). Measurement of Complex Permittivity using Artificial Neural Networks. *IEEE Antennas and Propagation Magazine*, 53(1), 200–203.
- He, S., Sepehri, N., & Unbehauen, R. (2001). Modifying Weights Layer-By-Layer with Levenberg- Marquardt Backpropagation Algorithm. *Intelligent Automation & Soft Computing*, 7(4), 233–247.
- İnal, M. (2008). Determination of dielectric properties of insulator materials by means of ANFIS: A comparative study. *Journal of Materials Processing Technology*, 195(1-3), 34–43.
- Jha, G. K. (2014). Artificial Neural Networks and its applications, *India Agricultural Research Institute*, 11 (12), 41–49.
- Karanayil, B., & Rahman, M. F. (2001). Artificial Neural Network Applications in Power Electronics and Electrical Drives. *Power electronics handbook: devices, circuits, and applications*, 3<sup>rd</sup> Ed., 1139–1154.
- Karimi, G., Sedaghat, S. B., & Banitalebi, R. (2013). Designing and modeling of ultra low voltage and ultra low power LNA using ANN and ANFIS for Bluetooth applications. *Neurocomputing*, 120(1), 504–508.
- Kiran, T. R., & Rajput, S. P. S. (2011). An effectiveness model for an indirect evaporative cooling (IEC) system: Comparison of artificial neural networks (ANN), adaptive neuro-fuzzy inference system (ANFIS) and fuzzy inference system (FIS) approach. *Applied Soft Computing*, 11(4), 3525–3533.
- Komarov, V., Wang, S., Tang, J., (2012). Permittivity and Measurement. *Encyclopedia of RF and Microwave Engineering*, Washington State University, 1–20.
- Lleó, L., Ruiz-Altisent, M., Hernández, N., & Gutiérrez, P. (2007). Application of Microwave Return Loss for sensing Internal Quality of Peaches. *Biosystems Engineering*, 96(4), 525–539.

- May, D. B., & Sivakumar, M. (2009). Prediction of urban stormwater quality using artificial neural networks. *Environmental Modelling and Software*, 24(2), 296–302.
- May, R., Dandy, G., & Maier, H. (2011). Review of Input Variable Selection Methods for Artificial Neural Networks. *Methodological Advances and Biomedical Applications* 1(1), 19–42.
- Misra K. Dendera. (1987). A Quasi-Static Analysis of Open-Ended Coaxial Lines, *IEEE Transaction on Microwave and Technique*, 35(10), 925-928.
- Mucsi, K., Khan, A. M., & Ahmadi, M. (2011). An Adaptive Neuro-Fuzzy Inference System for estimating the number of vehicles for queue management at signalized intersections. *Transportation Research Part C: Emerging Technologies*, 19(6), 1033–1047.
- Mukherjee, I., & Routroy, S. (2012). Comparing the performance of neural networks developed by using Levenberg–Marquardt and Quasi-Newton with the gradient descent algorithm for modelling a multiple response grinding process. *Expert Systems with Applications*, 39(3), 2397–2407.
- Naderloo, L., Alimardani, R., Omid, M., Sarmadian, F., Javadikia, P., Torabi, M. Y., & Alimardani, F. (2012). Application of ANFIS to predict crop yield based on different energy inputs. *Measurement*, 45(6), 1406–1413.
- Nazari, A., & Khalaj, G. (2012). Prediction compressive strength of lightweight geopolymers by ANFIS. *Ceramics International*, 38(1), 4501-4510.
- Nelson, S O, & Lawrence, K. C. (1995). Assessment of microwave permittivity. *American Society of Agricultural Engineers*, 38(2), 579–585.
- Nelson, Stuart O, Guo, W., & Trabelsi, S. (2008). Investigation of Dielectric Sensing for Fruit Quality Determination. *IEEE Sensors Applications Symposium*, 8(1), 8–10.
- Neshat, M., Adeli, A., Sepidnam, G., Sargolzaei, M., & Toosi, A. N. (2012). A Review of Artificial Fish Swarm Optimization Methods and Applications. *International Journal on Smart Sensing and Intelligent Systems*, 5(1), 107–148.
- Ong, H. C., Mahlia, T. M. I., Masjuki, H. H., & Norhasyima, R. S. (2011). Comparison of palm oil, *Jatropha curcas* and *Calophyllum inophyllum* for biodiesel: A review. *Renewable and Sustainable Energy Reviews*, 15(8), 3501–3515. 5



- Oral, B., Yu, T., & Ortega, J. A. (2006). A methodology for determining complex permittivity of construction materials based on transmission-only coherent , wide-bandwidth free-space measurements, *28(1)*, 349–359.
- Parveen, S. E., Sangeeta, G., & Dharminder, K. (2012). Minimization of Error in Training a Neural Network Using Gradient Descent Method. *International Journal of Technical Research*, *1(1)*, 10–12.
- Pedreño-Molina, J. L., Pinzolas, M., & Monzó-Cabrera, J. (2006). A new methodology for in situ calibration of a neural network-based software sensor for S-parameter prediction in six-port reflectometers. *Neurocomputing*, *69(16-18)*, 2451–2455.
- Perez, M. D. (2012). General effective medium model for the complex permittivity extraction with an open-ended coaxial probe in presence of a multilayer material under test. PhD dissertation, Universita Di Bologna, Bologna, Italia, 17-172.
- Pozar, D.M (2005). *Microwave Engineering*, John Wiley & Sons, 3<sup>rd</sup> Ed., 58.
- Rahmanian, B., Pakizeh, M., Mansoori, S. A. A., Esfandyari, M., Jafari, D., Maddah, H., & Maskooki, A. (2012). Prediction of MEUF process performance using artificial neural networks and ANFIS approaches. *Journal of the Taiwan Institute of Chemical Engineers*, *43(4)*, 558–565.
- Rhodes, M. (2013). Underwater Electromagnetic Propagation: Re-evaluating Wireless Capabilities. <http://www.hydro-international.com>.
- Riedmiller, M., & Braun, H. (1993). A direct adaptive method for faster backpropagation learning: the RPROP algorithm. *IEEE International Conference on Neural Networks*, *5(93)*, 586–591.
- Stuchly, S.S., Sibbald, C.L. & Anderson, J.M. (1994). A new aperture model for Open-Ended Waveguides. *IEEE transactions on microwave theory and techniques.*, *42(2)*, 192–198.
- Scott, D. J., Coveney, P. V., Kilner, J. a., Rossiny, J. C. H., & Alford, N. M. N. (2007). Prediction of the functional properties of ceramic materials from composition using artificial neural networks. *Journal of the European Ceramic Society*, *27(16)*, 4425–4435.
- Sekeljic, N. (2010). Asymptotic Expansion of Bessel Functions ; Applications to Electromagnetics. *Asymptotics and Perturbations*, *2(1)*, 1–11.

- Sheela, K. G., & Deepa, S. N. (2013). Neurocomputing Neural network based hybrid computing model for wind speed prediction, *Neurocomputing*, 122(1), 425–429.
- Soltani, M., Alimardani, R., & Omid, M. (2011). Evaluating banana ripening status from measuring dielectric properties. *Journal of Food Engineering*, 105(4), 625–631.
- Sosa-Morales, M. E., Valerio-Junco, L., López-Malo, a., & García, H. S. (2010). Dielectric properties of foods: Reported data in the 21st Century and their potential applications. *LWT - Food Science and Technology*, 43(8), 1169–1179.
- Tan, K. T., Lee, K. T., Mohamed, A. R., & Bhatia, S. (2009). Palm oil: Addressing issues and towards sustainable development. *Renewable and Sustainable Energy Reviews*, 13(2), 420–427.
- Trabelsi, S., & Nelson, S. O. (2006a). Nondestructive sensing of bulk density and moisture content in shelled peanuts from microwave permittivity measurements. *Food Control*, 17(4), 304–311.
- Trabelsi, S., & Nelson, S. O. (2006b). Nondestructive Sensing of Physical Properties of Granular Materials by Microwave Permittivity Measurement. *IEEE Transactions on Instrumentation and Measurement*, 55(3), 953–963.
- Übeyli, E. D., & Güler, İ. (2004). Multilayer perceptron neural networks to compute quasistatic parameters of asymmetric coplanar waveguides. *Neurocomputing*, 62(1), 349–365.
- Van der Vossen, H. A. M. (1974). Towards more efficient selection for oil yield in the oil palm. *Centre for Agricultural Publishing and Documentation Wageningen*, PhD thesis, 57–58.
- Wilamowski, B. M., & Yu, H. (2010). Improved computation for Levenberg-Marquardt training. *IEEE transactions on neural networks*, 21(6), 930–7.
- Yaghini, M., Khoshraftar, M. M., & Fallahi, M. (2012). A hybrid algorithm for artificial neural network training. *Engineering Applications of Artificial Intelligence*, Article in press, 1–9.
- Yildiz, C., Gultekin, S., Guney, K., & Sagiroglu, S. (2002). Neural Models for the Resonant Frequency of Electrically Thin and Thick Circular Microstrip Antennas and the Characteristic Parameters of Asymmetric Coplanar

Waveguides Backed with a Conductor. *International Journal of Electronics and Communications*, 56(6), 396–406.

Yildiz, C., & Türkmen, M. (2004). A CAD Approach Based on Artificial Neural Networks for Shielded Multilayered Coplanar Waveguides. *AEU - International Journal of Electronics and Communications*, 58(4), 284–292.

You, K. Y. (2006). Application of open-ended coaxial sensor to determine oil palm fruit ripeness. PhD thesis, *Universiti Putra Malaysia*, 1.5–1.8.

You, K. Y., Abbas, Z., & Khalid, K. (2010). Application of Microwave Moisture Sensor for Determination of Oil Palm Fruit Ripeness. *Measurement Science Review*, 10(1), 7–14.

Yu, H., & Wilamowski, B. M. (2012). Neural network training with second order algorithms. *Department of Electrical and Computer Engineering, Auburn University, Auburn, AL, USA*, 1–14.

Zadeh, L. (1965). Fuzzy sets. *Information and Control*, 8(1), 338–353.

Zhou, L., Chang, Y., Che, W., & Man, K. F. (2011). Investigations on the Three Theoretical Models of Permittivity Measurement for Biological Tissues. *IEEE Transaction on Microwave Theory and Techniques*, (1), 1-4.