



UNIVERSITI PUTRA MALAYSIA

***NUMERICAL INVESTIGATION ON HEAT TRANSFER ENHANCEMENT
IN A DOUBLE PIPE HEAT EXCHANGER USING ROD INSERTS AND
NANOFLUIDS***

SADEQ RASHID NFAWA

FK 2016 165



**NUMERICAL INVESTIGATION ON HEAT TRANSFER ENHANCEMENT
IN A DOUBLE PIPE HEAT EXCHANGER USING ROD INSERTS AND
NANOFLUIDS**

By

SADEQ RASHID NFAWA

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfilment of the Requirements for the Degree of Master of Science**

November 2016

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs, and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright© Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirements for the Degree of Master of Science

**NUMERICAL INVESTIGATION ON HEAT TRANSFER ENHANCEMENT
IN A DOUBLE PIPE HEAT EXCHANGER USING ROD INSERTS AND
NANOFLUID**

By

SADEQ RASHID NFAWA

November 2016

Chairman : Siti Ujila Binti Masuri, PhD
Faculty : Engineering

In recent years, research on the methods for heat transfer enhancement in heat exchangers have received great attention in order to cater for the growing needs of higher efficiencies in these devices. For this purpose, double pipe heat exchanger with inserts devices is one of the many suitable techniques to enhance the heat transfer in heat exchangers. When fluid flows in a pipe with rod inserts fitted on the inner wall of the pipe, the flow becomes disturbed due to growing re-circulation regions near the pipe wall, which enhances the mixing of fluid as well as heat transfer. On the coolant side, the use of nanofluids (a liquid in which nanoparticles are added to a base fluid) can also enhance the heat transfer due to the improved thermal conductivity of the fluid.

The objectives of the present investigation are to improve the thermal performance of double pipe heat exchanger by using compound of vortex generator and nanofluids simultaneously. Different angles of vortex generators were examined. Four types of nanoparticles were investigated. Several solid particle diameters and concentrations were covered. Constant nanofluid properties and single-phase models were numerically considered.

A wide range of Reynolds number has been studied to cover the turbulent flow regimes. The results were subjected to Performance Evaluation Criteria to show their superiority. Numerical simulations have been achieved on wide parameters of forced convection heat transfer and nanofluids flow characteristics in the circular pipe by using turbulators protrusions namely, rod inserts of vortex generator. The rod inserts were attached on the inner wall of the test pipe while the wall was directly heated by using constant wall temperature of constant heat flux boundary conditions. The effects of four different slant angles of rod inserts ($\alpha=20^\circ, 25^\circ, 35^\circ, 45^\circ$) with

different of Reynold numbers from 7,500 -20,000 on the flow and thermal fields are presented and analyzed. Four different types of nanoparticles, Al_2O_3 , CuO , SiO_2 , and ZnO with different volume fractions in the range of 0% to 4 % and different nanoparticle diameters in the range of 20nm to 60nm, dispersed in a base fluid (water) were used. Comparisons of the numerical results with those available in the literature have been presented and a good agreement between the results is observed. The value of performance evaluation criterion (PEC) lies in the range of 1.74-2.82, which demonstrates that the rods strip insert has a very good thermo-hydraulic performance. From the numerical results, it is clearly seen that the heat transfer with rod inserts was higher than smooth tube. Results show that the average Nusselt number, heat transfer enhancement, pressure drop, as well as the thermal hydraulic performance increase with higher values of slant angle. The circular pipe with ($\alpha=45^\circ$) rod insert provides the highest thermal- hydraulic performance at amplitudes of 7500 and 20000 of Reynolds numbers.

A dramatic enhancement in Nusselt number obtained by using rod inserts of vortex generator and base fluid compared to the plane tube. Maximum enhancement of Nusselt number is about 174% by using rod inserts compared to the plane tube with water. The maximum skin friction coefficient has been found by using rod inserts in the tube at ($\alpha=45^\circ$) and pitch distance ($S = 30\text{mm}$). The maximum value of the (PEC) was found in the case of the lowest slant angle of ($\alpha =20^\circ$) and the pitch distance of $S=30\text{mm}$. Results presented show that the average Nusselt number, heat transfer enhancement, pressure drop as well as the thermal-hydraulic performance increase with higher nanoparticle volume fraction and with smaller diameter of nanoparticles. Furthermore, the SiO_2 water nanofluid provides the best thermal hydraulic performance followed by Al_2O_3 , ZnO and CuO water nanofluids. The average Nusselt number and pressure drop in the circular pipe with different shapes significantly increase, as the Reynolds number increases. About 7.5 % enhancement in the heat transfer rate were observed for SiO_2 -water nanofluid with 4% volume fraction and 20 nm particles diameter compared to the CuO -water nanofluid at the same volume fraction and particles diameter.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**PENYIASATAN BERANGKA BERKENAAN PENINGKATAN
PEMINDAHAN HABA DI DALAM PENUKAR HABA PAIP BERGANDA
MENGUNAKAN SISIPAN ROD DAN NANOBENDALIR**

Oleh

SADEQ RASHID NFAWA

November 2016

Pengerusi : Siti Ujila Binti Masuri, PhD
Fakulti : Kejuteraan

Dalam tahun-tahun kebelakangan ini, penyelidikan mengenai kaedah untuk meningkatkan pemindahan haba di dalam penukar haba telah mendapat perhatian yang besar untuk menampung keperluan yang semakin meningkat terhadap kecekapan yang lebih tinggi di dalam peranti ini. Bagi tujuan ini, penukar haba paip berganda dengan peranti sisipan adalah salah satu daripada teknik-teknik yang sesuai untuk meningkatkan pemindahan haba di dalam penukar haba. Apabila bendalir mengalir di dalam paip yang mempunyai sisipan rod dipasang pada dinding sebelah dalam paip tersebut, aliran menjadi terganggu kerana kawasan peredaran semula membesar berhampiran dinding paip itu, yang meningkatkan pencampuran cecair serta pemindahan haba. Dari segi penyejuk, penggunaan nanobendalir (cecair di mana nanopartikel ditambah kepada cecair asas) juga boleh meningkatkan pemindahan haba kerana kekonduksian haba bendalir itu yang lebih baik. Objektif penyiasatan ini adalah untuk meningkatkan prestasi haba penukar haba paip berganda dengan menggunakan gabungan penjana vorteks dan nanobendalir serentak. Sudut penjana vorteks yang berbeza telah diperiksa. Empat jenis nanopartikel telah disiasat. Beberapa diameter zarah pepejal dan kepekatan diliputi. Ciri-ciri nanobendalir malar dan model fasa-tunggal telah dipertimbangkan secara berangka. Julat angka Reynolds yang luas telah dikaji untuk merangkum rejim aliran gelora. Hasil telah tertakluk kepada Kriteria Penilaian Prestasi untuk menunjukkan kelebihanannya. Simulasi berangka telah dicapai pada parameter yang luas bagi pemindahan haba periplakin terpaksa dan ciri-ciri aliran nanobendalir di dalam paip bulat itu dengan menggunakan tonjolan gelora iaitu, sisipan rod penjana vorteks tersebut. Sisipan rod ditempatkan di dinding dalaman paip ujian manakala dinding tersebut dipanaskan secara langsung dengan menggunakan suhu dinding malar dengan keadaan sempadan fluks haba malar. Kesan daripada empat sudut condong sisipan rod yang berbeza ($\alpha=20^\circ, 25^\circ, 35^\circ, 45^\circ$) dengan angka Reynolds dari 7500-20,000 terhadap aliran dan bidang-bidang haba dibentangkan dan dianalisis. Empat jenis nanopartikel, Al_2O_3 , CuO , SiO_2 , dan ZnO dengan pecahan isi padu yang

berbeza dengan julat 0% hingga 4% dan diameter nanopartikel yang berbeza dengan julat 20nm hingga 60nm, tersebar di dalam cecair asas (air) telah digunakan. Perbandingan keputusan berangka dengan yang terdapat di dalam kepustakaan telah dibentangkan dan kesesuaian yang baik antara keputusan diperhatikan. Nilai kriteria penilaian prestasi (PEC) terletak di dalam julat 1.74-2.82, yang menunjukkan bahawa jalur sisipan rod mempunyai prestasi termo-hidraulik yang sangat baik. Daripada keputusan berangka, jelas kelihatan bahawa pemindahan haba dengan sisipan rod adalah lebih tinggi berbanding tiub licin. Hasil menunjukkan bahawa purata angka Nusselt, peningkatan pemindahan haba, penurunan tekanan, serta prestasi hidraulik terma meningkat dengan nilai-nilai sudut condong yang lebih tinggi. Paip bulat dengan sisipan rod ($\alpha=45^\circ$) memberi prestasi terma-hidraulik tertinggi pada amplitud 7500 dan 20000 angka Reynolds. Suatu peningkatan dramatik dalam angka Nusselt telah diperolehi dengan menggunakan sisipan rod penjana vorteks dan cecair asas berbanding tiub satah. Peningkatan maksimum angka Nusselt adalah kira-kira 174% dengan menggunakan sisipan rod berbanding tiub satah dengan air. Pekali geseran kulit maksimum telah didapati dengan menggunakan sisipan rod dalam tiub di ($\alpha=45^\circ$) dan jarak pic ($S=30\text{mm}$). Nilai maksimum (PEC) didapati dalam kes sudut menyenget terendah ($\alpha = 20^\circ$) dan jarak pic $S=30\text{mm}$. Keputusan yang dikemukakan menunjukkan bahawa purata angka Nusselt, peningkatan pemindahan haba, kejatuhan tekanan serta prestasi terma-hidraulik meningkat dengan pecahan isipadu nanopartikel yang lebih tinggi dan dengan diameter nanopartikel yang lebih kecil. Tambahan pula, nanobendalir air SiO_2 memberikan prestasi hidraulik terma yang terbaik diikuti oleh nanobendalir air Al_2O_3 , ZnO dan CuO . Purata angka Nusselt dan kejatuhan tekanan di dalam paip bulat dengan bentuk yang berbeza meningkat dengan ketara, apabila angka Reynolds meningkat. Kira-kira 7.5% peningkatan kadar pemindahan haba diperhatikan untuk nanobendalir air SiO_2 dengan 4% pecahan isipadu dan 20 nm diameter partikel berbanding dengan nanobendalir air-CuO pada pecahan isipadu dan diameter partikel yang sama.

ACKNOWLEDGEMENTS

Firstly, praise for ALLAH for giving me the strength and patience to complete this study.

I would like to express my sincere thanks and deepest gratitude to my supervisor Dr. Siti Ujila Binti Masuri for his invaluable guidance, advice, support, suggestions and perceptive comments throughout my research and preparation of this thesis. I am very grateful for all his help. In addition, I wish to extend my sincere thanks to my co- supervisors Associate Professor Ir. Dr Nor Mariah bt. Adam for their invaluable advices and discussions during the course of this study.

I wish to express my sincere gratitude to my parents, my brothers and my sisters who have supported me during my life stages and pray to ALLAH to save them for me. Finally, I would like to thanks my wife and my children JAAFAR, AHMED, RAWSUN and, RUQAYAH for their encouragement and support during the course of this work.

I certify that a Thesis Examination Committee has met on 21 November 2016 to conduct the final examination of Sadeq Rashid Nfawa on his thesis entitled "Numerical Investigation on Heat Transfer Enhancement in a Double Pipe Heat Exchanger using Rod Inserts and Nanofluids" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

Edi Syams bin Zainudin, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Abd. Rahim bin Abu Talib, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Hayder A Abdulbari, PhD

Associate Professor
University Malaysia Pahang
Malaysia
(External Examiner)



NOR AINI AB. SHUKOR, PhD
Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 28 February 2017

This thesis was submitted to the Senate of the Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

Siti Ujila Binti Masuri, PhD
Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Nor Mariah bt. Adam, PhD
Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD
Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice- Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: _____ Date: _____

Name and Matric No: Sadeq Rashid Nfawa, GS41171

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) were adhered to.

Signature: _____

Name of
Chairman of
Supervisory
Committee:

Dr. Siti Ujila Binti Masuri

Signature: _____

Name of
Member of
Supervisory
Committee:

Associate Professor Ir. Dr Nor Mariah bt. Adam

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	viii
LIST OF TABLES	xii
LIST OF FIGURES	xii
LIST OF SYMBOLS	xvii
CHAPTER	
1 INTRODUCTION	1
1.1 Research background	1
1.2 Problem Statement	4
1.3 Objectives of the Study	5
1.4 Scope of the Work	5
1.5 Outline of the Thesis	5
2 LITERATURE REVIEW	7
2.1 Overview	7
2.2 Nanofluids and vortex generators	7
2.2.1 Fundamentals of Nanofluids	7
2.2.2 Preparation of Nanofluids	8
2.2.3 Thermal Conductivity of Nanofluid	9
2.2.3.1 Effect of Particle Volume Fraction	9
2.2.3.2 Effect of Particle Size and Shape	10
2.2.3.3 Effect of Temperature	11
2.2.4 Viscosity of Nanofluid	13
2.2.4.1 Effect of particle volume fraction	13
2.2.4.2 Effect of particle size and shape	14
2.2.4.3 Effect of temperature	16
2.3 Vortex Generators	17
2.3.1 Louvered Strip, Conical Strip, Perforated Plate, Conical-Strip, Butterfly Plate and Rod Inserts	17
2.3.2 Different coil inserts	23
2.3.3 Different twisted tape inserts	27
2.3.4 Different Vortex-Generator (VG) Insert	31
2.3.5 Different helical screw tape inserts	34
2.4 Summary	41
3 RESEARCH METHODOLOGY	42
3.1 Overview	42
3.2 CFD Theories	43
3.3 Governing Equations	43
3.4 Transport Equations of Turbulence Model	44
3.5 Boundary Conditions	45

3.6	Grid Independence Test	45
3.7	Code verification	46
3.8	The CFD Modelling Process	47
3.9	Convergence criterion	51
3.10	Thermophysical Properties of Nanofluids	51
	3.10.1 Effectual thermal conductivity	52
	3.10.2 Modelling, (T , ϕ)	52
	3.10.3 Effective viscosity	53
3.11	Summary	53
4	RESULTS AND DISCUSSION	54
4.1	Overview	54
4.2	Results and Discussion	54
	4.2.1 Effect of Geometrical Parameters	54
	4.2.2 Performance evaluation criteria	57
	4.2.3 Comparison with previous work	58
	4.2.4 Effect of combination of nanofluids and vortex generator	61
	4.2.5 The effect of different types of nanoparticles	62
	4.2.6 The effect of different volume fractions of Nanoparticles	68
	4.2.7 The Effect of Different Nanoparticles Diameters	74
	4.2.8 The Effect of Different Reynolds Numbers	80
4.3	Summary	84
5	CONCLUSIONS AND RECOMMENDATIONS FOR FUTURE WORK	85
5.1	Overview	85
5.2	Conclusions	85
5.3	Recommendations for Future Work	86
	REFERENCES	87
	APPENDICES	96
	BIODATA OF STUDENT	98
	LIST OF PUBLICATIONS	99

LIST OF TABLES

Table		Page
2.1	Comparison of different tube arrangement	39
3.1	Values of β for different nanoparticles (Vajjha and Das, 2012).	52
6.1	The thermo-physical properties of water and different nanoparticles at $T=300K$ (Mohammed et al., 2012).	96
6.2	Effective thermo-physical properties of Al_2O_3 -water for ϕ in the range of (1%&4%) and dp in the range of (20-60) nm.	96
6.3	Effective thermo-physical properties of SiO_2 -water at ϕ in the range of (1%&4%) and dp in the range of (20-60) nm.	96
6.4	Effective thermo-physical properties of CuO -water for ϕ in the range of (1%&4%) and dp in the range of (20-60) nm.	97
6.5	Effective thermo-physical properties of ZnO -water for ϕ in the range of (1%&4%) and dp in the range of (20-60) nm.	97

LIST OF FIGURES

Figure		Page
1.1	Tube inserts heat exchanger. (a) Fan et al. (2012), (b) You et al. (2012) (c) Eiamsa-ard et al. (2012)	1
2.1	Thermal conductivity ratios of suspensions containing different solid particles. (Xie et al. 2002)	11
2.2	Effect of operating temperature on the thermal conductivity coefficient of nanofluids prepared with various additives. (Lin et al. 2011)	13
2.3	Viscosity is not a function of particle diameter. (Prasher et al. 2006)	15
2.4	Viscosity data at ambient temperature for nanofluids considered. (Nguyen et al. 2007)	15
2.5	Enhanced tube with conical strip inserts. (You et al. 2012)	17
2.6	The louvered strip insert. (Fan et al. 2012)	18
2.7	Louvered strips with forward and backward arrangements.	19
2.8	Perforated plate inserts. (Mwesigye et al. 2014)	19
2.9	The circular tube with the conical-strip insert. (Guo et al. 2013)	20
2.10	Butterfly tube inserts with an inclined angle of 90° for using in copper tube (Azari et al. 2015)	20
2.11	Butterfly insert (Shabanian et al. 2011)	21
2.12	The rod insert (Wenbin et al. 2014)	22
2.13	Small pipe inserts (Wenbin et al. 2015)	22
2.14	Varied inserts shapes of: perforated-tape, jagged-tape, twisted-tape, helical- screw, vortex -generator, and off-season-strip.	23
2.15	Duct fitted with wire coil elements (Eiamsa-ard et al. 2012)	24
2.16	Wire coil inserts (Chandra et al 2014)	24
2.17	Test section with wire coil insert and axial location of thermocouples (all numbers are in millimeter) (Behabadi et al. 2015).	25
2.18	Wire-coil inserts. (Garcia et al. 2013)	25

2.19	Test tube with wire coil and twisted tape inserts.	26
2.20	Tube with coiled wire insert. (Gunes et al. 2010)	26
2.21	Tube fitted with conventional, unilateral, and cross hollow twisted tapes. (Li et al.2015)	28
2.22	Twisted tape insert inside a tube (Toshio et al. 2016)	28
2.23	Circular tube with twisted tape with twist ratio of 2.88.	29
2.24	Physical model for different tube inserts. (Chiu et al. 2009)	29
2.25	Actual Photo of Twisted Tape (Waghole et al. 2014)	30
2.26	Schematic diagram of the twisted wires brush inserts in tube (Naphon et al. 2011)	30
2.27	Circular tube with twisted tapes inserts. (Eiamsa-ard et al. 2014)	31
2.28	Geometrical details of delta wing vortex generator.	32
2.29	Square-duct with Several Vfinned tape inserts.	32
2.30	Vortex- generator VG inserts. (Aliabadi et al. 2015)	33
2.31	(a) Fluid flow behavior, (b) proposed insert geometry, and (c) heat exchanger with perforated disk insert. (Kumar et al. 2016).	34
2.32	2d Different helical tape inserts with central core.	35
2.33	(a) Geometry of test section fitted with triple helical tape insert with a core rod, and (b) geometric parameters of the triple helical tape insert. (Bhuiya et al. 2012)	35
2.34	Helical screw-tape inserts of different twist ratios.	36
2.35	Layout of a circular duct with full -length fin insert. Helical screw -tape (b)twisted -tape. (Subhankaret al. 2013)	36
2.36	Geometrical configuration of helical screw-tape inserts.	37
2.37	Test section with double twisted-tapes. (Tamnaet al. 2016)	38
3.1	Flow chart of the numerical study.	42
3.2	Grid independence test for various pressure with distances X at different	46

3.3	Comparison of the present results with the result of Fan et al. (2012) with different pitch (a) S=30mm, (b) S=45mm and (c) S =60mm at angle 20° for the louvered inserts	47
3.4	Flowchart of CFD simulation	48
3.5	Schematic diagram of a circular tube with rod inserts	49
3.6	Mesh and details of the mesh	49
4.1	Variation of the Nusselt number versus Reynolds number at slant angles $\alpha = (20^\circ, 25^\circ, 35^\circ \text{ and } 45^\circ)$. S=30mm of rod inserts.	55
4.2	Variation of the pressure drop with Reynolds number at slant angles $\alpha = (20^\circ, 25^\circ, 35^\circ \text{ and } 45^\circ)$. S=30mm of rod inserts.	56
4.3	Variation of the skin friction coefficient with Reynolds number at different slant angles $\alpha = (20^\circ, 25^\circ, 35^\circ \text{ and } 45^\circ)$ and S=30mm of Rod inserts	57
4.4	Variation of the PEC with different Reynolds number at different slant angle $\alpha = (20^\circ, 25^\circ, 35^\circ \text{ and } 45^\circ)$ and S=30mm of rod inserts.	58
4.5	Comparisons with previous work	59
4.6	Velocity (m/s) (top) and temperature (K) (bottom) at Re=7500, S=30mm, (a) $\alpha=45^\circ$, (b) $\alpha=35^\circ$ and (c) $\alpha=25^\circ$	61
4.7	Relationship between Nusselt number ratio (Nu / Nu_0) and Reynolds number at different slant angle $\alpha = (25^\circ, 35^\circ \text{ and } 45^\circ)$.	62
4.8	Variation of average Nusselt number with Reynolds number for different nanofluids types and pure water at $\alpha=45^\circ$ and S=30mm.	63
4.9	Pressure drop vs. Reynolds number for different types of nanofluids at $\alpha=45^\circ$ S=30 mm, $dp=20$ nm and $\phi=4\%$.	64
4.10	Variation of Skin friction coefficient with Reynolds number for different nanofluids types and pure water at $\alpha=45^\circ$ and S=30mm.	65
4.11	Velocity (m/s) (top) and temperature (K) (bottom) at $\phi=0.04$, $dp=20$ nm, $\alpha=45^\circ$ S=30mm, (a) SiO ₂ , Re =7500, (b) Al ₂ O ₃ , Re =7500, (c) ZnO, Re =7500, (d) CuO, Re=7500 and (e) Pure water, Re=7500.	68
4.12	Variation of average Nusselt number with Reynolds number for different volume fractions, ϕ at $dp=20$ nm, $\alpha=45^\circ$ and S=30mm.	69
4.13	Pressure drop vs. Reynolds number at $\alpha=45^\circ$, S=30mm and, $dp=20$ nm for different volume fraction of SiO ₂ .	70

4.14	Variation of Skin friction coefficient with Reynolds number for different volume fraction, ϕ at $d_p = 20\text{nm}$, with $\alpha = 45^\circ$ and $S = 30\text{mm}$	71
4.15	Velocity (m/s) (top) and temperature (K) (bottom) at SiO_2 , $\text{Re} = 7500$, $d_p = 20\text{nm}$, $\alpha = 45^\circ$, $S = 30\text{mm}$, (a) $\phi = 0.04$, (b) $\phi = 0.03$, (c) $\phi = 0.02$ and (d) $\phi = 0.01$	73
4.16	Variation of average Nusselt number with Reynolds number for different nanoparticles diameter with $\phi = 4\%$ for $\alpha = 45^\circ$ and $S = 30\text{mm}$.	74
4.17	Pressure drop vs. Reynolds number for different particles diameters of SiO_2 at $\alpha = 45^\circ$, $S = 30\text{mm}$ and $\phi = 4\%$.	75
4.18	Variation of Skin friction coefficient with Reynolds number for different nanoparticles diameter, with $\alpha = 45^\circ$ and $S = 30\text{mm}$	76
4.19	Velocity (m/s) (top) and temperature (K) (bottom) for SiO_2 water nanofluids at $\text{Re} = 7500$, $\phi = 0.04$, (a) $d_p = 20\text{nm}$, (b) $d_p = 30\text{nm}$, (c) $d_p = 40\text{nm}$, (d) $d_p = 50\text{nm}$ (e) $d_p = 60\text{nm}$, and (f) water.	79
4.20	Variation of local Nusselt number with x-position at different Reynolds numbers for (SiO_2 -water nanofluid) at $\alpha = 45^\circ$, $S = 30\text{mm}$.	80
4.21	Velocity (m/s) (top) and temperature (K) (bottom) using (SiO_2 -water nanofluid) at $\alpha = 45^\circ$, $S = 30\text{mm}$, (a) $\text{Re} = 7500$, (b) $\text{Re} = 10000$, (c) $\text{Re} = 12500$, (d) $\text{Re} = 15000$, (e) $\text{Re} = 17500$, (f) $\text{Re} = 20000$.	83

LIST OF SYMBOLS

A	Area, m^2
C_p	Specific heat, $kJ/kg \cdot K$
D	Hydraulic diameter, m
dp	Nanoparticles diameter, nm
C_f	Skin friction coefficient, $C_f = \frac{\Delta PD}{2L\rho u^2}$
h	Average heat transfer coefficient, $W/m^2 \cdot K$
k	Thermal conductivity, $W/m \cdot K$
k_{eff}	Effective thermal conductivity, $W/m \cdot K$
L	Length of tube, m
M	molecular weight (kg/mol)
$m.b$	The component of vector b
Nu	Nusselt number, $Nu = h D/K$
N	Avogadro number ($N=6.02214179 \times 10^{23} \text{ mol}^{-1}$)
P	Pressure, N/m^2
Pr	Prandtl number, $Pr = \mu C_p / k$
PEC	Performance evaluation criteria, $PEC = Nu/Nu_o / (f/f_o)^{1/3}$
q''	Heat flux rate per unit tube length, W/m
Re	Reynolds number, $Re = \rho u D/\mu$
S	Pitch distance of louvered strip, m
T	Temperature, K

Greek symbols

α	Slant angle ($^\circ$)
ρ	Density of fluid, kg/m^3
μ	Dynamic viscosity, Ns/m^2
ε	Turbulent dissipation rate, m^2/s^3
ϕ	Nanoparticles volume fraction

Subscript

o	smooth tube
av	Average value
bf	base fluid
<i>eff</i>	Effective
f	Fluid
nf	nanofluid
np	Nanoparticles
p	particle
w	wall



CHAPTER 1

INTRODUCTION

1.1 Research background

Forced convection heat transfer in a circular tube with inserts (Figure 1.1), has been a subject of attention in many research studies recently. In order to reduce the cost and the size of the heat exchangers devices and save up the energy, many engineering techniques played vital role to enhance the heat transfer rate among fluids in heat exchangers. One of best techniques has been used to improve the heat transfer rate is the passive method.

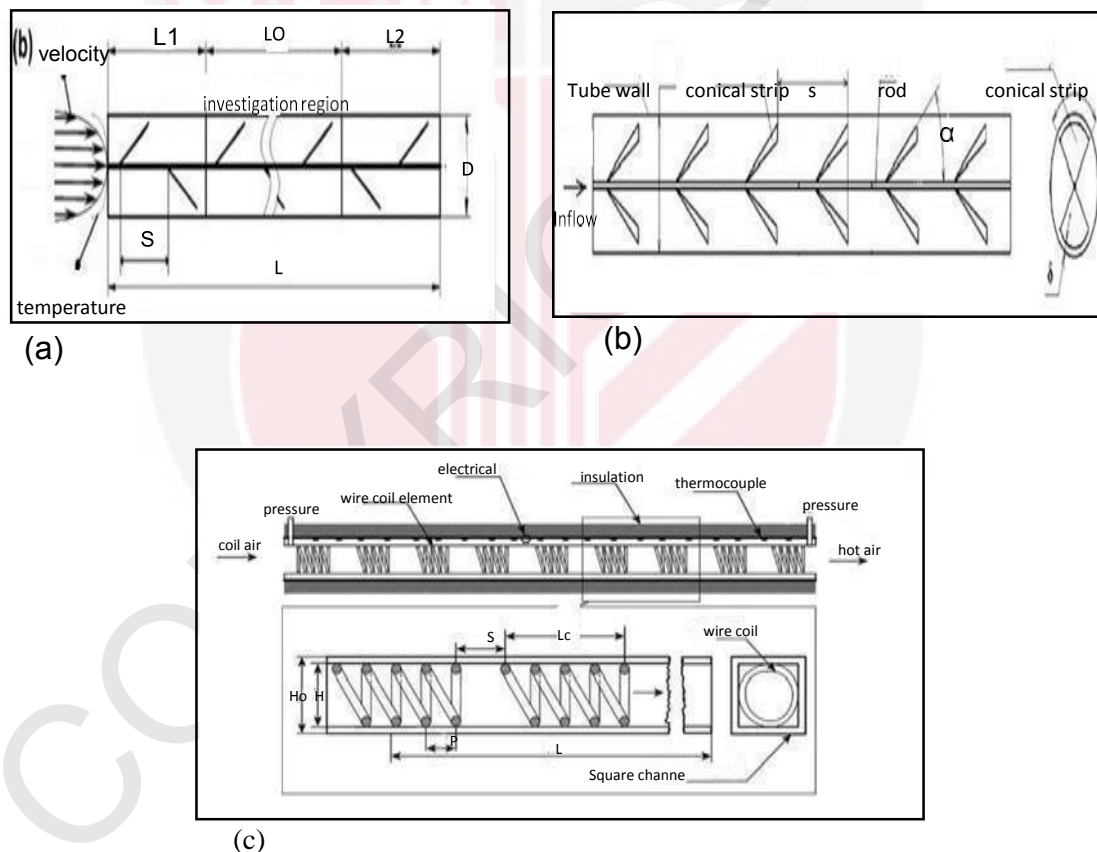


Figure 1.1: Tube inserts heat exchanger. (a) Fan et al. (2012), (b) You et al. (2012) (c) Eiamsa-ard et al. (2012)

The heat transfer enhancement techniques are employed to enhance the heat transfer rate between the fluids and the walls in the heat exchanger to save energy, reduce the cost and size of the heat exchanger. Passive method is one of the most important technique, which was used to enhance heat transfer. The passive technique involves the different elements inserts in order to increase the heat transfer coefficient from the flow surface through an increase in turbulent motion. The effect of various types

of insertion elements in tube and channel on heat transfer enhancement were examined numerically and experimentally such as conical-strip inserts, vortex-generator VG inserts, V-finned tape inserts, twisted tapes inserts, wire coil inserts, butterfly inserts, helical tape inserts, Helical screw tape inserts, perforated circular disk inserts, louvered strip inserts, twisted tape and wire coil inserts, small rod insert, hollow twist tapes, and perforated plate inserts. The heat transfer enhancement technique in heat exchangers was improved and exceedingly employed in considerable engineering applications and industrial equipment such as; power plant, car radiator, process industry, solar thermal systems, petrochemical industry, air-conditioning, refrigeration, chemical reactors and nuclear reactor shell-and-tubes heat exchangers. The different insert in tube for previous studied was located in the core and the walls of the tube. Whilst the active techniques require a direct application of external power for enhancement, such as surface vibration, mechanical aids electrostatic fields and fluid vibration. Generally, the active techniques have received relatively little attention in research and practice because of the cost, noise, safety, or reliability concerns associated with the enhancement device and therefore the passive techniques are preferred. It is possible to combine two or more of the above techniques. These called compound technique, which can lead to preferable improvement in the heat transfer than the use each of enhancement techniques separately (Webb, 1994). The effect of thermal conductivity of liquids on heat transfer enhancement was previously made achievable by combine particles with base fluid (Maxwell, 1881). However, sediment, high-pressure drop erosion, and clogging caused by those small particles had tended the technology far to use the nanoparticles. Further enhancement in heat transfer has become essential. On coolant side, the low thermal conductivities of traditional fluids (water, ethylene and glycol oil) is considered as a fundamental obstacle to improve heat exchangers performance. To overcome this limitation, thermal conductivities of traditional heat transfer liquids can be improved by suspending nanoparticle, with the sizes less than 100 nm, to these fluids (Lee et al., 1999). These called 'nanofluids' was first presented by Choi in 1995, Figure 1.2. In general, nanoparticles materials used in nanofluids synthesis are Cu, CuO, Al₂O₃, TiO₂, SiO₂ etc. Thermal conductivity of nanofluid is depending on different parameters such as type, shape, size and concentration of solid particles in addition to the type of the base fluid (Eastman et al., 2001; Kihm and Chon, 2005; Peterson and Li, 2006; Mintsa et al., 2009; Chandrasekhar et al., 2010 and Lin et al., 2011).

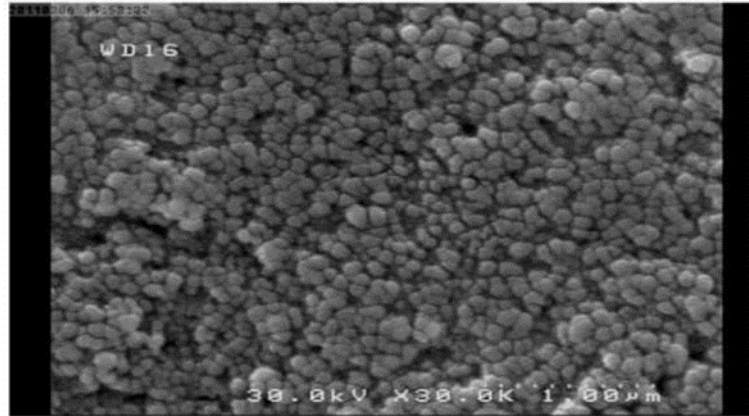


Figure 1.2: FESEM image of dispersed Al_2O_3 nanoparticles.
(Heyhat et al. 2012).

It is known that the thermal conductivity of the fluid effect directly on convective heat transfer coefficient. Several studies found that the improvement in heat transfer increased with particle volume fractions (Santra et al., 2009; Tahir and Mital, 2012; Bianco et al., 2011; Heris et al., 2013). Therefore, using nanofluid instead of traditional heat transfer can potentially lead to further improvement heat transfer of heat exchangers. The viscosity of nanofluid is also an important parameter in predicting the performance of heat exchangers because it affects the amount of pumping power of these devices. The viscosity of nanofluid has been studied by many researches (Chevalier et al., 2007; Chen et al., 2008; Pastoriza-Gallego et al., 2011). were observed that the viscosity of nanofluid raised with nanoparticles volume fraction. Other researchers observed that the viscosity of nanofluid increased when the particle size decreased (Namburu et al., 2007a; Pastoriza- Gallego et al., 2011).

Recent years, the subject of nanofluid has received great attention in research because of improved thermal conductivity of these fluids. For example, the convective heat transfer in smooth tube and duct has been numerically and experimentally studied by many researches (He et al., 2009, Santra et al., 2009; Rostamani et al., 2010; Bayat and Nikseresht, 2012; Abbasian and Amani, 2013). However, there are no numerical and experimental studies have been done on the heat transfer, and flow characteristics of nanofluid in circular pipe heat exchanger with rod insert fixed in the inner wall of a tube. In addition, the effect of different slant angle of rod inserts fixed on the surface of tube on thermal-hydraulic performance using nanofluids has never been reported. Therefore, the current study aims to fill the literature gap in this area.

1.2 Problem Statement

The global warming and the emission of carbon dioxide led to find way to improve the thermal performance of a heat exchanger. The heat exchangers have been used in many engineering applications and industrial devices such as power plant, car radiator refrigeration, air-conditioning, solar thermal systems, petrochemical industry, process industry, heat recovery process, cooler system for electronics devices, chemical reactor and refrigeration system etc. Lately the methods of heat transfer enhancement played essential role in order to improve the efficiency and the thermo-hydrodynamic performance of heat exchanger, which can improve the overall thermal efficiency for processes and systems. Therefore, methods of heat transfer enhancement are applied in order to reduce the cost, size and material of the heat exchanger. Some of applications need to design small size of heat exchanger for aerospace application and the cooling system for the computer and electronics devices. In addition, the changing in the geometrical parameters in order to increase the heat transfer rate are accompanied by increasing the pressure drop penalty. Moreover, the poor thermal conductivity and limitation of thermophysical properties of traditional fluids (pure water, engine oil and ethylene glycols) led to prepare new fluids, which can enhance the heat transfer. Nanofluid flow studies could lead to major steps forward in developing the next-generation coolants for numerous engineering applications. Their better capabilities in thermal properties can provide greater energy efficiency, smaller heat exchanger, low operation cost, and a much cleaner environment. Recently, many methods were used to enhance the thermophysical properties of fluids by increasing the thermal conductivity. One of the most important method is adding the metallic nanoparticles, which have high thermal conductivity (aluminum, gold, copper, etc. to the base fluid to increase thermal conductivity of the fluid. The advantages of using the nanofluids as working fluids led to test nanofluids in present study with inserts. This study aims to answer the following questions:

- What is the effect of different angle of rod inserts in tube on thermal-hydraulic performance?
- What is the performance of nanofluids flowing in circular pipe heat exchanger?

The hypothesis of the research are as follows:

Double pipe heat exchanger with rod inserts will enhance heat transfer.

- Offer of double pipe with rod inserts will increase the friction factor and pressure drop.
- Nanofluid will enhance heat transfer in double pipe heat exchanger.

1.3 Objectives of the Study

The objectives of the present work are:

- i. To analyze the effects of different slant angles of the rods inserts α (20° , 25° , 35° , and 45°) with pitch distance (30mm) on the Nusselt number, pressure drops and skin friction coefficient in circular tube.
- ii. To study the effect of nanofluids with different types of nanoparticles, different particle sizes, and several volume fractions on the Nusselt number, pressure drops and skin friction coefficient in circular tube.
- iii. To examine the turbulent flow regimes (Reynold number Re in the range of 7500- 20000) and heat flux on the thermal performance and flow regions in the tube.
- iv. To evaluate Performance Evaluation Criteria by using vortex generator in enhance tube and comparing it with the previous work.

1.4 Scope of the Work

the scopes of this research are to study the effect of rod inserts fitted on the inner wall of the tube with nanofluid as base fluid by simulation. software used: ANSYS FLUENT 14.5. The simulation is based on:

- i. Stable governing steady-state Navier-stokes, continuity, momentum and energy equations with incompressible flow are employed in these simulations with K- ϵ RNG model
- ii. The angles of the rod inserts are 20° , 25° , 35° and 45° fitted on the inner wall of the tube with pitch distance 30mm.
- iii. Four types of Nano powders are studied; Al_2O_3 , SiO_2 , ZnO and CuO .
- iv. Different nanoparticles concentrations are examined. They are 1, 2, 3, And 4%. Water is considered as base working fluids
- v. Four solid particles diameters are tested, namely; 10, 20, 30, 40, 50 and 60 nm.
- vi. Reynolds number is varied from 7,500 to 20,000 to cover turbulent flow regime.
- vii. In the numerical modeling, the Low Reynolds number k- ϵ RNG model of Launder and Sharma (1974) was employed to simulate the turbulent flow regime.

1.5 Outline of the Thesis

There are 5 chapters in this thesis. The following is a brief outline of the synopsis of each chapter: The first chapter begins with an Introduction to the study. Following are the other key sections encompassing the Background to the study, the Problem Statement, Research Objectives and Research Questions, the scope of the current research, and the Outline of the thesis.

The second chapter is the review of the Literature which presented in 3 parts that cover the overview to the chapter; Nanofluids and reviews the use of various aspects of inserts in heat exchanger including Helical Screw Tape Inserts, Vortex-Generator(VG) Inserts, Twisted Tape Inserts, Louvered Strip, Conical Strip, Perforated Plate, Conical Strip, Butterfly Plate and Rod Inserts as well a range of other related aspects of the study in relation to the existing literature.

The third chapter, which also consists of 6 parts of the proposed numerical methodology used in this stuffy. Presented and discussed are the preamble to numerical methodology, an overview of CFD, its modeling, the physical model and the assumptions for the equations and boundary conditions, respectively. The final part of the chapter focuses on the thermophysical properties of nanofluids.

In Chapter 4, the focus is on the research outcomes and discussion in relation to the present study.

Chapter 5 presents the Conclusions derived from the outcomes of the current research while Recommendations are also made for further research related to the field of this study.

REFERENCES

- A.R. Anvari, K. Javaherdeh, M. Emami-Meibodi, A.M. Rashidi. (2014) "Numerical and experimental investigation of heat transfer behavior in a round tube with the special conical ring inserts" *Energy Conversion and Management* 88 214– 217.
- A.W. Fan, J.J. Deng, A. Nakayama, W. Liu. (2012) "Parametric study on turbulent heat transfer and flow characteristics in a circular tube fitted with louvered strip inserts" *International Journal of Heat and Mass Transfer* 55 5205–5213.
- Abbasian Arani, A. A., & Amani, J. (2013). Experimental investigation of diameter effect on heat transfer performance and pressure drop of TiO₂-water nanofluid. *Experimental Thermal and Fluid Science*, 44 (January) 520-533.
- Abu-Nada, E. (2008). Application of nanofluids for heat transfer enhancement of separated flows encountered in a backward facing step. *International Journal of Heat and Fluid Flow*, 29(1), 242-249.
- Aggrey Mwesigye, Tunde Bello-Ochende, Josua P. Meyer. (2014) "Heat transfer and thermodynamic performance of a parabolic trough receiver with centrally placed perforated plate inserts" *Applied Energy* 136. 989–1003.
- A. Akhavan-Behabadi, Mohamad Shahidi, M.R. Aligoodar. (2015) "An experimental study on heat transfer and pressure drop of MWCNT–water nano- fluid inside horizontal coiled wire inserted tube" *International Communications in Heat and Mass Transfer* 63. 62–72.
- Azari, A., & Derakhshandeh, M. (2015). An experimental comparison of convective heat transfer and friction factor of Al₂O₃ nanofluids in a tube with and without butterfly tube inserts. *Journal of the Taiwan Institute of Chemical Engineers*, 52, 31-39.
- B. Ghasemi, S.M. Aminossadati (2010), Brownian motion of nanoparticles in a triangular enclosure with natural convection, *International Journal of Thermal Sciences* 49 (6) (931-940).
- Bayat, J., & Nikseresht, A. H. (2012). Thermal performance and pressure drop analysis of nanofluids in turbulent forced convective flows. *International Journal of Thermal Sciences*, 60, 236-243.
- Bianco, V., Manca, O., & Nardini, S. (2011). Numerical investigation on nanofluids turbulent convection heat transfer inside a circular tube. *International Journal of Thermal Sciences*, 50(3), 341-349.
- Chandrasekhar, M., Suresh, S., & Chandra Bose, A. (2010). Experimental investigations and theoretical determination of thermal conductivity and viscosity of Al₂O₃/water nanofluid. *Experimental Thermal and Fluid Science*, 34(2), 210-216.
- Chen, H., Ding, Y., He, Y., & Tan, C. (2007). Rheological behaviour of ethylene glycol based Titania nanofluids. *Chemical Physics Letters*, 444(4), 333-337.

- Chen, L., Xie, H., Li, Y., & Yu, W. (2008). Nanofluids containing carbon nanotubes treated by mechanochemical reaction. *Thermochimica Acta*, 477(1), 21-24.
- Chevalier, J., Tillement, O., & Ayela, F. (2007). Rheological properties of nanofluids flowing through microchannels. *Applied physics letters*, 91(23), 233103- 233103.
- Chon, C. H., & Kihm, K. D. (2005). Thermal conductivity enhancement of nanofluids by Brownian motion. *Journal of Heat Transfer*, 127(8), 810.
- Corcione, M. (2011). Empirical correlating equations for predicting the effective thermal conductivity and dynamic viscosity of nanofluids. *Energy Conversion and Management*, 52(1), 789-793.
- D.S. Martínez, A. García, J.P. Solano, A. Viedma. (2014) "Heat transfer enhancement of laminar and transitional Newtonian and non-Newtonian flows in tubes with wire coil inserts" *International Journal of Heat and Mass Transfer* 76 540–548.
- Das, S. K., Putra, N., Thiesen, P., and Roetzel, W., (2003). Temperature Dependence of Thermal Conductivity Enhancement for Nanofluids. *Journal of Heat Transfer* 125(4), 567-574.
- Dnyaneshwar R. Waghole, R.M. Warkhedkar, V.S. kulkarni, R.K. Shrivastva. (2014) "Experimental Investigations on Heat Transfer and Friction Factor of Silver Nanofluid in Absorber/Receiver of Parabolic Trough Collector with Twisted Tape Inserts" *Energy Procedia* 45 558 – 567.
- Duangthongsuk, W., & Wongwises, S. (2009). Measurement of temperature dependent thermal conductivity and viscosity of TiO₂-water nanofluids. *Experimental Thermal and Fluid Science*, 33(4), 706-714.
- Eastman, J. A., Choi, S. U. S., Li, S., Yu, W., & Thompson, L. J. (2001). Anomalously increased effective thermal conductivities of ethylene glycol-based nanofluids containing copper nanoparticles. *Applied Physics Letters*, 78(6), 718-720.
- Eiamsa-ard, S., Pethkool, S., Thianpong, C., & Promvonge, P. (2008). Turbulent flow heat transfer and pressure loss in a double pipe heat exchanger with louvered strip inserts. *International Communications in Heat and Mass Transfer*, 35(2), 120-129.
- Fabio Toshio Kanizawa, Taye Stephen Mogaji, Gherhardt Ribatski. (2016) "A new model for flow boiling heat transfer coefficient inside horizontal tubes with twisted-tape inserts" *international journal of Refrigeration* 61 55–68.
- Fang, X., Ding, Q., Fan, L. W., Yu, Z. T., Xu, X., Cheng, G. H., & Cen, K. F. (2014) flow in different plate-fin channels. *Experimental Thermal and Fluid Science*, 52, 248-258.
- Fotukian, S. M., & Nasr Esfahany, M. (2010). Experimental investigation of turbulent convective heat transfer of dilute γ - Al₂O₃/water nanofluid inside a circular tube. *International Journal of Heat and Fluid Flow*, 31(4), 606-612.

- Fotukian, S. M., & Nasr Esfahany, M. (2010). Experimental study of turbulent convective heat transfer and pressure drop of dilute CuO/water nanofluid inside a circular tube. *International Communications in Heat and Mass Transfer*, 37(2), 214-219.
- García, A., Martín, R. H., & Pérez-García, J. (2013). Experimental study of heat transfer enhancement in a flat-plate solar water collector with wire-coil inserts. *Applied Thermal Engineering*, 61(2), 461-468.
- García, A., Solano, J. P., Vicente, P. G., & Viedma, A. (2007). Enhancement of laminar and transitional flow heat transfer in tubes by means of wire coil inserts. *International Journal of Heat and Mass Transfer*, 50(15), 3176-3189.
- H.A. Mohammed, Husam A. Hasan, M.A. Wahid. (2013) "Heat transfer enhancement of nanofluids in a double pipe heat exchanger with louvered strip inserts" *International Communications in Heat and Mass Transfer* 40 36–46.
- He, Y., Jin, Y., Chen, H., Ding, Y., Cang, D., & Lu, H. (2007). Heat transfer and flow behaviour of aqueous suspensions of TiO₂ nanoparticles (nanofluids) flowing upward through a vertical pipe. *International Journal of Heat and Mass Transfer*, 50(11), 2272- 2281. 207.
- He, Y., Men, Y., Zhao, Y., Lu, H., & Ding, Y. (2009). Numerical investigation into the convective heat transfer of TiO₂ nanofluids flowing through a straight tube under the laminar flow conditions. *Applied Thermal Engineering*, 29(10), 1965-972.
- Heris, S. Z., Nassan, T. H., Noie, S. H., Sardarabadi, H., & Sardarabadi, M. (2013). Laminar convective heat transfer of Al₂O₃/water nanofluid through square crosssectional duct. *International Journal of Heat and Fluid Flow*, 44, 375-382.
- Heris, S. Z., Nassan, T. H., Noie, S. H., Sardarabadi, H., & Sardarabadi, M. (2013). Laminar convective heat transfer of Al₂O₃/water nanofluid through square crosssectional duct. *International Journal of Heat and Fluid Flow*, 44, 375-382.
- Heyhat, M. M., Kowsary, F., Rashidi, A. M., Alem Varzane Esfehiani, S., & Amrollahi, A. (2012). Experimental investigation of turbulent flow and convective heat transfer characteristics of alumina water nanofluids in fully developed flow regime. *International Communications in Heat and Mass Transfer*, 39(8), 1272-1278.
- Hussein, A. M., Sharma, K. V., Bakar, R. A., & Kadrigama, K. (2014). A review of forced convection heat transfer enhancement and hydrodynamic characteristics of a nanofluid. *Renewable and Sustainable Energy Reviews*, 29, 734-743.
- Hwang, K.S., Jang, S.P., and Choi, S.U.S. (2009). Flow and Convective Heat Transfer Characteristics of Water-based Al₂O₃ Nanofluids in Fully Developed Laminar Flow Regime. *Int. J. Heat Mass Transfer*, 52, 193-199.

- Jian Guo, Yuexiang Yan, Wei Liu, Fangming Jiang, Aiwu Fan. (2013) “Effects of upwind area of tube inserts on heat transfer and flow resistance characteristics of turbulent flow” *Experimental Thermal and Fluid Science* 48 147–155.
- Jung-Yang San, Wen-Chieh Huang, Chang-A Chen. (2015) “Experimental investigation on heat transfer and fluid friction correlations for circular tubes with coiled-wire inserts” *International Communications in Heat and Mass Transfer* 65 8–14.
- Kalteh, M., Abbassi, A., Saffar-Avval, M., Frijns, A., Darhuber, A., & Harting, J. (2012). Experimental and numerical investigation of nanofluid forced convection inside a wide microchannel heat sink. *Applied Thermal Engineering*, 36, 260-268.
- Kole, M., & Dey, T. K. (2010). Viscosity of alumina nanoparticles dispersed in car engine coolant. *Experimental Thermal and Fluid Science*, 34(6), 677-683.
- Kumar, A., Kumar, M., & Chamoli, S. (2016). Comparative study for thermal-hydraulic performance of circular tube with inserts. *Alexandria Engineering Journal*, 55(1), 343-349.
- Launder, B. E., & Sharma, B. I. (1974). Application of the energy-dissipation model of turbulence to the calculation of flow near a spinning disc. *Letters in heat and mass transfer*, 1(2), 131-137.
- Lee, D. H., Lee, J. S., Park, H. J., & Kim, M. K. (2011). Experimental and numerical study of heat transfer downstream of an axisymmetric abrupt expansion and in a cavity of a circular tube. *Journal of Mechanical Science and Technology*, 25(2), 395-401.
- Lee, S., Choi, S. U., Li, S. A., & Eastman, J. A. (1999). Measuring thermal conductivity of containing copper nanoparticles. *Applied Physics Letters*, 78(6), 718-720.
- Li, C. H., & Peterson, G. P. (2006). Experimental investigation of temperature and volume fraction variations on the effective thermal conductivity of nanoparticle suspensions (nanofluids). *Journal of Applied Physics*, 99(8), 084314-084314.
- Lin, C. Y., Wang, J. C., & Chen, T. C. (2011). Analysis of suspension and heat transfer characteristics of Al₂O₃ nanofluids prepared through ultrasonic vibration. *Applied Energy*, 88(12), 4527-4533.
- Liu, M. S., Lin, M. C. C., Tsai, C. Y., & Wang, C. C. (2006). Enhancement of thermal conductivity with Cu for nanofluids using chemical reduction method. *International Journal of Heat and Mass Transfer*, 49(17), 3028-3033.
- M. Chandra Sekhara Reddy, Veeredhi Vasudeva Rao. (2014) “Experimental investigation of heat transfer coefficient and friction factor of ethylene glycol water based TiO₂ nanofluid in double pipe heat exchanger with and without helical coil inserts” *International Communications in Heat and Mass Transfer* 50 68–76.

- M. Hernandez-Calderon, "Heat transfer analysis of a non-Newtonian fluid flowing through a circular tube with twisted tape inserts" *Applied Thermal Engineering* 84 (2015) 225-236.
- M. Khoshvaght-Aliabadi, H. Shabanpour, A. Alizadeh, O. Sartipzadeh. (2015) "Experimental assessment of different inserts inside straight tubes: Nanofluid as working media" *Chemical Engineering and Processing* 97 1–11.
- M. Khoshvaght-Aliabadi, M.H. Akbari, F. Hormozi. (2015) "An Empirical Study on Vortex-Generator Insert Fitted in Tubular Heat" *Chinese Journal of Chemical Engineering*.
- M.M.K. Bhuiya, J.U. Ahamed, M.S.U. Chowdhury, M.A.R. Sarkar, B. Salam, R. Saidur, H.H. Masjuki b, M.A. Kalam. (2012) "Heat transfer enhancement and development of correlation for turbulent flow through a tube with triple helical tape inserts" *International Communications in Heat and Mass Transfer* 39 94– 101.
- Mahbubul, I. M., Saidur, R., & Amalina, M. A. (2012). Latest developments on the viscosity of nanofluids. *International Journal of Heat and Mass Transfer*,55(4), 874-885.
- Masuda, H., Ebata, A., Teramae, K., & Hishinuma, N. (1993). Alteration of thermal conductivity and viscosity of liquid by dispersing ultra-fine particles. *Netsu Bussei*, 7(4), 227-233.
- Maxwell, J. C. (1881). *A treatise on electricity and magnetism* (Vol. 1). Clarendon press.
- Menter, F. R., Kuntz, M., & Langtry, R. (2003). Ten years of industrial experience with the SST turbulence model. *Turbulence, heat and mass transfer*, 4(1), 625- 632.
- Mintsa, H. A., Roy, G., Nguyen, C. T., & Doucet, D. (2009). New temperature dependent thermal conductivity data for water-based nanofluids. *International Journal of Thermal Sciences*, 48(2), 363-371.
- Mohammed, H. A., Bhaskaran, G., Shuaib, N. H., & Saidur, R. (2011). Numerical study of heat transfer enhancement of counter nanofluids flow in rectangular microchannel heat exchanger. *Superlattices and Microstructures*,50(3), 215-233.
- Mokhtari Moghari, R., Akbarinia, A., Shariat, M., Talebi, F., & Laur, R. (2011). Two phase mixed convection Al_2O_3 -water nanofluid flow in an annulus. *International Journal of Multiphase Flow*, 37(6), 585-595.
- Murshed, S. M. S., Leong, K. C., & Yang, C. (2005). Enhanced thermal conductivity of TiO_2 water based nanofluids. *International Journal of Thermal Sciences*, 44(4), 367- 373.
- Namburu, P. K., Das, D. K., Tanguturi, K. M., & Vajjha, R. S. (2009). Numerical study of turbulent flow and heat transfer characteristics of nanofluids considering variable properties. *International Journal of Thermal Sciences*, 48(2), 290-302.

- Namburu, P. K., Kulkarni, D. P., Dandekar, A., & Das, D. K. (2007a). Experimental investigation of viscosity and specific heat of silicon dioxide nanofluids. *Micro & Nano Letters, IET*, 2(3), 67-71.
- Namburu, P. K., Kulkarni, D. P., Misra, D., & Das, D. K. (2007b). Viscosity of copper oxide nanoparticles dispersed in ethylene glycol and water mixture. *Experimental Thermal and Fluid Science*, 32(2), 397-402.
- Nguyen, C. T., Desgranges, F., Galanis, N., Roy, G., Maré, T., Boucher, S., & Angue Mintsa, H. (2008). Viscosity data for Al₂O₃ –water nanofluid—hysteresis: is heat transfer enhancement using nanofluids reliable? *International Journal of Thermal Sciences*, 47(2), 103-111.
- Nguyen, C. T., Desgranges, F., Roy, G., Galanis, N., Mare, T., Boucher, S., & Angue Mintsa, H. (2007). Temperature and particle-size dependent viscosity data for waterbased nanofluids hysteresis phenomenon. *International Journal of Heat and Fluid Flow*, 28(6), 1492-1506.
- Öztop, H. F. (2006). Turbulence forced convection heat transfer over double forward facing step flow. *International communications in heat and mass transfer*, 33(4), 508-517.
- P.V. Durga Prasad, A.V.S.S.K.S. Gupta, M. Sreeramulu, L. Syam Sundar, M.K. Singh, Antonio C.M. Sousa. (2015) “Experimental study of heat transfer and friction factor of Al₂O₃ nanofluid in U -tube heat exchanger with helical tape inserts” *Experimental Thermal and Fluid Science* 62 141–150.
- Paisarn Naphon, Tanapon Suchana. (2011) “Heat transfer enhancement and pressure drop of the horizontal concentric tube with twisted wires brush inserts” *International Communications in Heat and Mass Transfer* 38 236–241.
- Pandey, S. D., & Nema, V. K. (2012). Experimental analysis of heat transfer and friction factor of nanofluid as a coolant in a corrugated plate heat exchanger. *Experimental Thermal and Fluid Science*, 38, 248-256.
- Pastoriza-Gallego, M. J., Casanova, C., Legido, J. L., & Pineiro, M. M. (2011). CuO in water nanofluid: influence of particle size and polydispersity on volumetric behavior and viscosity. *Fluid Phase Equilibria*, 300(1), 188-196.
- Pastoriza-Gallego, M. J., Lugo, L., Legido, J. L., & Pineiro, M. M. (2011). Thermal conductivity and viscosity measurements of ethylene glycol-based Al₂O₃ nanofluids. *Nanoscale Research Letters*, 6(1), 1-11.
- Pengxiao Li, Zhichun Liu, Wei Liu a, Gang Chen. (2015) “Numerical study on heat transfer enhancement characteristics of tube inserted with centrally hollow narrow twisted tapes” *International Journal of Heat and Mass Transfer* 88 481– 491.
- Prashant W. Deshmukh, Rajendra P. Vedula. (2014) “Heat transfer and friction factor characteristics of turbulent flow through a circular tube fitted with vortex generator inserts” *International Journal of Heat and Mass Transfer* 79 551– 560. 551–560.

- Promvonge, P. (2008). Thermal augmentation in circular tube with twisted tape and wire coil turbulators. *Energy Conversion and Management*, 49(11), 2949-2955.
- Rios-Irbe, E. Y., Cervantes-Gaxiola, M. E., Rubio-Castro, E., Ponce-Ortega, J. M., González-Llanes, M. D., Reyes-Moreno, C., & Hernández-Calderón, O. M. (2015). Heat transfer analysis of a non-Newtonian fluid flowing through a circular tube with twisted tape inserts. *Applied Thermal Engineering*, 84, 225- 236.
- Rostamani, M., Hosseinizadeh, S. F., Gorji, M., & Khodadadi, J. M. (2010). Numerical study of turbulent forced convection flow of nanofluids in a long horizontal duct considering variable properties. *International Communications in Heat and Mass Transfer*, 37(10), 1426-1431.
- S. Suresh, K.P. Venkitaraj, P. Selvakumar. (2011) “Comparative study on thermal performance of helical screw tape inserts in laminar flow using Al₂O₃/water and CuO/water nanofluids” *Superlattices and Microstructures* 49 608–622.
- S.R. Shabanian, M. Rahimi, M. Shahhosseini, A.A. Alsairafi. (2011) “CFD and experimental studies on heat transfer enhancement in an air cooler equipped with different tube inserts” *International Communications in Heat and Mass Transfer* 38 383–390.
- Sandesh S. Chougule, S.K. Sahu. (2015) “Heat transfer and friction characteristics of Al₂O₃/water and CNT/water nanofluids in transition flow using helical screw tape inserts – a comparative study” *Chemical Engineering and Processing* 88 78–88.
- Santra, A. K., Sen, S., & Chakraborty, N. (2009). Study of heat transfer due to laminar flow of copper–water nanofluid through two isothermally heated parallel plates. *International Journal of Thermal Sciences*, 48(2), 391-400.
- Santra, A. K., Sen, S., & Chakraborty, N. (2009). Study of heat transfer due to laminar flow of copper–water nanofluid through two isothermally heated parallel plates. *International Journal of Thermal Sciences*, 48(2), 391-400.
- Sibel Gunes, Veysel Ozceyhan, Orhan Buyukalaca (2010) “The experimental investigation of heat transfer and pressure drop in a tube with coiled wire inserts placed separately from the tube wall” *Applied Thermal Engineering* 30(13), 1719-1725
- Smith Eiamsa-ard, Kunlanan Kiatkittipong. (2014) “Heat transfer enhancement by multiple twisted tape inserts and TiO₂/water nanofluids” *Applied Thermal Engineering* 70 896-924.
- Smith Eiamsa-ard, Narin Koolnapadol and Pongjet Promvonge. (2012) “Heat Transfer Behavior in a Square Duct with Tandem Wire Coil Element Insert” *Chinese Journal of Chemical Engineering*, 20(5) 863-869.
- Sombat Tamna, Yingyong Kaewkohkiat, Sompol Skullong, Pongjet Promvonge (2016) “Heat transfer enhancement in tubular heat exchanger with double V-ribbed twistedtapes” *Case Studies in Thermal Engineering* 714–24.

- Stephen U. S. Choi and J. A. Eastman (1995) “enhancing thermal conductivity of fluids with nanoparticles” Energy Technology Division and 2Materials Science Division Argonne National Laboratory, Argonne, IL 60439.
- Subhankar Saha, Sujoy Kumar Saha. (2013) “Enhancement of heat transfer of laminar flow of viscous oil through a circular tube having integral helical rib roughness and fitted with helical screw-tapes” *Experimental Thermal and Fluid Science* 47 81–89.
- Syam Sundar, L., & Sharma, K. V. (2008). Thermal conductivity enhancement of nanoparticles in distilled water. *International Journal of Nanoparticles*, 1(1), 66- 77.
- Tahir, S., & Mital, M. (2012). Numerical investigation of laminar nanofluid developing flow and heat transfer in a circular channel. *Applied Thermal Engineering*, 39, 8- 14. 217.
- Thermal Conductivity Enhancement of Ethylene Glycol-Based Suspensions in the Presence of Silver Nanoparticles of Various Shapes. *Journal of Heat Transfer*, 136(3), 034501.
- Timofeeva, E. V., Routbort, J. L., & Singh, D. (2009). Particle shape effects on thermophysical properties of alumina nanofluids. *Journal of Applied Physics*, 106(1), 014304-014304.
- Tu Wenbin, Tang Yong, Zhou Bo, Lu Longsheng. (2014) “Experimental studies on heat transfer and friction factor characteristics of turbulent flow through a circular tube with small pipe inserts” *International Communications in Heat and Mass Transfer* 56 1–7.
- Turgut, A., Tavman, I., Chirtoc, M., Schuchmann, H. P., Sauter, C., & Tavman, S. (2009). Thermal conductivity and viscosity measurements of water-based TiO₂ nanofluids. *International Journal of Thermophysics*, 30(4), 1213-1226.
- Vajjha, R. S., & Das, D. K. (2012). A review and analysis on influence of temperature and concentration of nanofluids on thermophysical properties, heat transfer and pumping power. *International journal of heat and mass transfer*, 55(15), 4063- 4078.
- Wang, X. Q., & Mujumdar, A. S. (2007). Heat transfer characteristics of nanofluids: a review. *International Journal of Thermal Sciences*, 46(1), 1-19.
- Wang, X. Q., & Mujumdar, A. S. (2008). A review on nanofluids-part II: experiments and applications. *Brazilian Journal of Chemical Engineering*, 25(4), 631-648.
- Wang, X., Xu, X., & S. Choi, S. U. (1999). Thermal conductivity of nanoparticle fluid mixture. *Journal of thermophysics and heat transfer*, 13(4), 474-480.
- Watcharin Noothong, Supattarachai Suwannapan, Chinaruk Thianpong, Pongjet Promvonge. (2015) “Enhanced heat transfer in a heat exchanger square-duct with discrete V-finned tape inserts” *Chin.J.Chem.Eng.* 23(3): 490-498
- Webb, R. L., & Kim, N. H. (1994). *Principles of enhanced heat transfer*. Taylor Francis: New York, NY, USA.

- Wenbin Tu, b, Yong Tang, Jinyi Hu, Qinghui Wang, Longsheng Lu. (2015) "Heat transfer and friction characteristics of laminar flow through a circular tube with small pipe inserts" *International Journal of Thermal Sciences* 96 .94-101.
- Wongcharee, K., & Eiamsa-Ard, S. (2011). Enhancement of heat transfer using CuO/water nanofluid and twisted tape with alternate axis. *International Communications in Heat and Mass Transfer*, 38(6), 742-748.
- Wongcharee, K., & Eiamsa-ard, S. (2012). Heat transfer enhancement by using CuO/water nanofluid in corrugated tube equipped with twisted tape. *International Communications in Heat and Mass Transfer*, 39(2), 251-257.
- Xie, H. Q., Wang, J. C., Xi, T. G., & Liu, Y. (2002). Thermal conductivity of suspensions containing nanosized SiC particles. *International Journal of Thermophysics*, 23(2), 571-580. 219.
- Yonghua You, Aiwu Fan, Wei Liu, Suyi Huang (2012) "Thermo-hydraulic characteristics of laminar flow in an enhanced tube with conical strip inserts" *International Journal of Thermal Sciences* 61 28-37.
- Yu, W., Xie, H., Li, Y., & Chen, L. (2011). Experimental investigation on thermal conductivity and viscosity of aluminum nitride nanofluid. *Particuology*, 9(2), 187- 191.
- Yu-Wei Chiu, Jiin-Yuh Jang. (2009) "3D numerical and experimental analysis for thermal-hydraulic characteristics of air flow inside a circular tube with different tube inserts" *Applied Thermal Engineering* 29 250–258.
- Z. Huang, G.L. Yu, Z.Y. Li, W.Q. Tao. (2015) "Numerical study on heat transfer enhancement in a receiver tube of parabolic trough solar collector with dimples, protrusions and helical fins" *Energy Procedia* 69 1306 – 1316.

BIODATA OF STUDENT

Sadeq Rashid Nfawa was born in 1968 in Al-Kut, Iraq. He received his bachelor's degree (B.Sc.) in Mechanical Engineering 1994 from the University of Technology, Iraq. After this, he got contract to work as mechanical engineer at Iraqi oil pipes line company.

In 2014, he enrolled as a M.sc student at University Putra Malaysia.
He is married and has four kids– JAAFAR, AHMED,RAWSUN and RUQAYAH.



LIST OF PUBLICATIONS

Sadiq R. NFAWA, Siti, U. M., Nor Mariah, A. (2016). Heat transfer enhancement of nanofluid in a double pipe heat exchanger with rod inserts. Case study in thermal engineering. CSITE-D-00084.

Sadiq R. NFAWA, Siti, U. M., Nor Mariah, A. (2016). Heat transfer enhancement of rod inserts in a double pipe heat exchanger. Case study in thermal engineering. CSITE-D-00082.





UNIVERSITI PUTRA MALAYSIA

STATUS CONFIRMATION FOR THESIS / PROJECT REPORT AND COPYRIGHT

ACADEMIC SESSION : _____

TITLE OF THESIS / PROJECT REPORT :

NUMERICAL INVESTIGATION ON HEAT TRANSFER ENHANCEMENT IN A DOUBLE PIPE
HEAT EXCHANGER USING ROD INSERTS AND NANOFUID

NAME OF STUDENT: SADEQ RASHID NFAWA

I acknowledge that the copyright and other intellectual property in the thesis/project report belonged to Universiti Putra Malaysia and I agree to allow this thesis/project report to be placed at the library under the following terms:

1. This thesis/project report is the property of Universiti Putra Malaysia.
2. The library of Universiti Putra Malaysia has the right to make copies for educational purposes only.
3. The library of Universiti Putra Malaysia is allowed to make copies of this thesis for academic exchange.

I declare that this thesis is classified as :

*Please tick (✓)

CONFIDENTIAL

(Contain confidential information under Official Secret Act 1972).

RESTRICTED

(Contains restricted information as specified by the organization/institution where research was done).

OPEN ACCESS

I agree that my thesis/project report to be published as hard copy or online open access.

This thesis is submitted for :

PATENT

Embargo from _____ until _____
(date) (date)

Approved by:

(Signature of Student)
New IC No/ Passport No.:

Date :

(Signature of Chairman of Supervisory Committee)
Name:

Date :

[Note : If the thesis is CONFIDENTIAL or RESTRICTED, please attach with the letter from the organization/institution with period and reasons for confidentially or restricted.]