



UNIVERSITI PUTRA MALAYSIA

***HANDOVER ENHANCEMENT IN IP MOBILITY FOR 6LoWPAN
SCENARIO***

AHMED FARIS ABDULRAHMAN

FK 2016 178



HANDOVER ENHANCEMENT IN IP MOBILITY FOR 6LoWPAN SCENARIO

By

AHMED FARIS ABDULRAHMAN

**Thesis submitted to the School of Graduate Studies, Universiti Putra Malaysia
in fulfillment of the requirements for the degree of Master of Science**

December 2016

COPYRIGHT

All material contained within the thesis, including without limitation, texts, logos, icons, photographs, and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from copyright holder. Commercial use of material may only be made with express, prior, written permission of Universiti Putra Malaysia.

Copyright© Universiti Putra Malaysia



DEDICATION

This thesis is dedicated to

All those I love

Especially

My dearest parents

My brother and sister

My best friends

Ali Nazar AL-Jourany & Ali Adnan Al-Khazraji

For their endless encouragement, patience, and support and for being a great source
of motivation and inspiration

All my friends

And to my homeland, Iraq

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Master of Science

HANDOVER ENHANCEMENT IN IP MOBILITY FOR 6LoWPAN SCENARIO

By

AHMED FARIS ABDULRAHMAN

December 2016

Chairman : Mohd. Fadlee A. Rasid, PhD
Faculty : Engineering

There are an enormous number of applications that could benefit from Wireless Sensor Networks (WSN). One of the main issues is that these applications apply a broad range of exclusive **technologies** that are difficult to combine with the Internet such as the ability to provide internet services for mobility devices. Therefore, 6LoWPAN was formed to tackle these limitation. The 6LoWPAN nodes were made more flexible and, as such, researchers have enhanced its efficiency by enabling it to move and be mobility node. However, in enabling its mobility feature researchers encountered multiple challenges such as its effect on network lifetime, delays, signaling costs, packet loss, power consumption, and security. Hence, related works sought to reduce the handover delay in order to increase the network lifetime while other works attempted to reduce handover costs and packet loss to achieve optimum handover results. Some of the related works tend to minimize the high percentage of delays in Layer 3 (L3) while others attempt that in Layer 2 (L2). There are also other works reporting on the use of location prediction to obtain the best handover performance. This research focuses on handover delay, packet loss, and handover costs in intra-mobility (micro-mobility) and inter-mobility (macro-mobility) elements of mobile sensor networks. It offers a new framework for 6LoWPAN handover enhancement to reduce the issues noted above. In order to improve handover performance, the research will focus on both L2 and L3. The originality of this research is in the number of thresholds targeted by the coverage area. Two threshold values have been adopted to detect the mobility of the node from Received Signal Strength Indication (RSSI) and Link Quality Indicator (LQI) in handover decision; this concept has not been considered in previous works which depend on only one threshold. The first threshold acts as a mobility detecting factor while the second as a disconnect-reconnect. This research also introduce a timer based method as a signal distribution technique in the handover process. The effects of traffic load for inter-PAN mobility scenario were also investigated. With these approaches, the method can efficiently improve handover performance by minimizing handover delay, packet loss, and handover costs, which is the aim of this project. The analysis

of the simulation results with the proposed threshold based approach noted that handover delay is less than the benchmark work by 43.84%. In addition, handover cost is also reduced by 24.93% while the packet loss is minimized by 43.76%.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk Ijazah Master Sains

PENINGKATAN PENYERAHAN DALAM MOBILITI IP BAGI SCENARIO 6LoWPAN

Oleh

AHMED FARIS ABDULRAHMAN

Disember 2016

Pengerusi : Mohd. Fadlee A. Rasid, PhD
Fakulti : Kejuruteraan

Terdapat sejumlah besar aplikasi yang boleh dicapai dari Sistem Pautan rangkaian sensor tanpa wayar (WSN). Buat masakini, aplikasi tersebut menggunakan pelbagai teknik teknologi lain yang menjadikannya sukar untuk digunakan dengan internet yang sekaligus menjadi isu utama dalam hal ini. Sebelum ini, 6LoWPAN telah direka untuk mengatasi masalah ini dan lain-lain yang berkaitan dengannya. Pada hakikatnya, nod 6LoWPAN adalah lebih fleksibel dan penyelidik telah menghasilkan nod tersebut yang lebih cekap dengan menjadikannya mudahalih serta mudah untuk dipindahkan. Bagaimanapun, teknik ini telah menimbulkan pelbagai masalah yang lain kepada penyelidik. Ciri-ciri mudahalih tersebut member kesan yang kurang baik kerana menimbulkan isu-isu berkaitan dengan jangkahayat rangkaian, kelewatan, kos operasi, kehilangan data paket, jumlah penggunaan tenaga, dan keselamatan. Oleh itu, kajian yang dijalankan adalah untuk mengurangkan kesan kelewatan masa penyerahan untuk meningkatkan jangkahayat rangkaian. Manakala, penyelidikan yang berasingan bertujuan mengurangkan kos operasi semasa proses penyerahan dan kehilangan data paket untuk mencapai keputusan penyerahan yang terbaik. Padamasa yang sama, focus penyelidikan lain adalah untuk mengurangkan masa kelewatan di lapisan ketiga (L3) kesan masa kelewatan di lapisan tersebut manakala hasil kerja lain bertujuan mengurangkan masa kelewatan pada lapisan kedua (L2). Terdapat kajian terdahulu yang menunjukkan bahawa teknik ramalan lokasi mampu menghasilkan keputusan proses penyerahan yang terbaik. Focus kajian ini ialah pada kelewatan masa penyerahan, kehilangan data paket, serta kos operasi untuk proses penyerahan mudahalih setempat dan mudahalih besar pada rangkaian sensor mudah alih. Tesis ini menyarankan system rangkakerja yang baru untuk 6LoWPAN bagi penambahbaik proses penyerahan untuk mengurangkan masa kelewatan peneyerahan, kehilangan data paket, dan kos operasi proses penyerahan. Bagi meningkatkan prestasi proses penyerahan, kami akan bergantung kepada L2 dan L3. Matlamat kami adalah kawasan liputan berpanduan jumlah had yang ditetapkan. Oleh itu, keunikkan kajian ini adalah untuk menentukan jumlah had yang ditetapkan. Dua jenis

pembolehubah ditekankan untuk mengesan kesan nod mudahalih dari RSSI dan LQI dalam keputusan penyerahan, dan konsep ini berbeza dari kajian terdahulu dimana hanya satu jumlah had ditetapkan. Pertama, had yang ditetapkan bertindak sebagai pengesan mudahalih manakala jumlah had yang kedua bertindak sebagai suis penyambung-pemutus. Penyelidikan ini memperkenalkan kaedah berdasarkan masa sebagai teknik baru untuk penyampaian isyarat. Kesan kepada beban trafik bagi scenario antara mobility turut disiasat. Dengan penglibatan dua jenis had ketetapan, kami mampu mengurangkan kesan masa kelewatan penyerahan, kehilangan data paket, dan kos operasi proses penyerahan yang merupakan matlamat kajian ini. Hasil analisis dari keputusan simulasi menunjukkan bahawa masa kelewatan penyerahan adalah kurang dari kedudukan sediaada sebanyak 43.84%, kos operasi untuk proses penyerahan berkurangan sebanyak 24.93%, dan kehilangan data paket berkurangan sebanyak 43.76%. Akhir sekali, hasil keputusan simulasi membuktikan bahawa penggunaan dua jenis had ketetapan mampu meningkatkan prestasi proses penyerahan.

ACKNOWLEDGEMENT

First of all, I wish to express my gratitude to my supervisor, Assoc. Prof. Dr. Mohd. Fadlee A. Rasid for his continuous support, invaluable guidance, and patience as well as his encouragement and inspiration along this research journey without which this thesis could not be done as smoothly as what we have. I am very thankful for all the tasks he has produced for me. God bless him and his family.

Deep gratitude also goes to my co-supervisor Dr. Nurul Adilah bt. Abdul Latiff whose helpful advice on the thesis draft helped improve the quality of this work. God bless her and her family.

Besides, to my dear friends and peers, I am so grateful to have companions like you by my side during this trip to pursue my degree. It is you who let me feel warm all the time to make my life abroad complete and colourful.

Most importantly, I want to say thanks to my dearest parents and my brother and sister. They helped me out of many difficulties in life and provided me with warm encouragement.

This thesis was submitted to the senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the supervisory committee were as follows:

Mohd. Fadlee b. A. Rasid, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Borhanuddin b. Mohd. Ali, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Nurul Adilah bt. Abdul Latiff, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) were adhered to.

Signature: _____

Name of
Chairman of
Supervisory
Committee:

Associate Professor Dr.Mohd. Fadlee b. A. Rasid

Signature: _____

Name of
Member of
Supervisory
Committee:

Professor Dr.Borhanuddin b. Mohd. Ali

Signature: _____

Name of
Member of
Supervisory
Committee:

Dr. Nurul Adilah bt. Abdul Latiff

TABLE OF CONTENTS

	ABSTRACT	Page
	ABSTRAKT	i
	ACKNOWLEDGEMENTS	iii
	APPROVAL	v
	DECLARATION	vi
	LIST OF TABLES	viii
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xiii
		xv
	 CHAPTER	
1	INTRODUCTION	1
	1.1. Background	1
	1.2. Problem Statement	2
	1.3. Research Aim and Objectives	2
	1.4. Thesis Scope	3
	1.5. Brief Methodology	4
	1.6. Thesis Organization	4
2	LITERATURE REVIEW	5
	2.1. Introduction	5
	2.2. Overview of Wireless Personal Area Network	5
	2.2.1. Standards IEEE 802.15 Family	6
	2.2.2. IEEE 802.15.4 Standard	7
	2.3. 6LoWPAN Introduction	8
	2.3.1. The 6LoWPAN Architecture	8
	2.3.2. 6LoWPAN Protocol Stack	10
	2.3.2.1. 6LoWPAN IEEE 802.15.4 Physical Layer	10
	2.3.2.2. 6LoWPAN IEEE 802.15.4 MAC Data Link Layer	11
	2.3.2.3. 6LoWPAN Adaptation Layer(LoWPAN)	11
	2.3.2.4. Network Layer	13
	2.3.2.5. Transport Layer	13
	2.3.2.6. Application Layer	14
	2.4. Mobility and Routing	14
	2.5. Comprehensive Characterization of Movement in WSN	14
	2.6. The Native Solution for Mobility IP	15
	2.7. Mobility Types	17
	2.8. Related Works	19
	2.9. Summary	24
3	METHODOLOGY	25
	3.1. Background	25
	3.2. Overview of Proposed Methodology	25

3.3.	Topology	27
3.3.1.	Intra-PAN Mobility or Micro Handover	28
3.3.2.	Inter-PAN Mobility or Macro Handover	31
3.3.2.1.	Inter-PAN Mobility in Ideal Case	31
3.3.2.2.	Inter-PAN Mobility in Traffic Load Case	33
3.4.	Performance and Evaluation	35
3.4.1.	Analytical	35
3.4.1.1.	Intra-PAN Mobility Analytical	35
3.4.1.2.	Inter-PAN Mobility Analytical	36
3.6.	Summary	37
4	RESULTS AND DISCUSSIONS	38
4.1.	Introduction	38
4.2.	Simulation	38
4.3.	System Description and Assumption	39
4.4.	Performance Evaluation of 6LoWPAN	41
4.4.1.	Benchmark Validation	42
4.4.2.	Analytical vs. Simulation	45
4.4.3.	Intra-PAN vs. Inter-PAN	49
4.5.	Performance Evaluation of Proposed Method	50
4.5.1.	Analytical vs. Simulation of Proposed Algorithm	51
4.5.2.	Traffic Load Effects	56
4.5.3.	Performance Against Related Works	58
4.6.	Summary	60
5	CONCLUSION AND FUTURE WORKS	61
5.1.	Summary and Conclusions	61
5.2.	Contributions	61
5.3.	Future Works	62
	REFERENCES	63
	APPENDICES	70
	BIODATA OF STUDENT	86

LIST OF TABLES

Table		Page
2.1	IEEE 802.15.X standards	7
2.2	Types of element movements	15
2.3	Comparison between IPv4 and IPv6	16
2.4	The mobility solution comparison	17
2.5	Summary of the literature review	23
4.1	Parameters	39
4.2	Example of the main function to execute the simulation	40
4.3	The improvement rate	58

LIST OF FIGURES

Figure		Page
1.1	Study Module	3
2.1	Star and point-to-point network topology	8
2.2	6LoWPAN architecture	9
2.3	6LoWPAN and IP protocol stacks	10
2.4	PHY packet structure IEEE 802.15.4	11
2.5	IEEE 802.15.4 MAC frame	11
2.6	LoWPAN adaptation frame format	12
2.7	Routing model	13
2.8	Micro-mobility and Macro-mobility	18
2.9	Network mobility	19
3.1	Node range	26
3.2	Topology	28
3.3	Algorithm	29
3.4	Intra-mobility	30
3.5	Intra-mobility signaling distribution	30
3.6	Inter-mobility	32
3.7	Signaling distribution in the inter-mobility scenario	33
3.8	inter-mobility with the traffic load	34
3.9	Signaling distribution in the inter-mobility load traffic case	34
4.1	6LoWPAN scenario	41
4.2	Validation of handover delay (intra-PAN)	42
4.3	Validation of handover delay (inter-PAN)	43
4.4	Validation of handover cost (intra-PAN)	43
4.5	Validation of handover cost (inter-PAN)	44
4.6	Validation of Packet loss (intra-PAN)	44
4.7	Validation of Packet loss (inter-PAN)	45
4.8	HO delay intra-mobility based on speed	46
4.9	HO delay inter-mobility based on speed	46
4.10	Packet loss intra-mobility	47

4.11	Packet loss inter-mobility	48
4.12	HO cost intra-mobility	49
4.13	HO cost inter-mobility	49
4.14	HO delay (intra-PAN Vs. inter-PAN)	50
4.15	Packet loss (intra-PAN Vs. inter-PAN)	50
4.16	HO cost (intra-PAN Vs. inter-PAN)	51
4.17	HO delay intra-mobility based on speed	52
4.18	HO delay inter-mobility based on speed	52
4.19	Packet loss intra-mobility	53
4.20	Packet loss inter-mobility	54
4.21	HO cost intra-mobility	55
4.22	HO cost inter-mobility	55
4.23	Handover number	57
4.24	Traffic load	57
4.25	Handover delay comparison based on speed	58
4.26	Packet loss rate comparison based on speed	59
4.27	Handover cost comparison based on speed	59
4.28	Number of handover (Proposed vs. Existing)	60

LIST OF ABBREVIATIONS

6LoWPAN	Low Power Wireless Personal Area Network based on IPv6
Ana.	Analytical
AoA	Angle of Arrival
BPSK	Binary phase-shift keying
CoA	Core-of-Address
DAD	Duplicate Address Detection
dBm	decibel-milliwatt
DSL	Digital Subscriber Line
ER	Edge Router
Exi.	Existing
FCD	Frame-Check-Sequence
FFD	Full-Function Device
FIB	Forwarding Information Base
GFSK	Gaussian frequency-shift keying
GHz	Gigahertz
GW	Gateway
HG	High Gateway
HGW	High Gateway
HO	Handover
HTTP	Hypertext Transfer Protocol
ICMPv6	Internet Control Message Protocol version 6
IDA	Infrared Data Association
IEEE	Institute of Electrical and Electronics Engineers
IETF	Internet Engineering Task Force
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
Kbps	Kilobits per second
L2	Layer two
L3	Layer three
LAN	Local Area Network

LQI	Link Quality Indicator
m	meter
MAC	Media Access Control
MAG	Media Access Gateway
MAG	Media Access Gateway
MAN	Metropolitan Area Network
Mbps	Megabits per second
MFR	MAC Footer
MHR	MAC header
MIPv6	Mobility IPv6
MN	Mobility Node
MSDU	MAC Service Data Unit
MSN	Mobile Sensor Network
MTU	Maximum Transmission Unit
ND	Neighbor Discovery
NFFD	New Full-Function Device
NMAG	New Media Access Gateway
Ns-2	Network Simulator version 2
OPSK	Optimum Phase-Shift Keying
OSI	Open System Interconnection
PAN	Personal Area Network
PFFD	Previous Full-Function Device
PHY	Physical layer
PMAG	Previous Media Access Gateway
PMIPv6	Proxy Mobility IPv6
Pro.	Proposed
PSK	Phase-shift keying
RA	Router-Advertisement
RFD	Reduces-Function Device
RIB	Routing Information Base
RLS	Radio Location System

RS	Router-Solicitation
RSSI	Received Signal Strength Indicator
RTI	Routing Table Information
Sim.	simulation
SMH	Seamless Mobility Handover
SN	Sensor Network
TCP	Transmission Control Protocol
TG	Task Group
thre1	threshold 1
thre2	threshold 2
UDP	User Datagram Protocol
ULA	Unique Local unicast Address
UWB	Ultra-Wide-Band
v	Velocity
WAN	Wide Area Network
WEI	Wireless Embedded Internet
WPAN	Wireless Personal Area Network
WSN	Wireless Sensor Network

CHAPTER 1

INTRODUCTION

1.1 Background

Low Power Wireless Personal Area Networks are based on IPv6 (6LoWPAN) comprising nodes that have low power, limited memory capacity, and restricted resources. The most common and significant example is Wireless Sensor Network (WSN) in which sensor nodes have the ability to sense certain physical parameters. To optimize a 6LoWPAN protocol, they should support its mobility to enable it to accept an additional application. Over the past decades, wireless sensor networks have been used in various applications, such as for environment monitoring, health, home, industrial automation, military and others [1-3]. The massive spread of communication devices such as smartphones, laptops, and others have increased the need for the internet to accommodate these devices. All previous researchers have created new methodologies for each device to reach the internet for WSN optimization [4].

The Internet Engineering Task Force (IETF) utilises the 6LoWPAN for communication with the internet [5, 6]. Of more importance in the 6LoWPAN protocol is that it allows the nodes to self-organize, detect, configurate, and heal without any human interaction [6-8].

Previously, researchers aimed to use the IPv6 connection in WSN in order to support and provide a significant advantage to the WSN [9]. Moreover, devices having the IPv6 can communicate with other devices without any interpretation [10]. However, a main disadvantages is the frame size on WSN, which is the IEEE 802.15.4, which is limited to 127 bytes [9]. To address this, the IETF defined the IPv6 on the Power Wireless Personal Area Network. Also, now and in the future, all the focus is on the IPv6 as many devices will require internet connections. Since the IPv6 has 128 bit. Therefore the maximum number of nodes allowed is 3.4×10^{38} based on 2^{128} [11, 12]. The IPv4 in turn can include $2^{32} = 4 \times 10^9$ but this number cannot offer an address for all the devices in existence. The IPv6 is faster in routing, host configuration, and the handover process as well as being more secure. Also, IPv6 produces less packet traffic as compared with IPv4 when executing the same function [13]. The 6LoWPAN WSN should support the mobility node and that because most of the devices have the ability to move and change their position. The main issue in the mobility scheme is latency handover delay, handover cost, packet loss, and energy consumption [14-16]. This has led researchers to design new methodology or to optimize the existing one to achieve the best results for these parameter. Recently, some of the solutions used to optimize the mobility handover for 6LoWPAN have resulted in a method to reduce those parameters depending on location predict, certain protocols such as PMIPv6 and MIPv6, and Layer 2, Layer 3 or both. Layer 2 is responsible for channel scanning and network authentication while Layer 3 is responsible for movement node detection and registration. For this purpose, L2 and

L3 work together but the latter begins and is completed after the L2 handover [17]. To obtain good performance in handover latency, costs, and packet loss, this research proposes a new algorithm which supports the mobility scheme. The results have proved that this algorithm can reduce handover latency, packet loss, and handover costs.

1.2 Problem Statement

6LoWPAN is a protocol that supports the internet protocol over low power wireless personal area networks. For each network the signaling cost is considered as an important factor and should be taken into account by designers. An increase in the number of users in one network leads to a rise in the number of signals transferred between the users leading to increased power consumption. Hence, the handover latency process is considered as the most important for using the signals.

In the 6LoWPAN WSN, any design must take into account certain parameters that should take care of them, such as the signaling cost, packet loss, security, and power consumption. Recently all the nodes have the ability to become mobile nodes and, because of this, handover delays are considered the most important in this field. The nodes in 6LoWPAN face many challenges because they have restricted characteristics such as limited capacity, memory, and power. The signaling cost depends on the delay [18] and any increase in handover delays leads to higher signaling costs. At the same time, power consumption will increase because the signal transmission needs more power while the packets loss will also increase. As such, it is clear that packet loss and signaling costs depend on handover latency [19]. Consequently, any new method should optimize and reduce handover delays, signaling costs, and packet loss. This research proposes a new method that depends on the number of the threshold value and new signals distribution to process the following:

- 1- Handover delay
- 2- Handover cost (signaling cost)
- 3- Handover packet loss
- 4- Networking lifetime

1.3 Research Aim and Objectives

The objectives of this research work are as follows:

- 1- To study the 6LoWPAN entity for improving the system's ability to accommodate many mobile users at the lowest delay, signaling costs, and packet loss.
- 2- To provide a new approach for 6LoWPAN mobility by introducing two threshold values from RSSI and LQI in handover decision.
- 3- To introduce a timer based method as a new signaling distribution technique in the handover process.

1.4 Thesis Scope

The scope of work in this research focuses on the 6LoWPAN Mobility Sensor Network (MSN) when the mobility node or user moves from one position to another. The work will concentrate on layer 2 (L2) and layer 3 (L3) since delays occur in them. Thus, this research will present a new method to optimize and reduce such delays, packet loss, and signaling costs.

Furthermore, a significant concept in this research includes a basic method and basic theory on 6LoWPAN MSN, that is, how the mobile node moves and what is the related protocol that organizes this movement. Finally, the study examines the main parameters involved.

Moreover, two means have been employed to obtain the objective of this thesis. The first is wireless communication and this research depends on WPAN as a wireless communication and focuses only on the IEEE 802.15.4. The second is the internet protocol which uses IPv6 because of its good characteristics. For IPv6 over Personal Area Network we depend on 6LoWPAN as the main protocol in this thesis. Each sensor node can be a mobile node and each uses 6LoWPAN as a protocol to transmit and receive signals. The main challenges in the 6LoWPAN protocol are when the sensors or users are moving. Thus, this study will seek to optimize the handover latency in the 6LoWPAN protocol. Figure 1.1 illustrates the study module and the main directions followed.

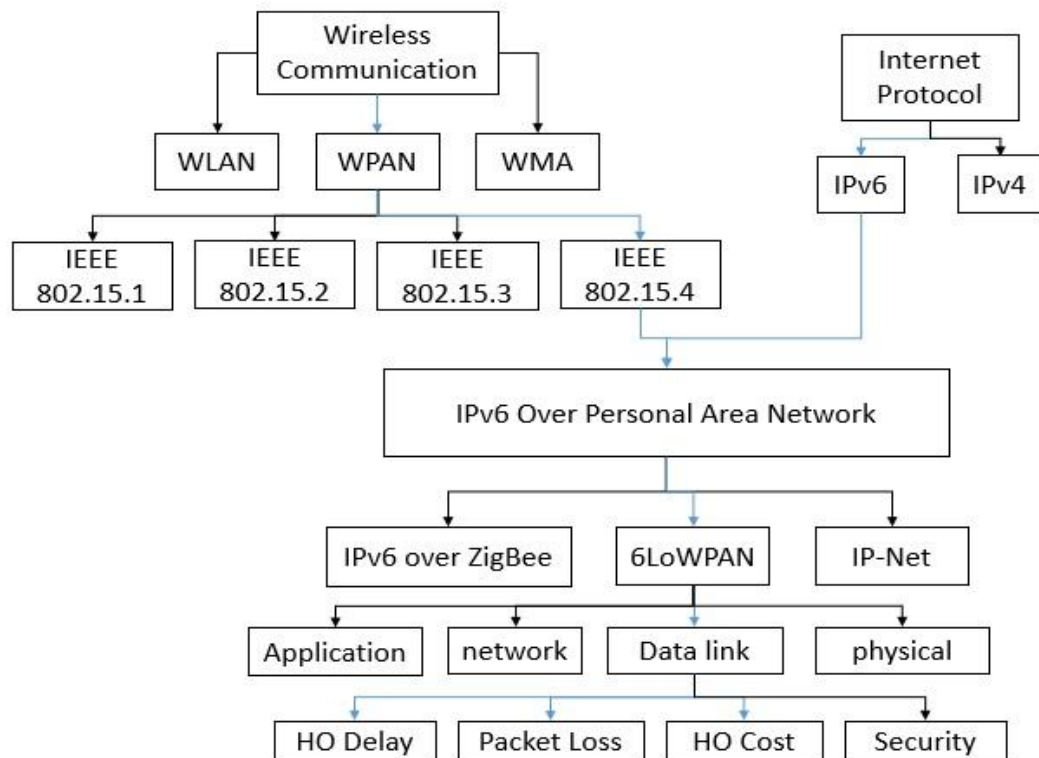


Figure 1.1: Study Module

1.5 Brief Methodology

The research data in this study depends on two main sources, namely the mathematical equation and the NS-2 simulator for estimating network performance. The handover latency threshold value is proposed to contain parameters to present the data for handover delay, packet loss, and handover cost.

Network lifetimes are important criteria in this field because of their limited capacity. Their lifetime is affected by the transmission signals number which is influenced by the time delay. That means that if the signal number increases the network lifetime will decrease. Thus, this research proposes a new method to reduce the handover latency parameters in order to enhance network performance.

The proposed method of this research depends on the number of the threshold values and takes the decision of disconnect and reconnect. It also has the benefit of using hops to communicate with the Media Access Gateway (MAG). The method aims to reduce handover delay, packet loss, and handover costs.

1.6 Thesis Organization

Chapter 1 provides a broad overview of this thesis and includes the introduction such as the background of 6LoWPAN, problem statement, and objective of this research.

Important concepts on the 6LoWPAN protocol and previous works and protocols on it are described in chapter 2 which also contains the 6LoWPAN architecture and the kinds of nodes used in this study. The chapter also presents the layers of the 6LoWPAN protocol stack as well as the mobility and types of mobility in 6LoWPAN. Then, the chapter reviews previous methods used to enhance or optimize the 6LoWPAN MSN work. The methodology of this thesis is explained in chapter 3. To evaluate the performance of 6LoWPAN, the main methods employed in this research are the simulation and analytical methods. All the results obtained from the simulation and analytical methods are described in chapter 4 as well as the proposed method used in this thesis. Finally, chapter 5 provides the conclusions as well as proposes future work to be done in this field.

REFERENCES

- [1] R. Khan and A. H. Mir, "Sensor fast proxy mobile IPv6 (SFPMPv6)-A framework for mobility supported IP-WSN for improving QoS and building IoT," in *Communications and Signal Processing (ICCSP), 2014 International Conference on*, 2014, pp. 1593-1598.
- [2] A. J. Jara, M. A. Zamora, and A. F. Skarmeta, "HWSN6: hospital wireless sensor networks based on 6LoWPAN technology: mobility and fault tolerance management," in *Computational Science and Engineering, 2009. CSE'09. International Conference on*, 2009, pp. 879-884.
- [3] M. P. Đurišić, Z. Tafa, G. Dimić, and V. Milutinović, "A survey of military applications of wireless sensor networks," in *Embedded Computing (MECO), 2012 Mediterranean Conference on*, 2012, pp. 196-199.
- [4] M. S. Shahamabadi, B. B. M. Ali, P. Varahram, and M. Noura, "On Power Consumption in IPv6 Over Low Power Wireless Personal Area Network (6LoWPAN)," in *The First International Conference on Green Computing, Technology and Innovation (ICGCTI2013)*, 2013, pp. 21-28.
- [5] Z. Suryady, M. H. M. Shaharil, K. A. Bakar, R. Khoshdelniat, G. R. Sinniah, and U. Sarwar, "Performance evaluation of 6LoWPAN-based precision agriculture," in *Information Networking (ICOIN), 2011 International Conference on*, 2011, pp. 171-176.
- [6] M. S. Shahamabadi, B. Bin Mohd Ali, P. Varahram, and A. J. Jara, "A Network Mobility Solution Based on 6LoWPAN Hospital Wireless Sensor Network (NEMO-HWSN)," in *Innovative Mobile and Internet Services in Ubiquitous Computing (IMIS), 2013 Seventh International Conference on*, 2013, pp. 433-438.
- [7] A. J. Jara, M. A. Zamora, and A. F. Skarmeta, "An initial approach to support mobility in hospital wireless sensor networks based on 6LoWPAN (HWSN6)," *Journal of Wireless Mobile Networks, Ubiquitous Computing, and Dependable Applications*, vol. 1, pp. 107-122, 2010.
- [8] A. J. Jara, R. M. Silva, J. S. Silva, M. A. Zamora, and A. F. Skarmeta, "Mobile ip-based protocol for wireless personal area networks in critical environments," *Wireless Personal Communications*, vol. 61, pp. 711-737, 2011.
- [9] D. Roth, J. Montavont, and T. Noel, "Performance evaluation of mobile IPv6 over 6LoWPAN," in *Proceedings of the 9th ACM symposium on Performance evaluation of wireless ad hoc, sensor, and ubiquitous networks*, 2012, pp. 77-84.

- [10] N. Jusic and T. Rathinavelu, "Wireless Sensor Networks," *Computers & Electrical Engineering*, vol. 4, pp. 21-43, 2011.
- [11] X. Wang and H. Qian, "Hierarchical and low-power IPv6 address configuration for wireless sensor networks," *International Journal of Communication Systems*, vol. 25, pp. 1513-1529, 2012.
- [12] N. H. A. Ismail, R. Hassan, and K. Wan Mohd Ghazali, "A study on protocol stack in 6LoWPAN model," *Journal of Theoretical and Applied Information Technology*, vol. 41, pp. 220-229, 2012.
- [13] A. N. A. Ali, "Comparison study between IPV4 & IPV6," *International Journal of Computer Science Issues*, vol. 9, pp. 314-317, 2012.
- [14] N. Kushalnagar, G. Montenegro, and C. Schumacher, "IPv6 over low-power wireless personal area networks (6LoWPANs): overview, assumptions, problem statement, and goals," RFC 4919 (Informational), Internet Engineering Task Force 2070-1721, 2007.
- [15] L. Atzori, A. Iera, and G. Morabito, "The internet of things: A survey," *Computer networks*, vol. 54, pp. 2787-2805, 2010.
- [16] A. Ludovici, A. Calveras, and J. Casademont, "Forwarding techniques for IP fragmented packets in a real 6LoWPAN network," *Sensors*, vol. 11, pp. 992-1008, 2011.
- [17] X. Wang, Q. Sun, and Y. Yang, "A cross-layer mobility support protocol for wireless sensor networks," *Computers & Electrical Engineering*, 2015.
- [18] J. Xie and I. F. Akyildiz, "An optimal location management scheme for minimizing signaling cost in Mobile IP," in *Communications, 2002. ICC 2002. IEEE International Conference on*, 2002, pp. 3313-3317.
- [19] R. Silva, J. S. Silva, and F. Boavida, "Mobility in wireless sensor networks—Survey and proposal," *Computer Communications*, vol. 52, pp. 1-20, 2014.
- [20] J. A. Gutierrez, E. H. Callaway, and R. L. Barrett, *Low-rate wireless personal area networks: enabling wireless sensors with IEEE 802.15. 4*: IEEE Standards Association, 2004.
- [21] I. Amiri, S. Alavi, S. M. Idrus, A. Nikoukar, and J. Ali, "IEEE 802.15. 3c WPAN standard using millimeter optical soliton pulse generated by a panda ring resonator," *Photonics Journal, IEEE*, vol. 5, pp. 7901912-7901912, 2013.
- [22] R. C. Braley, I. C. Gifford, and R. F. Heile, "Wireless personal area networks: an overview of the IEEE P802. 15 working group," *Mobile Computing and Communications Review*, vol. 4, pp. 26-33, 2000.

- [23] FARHAD, Mesrinejad. *Battery aware hybrid forwarding scheme for 6LoWPAN*. 2012. PhD Thesis. Universiti Putra Malaysia.
- [24] J.-S. Lee, Y.-W. Su, and C.-C. Shen, "A comparative study of wireless protocols: Bluetooth, UWB, ZigBee, and Wi-Fi," in *Industrial Electronics Society, 2007. IECON 2007. 33rd Annual Conference of the IEEE*, 2007, pp. 46-51.
- [25] U. Tiberi, C. Fischione, K. H. Johansson, and M. D. Di Benedetto, "Energy-efficient sampling of networked control systems over IEEE 802.15. 4 wireless networks," *Automatica*, vol. 49, pp. 712-724, 2013.
- [26] Z. Shelby and C. Bormann, *6LoWPAN: The wireless embedded Internet* vol. 43: John Wiley & Sons, 2011.
- [27] N. Salman, I. Rasool, and A. H. Kemp, "Overview of the IEEE 802.15. 4 standards family for low rate wireless personal area networks," in *Wireless Communication Systems (ISWCS), 2010 7th International Symposium on*, 2010, pp. 701-705.
- [28] Z. Alliance, "ZigBee Specification–June 2005," ed, 2005.
- [29] M. Bouaziz and A. Rachedi, "A survey on mobility management protocols in Wireless Sensor Networks based on 6LoWPAN technology," *Computer Communications*, 2014.
- [30] A. F. Molisch, K. Balakrishnan, D. Cassioli, C.-C. Chong, S. Emami, A. Fort, *et al.*, "IEEE 802.15. 4a channel model-final report," *IEEE P802*, vol. 15, p. 0662, 2004.
- [31] W. C. Craig, "Zigbee: wireless control that simply works," *ZigBee Alliance* http://www.zigbee.org/resources/documents/2004_ZigBee_CDC-P810_Craig_Paper.pdf, 2004.
- [32] A. Mahmood, N. Javaid, and S. Razzaq, "A review of wireless communications for smart grid," *Renewable and sustainable energy reviews*, vol. 41, pp. 248-260, 2015.
- [33] J. Mohiuddin, V. Bhadram, S. Palli, and S. S. Koshy, "6LoWPAN based service discovery and RESTful web accessibility for Internet of Things," in *Advances in Computing, Communications and Informatics (ICACCI), 2014 International Conference on*, 2014, pp. 24-30.
- [34] L. M. Oliveira, A. F. De Sousa, and J. J. Rodrigues, "Routing and mobility approaches in IPv6 over LoWPAN mesh networks," *International Journal of Communication Systems*, vol. 24, pp. 1445-1466, 2011.
- [35] R. M. Hinden and B. Haberman, "Unique local IPv6 unicast addresses," in *Industrial Electronics Society*, vol. 2, pp. 117-132, 2005.

- [36] T. Narten, W. A. Simpson, E. Nordmark, and H. Soliman, "Neighbor discovery for IP version 6 (IPv6)," *IEEE network*, 12(1), 28-33. 2007.
- [37] G. Mulligan, "The 6LoWPAN architecture," in *Proceedings of the 4th workshop on Embedded networked sensors*, 2007, pp. 78-82.
- [38] S. A. Catapang, Z. J. Roberts, K. I.-K. Wang, and Z. Salcic, "An infrastructure for integrating heterogeneous embedded 6LoWPAN networks for Internet of Things applications," in *Sensing Technology (ICST), 2013 Seventh International Conference on*, 2013, pp. 741-746.
- [39] C. Yibo, K.-m. Hou, H. Zhou, H.-l. Shi, X. Liu, X. Diao, *et al.*, "6LoWPAN stacks: a survey," in *Wireless Communications, Networking and Mobile Computing (WiCOM), 2011 7th International Conference on*, 2011, pp. 1-4.
- [40] R. Bonica, D. Gan, D. Tappan, and C. Pignataro, "Extended ICMP to support multi-part messages," *draft-bonica-internet-icmp-16*, ACM SIGCOMM Computer Communication Review 42.2 (2007): 87-93.
- [41] S. C. Ergen, "ZigBee/IEEE 802.15. 4 Summary," *UC Berkeley, September*, vol. 10, p. 17, 2004.
- [42] D. Johnson and C. Perkins, "J. Arkko," Mobility Support in IPv6," *IEEE network* 18.6 (2004): 34-40..
- [43] C. Hennebert and J. Dos Santos, "Security protocols and privacy issues into 6lowpan stack: A synthesis," *Internet of Things Journal, IEEE*, vol. 1, pp. 384-398, 2014.
- [44] A. H. Chowdhury, M. Ikram, H.-S. Cha, H. Redwan, S. Shams, K.-H. Kim, *et al.*, "Route-over vs Mesh-under Routing in 6LoWPAN," in *Proceedings of the 2009 international conference on wireless communications and mobile computing: Connecting the world wirelessly*, 2009, pp. 1208-1212.
- [45] G. Montenegro, N. Kushalnagar, J. Hui, and D. Culler, "Transmission of IPv6 packets over IEEE 802.15. 4 networks," *Internet proposed standard RFC*, vol. 4944, 2007.
- [46] A. P. Castellani, M. Rossi, and M. Zorzi, "Back pressure congestion control for CoAP/6LoWPAN networks," *Ad Hoc Networks*, vol. 18, pp. 71-84, 2014.
- [47] J. Gutierrez, "Wireless Medium Access Control and Physical Layer Specifications for Low-Rate Wireless Personal Area Networks," ed: IEEE Press: New York, NY, USA, 2006.
- [48] M. Shin, T. Camilo, J. Silva, and D. Kaspar, "Mobility support in 6LoWPAN," *Convergence and Hybrid Information Technology, ICCIT'08. Third International Conference on. Vol. 1. IEEE*, 2007.

- [49] W. W. V. Srinivasan and K.-C. Chua, "Trade-offs between mobility and density for coverage in wireless sensor networks," in *Proceedings of the 13th annual ACM international conference on Mobile computing and networking*, 2007, pp. 39-50.
- [50] B. Liu, P. Brass, O. Dousse, P. Nain, and D. Towsley, "Mobility improves coverage of sensor networks," in *Proceedings of the 6th ACM international symposium on Mobile ad hoc networking and computing*, 2005, pp. 300-308.
- [51] Z. M. Wang, S. Basagni, E. Melachrinoudis, and C. Petrioli, "Exploiting sink mobility for maximizing sensor networks lifetime," in *System Sciences, 2005. HICSS'05. Proceedings of the 38th Annual Hawaii International Conference on*, 2005, pp. 287a-287a.
- [52] H. S. Kim, T. F. Abdelzaher, and W. H. Kwon, "Minimum-energy asynchronous dissemination to mobile sinks in wireless sensor networks," in *Proceedings of the 1st international conference on Embedded networked sensor systems*, 2003, pp. 193-204.
- [53] D. Stevanovic and N. Vlatkovic, "Performance of IEEE 802.15. 4 in wireless sensor networks with a mobile sink implementing various mobility strategies," in *Local Computer Networks, 2008. LCN 2008. 33rd IEEE Conference on*, 2008, pp. 680-688.
- [54] A. Raja and X. Su, "Mobility handling in MAC for wireless ad hoc networks," *Wireless Communications and Mobile Computing*, vol. 9, pp. 303-311, 2009.
- [55] D. Johnson, C. Perkins, and J. Arkko, "Mobility support in IPv6," *IEEE Journal on selected areas in communications* 23.12 (2004): 2288-2304.
- [56] T. Schmidt, M. Waehlich, and S. Krishnan, "Base deployment for multicast listener support in Proxy Mobile IPv6 (PMIPv6) Domains," *IETF RFC6224*, April, 2011.
- [57] X. P. Costa, R. Schmitz, H. Hartenstein, and M. Liebsch, "A MIPv6, FMIPv6 and HMIPv6 handover latency study: analytical approach," in *IST Mobile and Wireless Telecommunications Summit*, 2002, pp. 100-105.
- [58] D. Zhou, H. Zhang, Z. Xu, and Y. Zhang, "Evaluation of Fast PMIPv6 and Transient Binding PMIPv6 in vertical handover environment," in *Communications (ICC), 2010 IEEE International Conference on*, 2010, pp. 1-5.
- [59] M. M. Islam, M. M. Hassan, and E.-N. Huh, "Sensor proxy mobile IPv6 (SPMIPv6)-a framework of mobility supported IP-WSN," in *Computer and Information Technology (ICCIT), 2010 13th International Conference on*, 2010, pp. 295-299.

- [60] X. Wang, S. Zhong, and R. Zhou, "A mobility support scheme for 6LoWPAN," *Computer Communications*, vol. 35, pp. 392-404, 2012.
- [61] R. Silva, J. S. Silva, and F. Boavida, "A proposal for proxy-based mobility in wsns," *Computer Communications*, vol. 35, pp. 1200-1216, 2012.
- [62] J. Kim, R. Haw, E. J. Cho, C. S. Hong, and S. Lee, "A 6LoWPAN sensor node mobility scheme based on proxy mobile IPv6," *Mobile Computing, IEEE Transactions on*, vol. 11, pp. 2060-2072, 2012.
- [63] X. Wang and H. Qian, "Constructing a 6LoWPAN wireless sensor network based on a cluster tree," *Vehicular Technology, IEEE Transactions on*, vol. 61, pp. 1398-1405, 2012.
- [64] W. Xiaonan and Z. Shan, "All-IP communication between wireless sensor networks and IPv6 networks based on location information," *Computer Standards & Interfaces*, vol. 35, pp. 65-77, 2013.
- [65] M.-S. Kim, S. Lee, D. Cypher, and N. Golmie, "Performance analysis of fast handover for proxy Mobile IPv6," *Information Sciences*, vol. 219, pp. 208-224, 2013.
- [66] X. Wang, D. Le, Y. Yao, and C. Xie, "Location-based mobility support for 6LoWPAN wireless sensor networks," *Journal of Network and Computer Applications*, vol. 49, pp. 68-77, 2015.
- [67] J. Montavont, D. Roth, and T. Nođ, "Mobile ipv6 in internet of things: Analysis, experimentations and optimizations," *Ad Hoc Networks*, vol. 14, pp. 15-25, 2014.
- [68] D. Niculescu and B. Nath, "Ad hoc positioning system (APS) using AOA," in *INFOCOM 2003. Twenty-Second Annual Joint Conference of the IEEE Computer and Communications. IEEE Societies*, 2003, pp. 1734-1743.
- [69] X. Wang, H. Chen, and D. Le, "A novel IPv6 address configuration for a 6LoWPAN-based WBAN," *Journal of Network and Computer Applications*, 2015.
- [70] T.-Y. Wu, W.-K. Liu, and W.-T. Lee, "Advanced handover enhancement for 6LoWPAN PMIPv6 by HF-PMIPv6," in *Information Science, Electronics and Electrical Engineering (ISEEE), 2014 International Conference on*, 2014, pp. 1770-1774.
- [71] Wang, Xiaonan. "A mobility frame for 6LoWPAN WSN." *IEEE Sensors Journal* 16.8 (2016): 2755-2762.
- [72] Y.-S. Chen, C.-S. Hsu, and H.-K. Lee, "An enhanced group mobility protocol for 6lowpan-based wireless body area networks," *Sensors Journal, IEEE*, vol. 14, pp. 797-807, 2014.

- [73] M. Ha, D. Kim, S. H. Kim, and S. Hong, "Inter-MARIO: a fast and seamless mobility protocol to support Inter-PAN handover in 6LoWPAN," in *Global Telecommunications Conference (GLOBECOM 2010)*, 2010 IEEE, 2010, pp. 1-6.
- [74] J. Xie and U. Narayanan, "Performance analysis of mobility support in IPv4/IPv6 mixed wireless networks," *Vehicular Technology, IEEE Transactions on*, vol. 59, pp. 962-973, 2010.
- [75] L.-S. Li, S.-S. Tzeng, R.-C. Bai, and M.-T. Li, "End to End Security and Path Security in Network Mobility," in *Parallel Processing Workshops (ICPPW)*, 2011 40th International Conference on, 2011, pp. 16-21.
- [76] S. González-Valenzuela, M. Chen, and V. Leung, "Mobility support for health monitoring at home using wearable sensors," *Information Technology in Biomedicine, IEEE Transactions on*, vol. 15, pp. 539-549, 2011.
- [77] J. Petäjäjärvi and H. Karvonen, "Soft handover method for mobile wireless sensor networks based on 6lowpan," in *Distributed Computing in Sensor Systems and Workshops (DCOSS)*, 2011 International Conference on, 2011, pp. 1-6.
- [78] H. Jang and J. Jeong, "mSFP: Multicast-based Inter-Domain Mobility Management Scheme in Sensor-based Fast Proxy Mobile IPv6 Networks," in *Intelligent Systems Design and Applications (ISDA)*, 2012 12th International Conference on, 2012, pp. 89-94.
- [79] J.-H. Lee, T. Ernst, and N. Chilamkurti, "Performance analysis of PMIPv6-based network mobility for intelligent transportation systems," *Vehicular Technology, IEEE Transactions on*, vol. 61, pp. 74-85, 2012.
- [80] C.-W. Lee, M. C. Chen, and Y. S. Sun, "A novel network mobility management scheme supporting seamless handover for high-speed trains," *Computer Communications*, vol. 37, pp. 53-63, 2014.
- [81] Metageek, "Acceptable Signal Strengths," pp. <http://www.metageek.com/training/resources/understanding-rssi.html>, 2014.
- [82] K. Zen, D. Habibi, and I. Ahmad, "A new algorithm to improve mobile sensor node connectivity based on link quality indicator," in *TENCON 2009-2009 IEEE Region 10 Conference*, 2009, pp. 1-6.
- [83] W. Xiaonan and C. Hongbin, "Research on seamless mobility handover for 6LoWPAN wireless sensor networks," *Telecommunication Systems*, pp. 1-17, 2015.
- [84] R. Patel and P. Kamboj, "Investigation of Network Simulation Tools and Comparison Study: NS3 vs NS2," *transactions*, vol. 14, p. 15.



UNIVERSITI PUTRA MALAYSIA

STATUS CONFIRMATION FOR THESIS / PROJECT REPORT AND COPYRIGHT

ACADEMIC SESSION : Second semester 2016/2017

TITLE OF THESIS / PROJECT REPORT :

HANDOVER ENHANCEMENT IN IP MOBILITY FOR 6LoWPAN SCENARIO

NAME OF STUDENT: AHMED FARIS ABDULRAHMAN

I acknowledge that the copyright and other intellectual property in the thesis/project report belonged to Universiti Putra Malaysia and I agree to allow this thesis/project report to be placed at the library under the following terms:

1. This thesis/project report is the property of Universiti Putra Malaysia.
2. The library of Universiti Putra Malaysia has the right to make copies for educational purposes only.
3. The library of Universiti Putra Malaysia is allowed to make copies of this thesis for academic exchange.

I declare that this thesis is classified as :

*Please tick (✓)

☐

CONFIDENTIAL

(Contain confidential information under Official Secret Act 1972).

☐

RESTRICTED

(Contains restricted information as specified by the organization/institution where research was done).

☐

OPEN ACCESS

I agree that my thesis/project report to be published as hard copy or online open access.

This thesis is submitted for :

☐

PATENT

Embargo from _____ until _____
(date) (date)

Approved by:

(Signature of Student)
New IC No/ Passport No.:

Date :

(Signature of Chairman of Supervisory Committee)
Name:

Date :

[Note : If the thesis is CONFIDENTIAL or RESTRICTED, please attach with the letter from the organization/institution with period and reasons for confidentiality or restricted.]