



UNIVERSITI PUTRA MALAYSIA

***DEVELOPMENT OF A MICROCONTROLLER-BASED MICROWAVE
INSTRUMENTATION SYSTEM FOR DETERMINATION OF MOISTURE
CONTENT IN OIL PALM FRUITS AND GINGER***

NUR BIHA BINTI MOHAMED NAFIS

FS 2018 31



**DEVELOPMENT OF A MICROCONTROLLER-BASED MICROWAVE
INSTRUMENTATION SYSTEM FOR DETERMINATION OF MOISTURE
CONTENT IN OIL PALM FRUITS AND GINGER**

By

NUR BIHA BINTI MOHAMED NAFIS

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfilment of the Requirements for the Degree of Master of Science**

January 2018

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



DEDICATION

Special thanks:

To my beloved Father, Mother, Siblings and Friends.



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

**DEVELOPMENT OF A MICROCONTROLLER-BASED MICROWAVE
INSTRUMENTATION SYSTEM FOR DETERMINATION OF MOISTURE
CONTENT IN OIL PALM FRUITS AND GINGER**

By

NUR BIHA BINTI MOHAMED NAFIS

January 2018

Chair: Associate Prof. Zulkifly Abbas, PhD
Faculty: Science

In agriculture, moisture content (MC) is among the important factors that are closely correlated to the properties of agriculture products. There is a diverse range of techniques such as Near-Infrared (NIR) spectroscopy, magnetic resonance, X-ray and computed tomography that have been used for the quality assessment in agriculture products. However, the microwave aquametry technique which applies MC measurement and correlates it to the quality of the agriculture products, has been widely used due to the fast, precise, cost and energy saving as well as compliance with safety regulations. Several sensors such as, microstrip and coplanar which are based on the attenuation measurement, have been suggested previously for the MC determination but these techniques required laborious preparation. The Keysight OEC probe has been used to determine the permittivity of agriculture products, however, it requires a network analyzer which is bulky and expensive. As a solution to this limitation, the low cost microcontroller-based microwave instrumentation system for determination of MC percentage in oil palm fruits and gingers is developed in order to determine the quality of samples by relying on MC measurement. This thesis describes in detail the development of a microcontroller-based microwave instrumentation system for the determination of MC percentage in oil palm fruits and ginger to determine the quality of samples by relying on MC measurement. This instrumentation system or also known as reflectometer operates at 2GHz includes a stripline directional coupler, two diode detectors, a PIC microcontroller, liquid crystal display (LCD), and sensors such as open ended coaxial-stub contact panel and monopole sensors. The stripline directional coupler's design, analysis and also performance testing are accomplished by using Microwave Office Software. The Flow Code version 5.5 was used to program the PIC16F690 microcontroller for data acquisition as well as to calculate the MC based on measured reflected voltage, processing and LCD display. The permittivity measurement is carried by using the Keysight 85070B dielectric probe kit that utilize with the computer controlled HP 8720B vector network analyzer software. The COMSOL Multiphysics® software is used to visualization of the electric field

distribution of both the open ended coaxial-stub contact panel and monopole sensors based on the permittivity value measured. The calibration equations relating the measured reflected voltage by using the reflectometer to the actual MC, and permittivity (dielectric constant (ϵ') and loss factor (ϵ'')) has been established. The predicted percentage of MC in samples is calculated based on the measured reflected voltages can by interchanging the y and x axes. On the other hand, for the predicted permittivity measurement, the calibration equation between the reflected voltage and MC is substituted into the relationship between permittivity and MC. The accuracies of the calibration equations were determined by comparing the predicted MC with the actual MC using microwave oven drying method on another batch of the samples while for the permittivity measurement, the accuracy is determined by comparing the predicted and actual permittivity values that obtained from the another batch of permittivity measurement by using Keysight OEC probe. All of the calibration equations shows a good agreement for input reflected voltage which utilizing the reflected voltage values to determine the MC, ϵ' and ϵ'' by utilizing the mean relative error formula. For oil palm fruits, the accuracies for MC, ϵ' and ϵ'' were within 3.8%, 4.1%, and 4.5%, respectively. While for ginger, the accuracies for MC, ϵ' and ϵ'' were within 2.9%, 2.7%, and 3.6%, respectively.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**PEMBANGUNAN SISTEM INSTRUMENTASI MIKROGELOMBANG
BERASASKAN MIKROPENGAWAL UNTUK MENENTUKAN
KANDUNGAN LEMBAPAN DALAM BUAH KELAPA SAWIT DAN HALIA**

Oleh

NUR BIHA BINTI MOHAMED NAFIS

Januari 2018

Pengerusi: Prof. Madya Zulkifly Abbas, PhD
Fakulti: Sains

Dalam pertanian, kandungan lembapan (MC) adalah antara faktor penting yang berkaitan rapat dengan sifat produk pertanian tersebut. Terdapat pelbagai teknik seperti spektroskopi Near-Infrared (NIR), resonans magnetik, sinar-X dan tomografi yang telah digunakan untuk penilaian kualiti dalam produk pertanian. Walau bagaimanapun, teknik gelombang mikro akuametri dengan menggunakan pengukuran MC yang boleh dikaitkan dengan kualiti produk pertanian telah digunakan secara meluas kerana teknik ini cepat, tepat dan juga penjimatan kos dan tenaga yang mematuhi peraturan keselamatan. Beberapa sensor seperti microstrip dan coplanar yang berdasarkan pengukuran pelemahan telah dicadangkan sebelum ini untuk penentuan MC tetapi teknik ini memerlukan persediaan yang sukar. Penggunaan Keysight OEC dalam menentukan ukuran ketelusan produk pertanian berdasarkan pengukuran MC di dalam sampel. Bagaimanapun, penggunaan Keysight OEC memerlukan penganalisis rangkaian yang besar dan mahal. Sebagai penyelesaian kepada had ini, sistem instrumentasi gelombang mikro berasaskan mikrokontroler kos rendah untuk menentukan peratusan MC dalam buah kelapa sawit dan ginger untuk menentukan kualiti sampel dengan bergantung pada pengukuran MC. Tesis ini menerangkan secara terperinci pembangunan sistem instrumentasi gelombang mikro berasaskan mikrokontroler untuk menentukan peratusan MC dalam buah kelapa sawit dan halia untuk menentukan kualiti sampel dengan bergantung kepada ukuran MC. Sistem instrumentasi atau lebih dikenali sebagai meter pantulan mikrogelombang beroperasi pada 2 GHz ini terdiri daripada satu pengandungan arah garis lucutan, dua pengesan diod, mikropengawal PIC, paparan kristal cecair (LCD), dan sensor seperti sensor panel perhubungan sepaksi koaksial terbuka dan sensor monopole. Reka bentuk, analisa dan juga ujian prestasi pengandungan arah garis lucutan dicapai dengan menggunakan perisian "Microwave Office". Perisian "Flowcode" versi 5.5 telah digunakan untuk memprogramkan mikrokontroler PIC16F690 untuk pengumpulan data serta mengira kandungan kelembapan berdasarkan voltan yang dipantulkan, pemprosesan dan paparan LCD. Pengukuran ketelusan dilakukan dengan menggunakan kit penyelidikan dielektrik

Keysight 85070B yang digunakan sekali dengan perisian penganalisis rangkaian vektor HP 8720B yang dikawal komputer. Perisian COMSOL Multiphysics® digunakan untuk memvisualisasikan pengedaran medan elektrik kedua-dua panel sensor panel perhubungan sepaksi koaksial terbuka dan sensor monopole berdasarkan nilai ketelusan yang diukur. Persamaan penentuan yang berkaitan dengan voltan yang dipantulkan yang diukur dengan menggunakan reflectometer dengan MC sebenar, dan ketelusan (pemalar dielektrik (ϵ') dan faktor kehilangan (ϵ'')) telah diadakan. Ramalan peratusan MC dalam sampel boleh dikira berdasarkan voltan pantulan yang diukur dengan menukar paksi y dan x. Selain itu, untuk pengukuran ketelusan yang diramalkan, persamaan penentuan antara voltan yang dipantul dan kandungan kelembapan diganti ke dalam hubungan antara ketelusan dan MC. Ketepatan persamaan penentuan ditentukan dengan membandingkan MC yang diramalkan dengan MC sebenar menggunakan kaedah pengeringan ketuhar micro gelombang dengan menggunakan kumpulan sampel yang berbeza manakala untuk ukuran ketelusan, ketepatan ditentukan dengan membandingkan nilai ketelusan yang diramalkan dan sebenar yang diperolehi dari satu lagi pengukuran ketelusan dengan menggunakan Keysight OEC. Semua persamaan penentuan menunjukkan perjanjian yang baik untuk input voltan yang dipantulkan yang menggunakan nilai voltan yang dipantulkan untuk menentukan MC, ϵ' dan ϵ'' dengan menggunakan rumusan ralat relatif min. Bagi buah kelapa sawit, ketepatan untuk MC, ϵ' dan ϵ'' berada dalam 3.8%, 4.1 %, dan 4.5%, manakala bagi halia, ketepatan bagi MC, ϵ' dan ϵ'' masing-masing adalah 2.9%, 2.7% dan 3.6%.

ACKNOWLEDGEMENTS

“In the name of Allah, the most beneficent and the most merciful”

First of all, I would like to express my highest gratitude to Allah (s.w.t) that I was able to finish this thesis successfully. I would like to express my greatest appreciation to my supervisor, Associate Prof. Zulkifly Abbas, who has shared his knowledge and expertise, and give as much advices and guidance's as possible that eventually help me to improve myself. My special thanks to my family especially my dad and mom, Mohamed Nafis Bin Baba and Azizah Binti Jakiriyah, for their unconditional love and continuous support. I would like to express thanks to my partner in crime/ best friend, Noradira Suhaime who always be there when I need the most in every ups and downs, and stay with me till the end. Besides, I would like to express thanks to Sakinah Mohamad Ibrahim, who has taught me things that I needed to know for my writing and also my research. Never to forget, my special thanks to brothers and sisters in Microwave and RF laboratory, Tity, Radzi, Sunday, Mehzen, Daw, Ahmad Khamis for their continuous support.

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	viii
LIST OF TABLES	xiii
LIST OF FIGURES	xiv
LIST OF ABBREVIATIONS	xvii

CHAPTER

1	INTRODUCTION	1
	1.1 Microwave Aquametry	2
	1.1.1 Microwave Sensors	2
	1.1.2 Open Ended Coaxial Sensor	3
	1.1.3 Complex Permittivity	4
	1.2 Problem Statement	5
	1.3 Research Objectives	6
	1.4 Thesis Layout	6
2	LITERATURE REVIEW	8
	2.1 Techniques for Moisture Content Determination of Agricultural Products	8
	2.1.1 Open Sun Drying Technique	8
	2.1.2 Oven Drying Technique	9
	2.1.3 Microwave Oven Drying Technique	9
	2.2 Microwave Moisture Measurement Method	10
	2.2.1 Rectangular Dielectric Waveguide Method	10
	2.2.2 Open Ended Coaxial (OEC) Method	11
	2.2.3 Monopole Sensor Method	13
	2.3 Basic of Microwave-Material Interaction	14
	2.4 Oil Palm Fruit	16
	2.4.1 An Overview of the Oil Palm Fruit	16
	2.4.2 Oil Palm Fruits Morphology	17
	2.4.3 Ripeness Techniques in Oil Palm Fruit	18
	2.5 Ginger	21
	2.5.1 An Overview of Ginger	21
	2.5.2 Ginger Morphology	22
	2.5.3 Post harvest of ginger	23
	2.6 Stripline Versus Microstrip	24
3	THEORY	26
	3.1 Stripline Impedance Formulation	26
	3.1.1 Linear Stripline	26
	3.1.2 Stripline's Width Equation	27

3.1.3	Attenuation of Stripline	27
3.1.4	Coupled Stripline	29
3.1.5	Coupler Stripline's Synthesis Equations	29
3.1.6	Attenuation of Coupler Stripline	30
3.2	Stripline Impedance Analysis	30
3.2.1	Variation in Characteristic Impedance with Substrate's Permittivity, Normalized Thickness and Width	30
3.2.2	The Optimum Parameters of 50 Ω Characteristic Impedance Stripline	32
3.2.3	Attenuation of Stripline	33
3.2.4	Maximum Frequency Operation for Single TEM Stripline	35
3.2.5	Variation in Even and Odd Mode Characteristic Impedance of the Coupled Stripline	36
3.2.6	Optimum Values of W/b and S/b for Coupled Stripline	39
3.2.7	Attenuation of Coupled Stripline	41
3.3	Theory of Open Ended Coaxial Sensor	41
3.3.1	Admittance Model	41
3.3.2	FEM Formulations and Implementations	42
4	METHODOLOGY	46
4.1	Sample Preparation and Measurement of Moisture Content	46
4.2	Complex Permittivity Measurement	48
4.3	Reflectometer	49
4.3.1	Measurement setup	49
4.3.2	Directional Coupler Circuit Layout and Simulation Using Microwave Office	52
4.3.3	Performance Testing of Stripline Directional Coupler	53
4.3.4	Fabrication of Directional coupler	55
4.3.5	Development of a Data Acquisition Program for the Reflectometer by using Flowcode Software	56
4.4	FEM Techniques for COMSOL Multiphysics procedure	58
5	RESULT AND DISCUSSION	65
5.1	The Permittivity of Standard Materials	65
5.2	Ginger	66
5.2.1	Variation in Dielectric Properties of Ginger with Frequency for Different Percentage of MC	66
5.2.2	Variation in Complex Permittivity of Ginger with Different Percentage of MC at Selected Frequencies	68
5.2.3	Calibration Equation to Determine the MC	71

	from Measured Permittivity	
5.2.4	The Effect Of Percentage of MC in Ginger on Electric Field Distribution	71
5.2.5	Calibration Equation to Determine the MC and Permittivity based on the Measured Reflected Voltage at 2 GHz	73
5.2.6	Performance Analysis OEC-SCP sensor	76
5.3	Oil palm fruits	77
5.3.1	Variation in Complex Permittivity of Oil Palm Fruit with Frequency for Different Percentage of Moisture Content	77
5.3.2	Variation in Permittivity of Oil Palm Fruit with Different Percentage of MC at Selected Frequencies	79
5.3.3	Calibration Equation to Determine the MC from Measured Permittivity	85
5.3.4	The Visualization of Effect Electric Field Distribution due to the Effects of MC Percentage in Oil Palm Fruit	85
5.3.5	Calibration Equation to Determine the MC and Permittivity based on the Measured reflected voltage at 2GHz	88
5.3.6	Performance Analysis of Monopole Sensor	89
6	CONCLUSION AND SUGGESTIONS	91
6.1	Conclusion	91
6.1.1	Main Contributions	92
6.2	Recommendations for Future Work	92
	REFERENCES	94
	APPENDICES	104
	BIODATA OF STUDENT	108
	PUBLICATIONS	109

LIST OF TABLES

Table		Page
2.1	Comparison between open sun drying, oven drying, and microwave oven drying	10
2.2	Comparison between RDWG, Agilent 85070B dielectric probe, OEC and monopole sensor	14
2.3	The composition of ginger as approaching maturity	22
3.1	Variation of W/b for 50Ω characteristic impedance of stripline of different t/b and ϵ_r	33
3.2	Values of parameters W/b and S/b of 50Ω coupled stripline for different types of RTDurioid substrate at selected coupling values	40
4.1	Comparison for S-parameter of stripline directional coupler	54
4.2	The dimension defined of monopole sensor in 2D work-plane	60
4.3	The geometrical parameter when the monopole sensor extruded to 3D work-plane	60
4.4	The properties of subdomain settings	62
4.5	Boundary settings	62
5.1	Measurement of permittivity of water and PTFE at 25°C for several selected frequencies by using Keysight OEC probe	65
5.2	The relationship between ϵ' and ϵ'' of Ginger with MC at selected frequencies	70
5.3	The sensitivity of (a) ϵ' and (b) ϵ'' against MC in ginger	70
5.4	Accuracy of prediction equation when compared to standard oven drying method	71
5.5	The relationship between ϵ' with MC at various selected frequencies	81
5.6	The sensitivity of ϵ' against MC in oil palm fruits	81
5.7	The relationship between ϵ'' with MC at various selected frequency	84
5.8	The sensitivity of ϵ'' against MC in oil palm fruits	84
5.9	Accuracy of prediction equation when compared to standard oven drying method	85

LIST OF FIGURES

Figure		Page
1.1	The sample measurement setup for OEC line sensor	4
2.1	The experimental setup for RDWG method	11
2.2	MC measurement procedure of a MUT using an OEC sensor	11
2.3	The comparison in fringing field between an OEC sensor (left) with a monopole sensor (right)	12
2.4	The structure of monopole sensor with radius and length of protruding inner conductor a and h , respectively	13
2.5	The water's relative permittivity values	15
2.6	Variation in permittivity with increasing frequency for potato	16
2.7	The oil palm fruit morphology	17
2.8	The categories of oil palm fruit. (a) Dura; (b) Tenera and (c) Pisifera	17
2.9	A tenera bunch	18
2.10	Variation in MC and oil content with weeks after anthesis	19
2.11	The relationship between water content and oil content in fruit mesocarp	20
2.12	A ginger morphology	23
3.1	Stripline	26
3.2	Coupled stripline	29
3.3	Relationship between stripline's characteristic Impedance with W/b for variation of t/b : (a)RTDuriod5870, (b)RTDuriod6006,(c) RTDuriod6010	31
3.4	Variation in W/b of stripline with ϵ_r . For various conductor thickness	32
3.5	The variation of attenuation with frequency for different substrate's thickness; (a) RTDuriod5870, (b)RTDuriod6006, (c) RTDuriod6010.	34
3.6	Cut off frequency for stripline at 50Ω characteristic impedance	36
3.7	The effect of coupling on characteristics impedance of coupled stripline	37
3.8	The characteristic impedance for coupled stripline with variation of W/b and S/b parameters; (a)RTDuriod5870, (b) RTDuriod6006, (c) RTDuriod6010	38
3.9	Optimum of (a) W/b and (b) S/b of 5038Ω characteristic impedance for various coupling and ϵ_r .	39
3.10	The attenuation for 50Ω characteristic impedance with 20dB coupling of coupled stripline	41
3.11	Types of finite element in the FEM: (a) three node triangular, (b) four node tetrahedron and (c) eight node hexahedron	43
3.12	The discretization of an arbitrary solution region with triangular elements.	43
4.1	Flowchart of methodology	46

4.2	Sample preparation for (a) ginger and (b) oil palm fruit	47
4.3	Electronic weight balance	47
4.4	Permittivity measurement setup with Keysight OEC probe	49
4.5	Permittivity measurement setup when the Keysight OEC probe loaded with the samples	49
4.6	Reflectometer;(a) block diagram,(b) Measurement setup, (c) OEC–SCP sensor, (d) monopole sensor,(e) Reflection measurement of the sensors loaded with both samples	50
4.7	Designed of stripline directional coupler using MWO: (a) schematic diagram and (b)design layout	53
4.8	S-parameter simulation (MWO) for 50Ω characteristic impedance of stripline directional coupler	54
4.9	Fabrication procedure of the reflectometer circuit	55
4.10	Fabricated stripline directional coupler	56
4.11	Flowcode software; (a) Graphical programming and (b) Panel view	58
4.12	COMSOL's procedure for FEM calculation	59
4.13	Model Navigator dialog box	59
4.14	The geometrical dimension of monopole sensor in: (a) 2D work plane and (b) 3D work	60
4.15	The boundary surrounding the sensor geometry when attached with the sample	61
4.16	The subdomain settings dialog box	61
4.17	Boundary Settings dialog box	62
4.18	The far field defined for the sample's wall in the Boundary Settings dialog box	63
4.19	Normal mesh size discretized sensor geometry	63
4.20	The field distribution of the unloaded (a) monopole and (b) OEC-SCP sensors at 2GHz	64
5.1	Variation of complex permittivity with frequency for water and PTFE when measured by using Keysight OEC probe	66
5.2	(a) ϵ' and (b) ϵ'' of Ginger with frequency at various percentages of MC	67
5.3	The relationship between pH and various percentage of MC	68
5.4	The relationship between MC and (a) ϵ' and (b) ϵ'' of ginger various selected frequencies	69
5.5	The electric field distribution surrounding the OEC–SCP sensor inside Ginger of variation of percentage of MC	72
5.6	Variation in reflected voltage with MC with of the OEC-SCP: (a) 30%-90%MC, (b) 40% -80%MC	74
5.7	Variation in (a) ϵ' and (b) ϵ'' with MC	75
5.8	Comparison between measured and actual (a) MC (b) ϵ' and (c) ϵ''	76
5.9	The relationship of (a) ϵ' and (b) ϵ'' with frequency for variation percentage of MC	78
5.10	The relationship between ϵ' and MC of oil palm fruit within range frequencies 1 GHz to 4 GHz.	79
5.11	The relationship between ϵ'' and MC of oil palm fruit within range frequencies 1 GHz to 4 GHz.	82
5.12	The electric field distribution of monopole sensor for oil	86

	palm fruits at different percentage of MC	
5.13	Variation in RV with MC at frequency of 2 GHz	88
5.14	The Relationship between Actual MC and Predicted MC	89



LIST OF ABBREVIATIONS

MC	Moisture content
NIR	Near-infrared
MUT	Material under test
Keysight OEC probe	Keysight 85070e dielectric probe kit
OEC	Open ended coaxial
ϵ^*	Complex dielectric permittivity
ϵ'	Dielectric constant
ϵ''	Loss factor
C	Static capacitance
OEC-SCP	Ended coaxial - stub contact panel
LCD	Liquid crystal display
FEM	Finite element method
VNA	Vector network analyzer
T	Sample thickness
$ \epsilon $	Expected complex permittivity
KF	Karl Fischer
IR	Infrared
PTH	Plated through hole
Z_o	Characteristic impedance
ϵ_r	Substrate's permittivity
b	Substrate's thickness
W	Conductor's width
t	Conductor's thickness
L	Line length
ρ	Metal bulk resistivity normalize to gold
α_T	Total loss of stripline
α_c	Conductor loss
α_d	Dielectric loss
f_T	Cut-off frequency
R_s	Sheet resistivity
$\tan\delta$	Loss tangent
Z_{oe}	Characteristic impedance of even mode
Z_{oo}	Characteristic impedance of odd mode
C	Coupling factor
S	Separation between parallel coupler lines
$\tilde{Y}$	Normalized admittance
Γ	Reflection coefficient
$G(0)/Y_o$	Normalized conductance
$B(0)/Y_o$	Susceptance
ϵ_c	Dielectric constant of the material filling the coaxial line
a	Inner radius
b	Outer radius
k_o	Free space propagation constant
J_o	Bessel function of zeroth order
Si	Sine integral
V	Potential
N	Number of elements (noes)

V_e	Element potential typically approximated with polynomial equation
n	The number of nodes
α_i	The element shape function
V_{ei}	Potential at node i
$C_{ij}^{(e)}$	Element coefficient matrix
f	Node with free potentials
p	Node with predetermined potentials
$[K]$	Sparse matrix
$[b]$	Excitation matrix
m_w	Mass before drying
m_d	Mass after drying
NaOH	Caustic soda
$FeCl_3$	Ferric chloride
LCD	Liquid crystal display panel
PTFE	Polytetrafluoroethylene
UV	Ultraviolet
$\sim .dxf$	Drawing exchange format
MWO	Microwave office
SMA	Sub-miniature a
ϵ'_{water}	Dielectric constant of water
ϵ''_{water}	Loss factor of water
pH	Potential of hydrogen
ϵ_0	Permittivity of free space
σ	Conductivity
f	Frequency
TEM	Transverse electromagnetic
PCB	Printed circuit board

CHAPTER 1

INTRODUCTION

The attention of using the microwave instrument in agriculture has risen rapidly nowadays. These microwave instrument has provided new methods for characterization of food properties in order to determine the precise harvest time, perform rapid measurement of certain products' quality, and determine the condition of various points in processing and storage operations. In Malaysia, the application of microwave instrumentation systems in agriculture is still new compared to infrared, laser, ultrasound, electrical capacitance. As Malaysia is one of the agriculture producers in the world, the demand of an instrument for quality analysis in crops is very high.

Wide ranges of microwave sensors have been used for moisture content (MC) determination in agriculture products. The appropriate sensors are chosen depending on the nature of the dielectric material to be measured, both physically and electrically, the frequency of interest, and the degree of accuracy required. The sensors that have been widely used in agriculture field can be categorized as reflection or transmission types using resonant or non resonant systems, with open or closed structures for sensing of the properties of material samples (Kraszewski, 1980). For the closed structures, it is represented by the waveguide and coaxial line transmission measurements. On the other hands, the open structure can be represented by the free-space transmission measurements and open ended coaxial (OEC) line systems. The resonant structures can be classified as either closed resonant cavities or open resonant structures. These structures can be operated on the types of measurement, where two-port devices suitable for transmission measurements while one port devices are used for the reflection measurements (Nelson, 1998).

There are many factors that can affect the permittivity measurement. Few studies have been carried out for permittivity measurements in the low, medium, and high frequency ranges, including the use of several bridges and resonant circuits (Field, 1954; Corcoran et al., 1970) and concluded that the electrode polarization phenomena at low frequencies can invalidate and affect the measurement data. It also reported by Nelson and Kraszewski (1990a) that the design of the dielectric sample holder for the interest material under test (MUT) is one of the important factor that affect the measurement technique. Previous developed techniques have been developed that applied high frequency for permittivity measurement in grain and seed samples. The Q-meter based on resonant circuit with 1 to 50 MHz range (Nelson, 1991), coaxial sample holders modeled as transmission-line sections with lumped parameters and measured with an RX- meter for the 50 to 250 MHz range (Jorgensen et al., 1970) and for the 200 to 500 MHz range, measured with an admittance meter (Stetson & Nelson 1970) are the examples for the developed techniques. Generally, techniques such as transmission-line, resonant cavity, and free-space techniques have been widely practiced at MW frequencies (1 GHz and

above) and have been illustrated in several reviews (Westphal, 1954; Altschuler, 1963; Bussey, 1967).

1.1 Microwave Aquametry

Water is known to be the most important components in agriculture products. Because of this reason, microwave measurement technique is the most appropriate, rapid and precise method in order to perform the quality analysis in crops as water is known to have a strong interaction with the electric field at microwave frequencies. Various techniques have been implemented to determine the MC of agriculture product such as X-rays, magnetic resonance, electrical and magnetic technology, and also near infrared (NIR) spectroscopy (Sunet al., 2010; Ruiz-Altisent et al., 2010; Butzet al., 2003). Among of these techniques, microwave measurement technique is the most practical method for agriculture application based on its unique features (Kraszewski & Nelson, 1995). This technique offers a fast, nondestructive and continuous monitoring of MUT without any alter nor contaminate the material and also low hazard risk towards the operator. The factors such as environmental conditions and negligibility of the effect of DC conductivity are uninfluenced to the measurement and make the moisture measurement easier.

1.1.1 Microwave Sensors

The microwave properties of agriculture products can be rapidly sensed based on the MC measurement by using proper sensors and can well correlate with the product's quality. The permittivity in agriculture products, such as fruits, grains, seeds, plants, vegetables, meats and other foods (Kraszewski & Nelson, 2004) have been measured by using the commercial microwave sensor such as Keysight 85070E Dielectric Probe Kit (Keysight OEC probe). However, the utilization of this sensor with a bulky network analyzer is not cost effective as the network analyzer is quite expensive.

Consequently, there is a high demand for microwave sensors that offers rapid and nondestructive measurement method on the agriculture product which can act as a cost and energy saving real time decision maker for quality determination and preservation during the pre-harvest, harvest and post-harvest process. This is supported by the fact that the low cost and feasible feature of the microwave components has offer a great opportunity for the development of a low-cost microwave instrumentation system which result in significant labor, cost savings that comply with safety regulations. This is relevant with the high consumer's awareness of putting the rules and guidelines regarding the safety standard in the first place.

The general measurement principle for microwave sensors relies on correlating the measured dielectric properties and physical properties of MUT. Dielectric properties are intrinsic electrical properties that characterize the electric field and material interaction. For that reason, development of reliable microwave sensors depends on

the accurate determination of the dielectric constant and loss factor, and the robustness of the algorithm correlating these properties with the MC parameter. The microwave sensing technique is highly recommended for water-containing MUT as water dipolar and free water mechanisms are highly associated with its dielectric properties at microwave frequencies (Hasted, 1973). For example, the determination of optimal state for preservation process of grain such as harvesting, storage, marketing, and drying utilized MC as the primary parameter (Nelson, 2000). This crucial parameter also has been used in determination of shelf life of food and agriculture products. Previously, the applications of conventional oven-drying and chemical titration methods for MC in-process monitoring are not relevant due to laborious sample preparation.

The choice of the measurement technique is often related to the application type. For wide spread use of these sensors, other factors are to be considered, including cost, portability, and seamless implementation within a given process. Microwave sensors operating at a single frequency are less expensive than those operating at multiple frequencies and easier to calibrate and maintain. Therefore, for a microwave sensor in moisture determination based on the permittivity measurement of the dielectric properties at a single microwave frequency, there is a need to take into account the effects of temperature and bulk density (Trabelsi et al., 1998).

1.1.2 Open Ended Coaxial Sensor

An OEC sensor consists of inner (a) and outer (b) radii of conductor that separated by the lossless homogeneous dielectric material such as Teflon that result in termination of relative permittivity in the plane $z=0$ into a flat metallic flange in the transverse direction (Pournaropoulos & Misra, 1994). The utilization of OEC line sensor has been widely given attentions as it offers non-destructive feature, easy to use, little sample preparation and also rapid measurement for permittivity and MC of MUTs at wide band of microwave frequencies with a reasonable accuracy ($\pm 5\%$) that only required a small sensing area (Abbas et al., 2005a; Abbas et al., 2005b; Grant et al., 1989; Marsland & Evans, 1987).

The commercialize Keysight OEC probe is made up with rugged structure and materials that allows the measurement to be carried out in a wide -40 to $+200^\circ\text{C}$ temperature range and for corrosive or abrasive materials. The designed flat surface of the sensor suitable to be used either in liquid or semisolid samples with homogeneous features for broadband permittivity measurements (Grant et al., 1989; Blackham & Pollard, 1997). Besides, this technique has been widely used for permittivity measurements of agriculture products such as fresh fruits and vegetables (Ohlsson et al., 1974; Nelson et al., 1994). The permittivity of the MUTs is calculated by using an equivalent admittance model of the coaxial sensor (Abbas et al., 2005a) based on the reflection coefficient measurement taken when the MUTs are placed against an open end of a coaxial line. The material terminating the aperture is assumed to be homogeneous, isotropic, linear, and nonmagnetic, of complex permittivity extending to infinity. A static capacitance (C), due to the

fringing fields excited by the transverse electromagnetic (TEM) fields of the line over the aperture. The measurement configuration of the coaxial line sensor with a ground plane is shown in Figure 1.1.

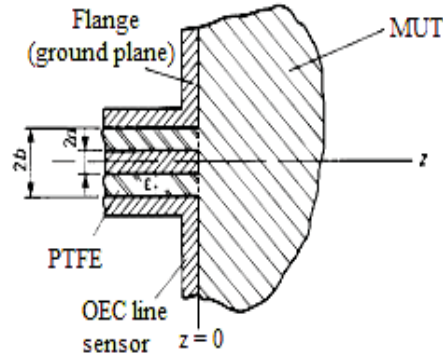


Figure 1.1: The sample measurement setup for OEC line sensor
(Source: Grant et al., 1989)

1.1.3 Complex Permittivity

The complex dielectric permittivity (ϵ^*) is defined based on the interaction between biological materials with electromagnetic fields which divided in two parts: the dielectric constant (ϵ') and the loss factor (ϵ''). The equation of complex permittivity based on (Hippel, 1954):

$$\epsilon^* = \epsilon' - j\epsilon'' \quad (1.1)$$

The ϵ' represented by the material's energy storage ability when MUT is exposed to an electric field and have impacts on both the electric field distribution and the phase of waves travelling through the material. The ϵ'' is described as the ability to dissipate energy when MUT is subjected to an applied electric field or various polarization mechanisms that have effects on both energy absorption and attenuation, which results in generation of heat (Ikediala et al., 2000; Mudgett, 1986). The amount of thermal energy converted in the food is proportional to the value of the ϵ'' (Sosa-Morales et al., 2010).

The complex permittivity of MUT can also be calculated by using a dielectric mixture model that includes the parameters such as fractional volume and the permittivity of each constituent in the MUT. Both the parameters are essential to be used in calculating the effective permittivity of the mixture. The dielectric mixture equations are suggested previously by (Liu et al., 2009; Jusoh et al., 2011; Subedi & Chatterjee, 1993).

1.2 Problem Statement

In agriculture, MC is among the important factor that closely correlated to the properties of agriculture products. There are a diverse range of techniques (Sun et al., 2010; Ruiz-Altisent et al., 2010; Butz et al., 2003) that have been used for the MC determination in agriculture products but only the microwave moisture technique that has been widely used due to the fast, precise and high sensitivity features of the technique. By using the suitable sensor, the correlation between microwave properties of agriculture products and its quality can be quickly detected. Several sensors such as microstrip and coplanar which based on the attenuation measurement have been suggested previously for the MC determination in oil palm fruits (Khalid & Abbas, 1992; Kent, 1990; Khalid et al., 1996; Khalid & Hua, 1998). However, laborious sensor preparation is required when using these sensors.

The commercial Keysight OEC probe is one of the most widely used microwave OEC sensor for determination of permittivity of moist materials. The Keysight OEC probe has been used to determine the permittivity of oil palm fruits (Yeow, 2003) and ginger (Hassan et al., 2011). However, the Keysight OEC probe requires a network analyzer which is bulky and expensive. As a solution to this limitation, a low cost open ended coaxial-stub contact panel (OEC-SCP) and a monopole sensor have been redesigned which can be used for both the dielectric properties and MC determination in oil palm fruits (Yeow, 2003; Lee, 2004) respectively. However, both these techniques utilized a data acquisition card in conjunction with a PC to retrieve the measured data where the results are computed and displayed on the PC's monitor. In this work and for the first time, a low cost microcontroller-based microwave reflectometer which utilizes the PIC16F690 microcontroller for data acquisition and calibration equation calculation and also directly displays the results on the LCD panel, is developed for the determination of both MC and permittivity of oil palm fruits and ginger using both OEC-SCP and monopole sensors.

The MC in ginger decreases from 91.63% to 78.33% as the rhizome's age increase from 5 to 7 months of planting. Drying is one of the important postharvest processing methods used for ginger preservation. Many of the moisture-mediated deterioration reactions and reproduction of micro-organisms causing decay can be prevented by removal of moisture by appropriate drying method. The small changes in MC as the ginger ages required the usage of a sensor with better performance in reflection measurement. The usage of OEC-SCP sensor is the most suitable as it has a flange that covered large area to maintain a good contact between the surface of the ginger and also the sensor.

For the oil palm fruit, the fruit development highly depends on the changes of MC as the increasing of fruits ages have significantly large differences of MC which from 82% to 30%. As the OEC-SCP sensor has a flange that covered large area, due to the obovoid shape of oil palm fruits, part of the fresh mesocarp is required to be sliced in longitudinal direction so that the good contact between the surface of the mesocarp and the OEC-SCP sensor can be maintained. This will cause the destruction to the oil palm fruits sample. So, a monopole sensor is suggested for the measurement of

dielectric properties in oil palm fruits due to the small contact area of the sensor which suitable for the non-destructive features of the MC measurement.

This thesis presents the development of a microcontroller-based microwave reflectometer using both OEC-SCP and monopole sensors for determination of both MC and permittivity of oil palm fruits and ginger. Calibration equations will be established to predict MC and permittivity from the measured reflected voltages from the oil palm fruits and ginger samples. The microwave reflectometer consists of a microwave source, stripline directional coupler, OEC-SCP and monopole sensors, two diode detectors, a microcontroller and a liquid crystal display (LCD) panel. The MC and permittivity results are compared with standard oven drying method and network analyzer, respectively.

1.3 Research Objectives

The main research objectives are:

1. To determine the relationship between the variations in dielectric properties of ginger and oil palm fruit with frequency for different percentage of MC.
2. To examine the effect of MC on the dielectric properties of ginger and oil palm fruit at several selected frequencies.
3. To establish the calibration equation to determine the MC from measured permittivity.
4. To visualize the electric field distribution of the OEC-SCP and monopole sensors due to ginger and oil palm fruit of various percentages of MC.
5. To develop a microwave reflectometer to determine the dielectric properties, MC from the reflected voltage measurement using the OEC-SCP and monopole sensors.

1.4 Thesis Layout

The prime focus in this study is to investigate the implementation of two different types of OEC sensors based on MC determination for the growth development and food preservation applications in oil palm fruit and ginger respectively.

Chapter 2 presents the various application of OEC sensor in agriculture products. This is followed by an overview of techniques for the ripeness determination and postharvest technique that implements in oil palm fruit and ginger respectively.

Chapter 3 describes the theoretical background required for the permittivity calculation based on the measure reflection coefficient of the industrial Keysight OEC probe with MUT. The theory of finite element method (FEM) that applied in COMSOL Multiphysics® software is also covered in this chapter. This chapter also

described in details the design and analysis of the stripline directional coupler by using Microwave Office software.

Chapter 4 highlights in details the sample preparation, measurement setup, fabrication of reflectometer, performance testing and software development by using Flowcode. This is follow by computational procedure to visualize the electric field distribution of unloaded and loaded sensor by using COMSOL Multiphysics® software. This chapter also include the experimental procedures to obtain the actual MC, permittivity and reflected voltage of oil palm fruit and ginger based on standard oven drying method and also microwave technique.

Chapter 5 presents the results and discussion. This chapter includes the analysis and discussion in variation of permittivity with frequency at selected MC for both oil palm fruit and ginger. This follows by correlations between the permittivity with MC at selected frequencies is analyzed and discussed. The electric field distribution by using FEM that applied in COMSOL Multiphysics® software for various MC in both MUTs is also visualized and discussed in chapter 5. The calibration equation to predict MC and permittivity based on the measured reflected voltage are presented. The validation of the calibration equations for all the microwave parameters with MC are also presented to determine the equation that will give the highest accuracy in the determination of MC in MUTs.

Lastly, Chapter 6 summarizes all the results and findings obtained in this study. This chapter also presents several recommendations for future works in this study.

REFERENCES

- Abbas, Z. (1994). A microstrip sensor for determination of harvesting time of oil palm fruits. Master's dissertation, Universiti Pertanian Malaysia.
- Abbas, Z., Mokhtar, R., Khalid, K., Hashim, M., & Abdul Aziz, S. (2007). RDWG technique of determination of moisture content in Oil Palm Fruits. *European Physical Journal Applied Physics*, 40(2), 207-210.
- Abbas, Z., Yeow, Y. K., Shaari, A. H., Khalid, K., Hassan, J., & Saion, E. (2005b). Complex permittivity and moisture measurements of oil palm fruits using an open-ended coaxial sensor. *IEEE Sensors Journal*, 5(6), 1281–1287.
- Abbas, Z., Yeow, Y. K., Shaari, A. H., Zakaria, A., Hassan, J., Khalid, K., & Saion, E. (2005a). Fast and accurate technique for determination of moisture content in oil palm fruits using open-ended coaxial sensor. *Japanese Journal of Applied Physics, Part 1: Regular Papers and Short Notes and Review Papers*, 44(7A), 5272–5274.
- Abdullah, M. Z., Guan, L. C., Lim, K. C., & Karim, A. A. (2004). The applications of computer vision system and tomographic radar imaging for assessing physical properties of food. *Journal of Food Engineering*, 61(1), 125–135.
- Altschuler, H.M. (1963). Dielectric constant. In M. Sucher, & J. Fox, *Handbook of Microwave Measurements*, (pp. 530-536). New York, NY: Brooklyn Polytechnic Press.
- Ansarudin, F., Abbas, Z., Hassan, J., Yahaya, N. Z., & Ismail, M. A. (2012). A simple insulated monopole sensor technique for determination of moisture content in Hevea Rubber Latex. *Measurement Science Review*, 12(6), 249–254.
- Anwar, S. I. (2010). Determination of moisture content of bagasse of jaggery unit using microwave oven. *Science And Technology*, 5(4), 472–478.
- Ariffin, A. (1984). *The Biochemical Aspects of Ripeness Standard*. Kuala Lumpur, Malaysia: Palm Oil Research Institute Of Malaysia .
- Ariffin, A. (2005). Fundamental aspects of oil and fats. In *Improving Oil Extraction Rates In Palm Oil Mills*. Sabah: CEPP & UTM.
- Ariffin, A., Mat, S.R., Banjari, M., & Wan, O.W.E. (1990). Morphological changes of the cellular component of the of the developing palm fruit (Terera: Elaeis Guineensis). *Palm Oil Research Institute of Malaysia Bulletin*, 21, 30-34.
- ASAE.(1995). *Moisture Measurement – Underground seeds S352.2*. 2950 Niles Road, St. Joseph , Michigan, USA. American Society of Agricultural Engineers. MI 49085-9659.
- Bahl, I. J. & Ramesh, G. (1978). Designer's guide to stripline circuits. *Microwave*, 17, 90-96.

- Baker, C. G. J. (1997). *Industrial Drying of Foods*. Great Britain: Chapman and Hall.
- Balanis, C. A. (2005). *Antenna theory: analysis and design*. Hoboken, NJ: Wiley.
- Basiron, Y., & Weng, C. K. (2004). The Oil Palm and its Sustainability. *Journal of Oil Palm Research*, 16(1), 1–10.
- Blackham, D. V., & Pollard, R. D. (1997). An improved technique for permittivity measurements using a coaxial probe. *IEEE Transactions on Instrumentation and Measurement*, 46(5), 1093–1099.
- Blackham, D.V., & R.D. Pollard. (1997). An improved technique for permittivity measurements using a coaxial probe. *IEEE Transactions of Instrumentation and Measurement*, 46(5),1093-1099.
- Brennan J.G. & Grandison A.S. (2006). *Food Processing Handbook*. Weinheim, Germany: Wiley VCH Verlag GmbH and Co. KGaA.
- Bussey, H.E. 1967. Measurement of RF properties of materials - A survey. *Proceedings of IEEE Conference*, 55(6), 1046-1053.
- Butz, P., Hofmann, C., & Tauscher, B. (2006). Recent Developments in Noninvasive Techniques for Fresh Fruit and Vegetable Internal Quality Analysis. *Journal of Food Science*, 70(9), 131-141.
- Canet, W. (1988). Determination of the moisture content of some fruits and vegetables by microwave heating. *Journal of Microwave Power and Electromagnetic Energy*, 23(4), 231–235.
- Cheng, E. M., Abbas, Z., Abdul Malek, M. F., Lee, K. Y., You, K. Y., Khor, S. F., Hassan, J., & Zainuddin, H. (2016). Finite difference analysis of an open-ended, coaxial sensor made of semi-rigid coaxial cable for determination of moisture in tenera oil palm fruit. *Applied Computational Electromagnetics Society Journal*, 31(10), 1181–1192.
- Choong, T. S., Abbas, S., Shariff, A. R., Halim, R., Ismail, M. H., Yunus, R., Ali, S., and Ahmadun, F. R. (2006). Digital image processing of palm oil fruits. *International Journal of Food Engineering*, 2(2), 1556–3758.
- Chung, B. K. (2007). Dielectric Constant Measurement for Thin Material At Microwave Frequencies. *Progress In Electromagnetics Research*, 75, 239–252.
- Cohn, S. B. (1955). Shielded Coupled-Strip Transmission Line. *IRE Trans. Microwave Theory and Techniques*, 3, 8–12.
- Corcoran, P.T., Nelson, S.O., Stetson, L.E. & Schlaphoff, C.W. (1970). Determining dielectric properties of grain and seed in the audio frequency range. *Transactions of the ASAE*, 13(3), 348-351.

- Diamante, L. M. & Munro, P. A. (1991). Mathematical modeling of hot air drying of sweet potato slices. *International Journal of Food Science and Technology*, 26(1), 99 – 109.
- El-Beltagy, A., Gamea, G. R., & Essa, A. H. A. (2007). Solar drying characteristics of strawberry. *Journal of Food Engineering*, 78(2), 456–464.
- FAO (2015). FAOSTAT database collections. *Food and Agriculture Organization of the United Nations*. Rome. Access date: June 20, 2016. URL: <http://faostat.fao.org>
- Field, R.F. (1954). Lumped circuits and dielectric measuring techniques. In A.R. von Hippel, *Dielectric Materials and Applications* (pp.12-22). New York, NY: John Wiley and Sons.
- Ghavidel, R. A., & Davoodi, M. G. (2010). Studies on physiochemical properties of tomato powder as affected by different dehydration methods and pretreatments. *World Academy of Science, Engineering and Technology*, 70, 596–605.
- Ginzburg, A.S. (1969). *Infrared radiation in food industry (in Polish)*. Warsaw, WydawnictwoNaukowo-Techniczne.
- Grant, J. P., Clarke, R. N., Symm, G. T., & Spyrou, N. M. (2000). A Critical Study of the Open-Ended Coaxial Line Sensor Technique For RF and Microwave Complex Permittivity Measurements. *Journal of Physics E: Scientific Instruments*, 22, 757–770.
- Grant, J.P., Clarke, R. N., Symm, G. T. & Spyrou, N. M. (1989). A critical study of the open-ended coaxial line sensor technique for RF and microwave complex permittivity measurements. *Journal of Physics: Electronics and Scientific Instrument*, 22, 757-770.
- Gunasekaran, S. (1999). Pulsed microwave-vacuum drying of food materials. *Drying Technology*, 17(3), 395-412.
- Gunston, M.A.R. (1972). *Microwave transmission-line impedance data*. London: Van Nostrand Reinhold.
- Gupta, K. C., Garg, R., & Chadha, R. (1981). *Computer aided design of microwave circuits*. Norwood, MA: ArtechHouse .
- Hartley, C.W.S. (1977). *The Oil Palm*. London, England: Longman Group Limited.
- Hassan, J., Khalid, K., Abbas, Z., Aziz, N. A. A. (2011). Effect of drying time and evaporated moisture on the dielectric behavior of ginger at 0.2 to 20 GHz. *Solid State Science and Technology*, 19(2), 99-106
- Hassan, J., Khalid, K., Abbas, Z., & Abd Aziz, N. A. (2011). Effect of drying time and evaporated moisture on the dielectric behavior of ginger at 0.2 to 20 GHz. *Solid State Science and Technology*, 19(2), 99-106.

- Hasted, J. B. (1973). *Aqueous dielectrics*. London, England: Chapman & Hall.
- Howe, H. (1974). *Stripline circuit design*. Dedham, Mass: Artech House.
- Huang, B., Wang, G., Chu, Z., & Qin, L. (2012). Effect of Oven Drying, Microwave Drying, and Silica Gel Drying Methods on the Volatile Components of Ginger (*Zingiber officinale* Roscoe) by HS-SPME-GC-MS. *Drying Technology*, 30(3), 248–255.
- Ikediala, J. N., Tang, J., Drake, S. R., & Neven, L. G. (2000). Dielectric Properties of Apple Cultivars and Codling Moth Larvae. *Transactions of the American Society of Agricultural Engineers*, 43(5), 1175–1184.
- Isengard, H. D. (1995). Rapid water determination in foodstuffs. *Trends in Food Science and Technology*, 6, 155-162.
- Işik, E., İzli, N. & Akbudak, B. (2012). Microwave heat treatment of dent corn (*Zea mays* var. *indentata* sturt: Drying kinetic and physical properties. *African Journal of Biotechnology*, 11(11), 2740-2751.
- Jindal, V. K. and Siebenmorgen, T. J. (1987). Effects of oven drying temperature and drying time on rough rice moisture content determination. *American Society of Agricultural Engineers*. 30(4): 1185-1192.
- Jorgensen, J.L., Edison, A.R., Nelson, S.O., & Stetson, L.E. (1970). A bridge method for dielectric measurements of grain and seed in the 50- to 250- MHz range. *Transactions of ASAE*, 13(1), 18-20.
- Jusoh, M.A., Abbas, Z., Hassan, J., Azmi, B.Z., Ahmad, A.F. (2011). A simple procedure to determine complex permittivity of moist materials using standard commercial coaxial sensor. *Measurement Science Review*, 11(1), 19-22.
- Kaatze, U. (1989). Complex permittivity of water as a function of frequency and temperature. *Journal of Chemical Engineering Data*, 34(4), 371–374.
- Kachru, R. P., & Gupta, R. K. (1993). Drying of spices: status and challenges. In *Proc. Of National Seminar of Post Harvest Technology of Spices*. Trivandrum.
- Kachru, R. P., & Srivastava, P. K. (1988). Post-harvest technology of ginger. *Cardamom J*, 20(5), 49-54.
- Kent, M. (1990). Hand-held instrument for fat/water determination in whole fish. *Food Control*, 1(1), 47–53.
- Khalid, K. B., & Hua, T. L. (1998). Development of conductor-backed coplanar waveguide moisture sensor for oil palm fruit. *Measurement Science and Technology*, 9(8), 1191-1195.

- Khalid, K., & Abbas, Z. (1992). A microstrip sensor for determination of harvesting time for oil palm fruits (Tenera: *ElaeisGuineensis*). *Journal of Microwave Power and Electromagnetic Energy*, 27(1), 3-10.
- Khalid, K., & Hua, T. L. (1998). Development of conductor-backed coplanar waveguide moisture sensor for oil palm fruit. *Measurement Science and Technology*, 9(8), 1191-1195.
- Khalid, K., Zakaria, Z., & Yusof, W. D. W. (1996). Variation of dielectric properties of oil palm mesocarp with moisture content and fruit maturity at microwave frequency. *Journal Elaeis*, 8(2), 83–91.
- Khodabakhshi, A., Mahfeli, M. & Zarein, M. (2015). Investigation of Microwave Power Effects on Drying Kinetics and Energy Efficiency of Banana Samples. *Global Journal of Science Frontier Research: D*, 15(4), 41-46.
- Kraszewski, A. W., & Nelson, S. O. (1995). Application of microwave techniques in agricultural research. *Microwave and Optoelectronics Conference.Proceedings., 1995 SBMO/IEEE MTT-S International*, 1, 117–126.
- Kraszewski, A. W., & Nelson, S. O. (2004). Microwave permittivity determination in agricultural products. *The Journal of Microwave Power and Electromagnetic Energy: A Publication of the International Microwave Power Institute*, 39, 41–52.
- Kraszewski, A.W. (1980). Microwave aquametry - A review. *Journal of Microwave Power*, 15(4), 209-220.
- Kumar, P. S., & Sagar, V. R. (2014). Drying kinetics and physico-chemical characteristics of osmo- dehydrated mango, guava and aonla under different drying conditions. *Journal of Food Science and Technology*, 51(8), 1540–1546.
- Kupfer, K. (2010). *Electromagnetic aquametry: electromagnetic wave interaction with water and moist substances*. Berlin: Springer.
- Laverghetta, T. S. (1987). *Microwave materials and fabrication techniques*. Boston, USA: Artech House.
- Lee, K.Y. (2003). Development of a 500 MHz reflectometer using stripline directional coupler for moisture measurement of oil palm fruit. Master's dissertation, Universiti Putra Malaysia, Malaysia.
- Liu, Y., Tang, J., & Mao, Z. (2009). Analysis of bread dielectric properties using mixture equations. *Journal of Food Engineering*, 93(1), 72–79.
- Madhlopa, A., Jones, S. A., & Kalenga Saka, J. D. (2002). A solar air heater with composite-absorber systems for food dehydration. *Renewable Energy*, 27(1), 27–37.

- Marsland, T. P., & Evans, S. (1987). Dielectric measurements with an open-ended coaxial probe. *IEEE Proceedings H: Microwaves, Antennas and Propagation*, 134(4), 341–349.
- Metaxas, A. C., & Meredith, R. J. (1993). *Industrial Microwave Heating*. London, England: Peter Peregrinus Ltd.
- Mishra, B. B., Gautam, S., & Sharma, A. (2004). Shelf-life extension of fresh ginger (*Zingiber officinale*) by gamma irradiation. *Journal of Food Science*, 69(9), 274–279.
- Mousa, N., & Farid, M. (2002). Microwave vacuum drying of banana slices. *Drying Technology*, 20(10), 2055–2066.
- Mudgett, R. E. (1986). *Electrical properties of food*. In M. Rao, A. Datta, & S. Rizvi (Eds.), *Engineering Properties of Foods* (pp. 329–390). New York, NY: Marcel Dekker, Inc.
- Nelson, S. O. (2000). Sensing moisture content in grain. *IEEE Instrumentation and Measurement Magazine*, 3(1), 17–20.
- Nelson, S. O. (2003). Frequency- and temperature-dependent permittivities of fresh fruits and vegetables from 0.01 to 1.8 GHz. *Transactions of the ASAE*, 46(2), 567–574.
- Nelson, S. O., & Bartley, P. G. (1997). Open-ended coaxial probe permittivity measurements on pulverized materials. In *Conference Record - IEEE Instrumentation and Measurement Technology Conference* (Vol. 1, pp. 653–657). Institute of Electrical and Electronics Engineers Inc.
- Nelson, S. O., & Stetson, L. E. (1976). Frequency and moisture dependence of the dielectric properties of hard red winter wheat. *Journal of Agricultural Engineering Research*, 21(2), 181–192.
- Nelson, S. O., Datta, A. K. Dielectric properties of food materials and electric field interactions. In A. K. Datta & R. C. Anantheswaran (Eds.), *Handbook of Microwave Technology for Food Applications*. New York, NY: Marcel Dekker.
- Nelson, S. O., Forbus, W. R., & Lawrence, K. C. (1995). Assessment of microwave permittivity for sensing peach maturity. *American Society of Agricultural Engineers*, 38(2), 579–585.
- Nelson, S., Forbus, W. J., & Lawrence, K. (1994). Permittivities of fresh fruits and vegetables at 0.2 to 20 GHz. *Journal of Microwave Power and Electromagnetic Energy*, 29(2), 81–93.
- Nelson, S.O. (1991). Dielectric properties of agricultural products - Measurements and applications. *IEEE Transactions of Electrical Insulation*, 26(5), 845–869.

- Nelson, S.O. (1998). Dielectric properties measuring techniques and applications. ASAE Paper No. 983067. St. Joseph, MI: ASAE.
- Nelson, S.O., & Kraszewski A.W. (1990a). Grain moisture content determination by microwave measurements. *Transactions of ASAE*, 33(4), 1303-1307.
- Nokkaew, R., & Punsuvon, V. (2016). Microwave drying combined with magnetic stirring for quick analysis of oil content of fresh palm bunch. *Science Asia*, 42(3), 207–212.
- Nyfors, E., & Vainikainen, P. (1989). *Industrial microwave sensors*. London: Artech House.
- Ohlsson, T., Bengtsson, N. E., & Risman, P.O. (1974). The frequency and temperature dependence of dielectric food data as determined by a cavity perturbation technique. *Journal of Microwave Power*, 9(2), 129-145.
- Oil Extraction Rate 2016. (n.d.). Retrieved September 05, 2017, from <http://bepi.mpob.gov.my/index.php/en/statistics/oil-extraction-rate/173-oil-extraction-rate-2016.html>
- Olson, S. C. and Iskander, M. F. (1986). A new in-situ procedure for measuring the dielectric properties of low permittivity materials. *IEEE Transaction on Instrumentation and Measurement*. 35(5): 2–6.
- Pournaropoulos, C. L., & Misra, D. (1994). A Study on the Coaxial Aperture Electromagnetic Sensor and Its Application in Material Characterization. *IEEE Transactions on Instrumentation and Measurement*, 43(2), 111–115.
- Pozar, D. M. (1998). *Microwave engineering*. New York, NY: Wiley.
- Ragni, L., Gradari, P., Berardinelli, A., Giunchi, A., & Guarnieri, A. (2006). Predicting quality parameters of shell eggs using a simple technique based on the dielectric properties. *Biosystems Engineering*, 94(2), 255-262.
- Rao, M. A., Rizvi, S. S., & Datta, A. K. (Eds.). (2005). *Engineering properties of foods*. Boca Raton, FL: CRC Press.
- Ravindran, P. N., & Babu, K. N. (2005). *Ginger: The Genus Zingiber*. Boca Raton, FL: CRC Press.
- Rodriquez, D. W. (1971). *Ginger; a short economic history*. Kingston, Jamaica: Agricultural Information Service, Ministry of Agriculture and Fisheries.
- Ruan, R. R., & Chen, P. L. (1998). Water in foods and biological materials: a nuclear magnetic resonance approach. Boca Raton, FL: CRC Press.
- Ruiz-Altisent, M., Ruiz-Garcia, L., Moreda, G., Lu, R., Hernandez-Sanchez, N., Correa, E.C., Diezma, B., Nicolai, B., García-Ramos, J. (2010). Sensors for

product characterization and quality of specialty crops—A review. *Computers and Electronics in Agriculture*, 74(2), 176-194.

Ryynanen, S. (1995). The electromagnetic properties of food materials: A review of the basic principles. *Journal of Food Engineering*, 27(4), 409-429.

Sadiku, M. N. (2001). *Elements of Electromagnetism*. New York: Oxford University Press.

Sagnard, F.M., Guilbert, V., & Fauchard, C. (2008). In-situ characterization of soil moisture using a monopole probe. *Journal of Applied Geophysics*, 68(2), 182-193.

Sato, T., & Buchner, R. (2004). Dielectric relaxation processes in ethanol/water mixtures. *Journal of Physical Chemistry A*, 108(23), 5007-5015.

Shah, J. J. & Raju, E. C. (1975). General morphology, growth and branching behaviour of the rhizomes of ginger, turmeric and mango ginger. *New Botanist*, 2, 59-69.

Shukla, T. P., & Anantheswaran, R. C. (2001). Ingredient interactions and product development. In A. K. Datta & R. C. Anantheswaran (Eds.), *Handbook of Microwave Technology for Food Applications* (pp. 355-395). New York, NY: Marcel Dekker.

Sigma Aldrich. (2003). HYDRANAL[®] - Manual <http://www.sigmaaldrich.com>.

Sontakke, M. S., & Salve, P. (2015). Solar Drying Technologies: A review. *International Journal of Engineering Science*, 4(4), 29-35.

Sosa-Morales, M. E., Valerio-Junco, L., Lopez-Malo, A., & Garcia, H. S. (2010). Dielectric properties of foods: Reported data in the 21st century and their potential applications. *LWT - Food Science and Technology*, 43(8), 1169-1179.

Southworth, A. (1976). Oil palm harvesting-A practical approach to the optimization of oil quantity and quality. In *Proceedings Malaysia International Agricultural Oil Palm Conference*. Kuala Lumpur, Malaysia.

Spraggon, S. A. (1988). Rapid dry matter maturity test for kiwifruit by microwave. *CSIRO Food Res.*, 48, 33-6.

Sreekumar, M. M., Sankarikutty, B., Menon, A. N., Padmakumari, K. P., Sumathikutty, M. A. & Arumughan, C. (2002). Fresh flavoured spice oil and oleoresin. *Spice India*, 15(4), 15-19.

Stetson, L. E., & Nelson, S. O. (1970). A method for determining dielectric properties of grain and seed in the 200- to 500- MHz range. *Transactions of ASAE*, 13(4), 491-495.

- Subedi, P., & Chatterjee, I. (1993). Dielectric mixture model for asphalt-aggregate mixtures," *Journal of Microwave Power and Electromagnetic Energy*, 28(2), 20-41.
- Sun, T., Huang, K., Xu, H., & Ying, Y. (2010). Research advances in nondestructive determination of internal quality in watermelon/melon: A review. *Journal of Food Engineering*, 100(4), 569-577.
- Trabelsi, S., Kraszewski, A. W., & Nelson, S. O. (1998). A microwave method for on-line determination of bulk density and moisture content of particulate materials. *IEEE Transactions on Instrumentation and Measurement*, 47(1), 127-132.
- Tran, V. N., Stuchly, S. S., & Kraszewski, A. (1984). Dielectric properties of selected vegetables and fruits 0.1-10.0 GHz. *Journal of Microwave Power*, 19(4), 251-258.
- Vandelin, G. (1970). Limitations on Stripline Q. *Microwave Journal*, 13, 63-69.
- Venkatesh, M., & Raghavan, G. (2004). An Overview of Microwave Processing and Dielectric Properties of Agri-food Materials. *Biosystems Engineering*, 88(1), 1-18.
- Westphal, W. B. (1954). Distributed circuits, permittivity and dielectric properties measuring techniques. In A.R. von Hippel, *Dielectric Materials and Applications* (pp. 22-35). New York, NY: John Wiley and Sons.
- Wheeler, H. A. (1978). Transmission-Line Properties of a StripLine Between Parallel Planes. *IEEE Transactions on Microwave Theory and Techniques*, 26(11), 866-876.
- Yahaya, N. Z., Abbas, Z., Ibrahim, N. M., Hafizi, M. H. M., & Yahaya, M. Z. (2014). Permittivity models for determination of moisture content in Hevea Rubber Latex. *International Journal of Agricultural and Biological Engineering*, 7(5), 48-54.
- Yeh, R. S., Anantheswaran, R. C., Shenk, J., & Puri, V. M. (1994). Determination of moisture profile in foods during microwave heating using VIS-NIR spectroscopy. *Food science and technology*, 27(4), 358-362.
- Yeow, K. Y. (2003). Development of a new technique for measurement of dielectric properties of oil palm fruits. Master's dissertation, Universiti Putra Malaysia, Malaysia.
- Yeow, Y. K., Abbas, Z., & Khalid, K. (2010). Application of microwave moisture sensor for determination of oil palm fruit ripeness. *Measurement Science Review*, 10(1), 7-14.

Zainuddin, M. F (2013). Development of monopole sensor for determination of moisture content in dioscorea hispida tuber. PhD's dissertation, Universiti Putra Malaysia, Malaysia.

Zakaria, Z. (1998). Dielectric properties of oil palm mesocarp at various moisture content. Master's dissertation, Universiti Putra Malaysia, Malaysia.

