



UNIVERSITI PUTRA MALAYSIA

***NEIGHBOR-BASED ON-DEMAND ROUTING ALGORITHMS FOR
MOBILE AD HOC NETWORKS***

ALI MOHAMED E. EJMAA

FSKTM 2018 10



**NEIGHBOR-BASED ON-DEMAND ROUTING ALGORITHMS FOR
MOBILE AD HOC NETWORKS**

By

ALI MOHAMED E. EJMAA

**Thesis Submitted to the School of Graduate Studies, Universiti Putra
Malaysia, in Fulfillment of the Requirements for the Degree of Doctor of
Philosophy**

November 2017



© COPYRIGHT UPM

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial uses of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright ©Universiti Putra Malaysia



DEDICATIONS

To my parents, my lovely wife, my wonderful kids, my brothers and my sisters.

To my supervisor and entire committee.

*Last but not least, I would like to dedicate this thesis to my beloved motherland,
LIBYA.*

And to All whom I love.



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in of the requirement for the degree of Doctor of Philosophy

NEIGHBOR-BASED ON-DEMAND ROUTING ALGORITHMS FOR MOBILE AD HOC NETWORKS

By

ALI MOHAMED E. EJMAA

November 2017

Chairman: Prof. Shamala Subramaniam, PhD
Faculty: Computer Science and Information Technology

Mobile Ad hoc NETwork (MANET) is a set of wireless mobile nodes temporary connected without existing network infrastructure or centralized administrations. These nodes with random movement and limited resources have created quite a number of new challenging research issues. One such issue is the routing, which has recently received significant attention from many researchers. In particular, the problems of the dropping decision, routing overhead and network density in the route request stage.

The routing overhead is due to the broadcasting method used in route discovery, which floods the network with a Route REQuest message (RREQ). Accordingly, the aim of this research is to address the deficiency of the broadcasting method at route request stage.

To overcome the issues related to the broadcasting method, several routing algorithms have been proposed over the Ad hoc on demand Distance Vector (AODV) such as Neighbor Coverage-Based Probabilistic Rebroadcast (NCPR). Although the NCPR did overcome the AODV routing algorithm in terms of reducing the routing overhead, such algorithm has its drawbacks. Thus, there is a room for further enhancement to develop a routing algorithm as to mitigate the drawbacks with the NCPR.

The dropping decision of the redundant RREQ in the NCPR algorithm completely relies on preset variables, such variables require to be set by the system administrator based on the scenario. Unfortunately, the setting which is proper for a specific scenario is not suitable for another. Furthermore, the connectivity

factor which is used to estimate the connectivity ratio at each node is still unable to estimate such ratio accurately. Therefore, a Dynamic Connectivity Factor Probabilistic (DCFP) is proposed, based on a novel formula that dynamically adjusts the dropping decision based on the neighbor information gathered from the node itself.

As the number of nodes or the network traffic load increases, the NCPR fails to relieve the routing overhead due to the increase in the RREQ redundant messages. Thus, a Scalable Neighbor-Based Routing algorithm (SNBR) is proposed, which reduces the routing overhead in the NCPR, by eliminating the redundant RREQ. The broadcasting in this algorithm is governed by the inverse relation between the number of neighbors and the probability of the rebroadcasted RREQ messages. This algorithm enhances the network performance, even though the network is experiencing an increase in the number of nodes or traffic load.

Naturally, nodes in MANET are free to move forming an arbitrary topology and at any time the network density may change. Such change may lead to an extreme performance degradation, especially when the routing algorithm relies on fixed threshold values in the dropping decision. Accordingly, a Novel Density-Aware Routing algorithm (NDAR) is proposed. The proposed algorithm totally eliminates the need for fixed threshold values through the use of a novel formula that can easily estimate the node density and replace the fixed threshold value based on the neighbor information.

All the three proposed algorithms are evaluated using discrete event simulation, in particular Network Simulator tool (NS2), and compared with the latest routing algorithm (NCPR) and fundamental algorithm (AODV) using five performance metrics. The first algorithm DCFP outperforms the NCPR algorithm in terms of normalize routing overhead by 11.27%, while maintaining the same packet delivery ratio. In addition, with regard to the second algorithm SNBR, the results show that SNBR overcomes the NCPR algorithm terms of normalize routing overhead by 58.80% as its due to its dropping factor. Furthermore, the third algorithm NDAR presents further enhancement and better performance in all five performance metrics as compared to NCPR and AODV algorithms in a low or high density of nodes. In terms of the applications, The DCFP is more suitable to be used for education applications, while the SNBR is a good algorithm designed to be used for rescue system as data and energy is the main concern. Finally, the NDAR is more suitable for personal area and home networking.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

ALGORITMA PENGHALAAN BERASASKAN PERMINTAAN NOD BERSEBELAHAN UNTUK RANGKAIAN AD HOC MOBILE

Oleh

ALI MOHAMED E. EJMAA

November 2017

Pengerusi: Prof. Shamala Subramaniam , PhD
Fakulti: Sains Komputer dan Teknologi Maklumat

Rangkaian Mobile Ad Hoc (MANET) adalah satu set rangkaian bergerak tanpa infrastruktur rangkaian atau pengurusan terpusat tersedia. Pergerakan nod rangkaian MANET yang rawak dan mempunyai had sumber telah menimbulkan pelbagai isu dan cabaran baru dalam penyelidikan. Salah satu isu yang menjadi tumpuan penyelidikan adalah berkenaan bidang penghalauan (routing) dalam rangkaian komputer. Di antara topik yang menjadi tumpuan adalah permintaan penghalauan rangkaian komputer yang meliputi peringkat pembuatan keputusan pengguguran paket rangkaian, overhead dan permintaan routing paket rangkaian. Kaedah penyiaran rangkaian yang digunakan untuk mendapatkan laluan dengan memenuhi rangkaian menerusi Route REQest message (RREQ) telah menyebabkan berlakunya overhead. Oleh yang demikian, tujuan penyelidikan ini adalah bagi menangani masalah kekurangan kaedah penyiaran rangkaian tersebut pada peringkat permintaan routing.

Beberapa algoritma routing telah diperkenalkan ke atas protokol Ad Hoc On Demand Distance Vector (AODV) bagi menyelesaikan isu berkaitan kaedah penyiaran rangkaian ini. Di antaranya adalah algoritma Neighbor Coverage-Based Probabilistic Rebroadcast (NCPR). Kaedah NCPR telah berjaya mengatasi algoritma AODV dengan mengurangkan overhead kepada routing. Walaubagaimanapun, terdapat kekurangan pada algoritma tersebut. Sehubungan dengan itu, masih ada ruang yang boleh ditambahbaik kepada algoritma NCPR. Di dalam algoritma NCPR, keputusan untuk menggugurkan mesej RREQ yang berlebihan adalah bergantung sepenuhnya kepada pembolehubah yang telah diprasetkan. Pentadbir sistem akan memprasapkan pembolehubah tersebut bergantung kepada senario. Malangnya, ada tetapan yang telah dibuat hanya sesuai untuk satu senario dan tidak boleh dilaksanakan untuk senario yang lain. Tambahan pula, faktor penyambungan yang digunakan dalam pengiraan anggaran nisbah sambungan di setiap nod rangkaian masih

tidak dapat dianggar dengan tepat. Dengan itu, satu algoritma yang novel diperkenalkan, menggunakan formula yang disesuaikan dengan keputusan menggugurkan nod bersebelahan secara dinamik, dan berasaskan maklumat nod bersebelahan yang dikumpulkan daripada nod induk tersebut. Algoritma ini dipanggil neighbor-based Dynamic Connectivity Factor Probabilistic routing Algorithm (DCFP).

Algoritma NCPR gagal untuk mengurangkan overhead routing apabila bilangan nod atau beban trafik rangkaian meningkat. Ini disebabkan oleh peningkatan mesej yang berlebihan dalam RREQ. Oleh itu, algoritma Scalable Neighbor-Based Mobile Routing Algorithm (SNBR) diperkenalkan. Algoritma ini telah dapat mengurangkan kos overhead routing dalam NCPR menerusi penyingkiran mesej RREQ yang berlebihan. Kaedah penyiaran dalam algoritma ini ditadbir melalui hubungan yang ditukar antara bilangan nod bersebelahan dengan kebarangkalian penyiaran semula mesej RREQ. Algoritma ini telah berjaya meningkatkan prestasi rangkaian, walaupun dalam situasi rangkaian tersebut menerima peningkatan bebanan trafik dan nod rangkaian.

Nod rangkaian dalam MANET yang boleh bergerak bebas secara semulajadi mewujudkan topologi yang tidak menentu. Ekoran itu, pada setiap masa, ketumpatan rangkaian boleh berubah. Perubahan ini boleh menyebabkan penurunan prestasi secara mendadak terutama, dalam situasi algoritma routing bergantung kepada fixed threshold value untuk keputusan menggugurkan nod. Oleh yang demikian, algoritma Density-Aware Routing Algorithm (NDAR) diperkenalkan. Algoritma ini telah menyingkirkan sepenuhnya keperluan fixed threshold value menerusi penghasilan satu formula yang novel. Formula ini dengan mudah dapat menganggarkan ketumpatan nod seterusnya menggantikan fixed threshold value berasaskan maklumat daripada nod bersebelahan.

Ketiga-tiga algoritma yang diperkenalkan dinilai menggunakan kaedah simulasi discrete event simulation. Secara terperinci, proses penilaian tersebut menggunakan alat simulasi dikenali NS2 Tool. Kesemua algoritma tersebut kemudiannya, dibandingkan dengan algoritma NCPR yang terkini dan algoritma AODV yang asas menggunakan lima metrik prestasi. Algoritma pertama, DCFP telah mengatasi algoritma NCPR untuk metrik normalize routing overhead sebanyak 11.27% di samping mengekalkan nisbah penghantaran paket. Untuk tambahan, algoritma kedua, SNBR juga telah mengatasi algoritma NCPR bagi metrik yang sama sebanyak 58.80% disebabkan faktor penggugurannya. Tambahan pula, algoritma ketiga, NDAR menunjukkan penambahbaikan berterusan dan peningkatan prestasi dalam lima metrik yang diuji berbanding dengan algoritma NCPR dan AODV sama ada dalam kapasiti nod yang tinggi atau rendah ketumpatannya. Dalam aspek penggunaan, algoritma DCFP adalah sesuai diaplikasikan dalam rangkaian pendidikan manakala SNBR pula sesuai direkabentuk dalam rangkaian sistem penyelamatan di mana data dan tenaga adalah sebagai pertimbangan utama dalam rangkaian sistem tersebut. Akhir sekali, algoritma NDAR pula sesuai diaplikasikan dalam rangkaian persendirian.

ACKNOWLEDGEMENTS

First and foremost, all praise is for *Allah Subhanahu Wa Taala* for giving me the strength, guidance and patience to complete this thesis. I thank Allah for His immense grace and blessing every stage of my entire life. May blessing and peace be upon Prophet Muhammad *Sallallahu Alaihi Wasallam*, who was sent for mercy to the world.

I would like to express my sincere gratitude to my supervisor Prof. Dr. Shamala Subramaniam for the continuous support of my study and research, for her patience, motivation, enthusiasm, and immense knowledge. Her guidance helped me in all the time of research and writing of this thesis. Her encouragement and help made me feel confident to overcome every difficulty I encountered in all the stages of this research. What I really learned from her, however, is her attitude to work and life - always aiming for excellence.

I would like to extend my gratitude and thanks to the distinguished committee member, Associate Professor Dr. Zuriati Ahmad Zukarnain, and Associate Professor Dr. Zurina Binti Mohd Hanapi for their encouragement and insightful comments.

I am very grateful to the Faculty of Computer Science and Information Technology and the staff of Postgraduate office, School of Graduate Studies, Library and Universiti Putra Malaysia, for providing me an excellent research environment. Thanks to every person who has supported me to produce my thesis.

I am very grateful to my family, my father, Mohamed and my mother, Mubrooka for their endless support throughout my life. Words fail me to express my appreciation to my lovely wife Basma whose dedication, love and persistent confidence in me, has taken the load off my shoulder. I owe her for being unselfishly let her intelligence, passions, and ambitions collide with mine. Special thank goes to my sons Mohamed, Hamam, my daughters Buthina, Nuseibah and, you are my joy and my guiding lights. Thanks for giving me your valuable time through all this long journey. I promise I will never let you alone again.

I am very grateful to my brothers, my sisters, my uncles, and my aunts for their unflagging love and support throughout my life. I have no suitable words that can fully describe my everlasting love to them except, I love you all.

Last but by no means least, it gives me immense pleasure to express my deepest gratitude to my brother Musbah, Abubaker, Fawzi, and my friends Almoqri, Alrshah, Ali, Sediq, Omer and Hairy for their constant support and encouragement.

I certify that a Thesis Examination Committee has met on 14 November 2017 to conduct the final examination of Ali Mohamed E. Ejmaa on his thesis entitled "Neighbour-Based on-Demand Routing Algorithms for Mobile Ad Hoc Networks" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Nur Izura binti Udzir, PhD

Associate Professor
Faculty of Computer Science and Information Technology
Universiti Putra Malaysia
(Chairman)

Rohaya binti Latip, PhD

Associate Professor
Faculty of Computer Science and Information Technology
Universiti Putra Malaysia
(Internal Examiner)

Azizol bin Hj. Abdullah, PhD

Senior Lecturer
Faculty of Computer Science and Information Technology
Universiti Putra Malaysia
(Internal Examiner)

Ekram Hossain, PhD

Professor
University of Manitoba
Canada
(External Examiner)



NOR AINI AB. SHUKOR, PhD
Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 28 December 2017

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy.

The members of the Supervisory Committee were as follows:

Shamala Subramaniam, PhD

Professor

Faculty of Computer Science and Information Technology

Universiti Putra Malaysia

(Chairman)

Zuriati Ahmad Zukarnain, PhD

Associate Professor

Faculty of Computer Science and Information Technology

Universiti Putra Malaysia

(Member)

Zurina Binti Mohd Hanapi, PhD

Associate Professor

Faculty of Computer Science and Information Technology

Universiti Putra Malaysia

(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean

School of Graduate Studies

Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: Ali M E Ejmaa

Date: _____

Name and Matric No.: Ali Mohamed E. Ejmaa (GS37434)

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____
Name of
Chairman of
Supervisory
Committee: Shamala Subramaniam

Signature: _____
Name of
Member of
Supervisory
Committee: Zuriati Ahmad Zukarnain

Signature: _____
Name of
Member of
Supervisory
Committee: Zurina Binti Mohd Hanapi

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	viii
LIST OF TABLES	xiii
LIST OF FIGURES	xiv
LIST OF ABBREVIATIONS	xvi
CHAPTER	
1 INTRODUCTION	1
1.1 Applications of MANET	2
1.2 MANET Constraints	3
1.3 Routing Protocols	4
1.3.1 Broadcast in MANET	5
1.4 Motivation	6
1.5 Problem Statements	7
1.6 Research Objectives	8
1.7 Research Scope	8
1.8 Research Significance	9
1.9 Thesis Organization	9
2 LITERATURE REVIEW	11
2.1 Introduction	11
2.2 MANETs OSI Reference Model	11
2.2.1 The Network Layer	12
2.3 Routing in MANETs	12
2.4 Review of Routing Protocols	13
2.4.1 Proactive Routing Protocols	13
2.4.2 Reactive Routing Protocols	15
2.4.3 Hybrid Routing Protocols	17
2.4.4 Routing Structures	17
2.5 Broadcast in MANET	19
2.6 Broadcasting Algorithms in MANETs	21
2.6.1 Speed-based Algorithms	21

2.6.2	Counter-based Algorithms	21
2.6.3	Area-based Algorithms	26
2.6.4	Neighbor Knowledge-based Algorithms	31
2.6.5	Probability-based Algorithms	35
2.7	Open Research Issues	38
2.8	Summary	39
3	METHODOLOGY	40
3.1	Introduction	40
3.2	Existing MANET Simulators	40
3.3	Notations and Definitions	41
3.3.1	Notations	41
3.3.2	Definitions and Conventions	41
3.4	Research Framework	42
3.4.1	Problem Formulation	42
3.4.2	Previous Algorithms Implementation	43
3.4.3	The Proposed Work	43
3.4.4	Simulation Experiments	44
3.4.5	Performance Metrics Evaluation	44
3.5	Simulation Environment	44
3.5.1	Computer Resources	44
3.5.2	Network Simulation	45
3.5.3	Network Topologies	45
3.5.4	Experimental Setups	47
3.6	Performance Metrics	47
3.6.1	Normalized Routing Overhead	48
3.6.2	Packet Delivery Ratio	49
3.6.3	Mean End to End Delay	49
3.6.4	MAC Collision Rate	50
3.6.5	Mean Energy Consumption	50
3.7	Summary	51
4	DYNAMIC CONNECTIVITY FACTOR PROBABILISTIC ROUTING ALGORITHM (DCFP)	52
4.1	Introduction	52
4.2	DCFP and Its Main Components	52
4.2.1	The Development of DCFP Algorithm	54
4.2.2	Analytical Study of the Forwarding Probability	56
4.2.3	The Pseudo-code of DCFP Algorithm	62
4.3	Performance Evaluation	62
4.3.1	Simulation Setup	63
4.4	Results and Discussion	63
4.4.1	Performance Against Varied Density of Nodes	63
4.4.2	Performance with Varied Traffic Load	67
4.5	Summary	71

5	A SCALABLE NEIGHBOR-BASED ROUTING ALGORITHM (SNBR)	72
5.1	Introduction	72
5.2	SNBR Algorithm and Its Components	72
5.2.1	The Development of SNBR Algorithm	73
5.2.2	Parameters Relationship	76
5.2.3	The Algorithm Details	79
5.3	Performance Evaluation	81
5.3.1	Simulation Setup	81
5.4	Results and Discussion	81
5.4.1	Performance Analysis Against Varied Number of Nodes	81
5.4.2	Performance with Varied Traffic Load	85
5.5	Summary	88
6	THE NOVEL DENSITY-AWARE ROUTING ALGORITHM (NDAR)	89
6.1	Introduction	89
6.2	The NDAR Mechanism	89
6.3	The RREQ Impact on the Network Performance	90
6.4	Density Aware Formula	91
6.5	The Novel Density Aware Routing Algorithm (NDAR)	93
6.5.1	NDAR Pseudo-code and Control Flow Diagram	94
6.6	Performance Evaluation	96
6.6.1	Simulation Setup	97
6.7	Results and Discussions	97
6.7.1	Performance Analysis Against Varied Number of Nodes	97
6.7.2	Performance with Varied Traffic Load	100
6.8	Summary	103
7	CONCLUSIONS AND FUTURE WORKS	105
7.1	Conclusions	105
7.2	Future Works	106
	REFERENCES	107
	BIODATA OF STUDENT	113
	LIST OF PUBLICATIONS	114

LIST OF TABLES

Table	Page
3.1 Simulation Parameters Settings	48
4.1 Average No. of Neighbors	55
4.2 DCF Fixed Variables and Their Values	56
6.1 Average No. of Neighbors	91
6.2 DF Fixed Variables and Their Values	92



LIST OF FIGURES

Figure	Page
1.1 Mobile Ad Hoc Network	2
1.2 MANET Applications	3
1.3 Broadcasting in the Route Discovery Stage	6
1.4 The Signal Overlapping for 5 Nodes	6
2.1 The OSI Model	12
2.2 The Flooding (Redundant Message (M))	18
2.3 The Broadcast within Five nodes in MANET	19
2.4 Additional Area Covered by Node Y	26
2.5 The d_{max} and d_{cur}	28
2.6 The Cross-layer Modified Flooding	29
2.7 The Intersection Area in Jaccard	30
2.8 The Simultation Area (A), α and Boundry Node	32
3.1 Research Framework	42
3.2 NS-2 Directory Structure	46
3.3 MANET Topology with Fifty Nodes	47
4.1 The Three Types of Routing Messages	53
4.2 Average No. of Neighbors from Experiment vs.DCF	55
4.3 DAF vs. Fc with Varied Number of Neighbors	57
4.4 DAF vs. Fc with Varied Number of Neighbors	58
4.5 Forwarding Probability vs. Number of Nodes in NCFP.	60
4.6 Forwarding Probability vs. Number of Nodes in DCFP	60
4.7 The Control Flow Diagram of DCFP	61
4.8 Normalized Routing Overhead vs. Number of Nodes	64
4.9 Packet Delivery Ratio vs. Number of Nodes	65
4.10 Average End to End Delay vs. Number of Nodes	65
4.11 MAC Collision vs. Number of Nodes	66
4.12 Average Energy Consumption vs. Number of Nodes	66
4.13 Network Connectivity Success Ratio vs. Number of Nodes	67
4.14 Normalized Routing Overhead vs. Number of CBR Connections	68
4.15 Packets Delivery Ratio vs. Number of CBR Connections	69
4.16 End to End Delay vs. Number of CBR Connections	69
4.17 MAC Collision vs. Number of CBR Connections	70
4.18 Average Energy Consumption vs. Number of Connections	70
4.19 Network Connectivity Success Ratio vs. Number of Connections	71
5.1 The λ_j' vs. λ_j as the Number of Neighbors Increases	75
5.2 The Drop Factor vs Forwarding Probability in SNBR	77
5.3 Relation Between the λ_j , DF, FP and Nodes Density	77
5.4 The Impact of Threshold on Normalized Routing Overhead	78
5.5 The Impact of Threshold T on Packet Delivery Ratio	78
5.6 The Control Flow Diagram of SNBR	80

5.7	Normalized Routing Overhead vs. Number of Nodes	82
5.8	Packet Delivery Ratio vs. Number of Nodes	83
5.9	Average End to End Delay vs. Number of Nodes	83
5.10	MAC Collision vs. Number of Nodes	84
5.11	Average Energy Consumption vs. Number of Nodes	84
5.12	Normalized Routing Overhead vs. Number of CBR Connections	85
5.13	Packets delivery Ratio vs. Number of CBR Connections	86
5.14	End to End Delay vs. Number of CBR Connections	86
5.15	MAC Collision vs. Number of CBR Connections	87
5.16	Average Energy Consumption vs. Number of Connections	87
6.1	Average Number of Neighbors Curve	92
6.2	The Control Flow Diagram of NDAR Algorithm	95
6.3	Normalized Routing Overhead vs. Number of Nodes	98
6.4	Packet Delivery Ratio vs. Number of Nodes	98
6.5	Average End to End Delay vs. Number of Nodes	99
6.6	MAC Collision vs. Number of Nodes	100
6.7	Average Energy Consumption vs. Number of Nodes	100
6.8	Normalized Routing Overhead vs. Number of CBR Connections	101
6.9	Packets Delivery Ratio vs. Number of CBR Connections	101
6.10	End to End Delay vs. Number of CBR Connections	102
6.11	MAC Collision vs. Number of CBR Connections	103
6.12	Average Energy Consumption vs. Number of Connections	103

LIST OF ABBREVIATIONS

AODV	Ad hoc On-demand Distance Vector
BSP	Broadcast Storm Problem
CBR	Constant Bit Rate
DA	Density Aware formula
DAF	Dynamic connectivity-Aware Factor
DCF	Dynamic Connectivity Formula
DCFP	Dynamic Connectivity Factor Probabilistic
DDF	Dynamic Density Factor
DSDV	Destination-Sequenced Distance Vector
DSR	Dynamic Source Routing
DYMO	Dynamic MANET On-demand
FANET	Flying Ad hoc NETWORK
Fc	Connectivity Factor
FONIAH	Flooding based on One-hop Neighbor Information & Adaptive Holdinglong
FP	Forwarding Probability
FSR	Fisheye State Routing
GPS	Global Positioning System
IHU	I Heard You
IOS	International Organization for Standardization
IoT	Internet of Things
LAR	Location-Aided Routing
MANET	Mobile Ad hoc NETWORK
MANETs	Mobile Ad hoc NETWORKs
MPRs	Multi-Point Relays
NCPR	Neighbor Coverage-based Probabilistic Rebroadcast
NDAR	Novel Density-Aware Routing algorithm
NS-2	Network Simulator 2
OLSR	Optimized Link State Routing
OSI	Open Systems Interconnection
RAD	Random Assessment Delay
RERR	Route ERRor
RREP	Route REPlY
RREQ	Route REQuest message
SAPF	Speed Adaptive Probabilistic Flooding
SLURP	Scalable Location Update Routing Protocol
SNBR	Scalable Neighbor-Based Routing algorithm
TC	Topology Control
UDP	User Datagram Protocol
VAN	Vehicle Area Network
VANET	Vehicular Ad Hoc NETWORK
WRP	Wireless Routing Protocol
WSNs	Wireless Sensor Networks
ZRP	Zone Routing Protocol

CHAPTER 1

INTRODUCTION

The field of wireless communication is witnessing an unprecedented growth in the scale and diversity, and becoming more popular than ever before. This is due to the proliferation of wireless data communication technologies and low cost mobile devices (Ayyash et al., 2015). Currently, there are two major approaches for wireless communication either based on an established cellular network infrastructure or organize an arbitrary and temporary ad hoc network among all mobile nodes interested in communicating with each other. The major challenge of the former approach is that such networks are limited to places where there is an existing cellular network infrastructure. In contrast, the second approach can be established without constraints at any place and time (on-demand).

The continuous progress in wireless communications has led to new research trends, which enable wireless networks to be highly deployed in daily life. Mobile Ad hoc NETWORK (MANET) is the most promising field of ad hoc networks. MANET is one a self-organized network with arbitrary distributed nodes (Ayyash et al., 2015). MANET has witnessed rapid development due to its ability to work along with different wire and wireless network such as Wireless Sensor Networks (WSNs) or Internet of Things (IoT). By using a unique sentence, while WSNs are networks of things, MANETs are networks of people: they are dynamically formed and allow people in a restricted area to send, receive, and share data, without the need of either infrastructure or centralized support (Bellavista et al., 2013).

Moreover, MANET is widely recognized with its low cost, diversity, and simplicity of its mobile devices. Such devices can form a reliable network in a short time for use as a rescue information system after a natural disaster such as fire, flood, or earthquake, at which the communication infrastructure may no longer be available or accessible. After a natural disaster, MANET is the preferable available option of wireless networks since such network could be easily configured in a short period without need for fixed infrastructure network. Vehicular Ad Hoc NETWORK (VANET) are a particular case of mobile ad hoc network where it can effectively be considered a subset of MANETs, in which mobile nodes are vehicles.

Furthermore, with a view to serving different types of applications, MANET has potential to work along with varied types of networks, such as VANET, Flying Ad hoc NETWORK (FANET), cellular networks or the Internet as shown in Figure 1.1 (Carvalho et al., 2016). Indeed, the applications of MANETs are diverse. These applications are not limited to areas such as emergency and crisis management, but also local level, commercial and military battlefield applications (Ayyash et al., 2015).



Figure 1.1: Mobile Ad Hoc Network

1.1 Applications of MANET

The set of applications of MANET is varied, ranging from small, static networks that are constrained by power sources, to large-scale, mobile, highly dynamic networks. In fact, MANET as a network is popular, since it is easy to be configured in a short time (NIST, U.S, 2016). In addition, due to the fast growth and diversity of mobile devices, and the massive demand on media sharing through mobile devices, MANET becomes the most efficient network to be used by a considerable number of applications such as:

- **Mobile conferences:** MANET enable mobile conferencing for business users, who need to collaborate outside their office, where no network infrastructure is available. There is a growing need for mobile computing environments, where different members of a project need to collaborate on design and development.
- **Personal area and home networking:** MANET are quite suitable for home as well as personal area networking applications.
- **Education Network:** mobile ad hoc network has potential to form a network to be used in classes, to share files or Internet connection.
- **Crisis Management Network:** this network can be used to provide an application for crisis management system after natural crises took place, at which the infrastructure communication is entirely destroyed or no longer available as depicted in Figure 1.2.
- **Military battlefield applications:** MANETs were mostly created for military purposes and applications (Rajabhushanam and Kathirvel, 2011). In these situations, the importance of ad hoc networking stems from main-

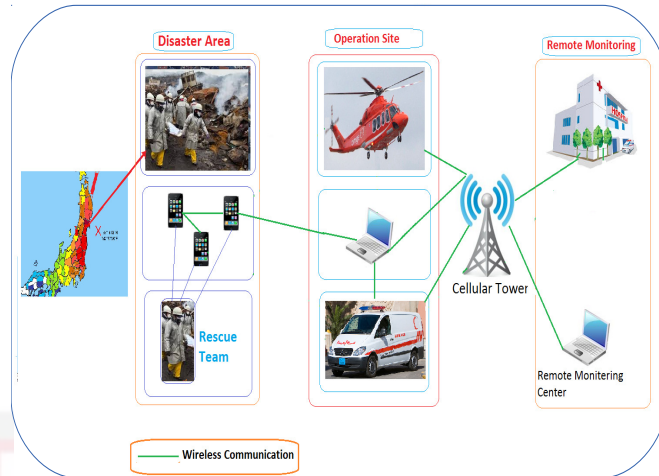


Figure 1.2: MANET Applications

taining an information exchange network among the soldiers, vehicles, and military information headquarters(Ayyash et al., 2015).

1.2 MANET Constraints

Despite the advantages that the MANET network offers, it has some constraints that are presented as follows:

- **Dynamic Topology:** naturally, nodes are mobile and free to move at any time to random places. This would add some issues in providing good performance and reducing from the link breakage.
- **Limited Resources:** such network is known with its finite resources in terms of bandwidth and energy as a result of mobility requirements.
- **Self-organized:** nodes in this kind of network are independent and they must track and collect neighborhood information during the connection time. Nodes may work as host or route at any time.
- **Multi-hop routing:** in MANET, nodes communicate with each other through single or multi-hop routing protocols in order to deliver data packets from a source to destination(Ayyash et al., 2015). Route may change and no longer be available during the transmission time.
- **Distributed function:** due to the infrastructure-less nature of MANET, the control management of the network is distributed among the mobile nodes. Therefore, nodes involved in a MANET should collaborate amongst each other to implement routing and distributed functions. These distributed

functions include distributed coordination function (DCF), point coordination function (PCF), and a modified PCF to operate over infrastructure-less networks by combining the operation of both DCF and PCF.

- **Varied link-capacity:** as the nodes are mobile nodes, the link are share among the nodes in the same area, accordingly they may compete to send their data and makes from such link vary in from at different time.
- **Security:** wireless links used in MANET are more susceptible to attacks than the wire link. Wormhole attack is most threatening security attack in ad hoc network where an attacker node receives packet at one location and replay them at other location which is remotely located far (Kaur et al., 2017)

As mentioned previously that nodes in MANET are free to move at any time in the absence of central control, the routing becomes one of the most challenging issues (Saleh et al., 2017). Moreover, such network has limited resources such as battery lifetime and bandwidth. As consequence, each type of network must probably choose the most suitable routing algorithm, in order to efficiently serve its applications to gain the optimum possible performance with available resources. The next section provides an overview of different types of the routing protocols and the MANET's routing protocols.

1.3 Routing Protocols

Routing protocols can be classified into three main groups: reactive, proactive, and hybrid based on the routing information gathering. Although there are some other classifications of the routing based on different approaches, these are out of the research scope. Such as multicast initiator, multicast topology, core or coreless, network maintenance method, dependency on unicast routing protocol and reliable multicast routing (Ghasemi and Bag-Mohammady, 2012).

In the reactive routing protocols, the route to a certain destination is discovered only when it is required, outdated, or invalid. Such routing protocols have low routing overhead and fewer storage requirements. In contrast, in the proactive routing protocols, the data delivery latency is low, since the path information is readily available. However, in the proactive routing protocols, there is an extra routing overhead due to a frequent update of the routing table. Moreover, the routing table size increases as the size of the network increases. On the other hand, in the hybrid routing protocols, the data is sent to a central entity (node) that can further process the received data and discriminated accordingly (Al-Karaki and Kamal, 2004). Saeed et al. (2012) has added another category to previously routing protocols groups. From their point of view the the routing algorithms are classified depending on the packet casting type, either unicast or multicast.

In Mobile Ad hoc NETWORKS (MANETs), reactive routing protocols are the most used and preferable due to their low overhead and the natural characteristics of these networks, such as low battery lifetime and limited bandwidth. Although, in last few years, there are many researches and work have been done on (MANETs) routing, there are still some challenges and issues because of the limited resources and mobile characters of such networks. Due these mentioned reasons, to design an effective and intelligent routing algorithm is still a challenge in (MANETS) (Chauhan and Sharma, 2016). In fact, the easiest and the most effective method for many routing algorithms at difference stages, is the broadcast method which is discussed in detail in the following section.

1.3.1 Broadcast in MANET

Generally, broadcasting is the distribution of audio and/or video content or other messages to a dispersed audience via any electronic mass communications medium, but typically one using the electromagnetic spectrum (radio waves), in a one-to-many model (Peters, 2012).

Broadcast at the physical layer can be based on two transmission approaches; the one-to-all and one-to-one approach. In the first one, the broadcasted message is sent to all nodes or neighbors within the transmission range of any node, while in the second approach, the broadcasted message is sent to only one node within the transmission range of any node. However, in this thesis, the one-to-all approach is used.

In contrast, at the network layer, broadcasting is considered as an indispensable method for numerous routing protocols such as Ad hoc On-demand Distance Vector (AODV), (Perkins et al., 2003) and Dynamic Source Routing (DSR)(Johnson et al., 2007).

Basically, the tradition and the straightforward mechanism to send data between nodes in a considerable number of routing algorithms is the broadcast (flooding), in particular, the route discovery stage, where the Route REQuest message (RREQ) message are broadcasted to almost all neighbors of the forwarding node as shown in Figure 1.3. Such mechanism definitely guarantees a great reachability at the cost of degrading the system performance, in which the delay and routing overhead showed a dramatic increase. In addition, when the transmission media is overwhelmed by these RREQ messages, a collision of the data packets takes place due to the signal overlapping as shown in Figure 1.4. Designing efficient forwarding scheme can reduce redundancy and collisions (Alghamdi et al., 2017).

Moreover, such broadcast may lead to contention between the nodes, as they share the same transmission media. As a result, sending and receiving data be-

come the most complicated process.

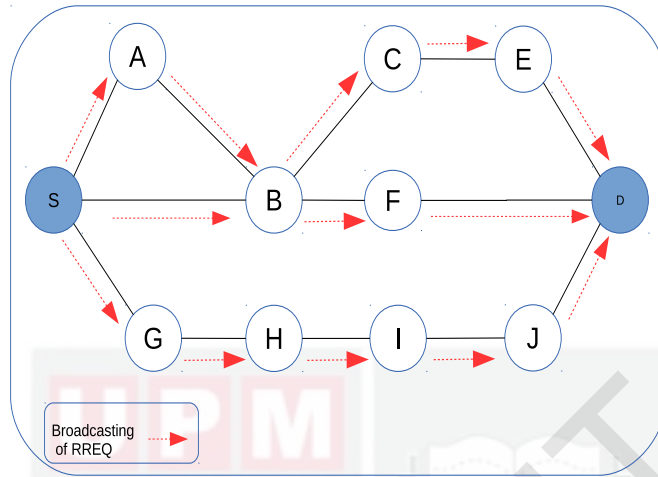


Figure 1.3: Broadcasting in the Route Discovery Stage

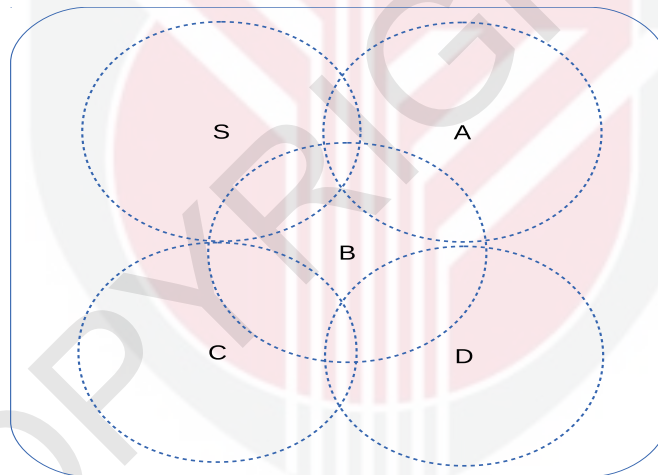


Figure 1.4: The Signal Overlapping for 5 Nodes

1.4 Motivation

Despite the fast development of MANET devices and its applications, the routing algorithms still unable to serve such devices efficiently. In addition, the state of art presented in Chapter 2 clearly shows that the available routing algorithms insufficient to serve the MANET devices efficiently, due to many redundant messages broadcasted in the whole network. For instance, In (Dodke et al., 2016), from the result it is seen that packet delivery ratio of AODV is higher as compare to DSR. Also from the result it is seen that DSR consume

40 less energy as compared to AODV. In addition, in NCPR and AODV, when the number of nodes increases more than 100 nodes, the performance of both protocols has been effected by these redundant RREQ packets (based on the simulation done). Such issues in the currently available routing algorithms open a space for further enhancement. This research was motivated by its benchmark shortage, in terms of the inherited routing overhead and low packet delivery ratio and not to mention the fixed preset variables which are highly required to be addressed. Such enhancements in current algorithms, enable many systems to provide the important information on time, especially in disaster situations.

In the disaster situations, the fast delivery of data is the main concern for the rescue system, therefore a routing algorithm with low end to end delay is the most desirable to be used. Furthermore, it is important to have a routing algorithm which consume a low energy for the network with as the nodes for outdoors network. In terms of the applications, it is necessary to find an algorithm that is more suitable to be used for education applications, while the another algorithm must be designed to be used for rescue system as data and energy is the main concern. Finally, one more algorithm is suitable for personal area and home networking.

1.5 Problem Statements

A considerable number of the predominate routing algorithms offers quick adaption to the dynamic link conditions and low routing overhead such as Neighbor Coverage-based Probabilistic Rebroadcast (NCPR) as compared to AODV protocol. In NCPR algorithm, the dropping decision for the redundant RREQ is completely relying on preset variables, such variables require to be set by the system administrator based on the scenario.

Unfortunately, the setting which is proper for a specific scenario is not suitable for another due to the dynamic character of MANET. Furthermore, the connectivity factor which is used to estimate the connectivity ratio at each node, is still unable to estimate such ratio accurately. Thus, using such algorithms in a network with a high density of nodes or high traffic load negatively affects the network performance. Therefore, a novel dynamic routing algorithm is highly needed, which could replace the preset variables and dynamically estimate the connectivity ratio using local available parameters at the forwarding node itself.

The NCPR algorithm significantly enhances the overall network performance in terms of routing overhead, end to end delay, packet delivery ratio and MAC collision, such enhancements are based on reducing the redundant RREQ messages. However, NCPR fails to relieve the routing overhead, as result of the RREQ redundant message, when the number of nodes or the network traffic load increases. Such issue results from the dropping mechanism used in this

algorithm. Thus, another algorithm must be used to accommodate with network scalability in terms of the number of nodes and network traffic load.

Furthermore, It is worthy to note that mobility brings many challenges when designing protocols for these networks (Abbas and Rahman, 2016). Naturally nodes in MANET are free to move forming an arbitrary topology at any time the network density may change frequently from low to high or from high to low. Such change may lead to an extreme performance degradation, especially when the routing algorithm relies on fixed threshold values in the dropping decision. Thus, enhancements addressing these issues and makes from such algorithm more powerful to gain a better ability to work under varied density of nodes is required by developing a new adaptive routing algorithm.

1.6 Research Objectives

The main goal of this thesis is to enhance the performance of the routing algorithms for MANET. In particular, such goal is divided into three significant objectives, as follows:

- To develop a novel neighbor-based routing algorithm aims to develop a novel formula that replaces the critical preset variables and the fixed connectivity factor, in order to immediately respond to the changing in the topology and the density of nodes without preset variables from the network. While, providing an accurate connectivity ratio.
- To develop a scalable neighbor-based routing algorithm which reduces the routing overhead in NCPR, by eliminating the redundant RREQ. Such algorithm aims to enhance the network performance, even though the network is experiencing an increase in the number of nodes or traffic load.
- To develop an optimized density-aware routing algorithm through the use of a dynamic formula that improves the network performance and makes from such routing algorithm able to accommodate varied density of nodes. Such formula aims to estimate the network density and accordingly drops the redundant RREQ packets.

1.7 Research Scope

Basically, routing in a network with arbitrary topology, mobile nodes and without any centralized control is considered a complex task. Therefore, this thesis concentrated on studying the NCPR routing algorithm in MANET. Furthermore, it focuses on enhancing the network performance at the routing layer of the end to end system. In particular, the research focuses on the routing overhead in the route discovery stage as many RREQ is broadcasted to find a

path to a certain destination. Such improvements are to meet the huge demand of a considerable number of applications, in total isolation from underlying networks as recommended by Open Systems Interconnection (OSI) model.

The proposed algorithms are developed and tested in wireless mobile nodes with random movement, using the well-known Network simulator 2 (NS-2) (McCanne and Floyd, 1998). Such simulator is being used by most researchers in the field, since such tool is a free and open source. Besides, all the experiments are simulated over wireless networks (MANET). Even though the proposed algorithms may applicable to work in another network such as VANET, the implementation of the proposed algorithms over other network lie beyond the scope of this thesis.

1.8 Research Significance

Certainly, as mentioned previously, in harsh and constrained situation after natural disasters such as fire, flood, or earthquake MANET is one among limited available options of wireless networks due to important reasons, which are: such network can be configured in short time, its cost is too low compared to infrastructure network, and such network can be connected to another network easily, such as the Internet. Therefore, the significant of this work arises from the need for an efficient routing algorithm, which is able to automatically adjust the network setting and reduces the extra messages broadcasted. As result, the network performance improves in terms of end to end delay, and the packet delivery ratio. All the mentioned facts emphasize the importance of conducting this research. Besides, the proposed work can be used to enhance the performance of other network such Vehicle Area Network (VAN).

1.9 Thesis Organization

The rest of this thesis is organized as follows:

Chapter 2 first presents the MANET and OSI Model, routing in MANET and classifications of the most significant routing protocols. Then, it discusses the broadcasting mechanism used in a numerous number of routing protocols, and its advantages and the drawbacks. Finally, the chapter concluded with the currently available open issues.

Chapter 3 it presents the methodology used in this thesis. The chapter first discusses the existing simulation tools and identifies the definition and the conventions used throughout the whole thesis. Then, it presents the research

framework, experimental setup, network topology and finally the evaluation method.

Chapter 4 presents a novel routing algorithm called DCFP aimed at replacing the preset variables of the network parameter (total number of nodes) through a new connectivity metric. Furthermore, it discusses the DCFP algorithm, its main components and provides analytical analysis behind the main idea used to develop the new formula and dynamic connectivity factor. The chapter is concluded by the performance evaluation and results of the proposed algorithm with one of the states of art algorithms and the stander algorithm.

Chapter 5 this chapter started by giving background of a new routing protocol called SNBR and its components, then it describes the parameter setting and the their relationship. In addition, the rest of the chapter presents the results of the proposed algorithm along with states of art algorithms under different scenarios includes a varied number of nodes and varied traffic load.

Chapter 6 presents a background of a novel routing algorithm namely, NDAR. Then, it describes NDAR mechanism and the impact of RREQ on the system performance. The chapter also provides the details of density aware formula and NDAR. Finally, the performance evaluation and results of the proposed algorithm is presented, along with two important algorithms as benchmarks.

Chapter 7 concludes the thesis and recommends some promising directions for future research.

REFERENCES

- Abbas, S. and Rahman, M. U. (2016), Simulation-based analysis of manet routing protocols using group mobility model, *in* 'Inventive Computation Technologies (ICICT), International Conference on', Vol. 1, IEEE, pp. 1–5.
- Abdulai, J.-d. (2009), Probabilistic route discovery for wireless mobile ad hoc networks (manets), PhD thesis, Citeseer.
- Abdulai, J.-D., Ould-Khaoua, M. and Mackenzie, L. M. (2009), 'Adjusted probabilistic route discovery in mobile ad hoc networks', *Computers & Electrical Engineering* **35**(1), 168–182.
- Abdulai, J.-D., Ould-Khaoua, M., Mackenzie, L. M. and Mohammed, A. (2008), Neighbour coverage: A dynamic probabilistic route discovery for mobile ad hoc networks, *in* 'Performance Evaluation of Computer and Telecommunication Systems, 2008. SPECTS 2008. International Symposium on', IEEE, pp. 165–172.
- Abolhasan, M., Wysocki, T. A. and Dutkiewicz, E. (2003), 'Lpar: an adaptive routing strategy for manets', *Journal of Telecommunications and Information Technology* pp. 28–37.
- Abolhasan, M., Wysocki, T. and Dutkiewicz, E. (2001), 'A scalability study of mobile ad hoc networks routing protocols', *Proceedings of sixth International DSPCS* .
- Aggelou, G. and Tafazolli, R. (1999), Rdmr: A bandwidth-efficient routing protocol for mobile ad hoc networks, *in* 'Proceedings of the 2nd ACM international workshop on Wireless mobile multimedia', ACM, pp. 26–33.
- Al-Karaki, J. N. and Kamal, A. E. (2004), 'Routing techniques in wireless sensor networks: a survey', *IEEE wireless communications* **11**(6), 6–28.
- Alghamdi, A. A., King, P. J. and Mirza, N. S. (2017), Colour-based forwarding scheme with variable-range transmission power in aodv, *in* 'Wireless Days, 2017', IEEE, pp. 248–251.
- Arango, J., Degermark, M., Efrat, A. and Pink, S. (2004), An efficient flooding algorithm for mobile ad-hoc networks, *in* 'Proc. of WiOpt', pp. 1–7.
- Ayyash, M., Alsbou, Y. and Anan, M. (2015), Introduction to mobile ad-hoc and vehicular networks, *in* 'Wireless Sensor and Mobile Ad-Hoc Networks', Springer, pp. 33–46.
- Bakhouya, M., Gaber, J. and Lorenz, P. (2011), 'An adaptive approach for information dissemination in vehicular ad hoc networks', *Journal of Network and Computer Applications* **34**(6), 1971–1978.
- Bellavista, P., Cardone, G., Corradi, A. and Foschini, L. (2013), 'Convergence of manet and wsn in iot urban scenarios', *IEEE Sensors Journal* **13**(10), 3558–3567.

- Boukerche, A., Turgut, B., Aydin, N., Ahmad, M. Z., Bölöni, L. and Turgut, D. (2011), 'Routing protocols in ad hoc networks: A survey', *Computer networks* **55**(13), 3032–3080.
- Carvalho, T. C. d., Ferreira Júnior, J. J. and Francês, R. L. (2016), 'Reliable energy-efficient multilayer mechanism with realistic battery model and qoe support in wireless manets', *Journal of Microwaves, Optoelectronics and Electromagnetic Applications* **15**(1), 30–48.
- Chakeres, I. D. and Perkins, C. E. (2008), 'Dynamic manet on-demand routing protocol'. IETF Internet Draft, draft-ietf-manet-dymo-12. txt.
- Chakeres, I. D. and Perkins, C. E. (2013), 'Dynamic manet on-demand routing protocol'. IETF Internet Draft, draft-ietf-manet-dymo-26.txt.
- Chauhan, A. and Sharma, V. (2016), Review of performance analysis of different routing protocols in manets, in 'Computing, Communication and Automation (ICCCA), 2016 International Conference on', IEEE, pp. 541–545.
- Chekhar, M., Zine-Dine, K., Bakhouya, M. and Aaroud, A. (2015), A dynamic threshold-based probabilistic scheme for broadcasting in ad hoc networks, in 'Intelligent Systems Design and Applications (ISDA), 2015 15th International Conference on', IEEE, pp. 511–516.
- Chroboczek, J. (2011), 'The babel routing protocol,(bable)'. IETF RFC 6126.
- Clausen, T. and Jacquet, P. (2003), 'Optimized link state routing protocol (olsr)'. IETF RFC 3626.
- Dodke, S., Mane, P. and Vanjale, M. (2016), A survey on energy efficient routing protocol for manet, in 'Applied and Theoretical Computing and Communication Technology (iCATccT), 2016 2nd International Conference on', IEEE, pp. 160–164.
- Garcia-Luna-Aceves, J. J. and Spohn, M. (1999), Source-tree routing in wireless networks, in 'Network Protocols, 1999.(ICNP'99) Proceedings. Seventh International Conference on', IEEE, pp. 273–282.
- Gerla, M., Hong, X. and Pei, G. (2002), 'Fisheye state routing protocol (fsr) for ad hoc networks', *draft-ietf-manet-fsr-03. txt* .
- Ghasemi, M. and Bag-Mohammady, M. (2012), Classification of multicast routing protocols for mobile ad hoc networks, in 'ICT Convergence (ICTC), 2012 International Conference on', IEEE, pp. 789–794.
- gnuplot (2016), 'Gnuplot graphing utility'. <http://www.gnuplot.info/> (accessed September 2016).
- Haas, Z. J., Pearlman, M. R. and Samar, P. (2002), 'The zone routing protocol (zrp) for ad hoc networks', *draft-ietf-manet-zone-zrp-04. txt* .
- Hong, X., Xu, K. and Gerla, M. (2002), 'Scalable routing protocols for mobile ad hoc networks', *IEEE network* **16**(4), 11–21.

- Issariyakul, T. and Hossain, E. (2011), *Introduction to network simulator NS2*, Springer Science & Business Media.
- Johnson, D., Hu, Y. and Maltz, D. (2007), 'The dynamic source routing protocol (dsr) for mobile ad hoc networks for ipv4'. RFC 4728.
- Kaur, G. and Garg, R. (2014), Ncpr-pso neighborhood coverage probabilistic re-broadcast with particle swarm optimization, *in 'Confluence The Next Generation Information Technology Summit (Confluence), 2014 5th International Conference-*, IEEE, pp. 298–303.
- Kaur, P., Kaur, D. and Mahajan, R. (2017), 'Simulation based comparative study of routing protocols under wormhole attack in manet', *Wireless Personal Communications* pp. 1–17.
- Ko, Y.-B. and Vaidya, N. H. (1999), Geocasting in mobile ad hoc networks: Location-based multicast algorithms, *in 'Mobile Computing Systems and Applications, 1999. Proceedings. WMCSA'99. Second IEEE Workshop on'*, IEEE, pp. 101–110.
- Ko, Y.-B. and Vaidya, N. H. (2000a), Geotora: a protocol for geocasting in mobile ad hoc networks, *in 'Network Protocols, 2000. Proceedings. 2000 International Conference on'*, IEEE, pp. 240–250.
- Ko, Y.-B. and Vaidya, N. H. (2000b), 'Location-aided routing (lar) in mobile ad hoc networks', *Wireless Networks* 6(4), 307–321.
- Lee, S.-H. and Ko, Y.-B. (2006), An efficient neighbor knowledge based broadcasting for mobile ad hoc networks, *in 'International Conference on Computational Science'*, Springer, pp. 1097–1100.
- Liarokapis, D. and Shahrabi, A. (2009), A probability-based adaptive scheme for broadcasting in manets, *in 'Proceedings of the 6th International Conference on Mobile Technology, Application & Systems'*, ACM, p. 46.
- Malhotra, J. et al. (2014), A survey on manet simulation tools, *in 'Computational Intelligence on Power, Energy and Controls with their impact on Humanity (CIPECH), 2014 Innovative Applications of'*, IEEE, pp. 495–498.
- McCanne, S. and Floyd, S. (1998), 'Ns network simulator - version 2'. <http://www.isi.edu/nsnam/ns> (accessed June 2016).
- McCanne, S. and Floyd, S. (2017), 'Omnet++ network simulator'. <https://omnetpp.org> (accessed MAY 2017).
- Mohammed, A., Ould-Khaoua, M., Mackenzie, L. M. and Abdulai, J. (2008), Performance evaluation of an efficient counter-based scheme for mobile ad hoc networks based on realistic mobility model, *in 'Performance Evaluation of Computer and Telecommunication Systems, 2008. SPECTS 2008. International Symposium on'*, IEEE, pp. 181–188.
- Mohammed, A., Ould-Khaoua, M., Mackenzie, L. M. and Abdulai, J.-D. (2009), Dynamic probabilistic counter-based broadcasting in mobile ad hoc networks, *in '2009 2nd International Conference on Adaptive Science & Technology (ICAST)'*, IEEE, pp. 120–127.

- Murthy, S. and Garcia-Luna-Aceves, J. (1995), A routing protocol for packet radio networks, *in* 'Proceedings of the 1st annual international conference on Mobile computing and networking', ACM, pp. 86–95.
- MyAssays-Ltd (2017), 'Formula construction from give curve by mycurvefit website'. <https://mycurvefit.com/> (accessed February 2017).
- Mylonas, Y., Lestas, M. and Pitsillides, A. (2008), Speed adaptive probabilistic flooding in cooperative emergency warning, *in* 'Proceedings of the 4th Annual International Conference on Wireless Internet', ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering), p. 81.
- Ni, S.-Y., Tseng, Y.-C., Chen, Y.-S. and Sheu, J.-P. (1999), The broadcast storm problem in a mobile ad hoc network, *in* 'Mobile Computing 99', ACM, pp. 151–162.
- NIST, U.S (2016), 'Manet applications'. <https://www.nist.gov/> (accessed October 2016).
- Patel, P. V. and Kadhiwala, B. (2016), Broadcasting techniques for route discovery in mobile adhoc network survey, *in* 'Computing for Sustainable Global Development (INDIACom), 2016 3rd International Conference on', IEEE, pp. 671–674.
- Pei, G., Gerla, M. and Chen, T.-W. (2000), Fisheye state routing: A routing scheme for ad hoc wireless networks, *in* 'Communications, 2000. ICC 2000. 2000 IEEE International Conference on', Vol. 1, IEEE, pp. 70–74.
- Perkins, C., Belding-Royer, E., Das, S. et al. (2003), 'Ad hoc on-demand distance vector routing (aodv)'. RFC 3561.
- Perkins, C. E. and Bhagwat, P. (1994), Highly dynamic destination-sequenced distance-vector routing (dsv) for mobile computers, *in* 'ACM SIGCOMM computer communication review', Vol. 24, ACM, pp. 234–244.
- Peters, J. D. (2012), *Speaking into the Air: A History of the Idea of Communication*, University of Chicago Press.
- Qian, Q., Qingwen, W., Hang, C. and Haoshan, S. (2013), A novel cross-layer dynamic probabilistic broadcasting algorithm for ad hoc networks, *in* 'Signal Processing, Communication and Computing (ICSPCC), 2013 IEEE International Conference on', IEEE, pp. 1–4.
- Qing-wen, W., Hao-shan, S. and Qi, Q. (2010), 'A dynamic probabilistic broadcasting scheme based on cross-layer design for manets', *International Journal of Modern Education and Computer Science* 2(1), 40.
- Rajabhushanam, C. and Kathirvel, A. (2011), 'Survey of wireless manet application in battlefield operations', *IJACSA International Journal of Advanced Computer Science and Applications* 2(1).
- Reina, D., Toral, S., Johnson, P. and Barrero, F. (2014), 'Improving discovery phase of reactive ad hoc routing protocols using jaccard distance', *The Journal of Supercomputing* 67(1), 131–152.

- Reina, D., Toral, S., Johnson, P. and Barrero, F. (2015), 'A survey on probabilistic broadcast schemes for wireless ad hoc networks', *Ad Hoc Networks* **25**, 263–292.
- Saeed, N. H., Abbod, M. F. and Al-Raweshidy, H. S. (2012), Manet routing protocols taxonomy, in 'Future Communication Networks (ICFCN), 2012 International Conference on', IEEE, pp. 123–128.
- Safa, H., Karam, M. and Moussa, B. (2014), 'Phaodv: Power aware heterogeneous routing protocol for manets', *Journal of Network and Computer Applications* **46**, 60–71.
- Saleh, A. I., Arafat, H. and Hamed, A. M. (2017), 'An adaptive hybrid routing strategy (ahrs) for mobile ad hoc networks', *Peer-to-Peer Networking and Applications* pp. 1–18.
- Shanmugam, K., Subburathinam, K. and Velayuthampalayam Palanisamy, A. (2016), 'A dynamic probabilistic based broadcasting scheme for manets', *The Scientific World Journal* **2016**.
- Wikipedia (2016a), 'Awk scripting processing language'. <https://en.wikipedia.org/wiki/AWK> (accessed September 2016).
- Wikipedia (2016b), 'Osi model'. https://en.wikipedia.org/wiki/OSI_model (accessed October 2016).
- Williams, B. and Camp, T. (2002), Comparison of broadcasting techniques for mobile ad hoc networks, in 'Proceedings of the 3rd ACM international symposium on Mobile ad hoc networking & computing', ACM, pp. 194–205.
- Woo, S.-C. M. and Singh, S. (2001), 'Scalable routing protocol for ad hoc networks', *Wireless Networks* **7**(5), 513–529.
- Xue, F. and Kumar, P. R. (2004), 'The number of neighbors needed for connectivity of wireless networks', *Wireless networks* **10**(2), 169–181.
- Yassein, M. B., Hameed, B. A., Mardini, W. and Khamayseh, Y. (2013), 'Performance analysis of adjusted counter based broadcasting in mobile ad hoc networks', *Communications and Network* **2013**.
- Yassein, M. B., Khaoua, M. O., Mackenzie, L. M., Papanastasiou, S. and Jamal, A. (2006), Improving route discovery in on-demand routing protocols using local topology information in manets, in 'Proceedings of the ACM international workshop on Performance monitoring, measurement, and evaluation of heterogeneous wireless and wired networks', ACM, pp. 95–99.
- Yassein, M. B., Nimer, S. F. and Al-Dubai, A. Y. (2011), 'A new dynamic counter-based broadcasting scheme for mobile ad hoc networks', *Simulation Modelling Practice and Theory* **19**(1), 553–563.
- Zhang, Q. and Agrawal, D. P. (2003), Dynamic probabilistic broadcasting in mobile ad hoc networks, in 'Vehicular Technology Conference, 2003. VTC 2003-Fall. 2003 IEEE 58th', Vol. 5, IEEE, pp. 2860–2864.

Zhang, Q. and Agrawal, D. P. (2005), 'Dynamic probabilistic broadcasting in manets', *Journal of parallel and Distributed Computing* **65**(2), 220–233.

Zhang, X. M., Wang, E. B., Xia, J. J. and Sung, D. K. (2013), 'A neighbor coverage-based probabilistic rebroadcast for reducing routing overhead in mobile ad hoc networks', *Mobile Computing, IEEE Transactions on* **12**(3), 424–433.

