



UNIVERSITI PUTRA MALAYSIA

***LINEAR CAVITY MULTIWAVELENGTH THULIUM-DOPED FIBER LASER
INCORPORATING A HIGHLY NONLINEAR FIBER***

ROZLINDA BINTI RADZALI

FK 2017 9



**LINEAR CAVITY MULTIWAVELENGTH THULIUM-DOPED FIBER LASER
INCORPORATING A HIGHLY NONLINEAR FIBER**

By

ROZLINDA BINTI RADZALI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfillment of the Requirements for the Degree of Master of Science**

January 2017

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia





**LINEAR CAVITY MULTIWAVELENGTH THULIUM-DOPED FIBER LASER
INCORPORATING A HIGHLY NONLINEAR FIBER**

By

ROZLINDA BINTI RADZALI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfillment of the Requirements for the Degree of Master of Science**

January 2017

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

LINEAR CAVITY MULTIWAVELENGTH THULIUM-DOPED FIBER LASER INCORPORATING A HIGHLY NONLINEAR FIBER

By

ROZLINDA BINTI RADZALI

January 2017

Chairman: Muhammad Hafiz Bin Abu Bakar, PhD
Faculty: Engineering

2- μm laser generation has attracted intense research interest due to its ability to fulfill shorter wavelength needs such as laser cutting and surgery whilst providing eye-safer operation. Additionally, in applications such as light detection and ranging (LIDAR), sensing, spectroscopy, and material processing, certain materials interact better in 2- μm wavelength band, thus delivering better accuracy and precision in the results. In recent times, the constant need for more data or information has evoked exploration on the use of 2- μm region as an expansion to the optical fiber communication band, further promoting interest in 2- μm thulium-doped fiber lasers. One major issue in multiwavelength thulium-doped fiber laser (MWTDFL) however, is the high loss of silica in that region. This consequently impedes the generation of high gain that is essential in producing multiple channels. Resultantly, most works had to resort to complex nonlinear structure in order to address this issue, thus lessening the feasibility of translating these laser devices into industrial applications.

This work proposed a simple thulium-doped fiber laser configuration capable of generating multiwavelength output. A linear cavity configuration was employed for this purpose with two loop mirrors confining the oscillation for the thulium-doped fiber induced gain. An optical interleaver was included to generate the multiwavelength seed signal, allowing four distinct lasing peaks to be observed albeit with instability to the two lower power peaks. The work then progressed to the integration of highly nonlinear fiber (HNLF) within the structure. A 500-m section of HNLF was spliced in the laser setup to investigate its performance. The presence of HNLF helped to increase the number of output channels to 22 and 35 lasing lines in 10-dB and 20-dB bandwidth respectively with optical signal to noise ratio as high as 30-dB. Maximum output power observed is 0.406 mW. The high nonlinearity from the presence of HNLF induced four-wave mixing (FWM) effect which assisted gain distribution allowing higher channel count to be produced. The stability of the HNLF-integrated MWTDFL was then investigated. This experiment was performed by observing the multiwavelength laser spectrum every 5 minutes for a total time span of one hour at the maximum pump power of 2000 mW.

Based on the findings, the laser exhibited power fluctuations of less than 1.325-dB, with the worst value recorded at shorter wavelength region due to the lower net gain profile. Maximum wavelength dithering of 0.12 nm was also observed thanks to the use of physical multiwavelength selector. In summary, the work has demonstrated the use of a simple linear cavity design to generate multiwavelength output achieved by integrating a section of HNLF within the cavity without complex nonlinear-based structure. High channel count was generated with minimal fluctuation to the peak power and wavelength. The success of this work can elevate the status of MWTDFL as a feasible candidate for industrial applications requiring 2- μ m laser band.



Abstrak tesis dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Sarjana Sains

LASER GENTIAN TERDOP THULIUM PELBAGAI PANJANG GELOMBANG RONGGA LINEAR MENGGABungkan GENTIAN SANGAT TAK LINEAR

Oleh

ROZLINDA BINTI RADZALI

Januari 2017

Pengerusi: Muhammad Hafiz Bin Abu Bakar, PhD
Fakulti: Kejuruteraan

Penjanaan laser 2- μm telah menarik perhatian dalam penyelidikan kerana kelebihannya dalam memenuhi keperluan panjang gelombang yang lebih pendek seperti pemotongan laser dan pembedahan disamping itu, penggunaannya yang lebih selamat untuk mata. Tambahan pula, dalam aplikasi seperti pengesanan cahaya dan meliputi (LIDAR), rangsangan, spektroskopi dan pemprosesan bahan, bahan-bahan tertentu dilihat lebih baik dalam panjang gelombang laser 2- μm . Lantaran itu, hasil yang lebih baik dapat diperolehi yang meliputi ketepatan dan perinciannya. Baru-baru ini, penerokaan dalam panjang gelombang 2- μm telah menjadi keperluan yang berterusan untuk data dan maklumat jika dipanjangkan kepada gentian optik komunikasi, disamping ia merupakan tarikan dalam 2- μm tulium-terdop gentian laser. Walaubagaimanapun, masalah utama dalam laser gentian terdop thulium pelbagai panjang gelombang (MWTDFL) ialah silika mengalami kehilangan yang sangat tinggi dalam kawasan ini. Oleh itu, ini telah mengakibatkan terhalang dari menghasilkan generasi yang sangat berganda untuk penghasilan saluran yang berbilang-bilang. Akibatnya, kebanyakan kerja-kerja penyelidikan menghasilkan kompleks struktur yang tidak linear dalam menyelesaikan isu ini. Oleh itu, kemungkinan ini telah mengurangkan penggunaan peranti laser untuk aplikasi dalam industri.

Tesis ini mencadangkan laser gentian terdop thulium yang mampu menghasilkan pelbagai panjang gelombang dengan menggunakan struktur yang mudah. Satu konfigurasi rongga linear dengan menggunakan dua gelung cermin dimana aliran ayunan laser dihadkn untuk merangsang gandaan gentian terdop thulium. Interleaver optik digunakan untuk menghasilkan isyarat pelbagai panjang gelombang yang menghasilkan empat puncak las yang berbeza dengan ketidakstabilan pada dua puncak kuasa yang terendah. Kerja ini kemudiannya berkembang dengan memperkenalkan gentian yang sangat tidak linear (HNLF) dalam struktur. HNLF sepanjang 500 meter disambungkan untuk mengkaji pretasinya dalam struktur laser. Kehadiran HNLF telah membantu meningkatkan hasil saluran kepada 22 dan 35 garisan laser dalam jalur lebar 10 dB dan 20 dB masing masing

dengan nisbah setinggi 30 dB. Hasil kuasa keluaran tertinggi ialah 0.406 mW. Malahan, dengan kehadiran sangat tidak linear daripada HNLF menggalakkan kesan daripada pergaulan empat gelombang (FWM) dimana membantu pengagihan dalam penghasilan kiraan saluran yang lebih tinggi. Seterusnya, kestabilan HNLF yang berintegrasi dengan MWTDFL dikaji. Eksperimen ini telah dijalankan dengan memerhatikan pelbagai panjang gelombang laser spektrum setiap 5 minit untuk jumlah tempoh masa satu jam pada kuasa pam maksimum 2000 mW. Berdasarkan keputusan menunjukkan turun naik kuasa laser yang kurang daripada 1.325 dB, dengan nilai yang paling teruk dicatatkan pada kawasan sebelah panjang gelombang yang lebih pendek kerana medium gandaan yang lebih rendah. Turun naik panjang gelombang maksimum iaitu pada 0.12 nm juga diperhatikan dengan bantuan pemilih fizikal pelbagai panjang gelombang. Ringkasnya, kerja yang ditunjukkan menggunakan bentuk rongga linear yang mudah untuk menghasilkan pelbagai panjang gelombang dengan integrasi sebahagian daripada HNLF dalam rongga tanpa kompleks struktur linear. Bilangan saluran yang tinggi telah dihasilkan dengan turun naik yang minimum dalam kuasa puncak dan panjang gelombang. Kejayaan karya ini mungkin boleh meningkatkan MWTDFL sebagai pilihan untuk aplikasi dalam industri yang memerlukan 2- μ m laser.

ACKNOWLEDGEMENTS

First of all, my utmost gratitude to ALLAH, The Almighty and The Most Merciful, for giving me the strength to pursue this project and granting me the capability to successfully complete it. I want to express my thanks to my supervisor Dr. Muhammad Hafiz Abu Bakar for his support, guidance, and discussion, which have been a great inspiration to me. I was really lucky to have him as my supervisor especially with the many difficulties I faced throughout this project. Special credit go to Prof. Dr. Mohd Adzir Mahdi and Dr. Abdul Moghni Ali Waza'a Al-Alimi who offered valuable advice and suggestion to enhance this work. Additionally, I would like to thank the other member of the supervisory committee, Dr. Amirah Abd Latif for her insight, encouragement, and motivation, which have been integral to the completion of my study.

Last but not least, thanks to my family, especially my beloved parents for raising me with full of love. Thank you for supporting me and believing in me. My Allah blesses them with health, happiness, and keeps them under the shade of Your Mercy and Protection. Subsequently my love goes to my husband, Yahya Al-Mubarak Jamal for his support and understanding during my pursuit of master that made the completion of thesis possible. I also like to give credits to all my lab colleagues, who made the atmosphere of our lab happy and highly conducive for research. Thank you for the constant companionship especially during the difficult times.



This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

Muhammad Hafiz Abu Bakar, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Amirah Abdul Latif, PhD

Senior Lecturer
Faculty of Science
Universiti Putra Malaysia
(Member)

Mohd. Adzir Mahdi, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by Graduate Student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: _____ Date: _____.

Name and Matric No.: Rozlinda Binti Radzali / GS41598

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____

Name of Chairman of
Supervisory
Committee:

Dr. Muhammad Hafiz Abu Bakar

Signature: _____

Name of Member of
Supervisory
Committee:

Dr. Amirah Abdul Latif

Signature: _____

Name of Member of
Supervisory
Committee:

Prof. Dr. Mohd Adzir Mahdi

LIST OF ABBREVIATIONS

ASE	Amplified spontaneous emission
BEFL	Brillouin Erbium fiber laser
BTFL	Brillouin Thulium fiber laser
BP	Brillouin pump
CPM	cross-phase modulation
DSF	Dispersion shifted fiber
DWDM	Dense division wavelength multiplexing
FUT	Fiber under test
EDF	Erbium-doped fiber
EDFA	Erbium-doped fiber amplifier
EDFL	Erbium-doped fiber laser
FWM	Four wave mixing
FBG	Fiber brag grating
FSR	frequency spacing range
HG-HNLF	Highly Germania highly nonlinear fiber
HNLF	Highly nonlinear fiber
LIDAR	Light detection and ranging
LD	Laser diode
MWFL	Multiwavelength fiber laser
MWTDFL	Multiwavelength thulium-doped fiber laser
MZI	Machzender interference
NPR	Nonlinear polarization rotation
NALM	Nonlinear amplifier loop mirror

TABLE OF CONTENTS

ABSTRACT	Page
<i>ABSTRAK</i>	i
ACKNOWLEDGEMENTS	iii
APPROVAL	v
DECLARATION	vi
LIST OF TABLES	viii
LIST OF FIGURES	xii
LIST OF ABBREVIATIONS / SYMBOLS	xiii
	xv
 CHAPTER	
 1. INTRODUCTION	 1
1.1 Overview	1
1.2 Problem Statement and motivation	1
1.3 Aim and Objectives of work	2
1.4 Scope of Research	2
1.5 Organization of thesis	3
 2. THEORY	 5
2.1 Overview	5
2.2 Principle of Lasing in optical fiber	5
2.3 2- μ m laser	11
2.4 Thulium gain medium	11
2.5 Reviews on multiwavelength Thulium-doped fiber laser	13
2.6 Summary	16
 3. HIGHLY NONLINEAR FIBER ASSISTED MULTIWAVELENGTH LASER GENERATION	 18
3.1 Methodology	18
3.2 Design and characterization of C-band pump	20
3.3 Optimization of pump wavelength and TDF length	21
3.4 Design and development of Multiwavelength thulium doped fiber laser	23
3.4.1 Free lasing characterization	24
3.4.2 Integration of interleaver in MWTDFL	26
3.4.3 Free lasing characterization with integration of HNLF	28
3.4.4 MWTDFL with the presence of interleaver and HNLF	30
3.5 Summary	35
 4. CONCLUSION AND FUTURE WORK	 36
4.1 Conclusion	36
4.2 Recommendations for Future Work	39

REFERENCES	41
BIODATA OF STUDENT	47
LIST OF PUBLICATIONS	48



LIST OF TABLES

Table		Page
2.1	Studies on MWTDFL and their respective output	14
4.1	Comparison of past studies to the proposed work	37



LIST OF FIGURES

Figure		Page
1. 1	Scope of work in generating stable MWTDFL	3
2. 1	Chronology of laser principle (a) absorption (b) spontaneous emission, and (c) stimulated emission.	6
2. 2	Configuration ring cavity	7
2. 3	Configuration linear cavity	8
2. 4	State energy level of Tm-based laser	12
3. 1	Methodology of research work	19
3. 2	Schematic setting of the pump for proposed MWTDFL	20
3. 3	Optical spectrum of TLS signal (red) and amplified TLS signal (blue)	21
3. 4	Experimental setup for basic TDFL	21
3. 5	Output spectrum of TDFL with different wavelengths at (a) 5meter, (b) 10 meter and (c) 15 meter TDF	22
3. 6	Output spectrum of TDFA with variation of TDF length at constant pump wavelength of 1560 nm	23
3. 7	Schematic diagram of free lasing	24
3. 8	Output spectrum of free lasing at the pump power of 2W	25
3. 9	Output power measurement as a function of pump power for free lasing	25
3. 10	MWTDFL configuration with integration of interleaver	26
3. 11	Output spectrum of comb-filter based MWTDFL assisted by interleaver	27
3. 12	Insertion loss of optical interleaver	27
3. 13	Power growth of MWTDFL integrated with interleaver	28
3. 14	MWTDFL configuration with the employment of HNLF	28

3. 15	Broadband ASE observed at 2- μ m wavelength region with integration	29
3. 16	Power growth of MWTDFL integrated with HNLF	29
3. 17	MWTDFL configuration with the presence of HNLF and interleaver	30
3. 18	Output spectrum of MWTDFL as a function of pump power variation	30
3.19	Output spectrum of MWTDFL at the maximum pump power of 2000 mW with the presence of HNLF and interleaver	31
3. 20	Number of channels within 10dB (blue) and 20dB (red)	32
3. 21	Power growth of MWTDFL integrated with HNLF and interleaver	33
3. 22	(a) Peak power and (b) wavelength fluctuations of six selected channels over time.	34

OPM	Optical power meter
OSNR	Optical signal noise to ratio
OSA	Optical spectrum analyzer
PC	Polarization controller
PM-TDF	Polarization maintaining-thulium doped fiber
PMF	Polarization maintaining fiber
SBS	Stimulated Brillouin-scattering
SRS	Stimulated Raman-scattering
SMF	Single mode fiber
SPM	self-phase modulation
SMSR	side mode suppression ratio
TBF	Tunable bandpass filter
TDF	Thulium-doped fiber
TLS	Tunable laser source
Tm	Thulium
TDFL	Thulium-doped fiber laser
WDM	Wavelength division multiplexing
YDF	Yterbium-doped fiber
YDFL	Yterbium-doped fiber laser

CHAPTER 1

INTRODUCTION

1.1 Overview

Over the past few years, light emission in wavelength range around 2- μm has been actively explored owing to their multiple applications, such as in Light detection and ranging (LIDAR), gas sensing systems and direct optical communications [1][2][3]. The bandwidth is of particular interest as it resides in the ‘eye safer’ range for human [4]. Additionally, certain materials have better absorption or interaction within that region thus enabling accurate spectroscopy measurement [5] and efficient material processing [6]. Rare earth elements such as thulium and holmium are capable of emission around 2- μm leading to their use as gain medium for laser generation within that band [7].

Thulium in particular, possesses remarkable properties since it can be directly excited with commercially available laser diodes at wavelength of approximately 800 nm. In contrast, adequate laser operation of holmium can only be achieved with excitation of laser at 1.9- μm or by utilizing an energy transfer process from thulium or ytterbium [8]. Thulium-based laser also offers high output power in the 2- μm wavelength region whilst minimizing temperature and water absorption issues inherent to its rival rare earth element; holmium [9].

Optical fiber-based thulium laser is an increasingly attractive device, due to its ability to be employed in conventional 2- μm band applications whilst also maintaining its coupling simplicity for optical fiber communication systems. The realization of Thulium-doped fiber laser (TDFL) with multiple lasing lines can further encourage deployment of systems in 2- μm bandwidth. Over the last decade, a number of studies have investigated the expansion of wavelength division multiplexing (WDM) communication scheme to 2- μm regions [10]. Such system will require the availability of 2- μm laser source with high channel count and stability in order to address the increasing demand for data. In addition, the flexibility accorded by having a laser with multiple channels of different wavelength will be highly beneficial for spectroscopy purposes.

1.2 Problem Statement and motivation

Despite numerous research proposals on multiwavelength TDFL (MWTDFL), high silica fiber loss in its operating region remains a challenging issue in the generation of 2- μm output. This drawback is further emphasized in multiwavelength laser generation due to the need for high gain to ensure stable multiple lasing lines output. In order to address this issue, many methods have been proposed to alleviate the limitation in multiwavelength thulium-doped fiber laser (MWTDFL). However, the proposals

typically employ complex procedural and operational designs that may hinder adoption of 2- μ m systems.

1.3 Aim and objectives of work

The aim of this project is to design and develop a simple MWTDFL with high channel count and stable output. Specific objectives supporting this aim are:

1. To design and develop linear cavity MWTDFL.
2. To integrate highly nonlinear fiber (HNLF) in the aforementioned structure.
3. To investigate the stability of the HNLF-integrated MWTDFL and its impact on the channel count.

1.4 Scope of work

The scope of study in this research work is summarized in Figure 1.1 This research work focuses on the design and development of an optical fiber laser. The wavelength range in focus is in 2- μ m wavelength band utilizing emission from rare-earth doped fiber gain medium. Thulium-doped fiber is the gain medium of choice and the laser system is designed for multiwavelength channel generation. The use of nonlinearity effects in fiber is explored in order to generate stable MWTDFL.

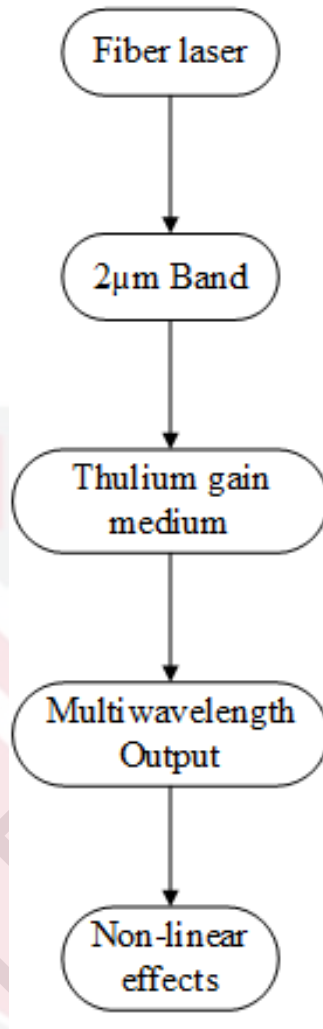


Figure 1.1: Scope of work in generating stable MWTDFL

1.5 Organization of thesis

The introduction section of this work is presented in Chapter 1. This chapter gives an overview of 2- μm laser systems and its status within the optical field of research. Problem statement and objectives of the study are elucidated as well. The direction of this project is presented in the scope of work as well as the thesis organization.

In chapter 2, literature review relevant to this research project is discussed. A brief theoretical outlook relevant to the proposed system is provided in this chapter. Subsequently, a review of past studies leading to the current state of the art in MWTDFL is presented.

The methodology employed in this work as well as findings and their discussions are detailed out in Chapter 3. Outcome from the experimental work performed according to the methodology is presented, analyzed, and discussed. Data obtained from the experiment is properly illustrated and described to highlight the research findings.

Finally, the main results are gathered and highlighted in Chapter 4 to emphasize the completion of all the research objectives. Conclusions are drawn out and recommendations for future work are provided in this chapter as well.



REFERENCES

- [1] Y. Jirong, U. N. Singh, N. P. Barnes, J. C. Barnes, M. Petros, and M. W. Phillips, "An all solid-state 2 μ m laser system for space coherent wind lidar," *Aerosp. Conf. Proceedings, 2000 IEEE*, vol. 3, pp. 27–33, 2000.
- [2] R. Lewicki, G. Wysocki, A. A. Kosterev, and F. K. Tittel, "Carbon dioxide and ammonia detection using 2 μ m diode laser based quartz-enhanced photoacoustic spectroscopy," *Appl. Phys. B-Lasers Opt.*, vol. 87, no. 1, pp. 157–162, 2007.
- [3] N. Mac Suibhne, Z. Li, B. Baeuerle, J. Zhao, J. Wooler, S. Alam, F. Poletti, M. Petrovich, A. Heidt, N. Wheeler, N. Baddela, E. R. Numkam Fokoua, I. Giles, D. Giles, R. Phelan, J. O'Carroll, B. Kelly, B. Corbett, D. Murphy, A. D. Ellis, D. J. Richardson, and F. Garcia Gunning, "WDM Transmission at 2 μ m over Low-Loss Hollow Core Photonic Bandgap Fiber," *Opt. Fiber Commun. Conf. Fiber Opt. Eng. Conf. 2013*, no. 2, p. OW11.6, 2013.
- [4] J. Geng, Q. Wang, Y. Lee, and S. Jiang, "Development of Eye-Safe Fiber Lasers Near 2 μ m," *IEEE J. Sel. Top. Quantum Electron.*, vol. 20, no. 5, 2014.
- [5] B. M. Walsh, "Review of Tm and Ho materials; spectroscopy and lasers," *Laser Phys.*, vol. 19, no. 4, pp. 855–866, 2009.
- [6] Milenky, Michael N., Eugene V. Raevsky, and Dmitry L. Saprykin. "Multi-wavelength laser system designed for material processing." In *SPIE Optical Systems Design*, pp. 96262Q-96262Q. International Society for Optics and Photonics, 2015.
- [7] T. Y. Fan, G. Huber, R. L. Byer, and P. Mitzscherlich, "Continuous-wave operation at 2.1 μ m of a diode-laser-pumped, Tm-sensitized Ho:Y3Al5O12 laser at 300 K," *Opt. Lett.*, vol. 12, no. 9, pp. 678–80, 1987.
- [8] K. Scholle, S. Lamrini, P. Koopmann, and P. Fuhrberg, "2 μ m Laser Sources and Their Possible Applications," *Frontiers in Guided Wave Optics and Optoelectronics, Bishnu Pal (Ed.), InTech*, pp. 674, no. February, 2010.
- [9] R. L. Blackmon, P. B. Irby, and N. M. Fried, "Holmium : YAG (λ = 2120 nm) Versus Thulium Fiber (λ = 1908 nm) Laser Lithotripsy," *Lasers Surg. Med.*, vol. 42, no. March, pp. 232–236, 2010.
- [10] A. H. M. H. Fady I. El-Nahal, "Thulium Doped Fiber Amplifier (TDFA) for S-band WDM Systems," *Open J. Appl. Sci.*, pp. 5–9, 2012.
- [11] M. Plank, A. Einstein, and C. Townes, "A Brief History of Lasers :," no. 847, pp.
- [12] CVI Melles Griot, "Basic Laser Principles in *Introduction to Laser Technology*," pp. 2–32, 2016.
- [13] S. C. Singh, H. Zeng, C. Guo, and W. Cai, "Lasers: Fundamentals, Types, and Operations," *Nanomater. Process. Charact. with Lasers*, pp. 1–34, 2012.

- [14] D. Williams, "Laser basics," *Anaesth. Intensive Care Med.*, vol. 9, no. 12, pp. 550–552, 2008.
- [15] S. C. Singh, H. Zeng, C. Guo, and W. Cai, "Lasers: Fundamentals, Types, and Operations," *Nanomater. Process. Charact. with Lasers*, pp. 1–34, 2012.
- [16] W. T. Silfvast, "Lasers," *Cochrane Database Syst. Rev.*, vol. 11, p. CD007152, 2011.
- [17] C. C. Davis, "Semiconductor Lasers," *Lasers and Electro-Optics*, pp. 308 – 354, 1996.
- [18] B. J. Thompson, "Solid -State Lasers and Applications," *New York*, 2007.
- [19] I. V. Pogorelsky, "Gas Lasers for Strong Field Applications," *AIP Conf. Proc.*, pp. 109–124, 2004.
- [20] R. Mary, D. Choudhury, and A. K. Kar, "Applications of Fiber Lasers for the Development of Compact Photonic Devices," *IEEE J. Sel. Top. Quantum Electron.*, vol. 20, no. 5, 2014.
- [21] M. N. Mohd Nasir, Z. Yusoff, M. H. Al-Mansoori, H. A. Abdul Rashid, and P. K. Choudhury, "Ring cavity multi-wavelength brillouin-erbium fiber laser utilizing a fiber bragg grating filter," *IEEE Int. Conf. Semicond. Electron. Proceedings, ICSE*, pp. 323–325, 2008.
- [22] a Ghosh, D. Venkitesh, and R. Vijaya, "Stability Studies on Continuous-Wave Broadband Generated in an Erbium-Doped Fiber Ring Laser Using Highly Nonlinear Fiber," *IEEE Photonics J.*, vol. 2, no. 5, pp. 703–711, 2010.
- [23] Anonymous, "The Optical Cavity," *Mathematica*, pp. 1–21.
- [24] X. Dong, N. Ngo, P. Shum, H.-Y. Tam, and X. Dong, "Linear cavity erbium-doped fiber laser with over 100 nm tuning range.," *Opt. Express*, vol. 11, no. 14, pp. 1689–1694, 2003.
- [25] S. Ali, K. a S. Al-khateeb, and B. Bouzid, "Comparison of the Effect Structure on Ring and Linear Cavity Lasers of Er- Doped Optical Fibers," *Comput. Eng.*, pp. 2008–2011, 2008.
- [26] K. Miziya, S. K. Sudheer, and A. C. Kuriakose, "Characterization of an optical communication system utilizing dispersion compensating fiber and nonlinear optical effects," *2013 4th International Conference on Computing, Communications and Networking Technologies, ICCCNT 2013*. 2013.
- [27] S. Sabitha, "International Journal of Emerging Technologies in Computational and Applied Sciences (IJETCAS)," *Int. J. Emerg. Technol. Comput. Appl. Sci. (IJETCAS)*, pp. 513–519, 2013.
- [28] S. P. Singh and N. Singh, "Nonlinear Effects in Optical Fibers: Origin, Management and Applications," *Prog. Electromagn. Res.*, vol. 73, pp. 249–275, 2007.

- [29] H. Q. Le, W. D. Goodhue, and K. Rauschenbach, "Measurement of third-order optical nonlinear susceptibility using four-wave mixing in a single-mode ridge waveguide," *Opt. Lett.* 15, 1126-1128 (1990).
- [30] M. Tang, X. L. Tian, P. Shum, S. N. Fu, H. Dong, and Y. D. Gong, "Four-wave mixing assisted self-stable 4x10 GHz active mode-locked Erbium fiber ring laser," *Opt. Express*, vol. 14, no. 5, pp. 1726-1730, 2006.
- [31] N. a Cholan, M. H. Al-Mansoori, a S. M. Noor, a Ismail, and M. a Mahdi, "Multi-wavelength generation by self-seeded four-wave mixing," *Opt. Express*, vol. 21, no. 5, pp. 6131-8, 2013.
- [32] Y. Zhao and S. Jackson, "Highly efficient free running cascaded Raman fiber laser that uses broadband pumping," *Opt. Express*, vol. 13, no. 12, pp. 4731-4736, 2005.
- [33] A. R. Sarmani, R. Zamiri, M. H. Abu Bakar, B. Z. Azmi, A. W. Zaidan, and M. A. Mahdi, "Tunable Raman fiber laser induced by Rayleigh back-scattering in an ultra-long cavity," *J. Eur. Opt. Soc.*, vol. 6, p. 18, 2011.
- [34] X. Wang, P. Zhou, X. Wang, H. Xiao, and L. Si, "Multiwavelength Brillouin-Thulium Fiber Laser," *IEEE Photonics J.*, vol. 6, no. 1, pp. 1-7, 2014.
- [35] N. S. Shahabuddin, H. Ahmad, Z. Yusoff, and S. W. Harun, "Spacing-switchable multiwavelength fiber laser based on nonlinear polarization rotation and brillouin scattering in photonic crystal fiber," *IEEE Photonics J.*, vol. 4, no. 1, pp. 34-38, 2012.
- [36] D. A. Chapman, "Erbium-doped fibre amplifiers: the latest revolution in optical communications," *Electron. Commun. Eng. J.*, vol. 6, no. 2, pp. 59-67, 1994.
- [37] H. Y. Ryu, W. K. Lee, H. S. Moon, and H. S. Suh, "Tunable erbium-doped fiber ring laser for applications of infrared absorption spectroscopy," *Opt. Commun.*, vol. 275, no. 2, pp. 379-384, 2007.
- [38] J. Cousin, P. Masselin, W. Chen, D. Boucher, S. Kassi, D. Romanini, and P. Szriftgiser, "Application of a continuous-wave tunable erbium-doped fiber laser to molecular spectroscopy in the near infrared," *Appl. Phys. B Lasers Opt.*, vol. 83, no. 2, pp. 261-266, 2006.
- [39] S. Gautam, "Erbium Doped Fiber Amplifier (EDFA) with Switches Technology for Optical Fiber Communication," *MIT IJECE*, vol. 4, no. 2, pp. 98-101, 2014.
- [40] J. Ma, M. Li, L. Y. Tan, Y. P. Zhou, S. Y. Yu, and C. Che, "Space radiation effect on EDFA for inter-satellite optical communication," *Optik (Stuttg.)*, vol. 121, no. 6, pp. 535-538, 2010.
- [41] H. M. Pask, R. J. Carman, D. C. Hanna, A. C. Tropper, C. J. Mackechnie, P. R. Barber, and J. M. Dawes, "Ytterbium-doped silica fibre lasers: versatile sources for the 1-1.2 μ m region," *IEEE Journal of Selected Topics in Quantum Electronics*. p. 2, 1995.

- [42] R. Royon, J. Lhermite, L. Sarger, and E. Cormier, "High power, continuous-wave ytterbium-doped fiber laser tunable from 976 to 1120 nm," *Opt. Express*, vol. 21, no. 11, p. 13818, 2013.
- [43] J. Yu, B. C. Trieu, M. Petros, Y. Bai, and P. J. Petzar, "Advanced 2- μ m solid-state laser for wind and CO₂ lidar applications," *Proc. SPIE - Int. Soc. Opt. Eng.*, pp. 1–12.
- [44] P. Kadwani, R. Sims, J. Chia, F. Altat, L. Shah, and M. Richardson, "Atmospheric Propagation Testing Using Broadband Thulium Fiber Systems," *Adv. Opt. Mater.*, p. FWB3, 2011.
- [45] S.-J. Xia, "Two-micron (thulium) laser resection of the prostate-tangerine technique: a new method for BPH treatment.," *Asian J. Androl.*, vol. 11, no. 3, pp. 277–281, 2009.
- [46] X. Z. S. Jiang, "2 μ m lasers enable versatile processing of plastics," *Ind. LASR Solut. Manuf.*, vol. 31, no. 3, 2016.
- [47] I. Ivb, V. B. Vib, and V. Viii, "Periodic Table of the Elements," *History*, 2001.
- [48] E. Lucas, L. Lombard, Y. Jaouën, S. Bordaïs, and G. Canat, "1 kW peak power, 110 ns single-frequency thulium doped fiber amplifier at 2050 nm.," *Appl. Opt.*, vol. 53, no. 20, pp. 4413–9, 2014.
- [49] Q. Fang, "2 μ m Pulsed Fiber Laser Sources and Their Application in Terahertz Generation," PhD Thesis, University of Arizona" 2012.
- [50] D. C. Hanna, R. M. Percival, R. G. Smart, and A. C. Tropper, "Efficient and tunable operation of a Tm-doped fibre laser," *Opt. Commun.*, vol. 75, no. 3–4, pp. 283–286, 1990.
- [51] L. F. Johnson, J. E. Geusic, and L. G. Van Uitert, "Coherent oscillations from Tm³⁺, Ho³⁺, Yb³⁺ and Er³⁺ ions in yttrium aluminum garnet," *Appl. Phys. Lett.*, vol. 7, no. 5, pp. 127–129, 1965.
- [52] D. C. Hanna, "CW oscillation of a monomode Tm-doped fibre laser," *Electron. Lett.*, vol. 24, no. 19, pp. 1222–1223, 1988.
- [53] D. C. Hanna, "A 1-Watt Tm cw fiber laser operating at 2 μ m," *Optics Communications*, vol. 80, no. 1, pp. 52–56, 1990.
- [54] J. O. Sculthorp, "Element Symbol : Se," 2011.
- [55] C. C. C. Willis, C. Culpepper, and R. Burnham, "Multi-wavelength high efficiency laser system for lidar applications," *Proc. SPIE, Lidar Remote Sensing for Environmental Monitoring XV*, vol. 9612, p. 96120I, 2015.
- [56] R. a. Perez-Herrera, S. Diaz, M. Fernández-Vallejo, M. López-Amo, M. a. Quintela, and J. M. Lopez-Higuera, "Switchable multi-wavelength erbium-doped fiber laser for remote sensing," *Proc. SPIE, 20th International Conference on Optical Fibre Sensors*, vol. 7503, p. 75031Y–75031Y–4, 2009.

- [57] S. Yamashita, T. Baba, and K. Kashiwagi, "Frequency-shifted multiwavelength FBG laser sensor," *2002 15th Opt. Fiber Sensors Conf. Tech. Dig. OFS 2002*, vol. 2, pp. 285–288, 2002.
- [58] R. A. Perez-Herrera, A. Ullán, D. Leandro, M. Fernández-Vallejo, M. A. Quintela, A. Loayssa, J. M. López-Higuera, and M. Lopez-Amo, "L-Band Multiwavelength Erbium-Doped Fiber Ring Laser for Sensing Applications," *Proc. SPIE - Int. Soc. Opt. Eng.*, vol. 7753, p. 77533C–77533C–4, 2011.
- [59] A. E. H. Oehler, S. C. Zeller, K. J. Weingarten, and U. Keller, "Broad multiwavelength source with 50 GHz channel spacing for wavelength division multiplexing applications in the telecom C band.," *Opt. Lett.*, vol. 33, no. 18, pp. 2158–2160, 2008.
- [60] S. Christensen, G. Frith, and B. Samson, "Thulium-doped fiber lasers: Providing eye-safer high power output," *LEOS 2008 - 21st Annu. Meet. IEEE Lasers Electro-Optics Soc.*, vol. 3, pp. 728–729, 2008.
- [61] S. Liu, F. Yan, T. Feng, W. Peng, X. Liang, and Y. Bai, "Multiwavelength thulium-doped silica fiber laser incorporating an all-fiber phase modulator," *Opt. Fiber Technol.*, vol. 22, pp. 52–55, 2015.
- [62] S. Liu, F.-P. Yan, B.-L. Wu, S.-Y. Tan, W.-J. Peng, T. Feng, X. Liang, and Q. Li, "A multiwavelength thulium-doped silica fiber laser incorporating a highly nonlinear fiber," *J. Opt.*, vol. 16, no. 5, p. 055201, 2014.
- [63] S. Liu, F. Yan, F. Ting, L. Zhang, Z. Bai, W. Han, and H. Zhou, "Multi-Wavelength Thulium-Doped Fiber Laser Using a Fiber-Based Lyot Filter," *IEEE Photonic. Tech. L.*, vol. 28, no. 8, pp. 864–867, 2016.
- [64] P. Liu, T.-S. Wang, P. Zhang, Y. Zhang, W.-Z. Ma, Y.-W. Su, M.-Z. Bi, and H.-L. Jiang, "Widely tunable multi-wavelength thulium-doped fiber laser based on nonlinear polarization rotation," *Microw. Opt. Technol. Lett.*, vol. 58, no. 7, pp. 1540–1543, Jul. 2016.
- [65] X. Wang, Y. Zhu, P. Zhou, X. Wang, H. Xiao, and L. Si, "Tunable multiwavelength Tm-doped fiber laser based on polarization rotation and four-wave-mixing effect," *Opt. Express*, vol. 21, no. 22, pp. 25977–25984, 2013.
- [66] Y. Wei, X. Yang, B.-M. Mao, Y. Lu, X. Zhou, M. Bi, and G. Yang, "Channel-spacing tunable multiwavelength thulium-doped fiber laser based on four-wave mixing effect in a high nonlinear fiber," *Microw. Opt. Technol. Lett.*, vol. 58, no. 2, pp. 337–339, Feb. 2016.
- [67] K. Hu, I. V Kabakova, S. Lefrancois, D. D. Hudson, S. He, and B. J. Eggleton, "Hybrid Brillouin/thulium multiwavelength fiber laser with switchable single- and double-Brillouin-frequency spacing.," *Opt. Express*, vol. 22, no. 26, pp. 31884–92, 2014.
- [68] T. Huang, X. Li, P. P. Shum, Q. J. Wang, X. Shao, L. Wang, H. Li, Z. Wu, and X. Dong, "All-fiber multiwavelength thulium-doped laser assisted by four-wave mixing in highly germania-doped fiber," *Opt. Express*, vol. 23, no. 1, pp. 184–

187, 2015.

- [69] S. Zhao, P. Lu, D. Liu, and J. Zhang, "Switchable multiwavelength thulium-doped fiber ring lasers," *Opt. Eng.*, vol. 52, no. 8, p. 86105, 2013.
- [70] P. Wanjing, Y. Fengping, L. Qi, L. Shuo, F. Ting, and T. Siyu, "A 1.97 μm multiwavelength thulium-doped silica fiber laser based on a nonlinear amplifier loop mirror," *Laser Phys. Lett.*, vol. 10, no. 11, p. 115102, 2013.
- [71] P. Zhang, W. Ma, and T. Wang, "Stable multi-wavelength thulium-doped fiber laser based on all-fiber Mach – Zehnder interferometer," *Chin. Opt. Lett.*, vol. 12, no. 11, pp. 10–13, 2014.
- [72] S. D. Agger and J. H. Povlsen, "Emission and absorption cross section of thulium doped silica fibers.," *Opt. Express*, vol. 14, no. 1, pp. 50–57, 2006.
- [73] P. Peterka, I. Kasik, A. Dhar, B. Dussardier, and W. Blanc, "Thulium-doped silica fibers with enhanced 3H₄ level lifetime: modelling the devices for 800-820 nm band," *Proc. SPIE*, p. 78430A–78430A–9, 2010.

BIODATA OF STUDENT