



UNIVERSITI PUTRA MALAYSIA

***EFFECTS OF SURFACE ROUGHNESS ON ROTATING CYLINDER AND
MAGNUS WIND TURBINE IN LOW WIND SPEED CONDITIONS***

OMAR FARUQI BIN MARZUKI

FK 2017 61



**EFFECTS OF SURFACE ROUGHNESS ON ROTATING CYLINDER AND
MAGNUS WIND TURBINE IN LOW WIND SPEED CONDITIONS**

By

OMAR FARUQI BIN MARZUKI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia, in
Fulfilment of the Requirements for the Degree of Doctor of Philosophy**

May 2017

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Doctor of Philosophy

**EFFECTS OF SURFACE ROUGHNESS ON ROTATING CYLINDER AND
MAGNUS WIND TURBINE IN LOW WIND SPEED CONDITIONS**

By

OMAR FARUQI BIN MARZUKI

May 2017

Chair : Azmin Shakrine Bin Mohd Rafie, PhD
Faculty : Engineering

In today's world, every functional society depends on electricity. As electricity becomes essential in daily life, demand for sustainable energy increases. However, countries with low wind velocity like Malaysia are unable to use conventional wind turbine for energy extraction. This is due to the absence of high wind velocity required to generate high torque that will rotate the generator of the conventional wind turbine. To extract wind energy from low wind velocity countries, Magnus wind turbine (MWT) that utilizes rotating cylinder was experimentally studied. MWT utilized rotating cylinder blades to harvest wind energy by generating Magnus force perpendicular to the incoming air. Furthermore, a simple surface roughness enhancement will increase the force generated from the rotating cylinder. One of the problems with MWT is that the effect from using enhancement of surface roughness on the rotating cylinder blades on Magnus force and torque generated has not been fully characterized and documented. The studies also included force balance for scaling effect on rotating cylinder size and the smoke flow visualization for visual inspection of boundary layer. Therefore, this research will provide valuable information regarding sanded surface roughness application on MWT through experimental study. The MWT and single rotating cylinder are designed and fabricated based on past researches and patents. All experiments were carried out in a wind tunnel. The proof on concept experiment showed that rotating cylinder produced higher lift force compared to the airfoil under similar condition. Next, force balance experiment demonstrated that as rotating cylinder scale increased, the Magnus force generated also significantly increased. The most significant finding is that the surface roughness enhancement increased the small scale rotating cylinder performance making it to be on par with large scale rotating cylinder. The smoke flow visualization experiment illustrated that by using surface roughness enhancement, the boundary layer separation point is further shifted upstream and since it opposed the incoming wind flow, pressure region and the Magnus force are also increased. Moreover, MWT model was subjected to smooth surface and eight types of surface roughness enhancement on the rotating cylinder blades. The result shows that as frequency of rotation cylinder blades and wind speed increased, depending on surface roughness enhancement used, the torque generated will increase. Furthermore, the result shows that minimum cut-in wind speed

is required to rotate the rotor as the velocity ratio and relative roughness increased. In summary, the outcome shows significant improvement of the effect of sanded surface roughness on the rotating cylinder blades. The sanded surface roughness produces five times higher torque coefficient and rate of change torque in comparison with smooth surface roughness. Hence, scientific community will gain the benefits of the effect on rotating cylinder with sanded surface roughness and will be able to use this data for future research.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

**KESAN KEKASARAN PADA SILINDER BERPUTAR DAN MAGNUS
TURBIN ANGIN DALAM KEADAAN KELAJUAN ANGIN YANG RENDAH**

Oleh

OMAR FARUQI BIN MARZUKI

Mei 2017

Pengerusi : Azmin Shakrine Bin Mohd Rafie, PhD
Fakulti : Kejuruteraan

Dalam dunia hari ini, setiap masyarakat berfungsi dengan bergantung kepada tenaga elektrik. Elektrik menjadi perkara penting dalam kehidupan seharian, permintaan untuk tenaga yang mampan meningkat. Walau bagaimanapun, negara-negara dengan halaju angin yang rendah seperti Malaysia tidak boleh menggunakan turbin angin konvensional untuk mengeluarkan tenaga daripada angin. Ini kerana kelajuan angin yang tinggi diperlukan untuk menghasilkan tork yang tinggi untuk memutar penjana turbin angin konvensional. Oleh itu, untuk mendapatkan tenaga daripada halaju angin rendah, turbin angin yang berlainan perlu digunakan iaitu Magnus turbin angin (MWT) yang menggunakan silinder berputar untuk mengeluarkan tenaga daripada angin. MWT menggunakan bilah silinder berputar untuk menuai tenaga angin dengan daya Magnus dijana seranjang dengan udara yang masuk. Tambahan pula, peningkatan kekasaran pada permukaan boleh meningkatkan daya yang dijana dari silinder berputar. Salah satu masalah dengan MWT ialah kesan kekasaran permukaan pada bilah silinder berputar kepada tork dan lif daya yang dijana daripada menggunakan peningkatan tidak dicirikan sepenuhnya dan didokumentasikan. Kajian-kajian itu juga termasuk keseimbangan daya untuk kesan skala pada saiz silinder berputar dan visualisasi aliran asap untuk pemeriksaan visual lapisan sempadan. Oleh itu, kajian ini akan memberikan maklumat yang berharga mengenai kesan kekasaran permukaan kertas pasir pada MWT melalui kajian eksperimen. MWT dan silinder berputar tunggal direka and dibuat berdasarkan kajian lepas dan paten. Semua eksperimen telah dijalankan di dalam terowong angin. Bukti mengenai konsep menunjukkan bahawa silinder berputar menghasilkan daya angkat yang lebih tinggi berbanding dengan aerofoil dalam keadaan yang sama. Seterusnya, alat daya pemberat eksperimen menunjukkan bahawa apabila skala silinder berputar meningkat, daya Magnus yang dijana juga meningkat dengan ketara. Penemuan yang paling ketara ialah peningkatan kekasaran permukaan meningkatkan prestasi silinder berputar kecil setanding dengan silinder berputar berskala besar. Eksperimen visualisasi aliran asap menggambarkan bahawa dengan menggunakan peningkatan kekasaran permukaan, sempadan titik pemisahan lapisan beralih lanjut ke hadapan dan menentang aliran angin datang, dengan itu ia meningkat rantau tekanan dan peningkatan daya Magnus. Kemudian MWT model yang dikenakan permukaan licin dan lapan jenis

peningkatan kekasaran permukaan pada bilah silinder berputar menunjukkan bahawa kekerapan bilah silinder putaran dan kelajuan angin meningkat, bergantung kepada tambahan kekasaran permukaan yang digunakan, tork yang dihasilkan akan lebih tinggi. Tambahan pula, kajian ini mendapati kelajuan angin masuk minimum yang diperlukan untuk rotor berputar berkurang kerana nisbah kelajuan dan kekasaran relatif meningkat. Ringkasnya, keputusan menunjukkan peningkatan yang ketara keatas kesan kekasaran permukaan yang dicampur dengan kertas pasir pada bilah silinder berputar. Kekasaran permukaan yang dicampur dengan pasir menghasilkan lima kali lebih tinggi dalam pekali tork dan kadar perubahan tork berbanding dengan kekasaran permukaan licin. Oleh itu, masyarakat saintifik akan mendapat manfaat daripada kesan ke atas silinder berputar dengan kekasaran permukaan yang dicampur dengan pasir dan akan dapat menggunakan data ini untuk penyelidikan masa depan.



ACKNOWLEDGEMENTS

First and foremost, I would like to express my deepest appreciation to my supervisors, Associate Professor Dr. Azmin Shakrine Mohd Rafie, Dr. Fairuz Izzuddin Romli, and Associate Professor Ir. Dr. Kamarul Arifin Ahmad for their valuable guidance and advice throughout this project. I would like to send my deep gratitude to them for being patient and supportive whenever I need their instruction and advice. They do not only guide me with their valuable suggestions, but also teach me a lot in doing research. Being their student has been a great honor for me.

I would like to thank all the staffs in the Aerospace Laboratory, namely Mr. Saffairus Salih for his help in my experiments.

I would like to thank the Ministry of Education for offering me the MyPhD scholarship.

Finally, I would like to thank my family members for their love and support. My deepest gratitude goes to my mother and father, for their continuous support and encouragement throughout my project.

I certify that a Thesis Examination Committee has met on 30 May 2017 to conduct the final examination of Omar Faruqi bin Marzuki on his thesis entitled “Effects of Surface Roughness on Rotating Cylinder and Magnus Wind Turbine in Low Wind Speed Conditions” in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Mohamad Ridzwan Ishak, PhD

Engineering
Universiti Putra Malaysia
(Chairman)

Faizal Mustapha, PhD

Associate Professor
Engineering
Universiti Putra Malaysia
(Internal Examiner)

Nor Mariah Adam, PhD

Associate Professor
Engineering
Universiti Putra Malaysia
(Internal Examiner)

Masaaki Tamagawa, PhD

Professor
Engineering
Kyushu Institute of technology
Japan
(External Examiner)

NOR AINI AB. SHUKOR, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 8 August 2017

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Azmin Shakrine Mohd Rafie, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Fairuz Izzuddin Romli, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Kamarul Arifin Ahmad, PhD

Associate Professor Ir.
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____
Name of Chairman of
Supervisory
Committee: Azmin Shakrine Mohd Rafie, PhD

Signature: _____
Name of Member of
Supervisory
Committee: Fairuz Izzuddin Romli, PhD

Signature: _____
Name of Member of
Supervisory
Committee: Kamarul Arifin Ahmad, PhD

TABLE OF CONTENTS

| | Page |
|--|---------------|
| ABSTRACT | i |
| ABSTRAK | iii |
| ACKNOWLEDGEMENTS | v |
| APPROVAL | vi |
| DECLARATION | viii |
| LIST OF TABLES | xii |
| LIST OF FIGURES | xiii |
| LIST OF ABBREVIATIONS | xv |
| CHAPTER | |
| 1 INTRODUCTION | 1 |
| 1.1 Backgrounds | 1 |
| 1.2 Problems Statement | 3 |
| 1.3 Research Objectives | 4 |
| 1.4 Scopes of Study | 4 |
| 1.5 Outlines of the Thesis | 5 |
| 2 LITERATURE REVIEW | 7 |
| 2.1 Wind Turbine | 7 |
| 2.1.1 Conventional Wind Turbine | 8 |
| 2.1.2 Magnus Wind Turbine | 9 |
| 2.2 Magnus Force Principles | 12 |
| 2.3 Surface Roughness Enhancement | 15 |
| 2.3.1 Airfoil with Surface Roughness | 15 |
| 2.3.2 Rotating Cylinder with Surface Roughness | 17 |
| 2.4 Magnus Force Theory | 25 |
| 2.4.1 Rotating Cylinder Theory | 26 |
| 2.4.2 Wind Turbine Theory | 28 |
| 2.5 Summary | 31 |
| 3 METHODOLOGY | 32 |
| 3.1 Methodology Flowchart | 32 |
| 3.2 Vertical-axis Single Rotating Cylinders | 34 |
| 3.2.1 Model Design and Fabrication | 34 |
| 3.2.2 Experiment Setup | 35 |
| 3.2.3 Experiment Methods and Procedures | 37 |
| 3.3 Horizontal-axis Single Rotating Cylinder | 41 |
| 3.3.1 Model Design and Fabrication | 41 |
| 3.3.2 Experiment Setup | 42 |
| 3.3.3 Experiment Methods and Procedures | 46 |
| 3.4 Magnus Wind Turbine Model | 47 |
| 3.4.1 Model design and fabrication | 47 |
| 3.4.2 Equipment Setup | 53 |
| 3.4.3 Experiment Method and Procedures | 55 |
| 3.5 Methods to Reduce Error | 60 |
| 3.6 Summary | 61 |

| | | |
|----------|--|------------|
| 4 | RESULTS AND DISCUSSION | 62 |
| 4.1 | Proof on Concept Rotating Cylinder Experiment | 62 |
| 4.1.1 | Measurement of Uncertainty on Proof on Concept Experiment | 62 |
| 4.1.2 | Proof on Concept Comparison Analysis | 64 |
| 4.2 | Proof on Concept Magnus Wind Turbine Model Experiment | 65 |
| 4.2.1 | Measurement of Uncertainty for Proof on Concept MWT Model | 65 |
| 4.2.2 | Proof on Concept MWT Model Experiment Performance | 66 |
| 4.3 | Scale-up Experiment | 69 |
| 4.3.1 | Measurement of Uncertainty on Scale-up Experiment | 69 |
| 4.3.2 | Scale-up Analysis | 76 |
| 4.4 | Smoke Flow Visualization Experiment Analysis | 81 |
| 4.5 | Surface Roughness Enhancement Experiment | 88 |
| 4.5.1 | Measurement of Uncertainty on the Surface Roughness Experiment | 88 |
| 4.5.2 | Surface Roughness Enhancement Performance | 92 |
| 4.6 | Summary | 103 |
| 5 | CONCLUSION AND RECOMMENDATION | 104 |
| 5.1 | Conclusion | 104 |
| 5.2 | Contribution | 106 |
| 5.3 | Recommendation for Future Work | 106 |
| | REFERENCES | 108 |
| | APPENDICES | 116 |
| | BIODATA OF STUDENT | 170 |
| | LIST OF PUBLICATIONS | 171 |

LIST OF TABLES

| Table | | Page |
|-------|---|------|
| 3.1 | Force balance models specification. | 35 |
| 3.2 | Surface roughness characteristic of sandpaper. | 40 |
| 3.3 | Smoke flow visualization model specification. | 42 |
| 3.4 | Magnus wind turbine model specifications. | 52 |
| 4.1 | Measurement of uncertainty for the proof on concept experiment. | 62 |
| 4.2 | Measurement of uncertainty for proof on concept model. | 66 |
| 4.3 | Measurement of uncertainty for the scale-up experiment. | 69 |
| 4.4 | Model scale analysis. | 76 |
| 4.5 | Measurement of uncertainty for surface roughness experiment. | 89 |

LIST OF FIGURES

| Figure | | Page |
|--------|---|------|
| 1.1 | Magnus force on the rotating cylinder. | 1 |
| 1.2 | Curve ball effected from Magnus Force. | 2 |
| 1.3 | Spiral Magnus wind turbine prototype. | 2 |
| 2.1 | The average wind speed distribution in Malaysia. | 7 |
| 2.2 | Wind turbine types. | 8 |
| 2.3 | Magnus wind turbine with six cylinder blades. | 10 |
| 2.4 | Spiral Magnus wind turbine patents changed. | 10 |
| 2.5 | Magnus wind turbine model with spiral cylinder blades. | 11 |
| 2.6 | Chiral rotor prototype. | 12 |
| 2.7 | Magnus Effect Principle. | 13 |
| 2.8 | Flow separation on rotating cylinder. | 14 |
| 2.9 | Lift-to-drag ratio comparison. | 15 |
| 2.10 | Comparison between surface roughness effects. | 16 |
| 2.11 | Boundary layer transition phases. | 18 |
| 2.12 | Comparison between smooth and groove surface cylinder on flow separation. | 18 |
| 2.13 | Lift coefficient comparison. | 19 |
| 2.14 | Rough versus smooth cylinder. | 20 |
| 2.15 | Torque coefficient comparison with sanded surface. | 21 |
| 2.16 | Torque coefficient with groove and knurled surface. | 22 |
| 2.17 | Lift comparison of rotating cylinder at leading edge. | 22 |
| 2.18 | Lift coefficient versus velocity ratio. | 23 |
| 2.19 | Comparison between various types surface roughness. | 24 |
| 2.20 | Splined versus smooth cylinders. | 25 |
| 2.21 | Magnus force equation elements. | 26 |
| 2.22 | Experiment parameters for MWT model. | 28 |
| 3.1 | Research methodology flowchart. | 33 |
| 3.2 | Vertical-axis single rotating cylinder drawing. | 34 |
| 3.3 | Wind tunnel test section and six-component balance. | 36 |
| 3.4 | Force balance on the rotating cylinder. | 36 |
| 3.5 | Vertical-axis single rotating cylinder controller. | 37 |
| 3.6 | Force balance method. | 38 |
| 3.7 | Cylinders and airfoils size comparison. | 39 |
| 3.8 | Cylinders and airfoils attached on force balance. | 39 |
| 3.9 | Surface roughness from left to right is smooth, P1000, P800, P600, P400, P100, P80, P60, and P40. | 41 |
| 3.10 | Sandpaper type P800 under microscope view. | 41 |
| 3.11 | Horizontal-axis single rotating cylinder drawing. | 42 |
| 3.12 | Wind tunnel test section and smoke generator. | 43 |
| 3.13 | Rotating cylinder inside test section. | 43 |
| 3.14 | Smoke flow visualization equipment. | 44 |
| 3.15 | Laser direction and dark region on the rotating cylinder. | 45 |
| 3.16 | Rotating cylinder and smoker generator controller. | 46 |
| 3.17 | Smoke flow visualization experiment method. | 46 |
| 3.18 | Isometric drawing of Magnus wind turbine model. | 48 |
| 3.19 | Cross-section view of Magnus wind turbine model. | 49 |

| | | |
|------|--|-----|
| 3.20 | Comparison between gear systems. | 50 |
| 3.21 | Material used on the Magnus wind turbine. | 51 |
| 3.22 | Gear connecting diagram for power generator. | 51 |
| 3.23 | Power supply and speed controller. | 52 |
| 3.24 | Open-loop wind tunnel. | 53 |
| 3.25 | MWT model inside open-loop wind tunnel test section. | 54 |
| 3.26 | Closed-loop wind tunnel. | 54 |
| 3.27 | MWT model inside closed-loop wind tunnel test section. | 55 |
| 3.28 | Spring-scaled attached to the holder before setup. | 56 |
| 3.29 | Model and apparatus setup inside wind tunnel. | 57 |
| 3.30 | Spring scales calibration. | 58 |
| 3.31 | Experiment apparatus for measuring voltage output. | 59 |
| 3.32 | MWT model with smooth and sand paper attachment. | 60 |
| 4.1 | Rotating cylinder performance compared to airfoil with similar scale of size. | 64 |
| 4.2 | Proof on concept experiments by trend comparison. | 67 |
| 4.3 | Torque versus wind speed. | 68 |
| 4.4 | Magnus force scale performance. | 77 |
| 4.5 | Magnus force with similarity Reynolds number and velocity ratio performance. | 78 |
| 4.6 | Surface roughness enhancement performance with similarity Reynolds number and velocity ratio. | 79 |
| 4.7 | Surface roughness enhancement performance for rotational speed 4051 rpm. | 80 |
| 4.8 | Surface roughness enhancement performance for rotational speed 5051 rpm. | 81 |
| 4.9 | Legend for smoke flow visualization figures. | 82 |
| 4.10 | Rotating cylinder with constant rotation speed. | 82 |
| 4.11 | Rotating cylinder with constant Reynolds number at 197×10^3 . | 84 |
| 4.12 | Rotating cylinder with constant Reynolds number at 236×10^3 . | 85 |
| 4.13 | Rotating cylinder with constant Reynolds number at 275×10^3 . | 86 |
| 4.14 | Rotating cylinder with constant Reynolds number at 314×10^3 . | 87 |
| 4.15 | Relative roughness comparison between sandpapers groups. | 92 |
| 4.16 | Comparison of calculated torque coefficient with velocity ratio. | 93 |
| 4.17 | Comparison between calculated torque coefficient and tip speed ratio. | 95 |
| 4.18 | Comparison calculated torque coefficient with velocity ratio provided by surfaces roughness. | 97 |
| 4.19 | Comparison of calculated torque coefficient with tip speed ratio provided by surfaces roughness. | 98 |
| 4.20 | Comparison between tip speed ratio and velocity ratio. | 99 |
| 4.21 | Comparison of calculated torque due to surfaces roughness. | 100 |
| 4.22 | Comparison between calculated torque coefficient and Reynolds number. | 101 |
| 4.23 | Tip speed ratio versus Reynolds number. | 102 |

LIST OF ABBREVIATIONS

| | |
|------------|--|
| MWT | Magnus Wind Turbine |
| PIV | Particle Image Velocimetry |
| HAWTs | Horizontal Axis Wind Turbines |
| VAWTs FEPA | Vertical Axis Wind Turbines Federation of European Producers of Abrasives |
| TSR | Tip Speed Ratio |
| LDR | Lift to Drag Ratio |
| ABS | Acrylonitrile Butadiene Styrene |

Symbols

| | |
|---------|---|
| Re | Reynolds number |
| d_e/d | Ratio of end plates diameter to cylinder diameter |
| V | Wind speed velocity |
| L | Lift force |
| C_L | Lift coefficient |
| T | Torque |
| C_T | Torque coefficient |
| d | Cylinder diameter |
| k/d | Ratio of roughness height to cylinder diameter |

CHAPTER 1

INTRODUCTION

1.1 Backgrounds

Wind energy is one of the natural resources that naturally replenished and can be used repeatedly. To capitalize this renewable energy, wind turbine is developed for harvesting the wind energy. Furthermore, wind turbine is a green energy and one of the sustainable energy that can fulfil current and future generation's needs (Brundtland, 1987).

Currently conventional wind turbine is dominated by horizontal axis wind turbine used airfoils shape blades for wind harvesting energy in high wind speed conditions. Conventional wind turbine required minimum wind speed of 4 meters per second (m/s) to generate minimal lift and wind speed of 16 m/s to generate optimum lift (Balat, 2009). Thus, an innovative type of wind turbine invention is requiring to harvest wind energy at lower wind speed. There are several types wind turbines that can harvest wind energy at lower wind speed, one of the known type wind turbine is Magnus wind turbine prototypes (Bychkov et al., 2007).

Magnus wind turbine utilizing Magnus force generated from a rotating cylinder. Figure 1.1 shows the Magnus force is perpendicular to the incoming air. Due to Magnus force effect, Magnus wind turbine (MWT) can operate under lowest wind speed condition and preferable under 8 m/s (Bychkov et al., 2007).

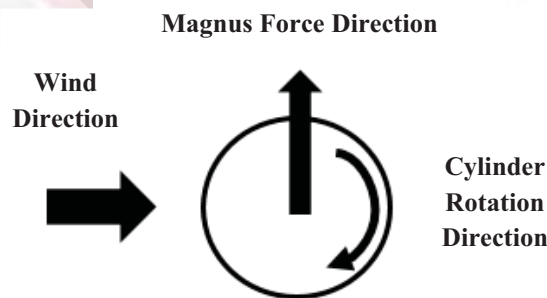


Figure 1.1: Magnus force on the rotating cylinder (Sedaghat et al., 2015).

A simple application of Magnus force used in daily life is in sport that utilizing sphere shape balls (Mehta and Pallis, 2001). One of it is football sport, where the player controls the spin on ball so that it curves during the ball travels. Figure 1.2 shows comparison between balls travelled direction. The no spin ball in the centre is not

effected by the Magnus force, as wind flow on all side is the similar. Whereas, both spinning balls on the sides are curves due to Magnus force.

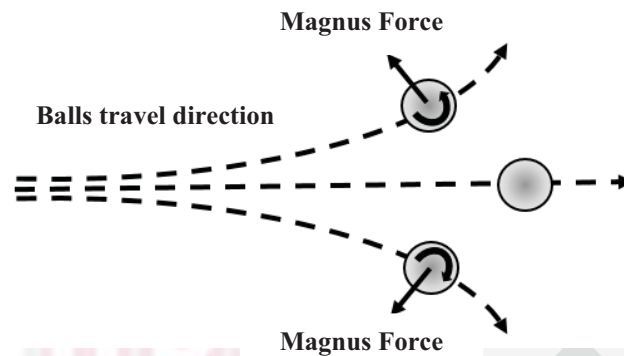


Figure 1.2: Curve ball effected from Magnus Force (Seifert, 2012a).

The significant different of MWT compared to conventional wind turbine is that blades that used to harvest wind energy. Furthermore, to increase the performance of MWT, innovative design of the rotating cylinder was developed. Several researcher used rotating cylinder with fin showed promising results improving lift and torque of MWT (Jinbo, Ceretta Moreira, et al., 2014; Murakami, 2010). Figure 1.3 shows the MWT prototype developed by Japan utilizing spiral fins that coiled around the rotating cylinder blades. Nonetheless, cylinder with spiral fins will increase the complexity of the cylinder blades design.



Figure 1.3: Spiral Magnus wind turbine prototype (MECARO Co. Ltd, 2007).

Moreover, there are several ways to further enhanced Magnus force, for example, by adding plate to the end of cylinder and by adding airfoil fins to the surface of cylinder (Brooks, 1963; Modi et al., 1998; Seifert, 2012a; Takayama and Aoki, 2005; Thom,

1934; Thom and Sengupta, 1932). By using simple innovative approach of sanded surface roughness enhancement. The effect of surface roughness on the rotating cylinder can be demonstrated by the increase in lift coefficient and torque as compared to the smooth surface cylinder (Seifert, 2012b). However, the study on sanded surface roughness enhancement is lacking in boundary layer evaluation (Lopez et al., 2015). Whereas, researchers (Marzabadi, 2012; Marzabadi and Soltani, 2013; Soltani et al., 2011) found that airfoil with sanded surface roughness enhancement reduced its overall performance due to the influence of boundary layer transition, thus causing early turbulence on the airfoil. In addition, researchers (Takayama and Aoki, 2005) shows that boundary layer separation point played an important role in improving rotating cylinder performance as the groove roughness varies on the cylinder surface. Thus, the sanded surface roughness enhancement performance and its effect on the boundary layer is yet to be clearly justified by past researchers.

Nevertheless, there are still lacking in data to support the advantage of surface roughness enhancement (Giudice and La Rosa, 2009; Sedaghat, 2014). Hence, the study in surface roughness is very important in proving significant improvement in MWT performance with different types sanded surface roughness characteristic are achieved. Thus, this study chooses a simple approach in improving Magnus force by using sanded surface roughness on the cylinder surface to avoid in weight and complexity in design. It is vitally important to do experiment research, as there is still gap of knowledge in MWT and enhancement effect of surface roughness. Finally, the study utilized six-component balance and smoke flow visualization to further analysis the effect of sanded surface roughness. In addition, the study will produce a function MWT model that can operate under control environment to fulfil the knowledge gaps. Therefore, this research is hope to shed light on the effect of surface roughness on rotating cylinder and MWT in low wind speed conditions.

In conclusion, six-component balance is used to observe the lift force generated from the vertical-axis single rotating cylinder with different size scales at wind speed 5 m/s. Next, the smoke flow visualization experiment focus on visual analysis to determine the boundary layer separation point on the horizontal-axis single rotating cylinder with selected type of sanded surface roughness enhancement. Finally, the research focus on the improvement torque generated from the MWT model with different type of sanded surface roughness enhancement and the cut-in wind speed. The cut-in wind speed is the lowest wind speed required for the rotor of wind turbine to start rotate.

1.2 Problems Statement

Current state of world technology is going towards renewable and sustainable energy. Wind is one of the green energy that continues to naturally replenish and is sustainable as it is produced from temperature difference due to uneven heating of Earth's surface by the sun. Unfortunately, Malaysia is one of the countries with low wind speed at an average 2 m/s to 3 m/s, whereas current conventional wind turbine requires optimum wind speed of 11 to 16 m/s to operate efficiently. As of current trend, conventional wind turbine is being developed for countries with high wind speed. Hence, the wind turbine with airfoil shaped blades technology is more developed and matured. Thus, to

overcome low wind speed problem, an innovative wind turbine technology was invented by utilizing Magnus effect. This technology is known as Magnus wind turbine that uses rotating cylinder as blades. The rotating cylinder is known to produce more lift force compared to the airfoil shaped blades under similar wind speed condition. However, the main problem of rotating cylinder application is limited information and experimental research on the subject (Sedaghat et al., 2014; Seifert, 2012a). Firstly, the conundrums arising from this lack of information and research would be the scaling effect and the effect of sanded surface roughness enhancement on the Magnus force. Under similar wind speed condition, there is a knowledge gap between rotating cylinder with sanded surface roughness enhancement and smooth surface rotating cylinder with different scale model sizes. This investigation is important to establish whether sanded surface roughness enhancement can improve the Magnus force compared to when using larger cylinder scales. Secondly, there is a gap in the visualization of boundary layer separation point effect on the rotating cylinder with surface roughness enhancement. This observation is critical in order to understand whether the separation point will be earlier or delayed as it will influence the pressure region on the rotating cylinder. Lastly, the application of sanded surface roughness enhancement on the MWT have yet to be explored. Several types of sanded surface roughness are selected to be further investigated for its effect on the torque performance of MWT. This study is important to establish the minimum wind speed required to operate the MWT as the type of sanded surface roughness used varies.

1.3 Research Objectives

The objective of this study is to experimentally investigate the effects of sanded surface roughness on rotating cylinder blades of MWT in low wind speed condition. It comprises of four sub-objectives, which are:

- i. To proof the concept of MWT by comparing rotating cylinder with airfoil shaped blades under low wind speed conditions and comparing MWT model with previous past experiment,
- ii. To evaluate the performance of vertical-axis single rotating cylinder with varying scale model sizes and the boundary layer effect on the horizontal-axis single rotating cylinder with different type of sanded surface roughness using smoke flow visualization,
- iii. To design MWT model, horizontal-axis single rotating cylinder, and vertical-axis single rotating cylinder with different sizes,
- iv. To improve the performance of MWT model with different types of surface roughness based on its' velocity ratio, Reynold numbers, tip speed ratio and torque coefficient.

1.4 Scopes of Study

The limitation of the research is the models size. The MWT and scale-up rotating cylinder models are constrained by the wind tunnel test section size with height of 1 m and width of 1 m. The wind speed is limited by the wind tunnel capability. Maximum wind speed for open-loop wind tunnel is 40 m/s and for closed-loop wind tunnel is 50 m/s. The wind speed is measured by anemometer and wind tunnel build-in sensor.

Only one selected sizes of rotating cylinder, cambered airfoil and symmetrical airfoil with similar dimension scaled are used to compare the lift coefficient performance. The Reynolds number range is 12×10^3 to 103×10^3 .

The sanded surface roughness with different relative roughness are selected from the market availability of commercial type sandpapers. Eight types sanded surface roughness are selected based of Federation of European Producers of Abrasives (FEPA). The sandpapers standard are P40, P60, P80, P100, P400, P600, P800 and P1000.

The scale-up models size are constrained to test section height as the model attached vertically on six-component balance for measuring Magnus force. The selected wind speed is at 5 m/s to simulate low wind speed condition due to limitation of equipment. Six cylinder size selected based on the aspect ratio of 7.292 due to wind tunnel test section constrain. The size from smaller scaled cylinder gradually increased by 1.23 times, 1.85 times, 2.31 times, 3.19 times and finally 4.23 times. The maximum rotation for motor is 5051 rpm except as the cylinder size increased and the weight further increased. Thus, reduced the capability of the motor to cylinder sizes 3.19 times and 4.23 times to nearly 3052 rpm. The vibration when the cylinder rotating is solved by using support structured that hold the cylinder end, thus stabilizer the rotating cylinder. For rotating cylinder scaled size Reynolds number is 9×10^3 to 38×10^3 , whereas for sanded surface roughness enhancement comparison Reynolds number is 9×10^3 to 21×10^3 .

The smoke flow visualization is used on selected surface roughness enhancement P800, P100, P80 and smooth surface. The visualization of boundary layer is only focusing on the top side cylinder due separation point between cylinder surface and incoming wind. The Reynolds number range is 197×10^3 to 314×10^3 .

Finally, the MWT model research is focusing only on torque performance with different velocity ratio, Reynolds number and tips speed ratio by using different types of sanded surface roughness. The rotating cylinder blades can only rotates up to 1000 rpm. Above 1000 rpm, the blades will vibrate due to only one side of the rotating cylinder blades are being hold by the hub. Power usage to rotate the cylinder blades is below 30 W. However, the study is only focusing on the improvement of sanded surface roughness enhancement toward torque performance. The Reynolds number range is 54×10^3 to 108×10^3 .

1.5 Outlines of the Thesis

The thesis outlines have five chapters. The chapters are categorize as following, Chapter 1 Introduction, Chapter 2 Literature Review, Chapter 3 Methodology, Chapter

4 Results and Discussions, and finally, Chapter 5 Conclusions and Recommendations. The details of chapters contain are described as below.

Chapter 1 briefly introduced the backgrounds of study focus, motivation, problem statement, objective to achieve in this study, and finally scopes of study.

Chapter 2 is review on all the information and knowledge regarding to the study focus to fully explored and deepen the understanding in the applications of MWT, the field of Magnus forces, and surface roughness effect. Moreover, theory for single rotating cylinder and MWT are also included in this chapter.

Chapter 3 is methodology approach used to achieve the experiment and its touch regarding procedures and apparatus used in the study in order to accomplish the target objective and results. Design, fabrication, and assembly of MWT model and single rotating cylinder are discussed.

Chapter 4 presented the results attained during experimental study and discussed to help in understanding the study objectives. The study results are related to past research findings for further understanding.

Chapter 5 is the summary of the study, the findings conclusions, contribution of the study, and finally, the recommendation for future study are suggested.

REFERENCES

- Abbas, A., de Vicente, J. and Valero, E. (2013), "Aerodynamic technologies to improve aircraft performance", *Aerospace Science and Technology*, Vol. 28 No. 1, pp. 100–132.
- Achenbach, E. (1971), "Influence of surface roughness on the cross-flow around a circular cylinder", *Journal of Fluid Mechanics*, Vol. 46 No. 2, pp. 321–335.
- Adaramola, M.S. and Krogstad, P.-å. (2011), "Experimental investigation of wake effects on wind turbine performance", *Renewable Energy*, Vol. 36 No. 8, pp. 2078–2086.
- Adelnia, R. and Daneshmand, S. (2006), "Influence surface finish on airfoil design", *International Technology and Innovation Conference 2006 (ITIC 2006)*, Vol. 2006, IEE, pp. 1759–1763.
- Ahlborn, F. (1930), *The Magnus Effect in Theory and in Reality*, available at: <http://digital.library.unt.edu/ark:/67531/metadc63663/?q=magnus>.
- Al-Garni, A.Z.A.M., Ahmed, S.A. and Sahin, A.Z. (2000), "Flow control for an airfoil with leading-edge rotation: An experimental study", *Journal of Aircraft*, Vol. 37 No. 4, pp. 617–622.
- Amano, R.S. and Sundén, B. (2015), "Scaling wind turbines for wind tunnel testing", *Aerodynamics of Wind Turbines: Emerging Topics*, pp. 76–82.
- Aoki, K., Muto, K. and Okanaga, H. (2010), "Aerodynamic characteristics and flow pattern of a golf ball with rotation", *Procedia Engineering*, Vol. 2 No. 2, pp. 2431–2436.
- Aoki, K., Muto, K., Okanaga, H. and Nakayama, Y. (2009), "Aerodynamic Characteristic and Flow Pattern on Dimples Structure of a Sphere", available at: <http://www.ihed.ras.ru/flucome10/cd/papers/221.pdf>.
- Asrokin, A., Ramly, M.R. and Ahmad, A.H. (2013), "Rotating cylinder design as a lifting generator", *IOP Conference Series: Materials Science and Engineering*, Vol. 50, p. 12025.
- Back, S.C., Hobson, G. V, Song, S.J. and Millsaps, K.T. (2010), "Effect of Surface Roughness Location and Reynolds Number on Compressor Cascade Performance", *ASME Conference Proceedings*, Vol. 2010 No. 44021, pp. 121–128.
- Badalamenti, C. and Prince, S. (2008a), "Effects of Endplates on a Rotating Cylinder in Crossflow", American Institute of Aeronautics and Astronautics, available at: <https://doi.org/10.2514/6.2008-7063>.
- Badalamenti, C. and Prince, S.A. (2008b), "Vortex shedding from a rotating circular cylinder at moderate sub-critical Reynolds numbers and high velocity ratio", *Proceedings of the 26th ICAS*, available at: <http://icas-proceedings.net/ICAS2008/PAPERS/069.PDF>.
- Balat, M. (2009), "A Review of Modern Wind Turbine Technology", *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, Vol. 31 No. 17, pp. 1561–1572.
- Bardal, L.M., Oggiano, L., Sætran, L., Konopov, I. and Troynikov, O. (2011), "Comparison of aerodynamic properties of wool and polyester knitted textiles", *Procedia Engineering*, Vol. 13, pp. 363–369.
- Barlow, J.B. and Domanski, M.J. (2008), "Lift on Stationary and Rotating Spheres Under Varying Flow and Surface Conditions", *AIAA Journal*, Vol. 46 No. 8, pp. 1932–1936.
- Batten, W.M.J., Bahaj, A.S., Molland, A.F. and Chaplin, J.R. (2007), "Experimentally

- validated numerical method for the hydrodynamic design of horizontal axis tidal turbines”, *Ocean Engineering*, Vol. 34 No. 7, pp. 1013–1020.
- Bearman, P.W. and Harvey, J.K. (1993), “Control of circular cylinder flow by the use of dimples”, *AIAA Journal*, Vol. 31 No. 10, pp. 1753–1756.
- Betz, A. (1925), *The “Magnus Effect” - the Principle of the Flettner Rotor*, available at: <http://digital.library.unt.edu/ark:/67531/metadc59072/?q=magnus>.
- Bhutta, M.M.A., Hayat, N., Farooq, A.U., Ali, Z., Jamil, S.R., Hussain, Z. and Aslam Bhutta, M.M. (2012), “Vertical axis wind turbine – A review of various configurations and design techniques”, *Renewable and Sustainable Energy Reviews*, Vol. 16 No. 4, pp. 1926–1939.
- Borg, J. (1986), *Magnus Effect: An Overview of Its Past and Future Practical Applications. Volumes 1 and 2*, available at: <http://oai.dtic.mil/oai/oai?verb=getRecord&metadataPrefix=html&identifier=AD A165902>.
- Bostan, I., Gheorghe, A., Dulgheru, V., Sobor, I., Bostan, V. and Sochirean, A. (2013), “Wind as Energy Source”, *Resilient Energy Systems*, Vol. 19, pp. 361–422.
- Brooks, J.D. (1963), *The Effect of a Rotating Cylinder at the Leading and Trailing Edges of a Hydrofoil*, available at: <http://oai.dtic.mil/oai/oai?verb=getRecord&metadataPrefix=html&identifier=AD 0403808>.
- Brundtland, G.H. (1987), “World commission on environment and development”, *Our Common Future*, pp. 8–9.
- Bruun, H.H. and Davies, P.O.A.. (1975), “An Experimental Investigation of the Separation Points on a Circular Rotating Cylinder in Cross Flow”, *Journal of Sound and Vibration*, Vol. 4 No. September 2007, pp. 535–559.
- Butt, U. and Egbers, C. (2013), “Aerodynamic Characteristics of Flow over Circular Cylinders with Patterned Surface”, available at: <http://www.ijmmm.org/papers/027-TT002.pdf>.
- Bychkov, N.M., Dovgal, A. V and Kozlov, V. V. (2007), “Magnus wind turbines as an alternative to the blade ones”, *Journal of Physics: Conference Series*, Vol. 75, p. 12004.
- Chen, T.Y. and Liou, L.R. (2011), “Blockage corrections in wind tunnel tests of small horizontal-axis wind turbines”, *Experimental Thermal and Fluid Science*, Vol. 35 No. 3, pp. 565–569.
- Cheng, M. and Luo, L.-S. (2007), “Characteristics of two-dimensional flow around a rotating circular cylinder near a plane wall”, *Physics of Fluids*, Vol. 19, p. 63601.
- Childs, P.R.N. (2011), “Rotating Cylinders, Annuli, and Spheres”, Elsevier, pp. 177–247.
- Correa, L.C., Lenz, J.M., Ribeiro, C.G., Trapp, J.G. and Farret, F.A. (2013), “MPPT for Magnus wind turbines based on cylinders rotation speed”, *2013 Brazilian Power Electronics Conference*, IEEE, pp. 462–467.
- Dai, K., Bergot, A., Liang, C., Xiang, W.-N. and Huang, Z. (2015), “Environmental issues associated with wind energy – A review”, *Renewable Energy*, Elsevier Ltd, Vol. 75, pp. 911–921.
- Dalili, N., Edrissy, A. and Cariveau, R. (2009), “A review of surface engineering issues critical to wind turbine performance”, *Renewable and Sustainable Energy Reviews*, Vol. 13 No. 2, pp. 428–438.
- Daneshmand, S., Dehghani, A. and Aghanajafi, C. (2007), “Investigation of Surface Roughness on Aerodynamics Properties”, *Journal of Aircraft*, Vol. 44 No. 5, pp. 1630–1634.
- Daut, I., Razliana, a. R.N., Irwan, Y.M. and Farhana, Z. (2012), “A study on the wind

- as renewable energy in perlis, northern Malaysia”, *Energy Procedia*, Vol. 18, pp. 1428–1433.
- Diaz, F., Gavalda, J., Kawall, J.G., Keffer, J.F. and Giral, F. (1985), “Asymmetrical Wake Generated by a Spinning Cylinder”, *AIAA Journal*, Vol. 23 No. 1, pp. 49–55.
- Duong, L., Luo, S.C. and Chew, Y.T. (2012), “Analysis of Vortex Shedding Mechanism through PIV Measurement of Flow past a Rotating Circular Cylinder”, pp. 9–12.
- Dyson, J.E. and Darvell, B.W. (1999), “Torque, power and efficiency characterization of dental air turbine handpieces”, *Journal of Dentistry*, Vol. 27 No. 8, pp. 573–586.
- Federation of European Producers of Abrasives FEPA. (2013), “P-Grit Sizes Coated”, available at: <http://www.fepa-abrasives.org/Abrasiveproducts/Grains/Pgritsizescoated.aspx> (accessed 10 June 2015).
- Freudenreich, K., Kaiser, K., Schaffarczyk, A.P., Winkler, H., Stahl, B. and K. Freudenreich, K.K. (2004), “Reynolds number and roughness effects on thick airfoils for wind turbines”, *Wind Engineering*, Vol. 28 No. 5, pp. 529–546.
- Frey, K. (1926), *Experiments with Rotating Cylinders in Combination with Airfoils*, available at: <http://digital.library.unt.edu/ark:/67531/metadc65071/?q=rotating>.
- Gasch, R. and Tvele, J. (2012), “Scaling wind turbines and rules of similarity”, in Gasch, R. and Tvele, J. (Eds.), , Springer Berlin Heidelberg, Berlin, Heidelberg, pp. 257–271.
- Giudice, F. and La Rosa, G. (2009), “Design, prototyping and experimental testing of a chiral blade system for hydroelectric microgeneration”, *Mechanism and Machine Theory*, Vol. 44 No. 8, pp. 1463–1484.
- Goh, H.H., Lee, S.W., Chua, Q.S., Goh, K.C. and Teo, K.T.K. (2016), “Wind energy assessment considering wind speed correlation in Malaysia”, *Renewable and Sustainable Energy Reviews*, Elsevier, Vol. 54, pp. 1389–1400.
- Goño, R., Rusek, S., Hrabčík, M., Gono, R., Rusek, S. and Hrabčík, M. (2009), “Wind Turbine Cylinders with Spiral Fins”, *8th IEEE International Conference on Environment and Electrical Engineering*, Karpacz, Poland, pp. 45–48.
- Gowree, E.R. and Prince, S.A. (2012), “A Computational Study Of The Aerodynamics Of A Spinning Cylinder In A Crossflow Of High Reynolds Number”, available at: <http://www.icas-proceedings.net/ICAS2012/PAPERS/245.PDF>.
- Grant, I., Parkin, P. and Wang, X. (1997), “Optical vortex tracking studies of a horizontal axis wind turbine in yaw using laser-sheet, flow visualisation”, *Experiments in Fluids*, Vol. 23 No. 6, pp. 513–519.
- Haidar, A.M. a, John, P.N. and Shawal, M. (2011), “Optimal configuration assessment of renewable energy in Malaysia”, *Renewable Energy*, Elsevier Ltd, Vol. 36 No. 2, pp. 881–888.
- Hall, R.T. (1960), *The Lift and Drag on a Rotating Cylinder in Supersonic Crossflow*, NAVAL ORDNANCE LAB WHITE OAK MD, available at: <http://www.stormingmedia.us/76/7652/0765232.pdf>.
- Hooker, R.W. (1933), *The Aerodynamic Characteristics of Airfoils as Affected by Surface Roughness*, available at: <http://digital.library.unt.edu/ark:/67531/metadc54195/?q=surface>.
- Howell, R., Qin, N., Edwards, J. and Durrani, N. (2010), “Wind tunnel and numerical study of a small vertical axis wind turbine”, *Renewable Energy*, Vol. 35 No. 2, pp. 412–422.
- Hu, D. and Du, Z. (2009), “Near Wake of a Model Horizontal-Axis Wind Turbine”, *Journal of Hydrodynamics, Ser. B*, Vol. 21 No. 2, pp. 285–291.

- Huber II, A.F. and Mueller, T.J. (1987), "The effect of trip wire roughness on the performance of the Wortmann FX 63-137 airfoil at low Reynolds numbers", *Experiments in Fluids*, Vol. 5 No. 4, pp. 263–272.
- Ito, A., Kawashima, S., Nishizawa, Y., Ushiyama, I. and Komatinovic, N. (2013), "A Study on Savonius Type Magnus Wind Turbine", available at: http://proceedings.ewea.org/ewec2007/allfiles2/202_Ewec2007fullpaper.pdf.
- Jinbo, M., Ceretta Moreira, M., Lellis Hoss, D., Farret, F.A. and Cardoso Junior, G. (2014), "Fixed and Adaptive Step HCC Algorithms for MPPT of the Cylinders of Magnus Wind Turbines", *3rd Renewable Power Generation Conference (RPG 2014)*, p. 8.36-8.36.
- Jinbo, M., Farret, F.A., Cardoso Junior, G., Dreher, J.R. and Lellis Hoss, D. (2014), "MPPT for Magnus wind system with DC servo drive for the cylinders and boost converter", *3rd Renewable Power Generation Conference (RPG 2014)*, p. 8.31-8.31.
- Joseph, J., Chembanal, R.M. and Kumar, V. V. (2013), "Coupling Effect of Windmill Energy and Magnus Effect on Yacht", *TIST International Journal For Science, Technology & Research*, Vol. 2 No. 2, pp. 23–36.
- Kato, H., Koike, S., Nakakita, K., Ito, T., Shiohara, T., Kato, C., Iida, A., et al. (2013), "PIV Measurements of Unsteady Flowfields around Magnus Wind Turbines with Spiral Fins", available at: <http://repository.tudelft.nl/assets/uuid:168fcd8e-2dc8-4f66-a55c-7757f93c095c/A077-Paper.pdf>.
- Khatib, T., Sopian, K., Mohamed, A. and Ibrahim, M.Z. (2012), "Sizing of a wind charger at minimum cost for remote housing electrification: A case study for nine coastal sites in Malaysia", *Energy and Buildings*, Elsevier B.V., Vol. 51, pp. 185–190.
- Kim, J., Choi, H., Park, H. and Yoo, J.Y. (2014), "Inverse Magnus effect on a rotating sphere: when and why", *Journal of Fluid Mechanics*, Vol. 754, p. R2.
- Kimura, T. and Tsutahara, M. (1991), "Fluid dynamic effects of grooves on circular cylinder surface", *AIAA Journal*, Vol. 29 No. 12, pp. 2062–2068.
- Kishore, R.A., Coudron, T. and Priya, S. (2013), "Small-scale wind energy portable turbine (SWEPT)", *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 116, pp. 21–31.
- Klän, S., Burgmann, S., Bachmann, T., Klaas, M., Wagner, H. and Schröder, W. (2012), "Surface structure and dimensional effects on the aerodynamics of an owl-based wing model", *European Journal of Mechanics - B/Fluids*, Vol. 33, pp. 58–73.
- Kray, T., Franke, J. and Frank, W. (2012), "Magnus effect on a rotating sphere at high Reynolds numbers", *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 110, pp. 1–9.
- Kray, T., Franke, J. and Frank, W. (2014), "Magnus effect on a rotating soccer ball at high Reynolds numbers", *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 124, pp. 46–53.
- Kumar, Y., Ringenber, J., Depuru, S.S., Devabhaktuni, V.K., Lee, J.W., Nikolaidis, E., Andersen, B., et al. (2016), "Wind energy: Trends and enabling technologies", *Renewable and Sustainable Energy Reviews*, Vol. 53, pp. 209–224.
- Kussaiynov, K., Tanasheva, N.K., Turgunov, M.M., Shaimerdenova, G.M. and Alibekova, A.R. (2015), "The effect of porosity on the aerodynamic characteristics of a rotating cylinder", *Modern Applied Science*, Vol. 9 No. 2, pp. 215–222.
- Lam, K.M. (2009), "Vortex shedding flow behind a slowly rotating circular cylinder", *Journal of Fluids and Structures*, Vol. 25 No. 2, pp. 245–262.
- Lee, T., Mokhtarian, F. and Kafyeke, F. (2002), "Flow Past an Airfoil with a Leading-Edge Rotation Cylinder", *Journal of Aircraft*, Vol. 39 No. 6, pp. 1079–1084.

- Lim, H.-C. and Lee, S.-J. (2002), "Flow Control of Circular Cylinders with Longitudinal Grooved Surfaces", *AIAA Journal*, Vol. 40 No. 10, pp. 2027–2036.
- Liu, P.Q., Zhu, J.Y. and Zhao, W.L. (2011), "Aerodynamic Performance of Wind Turbine with Horizontal Axis", Vol. 1376, p. 225.
- Lopez, N.S.A., Mara, B.K.G., Mercado, B.C.C., Mercado, L.A.B. and Pascual, J.M.G. (2015), "Characterisation of the Effects of Surface Modifications to Flow Across Rotating Cylinders using ANSYS CFD Modelling", *CHEMICAL ENGINEERINGTRANSACTIONS*, Vol. 45, pp. 1129–1134.
- Luo, D., Huang, D. and Wu, G. (2011), "Analytical solution on Magnus wind turbine power performance based on the blade element momentum theory", *Journal of Renewable and Sustainable Energy*, Vol. 3 No. 3, available at: <https://doi.org/10.1063/1.3588039>.
- Luo, S.C., Duong, T.T.L. and Chew, Y.T. (2009), "Flow Separation of a Rotating Cylinder", *IUTAM Symposium on Unsteady Separated Flows and Their Control*, Springer Netherlands, pp. 487–492.
- Mara, B.K., Mercado, B.C., Mercado, L.A., Pascual, J.M. and Lopez, N.S. (2014), "Development and validation of a CFD model using ANSYS CFX for aerodynamics simulation of Magnus wind rotor blades", *International Conference on Humanoid, Nanotechnology, Information Technology, Communication and Control, Environment and Management (HNICEM)*, pp. 1–6.
- Marzabadi, F.R. (2012), "Effect of Plunging Oscillation on an Offshore Wind Turbine Blade Section", available at: <https://waset.org/journals/waset/v70/v70-131.pdf>.
- Marzabadi, F.R. and Soltani, M.R. (2013), "Effect of leading-edge roughness on boundary layer transition of an oscillating airfoil", *Scientia Iranica*, available at: <http://www.sciencedirect.com/science/article/pii/S1026309813000680>.
- Massaguer, A., Massaguer, E., Pujol, T., Comamala, M. and Velayos, J. (2014), "Blade shape influence on aerodynamic efficiency of a Magnus wind turbine using particle image velocimetry", *International Conference on Renewable Energies and Power Quality (ICRE PQ'14)*, Cordoba, Spain, available at: <http://icrepq.com/icrepq'14/354.14-Massaguer.pdf>.
- Masseran, N., Razali, A.M., Ibrahim, K. and Wan Zin, W.Z. (2012), "Evaluating the wind speed persistence for several wind stations in Peninsular Malaysia", *Energy*, Vol. 37 No. 1, pp. 649–656.
- McTavish, S., Feszty, D. and Nitzsche, F. (2013), "Evaluating Reynolds number effects in small-scale wind turbine experiments", *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 120, pp. 81–90.
- MECARO Co. Ltd. (2007), "Spiral Magnus: Latest Evolution of Wind Turbine Technology", available at: <http://www.mecaro.jp/eng/products.html> (accessed 27 November 2016).
- Mehta, R.D. (1985), "Aerodynamics of sports balls", *Annual Review of Fluid Mechanics*, Vol. 17 No. 1, pp. 151–189.
- Mehta, R.D. and Pallis, J.M. (2001), "Sports Ball Aerodynamics: Effects of Velocity, Spin and Surface Roughness", *Tms*, Vol. 7514 No. 724, pp. 185–197.
- Michaelides, E.E. and (Stathis) Michaelides, E.E. (2012), "Wind Power", Springer Berlin Heidelberg, Berlin, Heidelberg, pp. 231–256.
- Missouri Wind and Solar. (2015), "Wind Turbine Generator 500 W", available at: <http://www.ebay.com/itm/permanent-magnet-alternator-12-volt-DC-used-4-building-a-wind-turbine-generator-/390953657503?> (accessed 9 June 2015).
- Mittal, S. and Kumar, B. (2003), "Flow past a rotating cylinder", *Journal of Fluid Mechanics*, Vol. 476, available at: <https://doi.org/10.1017/S0022112002002938>.
- Modi, V. and Mokhtarian, F. (1986), "Fluid dynamics of airfoils with moving surface

- boundary layer control", available at: <http://arc.aiaa.org/doi/pdf/10.2514/6.1986-2184>.
- Modi, V.J. (1997), "Moving surface boundary-layer control: A review", *Journal of Fluids and Structures*, Vol. 11 No. 6, pp. 627–663.
- Modi, V.J., Fernando, M.S.U.K. and Yokomizo, T. (1991), "Moving Surface Boundary-Layer Control: Studies with Bluff Bodies and Application", *AIAA Journal*, Vol. 29 No. 9, pp. 1400–1407.
- Modi, V.J., Munshi, S.R., Bandyopadhyay, G. and Yokomizo, T. (1998), "High-Performance Airfoil with Moving Surface Boundary-Layer Control", *Journal of Aircraft*, Vol. 35 No. 4, pp. 544–553.
- Morris, A.S. and Langari, R. (2012), "Chapter 18 - Mass, Force, and Torque Measurement", in Morris, A.S. and Langari, R.B.T.-M. and I. (Eds.), , Butterworth-Heinemann, Boston, pp. 477–496.
- Munshi, S.R., Modi, V.J. and Yokomizo, T. (1999), "Fluid dynamics of flat plates and rectangular prisms in the presence of moving surface boundary-layer control", *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 79 No. 1, pp. 37–60.
- Murakami, A.N. (2010), "Magnus Type Wind Power Generator", Google Patents.
- Murakami, N. and Ito, J. (2009), "Magnus Type Wind Power Generator", *U.S. Patent No. 7,504,740 B2*, Google Patents.
- Muto, M., Tsubokura, M. and Oshima, N. (2012), "Numerical visualization of boundary layer transition when negative Magnus effect occurs", *Journal of Visualization*, Vol. 15 No. 3, pp. 261–268.
- Muto, M., Watanabe, H., Tsubokura, M. and Oshima, N. (2011), "Negative Magnus Effect on a Rotating Sphere at around the Critical Reynolds Number", *Journal of Physics: Conference Series*, Vol. 318 No. 3, p. 32021.
- Niemann, H.-J. and Hölscher, N. (1990), "A review of recent experiments on the flow past circular cylinders", *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 33 No. 1, pp. 197–209.
- Otsuka, K., Niwa, F. and Ikeda, Y. (1995), "Forces on and Flow Around Oscillating Roughened Cylinders-Part 1: Effect of Roughness Height", *International Journal of Offshore and Polar Engineering*, Vol. 5 No. 3.
- Panda, S.K. and Chhabra, R.P. (2010), "Laminar flow of power-law fluids past a rotating cylinder", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 165 No. 21–22, pp. 1442–1461.
- Pope, K., Dincer, I. and Naterer, G.F. (2010), "Energy and exergy efficiency comparison of horizontal and vertical axis wind turbines", *Renewable Energy*, Vol. 35 No. 9, pp. 2102–2113.
- Pralits, J.O., Brandt, L. and Giannetti, F. (2010), "Instability and sensitivity of the flow around a rotating circular cylinder", *Journal of Fluid Mechanics*, Vol. 650, p. 513.
- Prandtl, L. (1926), *Application of the "Magnus Effect" to the Wind Propulsion of Ships*, available at: <http://digital.library.unt.edu/ark:/67531/metadc65110/?q=magnus>.
- Qian, X. and He, Y. (2012), "Wind Power Turbine and Its Aerodynamic Characteristics", *International Journal of Education and Management Engineering*, Vol. 2 No. 7, pp. 80–87.
- Quintavalla, S.J., Angilella, A.J. and Smits, A.J. (2013), "Drag reduction on grooved cylinders in the critical Reynolds number regime", *Experimental Thermal and Fluid Science*, Vol. 48, pp. 15–18.
- Reid, E.G. (1924), *Tests of Rotating Cylinders*, available at: <http://digital.library.unt.edu/ark:/67531/metadc53882/?q=rotating>.
- de Ridder, E.-J., Otto, W., Zondervan, G.-J., Huijs, F. and Vaz, G. (2014), "Development

- of a Scaled-Down Floating Wind Turbine for Offshore Basin Testing”, *Volume 9A: Ocean Renewable Energy*, ASME, p. V09AT09A027.
- Ryi, J., Rhee, W., Chang Hwang, U. and Choi, J.-S. (2015), “Blockage effect correction for a scaled wind turbine rotor by using wind tunnel test data”, *Renewable Energy*, Elsevier Ltd, Vol. 79, pp. 227–235.
- Sagol, E., Reggio, M. and Ilinca, A. (2013), “Issues concerning roughness on wind turbine blades”, *Renewable and Sustainable Energy Reviews*, Vol. 23, pp. 514–525.
- Saito, S., Mokhtarian, F., Fernando, M.S.U.K. and Modi, V.J. (1989), “Moving Surface Boundary Layer Control with Application to High Performance Aircraft”, available at: <https://getinfo.de/app/Moving-Surface-Boundary-Layer-Control-with-Application/id/BLCP:CN003629338>.
- Savonius, S.J. (1981), *The Wing-Rotor in Theory and Practice*, Omnia-Mikrofilm-Technik.
- Sayers, A.T. and Lelimo, N. I. (2007), “Aerodynamic Coefficients of Stationary and Spinning Cricket Balls”, *R & D Journal*, Vol. 23 No. 2.
- Sedaghat, A. (2014), “Magnus type wind turbines: Prospectus and challenges in design and modelling”, *Renewable Energy*, Vol. 62, pp. 619–628.
- Sedaghat, A., Badri, M.A., Saghafian, M. and Samani, I. (2014), “An innovative Treadmill-Magnus wind propulsion system for naval ships”, *Recent Patents on Engineering*, Vol. 8 No. 2, pp. 95–99.
- Sedaghat, A., Samani, I., Ahmadi-Baloutaki, M., El Haj Assad, M. and Gaith, M. (2015), “Computational study on novel circulating aerofoils for use in Magnus wind turbine blades”, *Energy*, Elsevier Ltd, Vol. 91, pp. 393–403.
- Seifert, J. (2012a), “A review of the Magnus effect in aeronautics”, *Progress in Aerospace Sciences*, Vol. 55, pp. 17–45.
- Seifert, J. (2012b), “Micro Air Vehicle lifted by a Magnus Rotor A Proof of Concept”, *AIAA*, available at: <http://arc.aiaa.org/doi/pdf/10.2514/6.2012-389>.
- Selonick, S., Ripp, P. and McNelis, K. (2007), “Effect of Surface Roughness and Rotation on the Motion of a Sphere”, available at: <http://www.me.rochester.edu/courses/ME241.gans/1-roughness.pdf>.
- Sherry, M., Sheridan, J. and Jacono, D. Lo. (2013), “Characterisation of a horizontal axis wind turbine’s tip and root vortices”, *Experiments in Fluids*, Vol. 54 No. 3, available at: <https://doi.org/10.1007/s00348-012-1417-y>.
- Soltani, M.R., Birjandi, a. H. and Seddighi Moorani, M. (2011), “Effect of surface contamination on the performance of a section of a wind turbine blade”, *Scientia Iranica*, Elsevier B.V., Vol. 18 No. 3, pp. 349–357.
- Sun, X., Zhuang, Y., Cao, Y., Huang, D. and Wu, G. (2012), “A three-dimensional numerical study of the Magnus wind turbine with different blade shapes”, *Journal of Renewable and Sustainable Energy*, Vol. 4 No. 6, p. 63139.
- Swanson, W.M. (1961), “The Magnus Effect: A Summary of Investigations to Date”, *Journal of Basic Engineering*, Vol. 83 No. 3, pp. 461–470.
- Takayama, S. and Aoki, K. (2004), “Flow Characteristics around a Rotating Circular Cylinder with Arc Grooves”, *Proc. Schl. Eng.*, Vol. 29, pp. 9–14.
- Takayama, S. and Aoki, K. (2005), “Flow characteristics around a rotating grooved circular cylinder with grooved of different depths”, *Journal of Visualization*, Vol. 8 No. 4, pp. 295–303.
- Tanaka, H. and Nagano, S. (1972), “Study of Flow around a Rotating Circular Cylinder”, *Transactions of the Japan Society of Mechanical Engineers*, Vol. 38 No. 310, pp. 1343–1352.
- Thom, A. (1934), *On the Effect of Discs on the Air Forces on a Rotating Cylinder*,

- Aeronautical Research Committee, Reports and Memoranda 1934; 1623.
- Thom, A. and Sengupta, S.R. (1932), *Air Torque on a Cylinder Rotating in an Air Stream*, Aeronautical Research Committee, Reports and Memoranda 1932; 1520.
- Thouault, N., Breitsamter, C., Adams, N., Seifert, J., Badalamenti, C. and Prince, S.A. (2012), "Numerical Analysis of a Rotating Cylinder with Spanwise Disks", *AIAA Journal*, Vol. 50 No. 2, pp. 271–283.
- Turner, H.R. (1944), *The Effects of Roughness at High Reynolds Numbers on the Lift and Drag Characteristics of Three Thick Airfoils*, available at: <http://digital.library.unt.edu/ark:/67531/metadc61334/?q=surface>.
- Walker, J.M., Flack, K. a., Lust, E.E., Schultz, M.P. and Luznik, L. (2014), "Experimental and numerical studies of blade roughness and fouling on marine current turbine performance", *Renewable Energy*, Elsevier Ltd, Vol. 66, pp. 257–267.
- Wang, T., Wang, L., Zhong, W., Xu, B. and Chen, L. (2011), "Large-scale wind turbine blade design and aerodynamic analysis", *Chinese Science Bulletin*, Vol. 57 No. 5, pp. 466–472.
- Ware, G.M. and Spencer, B. (1988), "Effects of surface roughness on two Shuttle Orbiter models", *Journal of Aircraft*, Vol. 25 No. 4, pp. 349–354.
- Wolff, E.B. (1925), *Preliminary Investigation of the Effect of a Rotating Cylinder in a Wing*, available at: <http://digital.library.unt.edu/ark:/67531/metadc59069/citation/?q=rotating>.
- Yamagishi, Y. and Oki, M. (2007), "Numerical simulation of flow around a circular cylinder with curved sectional grooves", *Journal of Visualization*, Vol. 10 No. 2, pp. 179–186.
- Yokoi, Y., Igarashi, T. and Hirao, K. (2011), "The Study about Drag Reduction of a Circular Cylinder with Grooves", *Journal of Fluid Science and Technology*, Vol. 6 No. 4, pp. 637–650.
- Zhao, J., Hou, Q., Jin, H., Yan, J., Zhu, Y. and Li, G. (2013), "Discussion on improving Magnus effect of cylinder based on CFD", pp. 539–543.
- Zhou, B., Wang, X., Guo, W., Gho, W.M. and Tan, S.K. (2015), "Experimental study on flow past a circular cylinder with rough surface", *Ocean Engineering*, Elsevier, Vol. 109, pp. 7–13.