



**UNIVERSITI PUTRA MALAYSIA**

***DEVELOPMENT OF HYBRID PROBLEM SOLVING METHOD FOR  
SUBSEA INDUSTRY***

**Ir. KHAIRUL NIZAM BIN MD TOHIT**

**FK 2018 84**



**DEVELOPMENT OF HYBRID PROBLEM SOLVING METHOD FOR  
SUBSEA INDUSTRY**

**By**

**Ir. KHAIRUL NIZAM BIN MD TOHIT**

**Thesis Submitted to the School of Graduate Studies  
Universiti Putra Malaysia, in Fulfilment of the  
Requirements for the Doctor of Philosophy**

**July 2018**

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in  
fulfilment of the requirement for the degree Doctor of Philosophy

## **DEVELOPMENT OF HYBRID PROBLEM SOLVING METHOD FOR SUBSEA INDUSTRY**

By

**Ir. KHAIRUL NIZAM BIN MD TOHIT**

**July 2018**

**Chairman : Associate Professor Norzima Binti Zulkifli, PhD**  
**Faculty : Engineering**

This research is about the development of hybrid problem solving method to identify failures mainly applied in the subsea environment. A3 analysis with support from fishbone diagram and 5 whys analysis techniques were introduced to identify the actual cause of failures. The integration between these two techniques known as a hybrid problem solving method was then applied to identify the actual cause of failures. Upon identification of the actual cause of failure, improvement actions were taken to eliminate the actual cause. In this research, few comparisons in terms of different problem solving methodology applied for different industries namely aerospace, automotive, semi-conductor, chemical and oil and gas industry were reviewed and evaluated to understand the differences for closing the gaps with this new methodology. The proposed hybrid problem solving methodology was validated using a case study. The case study was focusing into the identification of the actual cause of failure related to the Inconel 718 fasteners that were used for Methanol Injection Tree Valve (MITV). Proposal on the lab analysis on fresh and failure fasteners was performed upon reviewing the outcome from the hybrid methodology to ensure the effectiveness of the analysis technique. Few analysis activities were performed consisting of mechanical property evaluation, chemical composition and microstructure review for validating the results. It was identified that the hardness value for Inconel 718 that was applied for this application was 18% higher than the maximum value of 40HRC as stated in MS-607 requirement of material Inconel 718 and API standard 6A718-2009. The data was then compared to understand the characteristics of the failure. One of the steps in the A3 technique is future state and target that requires a mitigation action to eliminate the cause of failure. This was performed by conducting a new material analysis e.g. L7M fasteners for future reference. There is no similar re-occurrence recorded upon implementing the mitigation actions of this problem solving methodology since 2012. This achievement can be concluded as a success of

identifying the real cause of failure using hybrid root cause analysis technique. Standard template for subsea's problem solving method was established upon completing the analysis for future use to increase efficiency and reduce cost of failures for each issue in the future.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia  
sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

## **PEMBANGUNAN KAEDAH HIBRID BAGI PENYELESAIAN MASALAH DI DALAM INDUSTRI LAUTAN DALAM**

Oleh

**Ir. KHAIRUL NIZAM BIN MD TOHIT**

**Julai 2018**

**Pengerusi : Profesor Madya Norzima Binti Zulkifli, PhD**  
**Fakulti : Kejuruteraan**

Kajian ini adalah berkenaan pembangunan kaedah hibrid bagi penyelesaian masalah di dalam industri lautan dalam bagi mengesan punca kegagalan di dalam persekitaran industri lautan dalam. Analisis A3 yang mengguna pakai teknik punca dan kesan berserta 5 kenapa diperkenalkan bagi membantu mengesan punca kegagalan didalam aplikasi ini. Integrasi diantara teknik punca dan kesan bersama dengan 5 kenapa adalah dikenali sebagai teknik hibrid yang akan digunakan bagi mengenalpasti punca sebenar kegagalan. Sebaik punca sebenar dikenalpasti, tindakan pembaharuan telah diambil bagi menyingkirkan punca sebenar tersebut. Didalam kajian ini juga, beberapa perbandingan berkenaan teknik penyelesaian masalah yang digunapakai didalam industri yang berlainan seperti aeroangkasa, automotif, semi-konduktor, kimia dan minyak dan gas telah dianalisa bagi memahami konsep dan jurang bagi mengurangkan perbezaan tersebut bagi kegunaan pembangunan konsep hibrid. Cadangan pembangunan konsep hibrid ini telah diuji berserta dengan kajian kes sebenar. Kajian kes adalah cenderung menumpukan identifikasi punca kegagalan sebenar bagi aplikasi bolt Inkonel 718 pada Injap Kawalan Metanol (MITV) yang digunakan oleh industri lautan dalam. Cadangan analisis makmal pada bolt yang baru dan gagal telah dijalankan setelah meneliti keputusan analisis hibrid. Ini adalah untuk memastikan kebolehpayaan analisis hibrid ini untuk membantu menyelesaikan masalah di dalam industri lautan dalam. Beberapa analisis telah dilakukan seperti ujian bahan, ujian kimia dan ujian mikrostruktur bagi mengesahkan hipotesis yang digunapakai didalam melaksanakan kajian ini. Punca sebenar kegagalan bolt Inkonel 718 adalah berpunca daripada kekerasan bahan yang digunapakai adalah melebihi sebanyak 18% daripada kekerasan maksima bahan sebanyak 40 HRC seperti yang disyorkan oleh spesifikasi MS-607 dan standard API 6A 718-2009. Data yang telah dikumpulkan kemudiannya dibandingkan bagi memahami struktur dan sifat-sifat bahan. Salah satu tindakan di dalam analisa A3 ini adalah cadangan

untuk penambahbaikan bagi kegunaan pada masa hadapan. Ini telah dilakukan dengan melaksanakan ujian makmal terhadap bahan baru seperti bolt L7M bagi menggantikan bolt Inkonel 718 bagi kegunaan dan aplikasi yang sama. Tiada pengulangan insiden yang sama direkodkan sejak tahun 2012 semenjak pelaksanaan langkah-langkah pembetulan berdasarkan metodologi penyelesaian masalah hibrid ini dilaksanakan. Kejayaan ini adalah berpunca daripada pengenalan kaedah hibrid didalam mengenalpasti punca masalah sebenar yang dihadapi. Templat rasmi bagi kegunaan penyelesaian masalah di dalam lautan dalam telah diwujudkan bagi rujukan dan kegunaan pada masa hadapan bagi meningkatkan kecekapan dan mengurangkan kos kegagalan pada setiap masalah.



## ACKNOWLEDGEMENTS

I would like to take this opportunity to wish my gratefulness to my supervisor, Prof. Madya Dr Norzima Binti Zulkifli, for her continuous support, advises and supervision. Her invaluable continuous help and constructive comments, suggestions and support throughout my thesis works have contributed to the success of this research. In addition, my appreciation goes to my Supervisory Committee, Prof. Dr. Shamsuddin Bin Sulaiman and Prof. Madya Ir. Dr. B.T Hang Tuah Bin Baharudin for their support and knowledge regarding this research.

Last but not least, my deepest gratitude goes to my beloved parents; Hj. Md. Tohit Bin Hj. Hasan and Hajjah Aspiyah Bini Hj. Juri. Also to my wife Mrs. Elya Hani Binti Hj. Hasnan and my children: Aidan Mikhail, Iryn Aylis and Eilyn Rheanis for love, care and courage. To those who indirectly contributed for this research, your kindness and supports mean a lot to me.

Thank you very much.  
Ir. Khairul Nizam Bin Md Tohit



The thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

**Norzima Binti Zulkifli, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Shamsuddin b. Sulaiman, PhD**

Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**B.T Hang Tuah Bin. Baharudin, PhD**

Associate Professor/Ir.  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**ROBIAH BINTI YUNUS, PhD**

Professor and Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

## Declaration by graduate student

I hereby confirm that:

- this thesis is my original work
- quotations, illustrations and citations have been fully referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Name and Matric No.: \_\_\_\_\_

## Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: \_\_\_\_\_  
Name of Chairman  
of Supervisory  
Committee: \_\_\_\_\_

Signature: \_\_\_\_\_  
Name of Member  
of Supervisory  
Committee: \_\_\_\_\_

Signature: \_\_\_\_\_  
Name of Member  
of Supervisory  
Committee: \_\_\_\_\_

## TABLE OF CONTENTS

	Page
<b>ABSTRACT</b>	i
<b>ABSTRAK</b>	iii
<b>ACKNOWLEDGEMENTS</b>	v
<b>APPROVAL</b>	vi
<b>DECLARATION</b>	ix
<b>LIST OF TABLES</b>	xii
<b>LIST OF FIGURES</b>	xiii
<b>LIST OF ABBREVIATIONS</b>	xv
 <b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	<b>1</b>
1.1 Prologue	1
1.2 Background	3
1.3 Subsea Trees	4
1.4 Problem Statement	6
1.5 Objectives of Study	7
1.6 Scope of Work	8
1.7 Limitation of Works	8
1.8 Thesis Layout	9
 <b>2 LITERATURE REVIEW</b>	 <b>11</b>
2.1 Introduction	11
2.2 Quality Management System	12
2.2.1 Quality Requirements	15
2.2.2 Quality Tools and Techniques	20
2.2.3 Decision Making Method	22
2.2.4 The Role of Executives in the Problem Solving	23
2.2.5 Failure Mode and Effect Analysis (FMEA)	25
2.2.6 Importance-Performance Analysis (IPA)	26
2.2.7 DEMATEL Method	27
2.3 Material Selection and Characteristics	29
2.3.1 Material Selection	29
2.3.2 Undersea Fasteners Requirements	30
2.3.3 Calculation of Cathodic Protection	34
2.3.4 Cathodic Protection	35
2.3.5 Characteristics of the Alloy Sacrificial	36
2.3.6 Inconel 718 Fastener Evaluation	36
2.3.7 Nut and Stud Capacity Checks	39
2.4 Findings of Literature	41
2.5 Research Gap	56
2.6 Propose to the Research	57

<b>3</b>	<b>METHODOLOGY</b>	<b>58</b>
3.1	Introduction	58
3.2	Research Framework	59
3.3	Comparison from Other Concepts and Issues	61
3.4	Problem Solving and A3 Technique	63
3.5	Root Cause Analysis	67
3.5.1	Broken Stud Bolt Analysis	70
3.5.2	Fresh Stud Bolt Analysis	71
3.6	Future State and Target	71
3.6.1	HISC Analysis for L7M Stud Specimen	71
3.7	Hypothesis	74
<b>4</b>	<b>RESULTS AND DISCUSSION</b>	<b>77</b>
4.1	Introduction	77
4.2	Observed Problem	77
4.3	Current State	82
4.4	Problem Description	83
4.5	Root Cause Analysis	84
4.5.1	Broken Stud Bolt Analysis	86
4.5.1.1	Visual and Macro Examination	87
4.5.1.2	Fractographic Examination	88
4.5.1.3	Metallographic Examination	91
4.5.1.4	EDX Analysis	95
4.5.1.5	Chemical Composition Analysis	97
4.5.1.6	Hardness Measurement	98
4.5.2	Fresh Stud Bolt Analysis	99
4.5.2.1	Visual/Macro Examination	99
4.5.2.2	Micro-Structural Examination	100
4.5.2.3	ASTM Grain Size Evaluation	102
4.5.2.4	Chemical Composition Analysis	102
4.5.2.5	Tensile Test	103
4.5.2.6	Hardness Measurement	105
4.5.3	Broken and Fresh Inconel 718 Analysis	107
4.6	Future State and Target	107
4.7	Mitigation Actions	108
4.7.1	HISC Analysis for L7M Stud Bolt	108
4.8	Hypothesis Evaluation	115
4.9	Hybrid Method Evaluation Summary	117
<b>5</b>	<b>CONCLUSION AND RECOMMENDATION</b>	<b>120</b>
5.1	Conclusion	120
5.2	Recommendation for Future Research	121
	<b>REFERENCES</b>	<b>122</b>
	<b>APPENDICES</b>	<b>129</b>
	<b>BIODATA OF STUDENT</b>	<b>130</b>
	<b>LIST OF PUBLICATIONS</b>	<b>131</b>

## LIST OF TABLES

Table	Page
2.1 Common design and quality requirement gap (Kirkemo, 2014)	16
2.2 Subsea bolting materials and grades (Kirkemo, 2014)	29
2.3 Low alloy steel minimum and maximum hardness (Kirkemo, 2014)	30
2.4 Criticality of fasteners	31
2.5 Product specifications	32
2.6 Fasteners for subsea tree frames	33
2.7 Subsea fasteners application summary	34
2.8 Bare steel minimum current density for cathodic protection	35
2.9 Studs and nuts (limit loads) tension capacities (Kirkemo, 2014)	40
2.10 Nut and stud capacity check and stud combinations (Kirkemo, 2014)	41
2.11 Findings on problem solving methodology	43
2.12 Findings on problem solving methodology	44
2.13 Findings on problem solving methodology	45
2.14 Findings on problem solving methodology	46
2.15 Findings on problem solving methodology	47
2.16 Findings on problem solving methodology	48
2.17 Findings on problem solving methodology	49
2.18 Findings on problem solving methodology	50
2.19 Findings from material perspective	51
2.20 Findings from material perspective	52
2.21 Findings from material perspective	53
2.22 Findings from material perspective	54
2.23 Different methodology applied from various industries	55
2.24 Summary of researches performed in problem solving methodologies	56
4.25 Broken bolt chemical composition analysis results	98
4.26 Fresh bolt chemical composition analysis results	103
4.27 Tensile test results	103
4.28 Rockwell hardness on the base material of fresh stud bolt	105
4.29 Test matrix	109
4.30 Vickers hardness test (HV 10)	113
4.31 Summary results of post-test examination	113
4.32 Summary results of post-test examination on L7M stud bolt	114
4.33 Hypothesis evaluation summary	115
4.34 Hypothesis evaluation summary	116

## LIST OF FIGURES

Figure	Page
1.1 Subsea Production System (XMT Assembly)	3
1.2 Subsea Tree with MITV and CITV positions (XMT Assembly)	5
1.3 Subsea tree with CITV Position (XMT Assembly)	5
2.4 Theoretical Model (Choo et al., 2015)	24
2.5 IPA chart (Tsai et al., 2018)	26
2.6 Inconel 718 microstructure with delta phase precipitated grain boundary	37
2.7 Intergranular cracks in Inconel 718 exposed to CP system, with delta phase precipitate along grain boundary	38
2.8 Number of researches performed for MCDM technique (Castro & Parreiras, 2018)	55
3.9 Research framework	60
3.10 A3 tool process flow descriptions	64
3.11 A3 tool description columns	65
3.12 Example of cause and effect diagram	68
3.13 Illustration on how 5 whys analysis technique is applied	68
3.14 Example of 5 Whys analysis technique	69
3.15 A3 tool functional area and responsibility	70
3.16 Schematic drawing of stud loading fixture	72
3.17 Loading of stud specimen by tensile machine	73
3.18 Application of cathodic protection to the fixtures	74
4.19 Fluid observed coming out from this point	78
4.20 Bolt sheared observed	78
4.21 Chronological events for XMT#1, XMT#2, PX05, PX05B and P201	80
4.22 Failed portion of the stud that has been retrieved by the ROV	81
4.23 Cause and effect diagram	84
4.24 Fault Tree analysis on the potential cause of failure	86
4.25 5 Whys analysis technique	86
4.26 Condition of broken stud bolt	87
4.27 Broken stud bolt fracture surface	88
4.28 Brittle fracture mode. Figure (a)-(b)-(c): General view. Figure (d)-(e)-(f): Respective magnified view (500X)	89
4.29 Elongated dimple surface morphology, indicating overload final fracture (500X)	90
4.30 Macrograph cross-section of the broken stud bolt	91
4.31 Broken stud bolt rolled-thread profile	91
4.32 Intergranular fracture path at the thread root of initiation area	92
4.33 SEM micrographs cross-section and grain deformation at the thread roots (500X)	93
4.34 Intergranular cracking. (a)-(b)-(c)-Pre etch and (d)-(e)-(f)-Post etch	94
4.35 Microstructure of base material of broken stud bolt (100X)	95
4.36 Microstructure of base material of broken stud bolt (500X)	95
4.37 Respective SEM view of the deposit on the fracture surface	96

4.38	Representative EDX spectra of the deposit on the fracture surface	96
4.39	Representative EDX spectra of large particles observed in the microstructure of base material	97
4.40	Rockwell hardness on the base material of broken stud bolt	98
4.41	Fresh stud bolt received condition	100
4.42	Cross-section micrograph of the base material fresh stud bolt (100X)	101
4.43	Cross-section micrograph of the base material fresh stud bolt (500X)	101
4.44	Fresh bolt Grain Size Evaluation	102
4.45	Post-tensile test piece	104
4.46	Fracture surface of post-tensile test piece	104
4.47	Cross-section micrograph at hardness measurement location 1: (a) (100X); (b) 500X	106
4.48	Cross-section micrograph at hardness measurement location 5: (a) (100X); (b) 500X	106
4.49	Cross-section micrograph at hardness measurement location 10: (a) (100X); (b) 500X	106
4.50	As tested L7M stud bolt condition after 30 days	110
4.51	Tested L7M stud bolt after dye penetrant inspection test	110
4.52	Macrograph cross-section of the tested stud sample	111
4.53	Macrograph cross-section of the reference stud sample	112
4.54	Cause and effect diagram	117
4.55	5 Whys analysis technique	118
4.56	Completed A3 analysis that was developed for this research	119



## LIST OF ABBREVIATIONS

API	American Petroleum Institute
ASME	American Society of Mechanical Engineers
ASMT	American Society of Medical Technologists
ASTM	American Section of the International Association for Testing Materials
CITV	Chemical Injection Tree Valve
CP	Cathodic Protection
CRA	Corrosion Resistance Alloy
DEMATEL	Decision Making Trial and Evaluation Laboratory
DHPT	Down Hole Pressure and Temperature Transducers
DHSV	Downhole Safety Valve
DNV	Det Norske Veritas As
EDX	Energy Dispersive X-Ray
FMEA	Failure Mode and Effect Analysis
FPSO	Floating Production Storage and Offloading
FSO	Floating Storage Offloading Vessel
HE	Hydrogen Embrittlement
HISC	Hydrogen Induced Stress Cracking
HISCC	Hydrogen Embrittlement and Stress Corrosion Cracking
HRC	Rockwell Hardness Measurement
ISO	International Organization for Standardization
IPA	Importance Performance Analysis
LAS	Low Alloy Steel
MCCR	Mechanical Completion and Checklist Reference
MITV	Methanol Injection Tree Valve
NORSOK	Norsk Søkkel Konkuranseposisjon
PPM	Pre-Production Meeting
PWB	Production Wing Block
RCA	Root Cause Analysis
SCC	Stress Corrosion Cracking
SLS	Subsea Lifecycle Services
XMT	Subsea Tree

## CHAPTER 1

### INTRODUCTION

#### 1.1 Prologue

Subsea production system is representing a few combinations of facilities namely wellhead system, controls, subsea trees, manifolds and structures. It is known that the subsea operation involves many challenges such as high pressure containment, flow assurance in hostile sea surface and very low temperature. It is understood that the low temperature and high pressure are the common factors that may lead to high cost of repairs and maintenance (Cheliyan & Bhattacharyya, 2017). Subsea oil production system is spread in large geographical area that may cause the task of risk assessment for oil and gas leakage will become a highly extensive task. It is understood that the most powerful risk analysis method applied in the subsea industry is the fault tree analysis (FTA). This method uses a quantitative method for the computation of failure probability of each component in the particular system (Cheliyan & Bhattacharyya, 2017).

The failure probabilities of the basic events (*BE*) are the exact values as recommended in the conventional FTA. This is because precise estimation of failure probabilities for basic events is not practical. There is insufficient data recorded that prohibits the analysis to be performed (Liang et al., 2003). Therefore, it is often to perform the analysis with approximate probabilities of estimation in the absence of precise data. This is related to the usage of “possibility” instead of “probability” to complete the analysis (K.B. Misra et al., 2003).

There are various aspects of safety and reliability of subsea components that require special attention including review on the reliability estimates of the safety instrumented systems (Hui et al., 2012) and reliability of subsea trees (Wanvik et al., 1981). However, for subsea industry, the application of risk based methodologies especially the usage of FTA application is very rare (Cheliyan & Bhattacharyya, 2017). This contradicts with the aerospace and nuclear industries whereby the application of risk based methodologies have been well adopted (Cheliyan & Bhattacharyya, 2017).

Due to the nature of subsea production system which is complex, severe environment and inaccessible that are causing the operation, repair and maintenance are costly and time consuming. Thus, it is important that the quantitative risk estimation methodologies shall be adopted into subsea design and operation. A previous analysis made by Hu et al., (2012) analyzed the problem of leakage of oil and gas in a subsea production system. However, the analysis was considered sketchy and considered as a preliminary analysis. In comparison, there has been practically no work performed in the quantitative risk analysis (QRA) except for the preliminary study performed by Hu et al., (2012).

There is a challenge experienced for the fasteners used for critical applications in subsea industry. The challenges are in terms of selection of material, quality assurance and control, traceability's documentation for manufacturing, and production. Those challenges are crucial for meeting sufficient performance, components' integrity to prevent any costly failures. Criticality of subsea fasteners are defined as fasteners applied for pressure containing and primary load bearing joints. In addition, it also considers fasteners that are applied for joints or connections that have the potential of impacting the valves' functionality, safety, reliability and effective operational cost (Kirkemo, 2014).


Hydrogen induced stress cracking (HISC) or hydrogen embrittlement (HE) was identified as the major failure experienced during the last decade in the subsea industry. HISC primarily results from the hydrogen charging conditions of the cathodic protection (CP) system. A majority of fasteners use subsea from low alloyed steel grade type such as ASTM 320 Grade L7, L7M, L43 bolts with ASTM 194 Grade 4, 7M, 7 nuts. Those fasteners rely on the electrical continuity to the cathodic protection system. This is to prevent from sea water corrosion on the subsea trees that can potentially become the main contributor for HISC/HE. This may happen if the fasteners' hardness and strength level exceed the maximum ranges specified by the mill manufacturer (Kirkemo, 2014).

Cold formed hardened corrosion resistance alloy (CRA) is usually designated to be used if higher strength materials are required by engineering or design. There are a few grades used for this application such as grades 59, 660, 625, 686, 718, 725. However, the potential or probability of having HISC/HE depends on the hardness, strength range and manufacturing application. Majority of fasteners are used in the automotive and aerospace industries. For oil and gas industry, bolted connections are normally used for high integrity systems, high pressure containing connections and required a long-term performance like a structural components, pressurized vessels and piping (Pires et al., 2011).

It has become highly important for all bolted connections to be designed, manufactured and installed to the specified requirements to ensure long life cycle and reliability for various exposure and service conditions applied upon installation and application in subsea industry. The number of bolting failures may be due to various reasons namely overload, fatigue or corrosion. A few steps are taken seriously starting from the material selection, bolt manufacturing, coating and painting application like xylan and molykote application up to the final bolt installation process to ensure the bolt's functionality meets the desired design requirements.

## 1.2 Background

Subsea field in this study covers approximately 230 km offshore with the water depth range between 1200 m to 1400 m. The subsea production and injection system consists of several subsea stations namely production manifold, service umbilical, subsea trees, well jumpers with flowlines and umbilical connection to the Floating Production Storage and Offloading (FPSO) station as process facility as indicated in Figure 1.1. The production wells are clustered around the manifolds, with each manifold supporting each other.

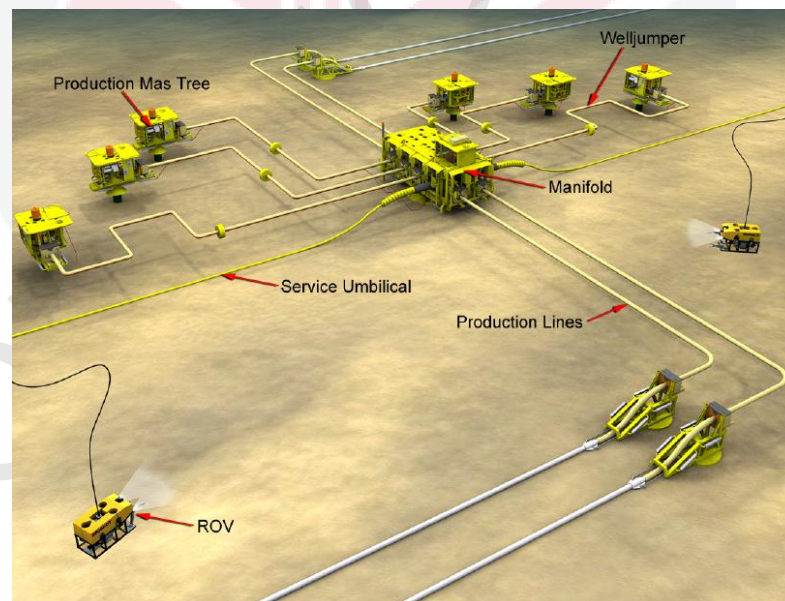

**Figure 1.1: Subsea Production System (XMT Assembly)**

The subsea station is defined to include the following systems:

1. Wellhead System
2. Subsea Trees (XMT) System including the work-over system
3. Subsea Production Control System including topside equipment
4. Tie-in System
5. Structures (including manifolds)

### 1.3 Subsea Trees

Subsea wellheads and Xmas trees are one of the important equipment in a subsea production system. The functions of subsea wellhead system performance will be similar with the same general functions of conventional surface wellhead. In general, a subsea Xmas tree is basically a combination of valves that are installed on subsea wellhead to ensure controllable interface between the subsea well and other production facilities. Different names for subsea trees are Christmas tree, cross tree, X-tree or tree (Yong Bai et al., 2012).

Different subsea trees will be used for different applications such as production of water/gas injection. Subsea wellhead systems are normally designed according to the standard and codes as below:


1. API 6A, Specification for Wellhead and Christmas Trees Equipment;
2. API 17D, Specification for Subsea Wellhead and Christmas Tree Equipment;
3. API RP 17A, Recommended Practice for Design and Operation of Subsea Production Systems;
4. API RP 17H, Remotely Operated Vehicle (ROV) Interfaces on Subsea Production System;
5. API RP 17G, Design and Operation of Completion/Workover Risers;
6. ASME B31.3, Process Piping;
7. AWS D1.3, Structural Steel Welding Code;
8. DNV RP B 401, Cathodic Protection

The subsea trees' functions and requirements should be referred as below:


- i. To provide orientation of the wellhead and tree system with respect to the tree-to-manifold connection (Yong Bai et al., 2012)
- ii. To interface with and support Xmas tree system and blowout preventer (BOP) (Yong Bai et al., 2012)
- iii. To ensure alignment, concentricity and verticality of the low-pressure conductor housing and high pressure of wellhead housing (Yong Bai et al., 2012)
- iv. To prove the field design that is able to serve with minimum sensitivity to water depth and sea conditions (Yong Bai et al., 2012)



Figures 1.2 and 1.3 show the physical condition of the Subsea Tree with Methanol Injection Tree Valve (MITV) and Chemical Injection Tree Valve (CITV) positions. The valves are mounted on the lateral sides that allow simple well intervention and tubing recovery. This will be an added advantage for wells that require a high number of interventions (Yong Bai et al., 2012).

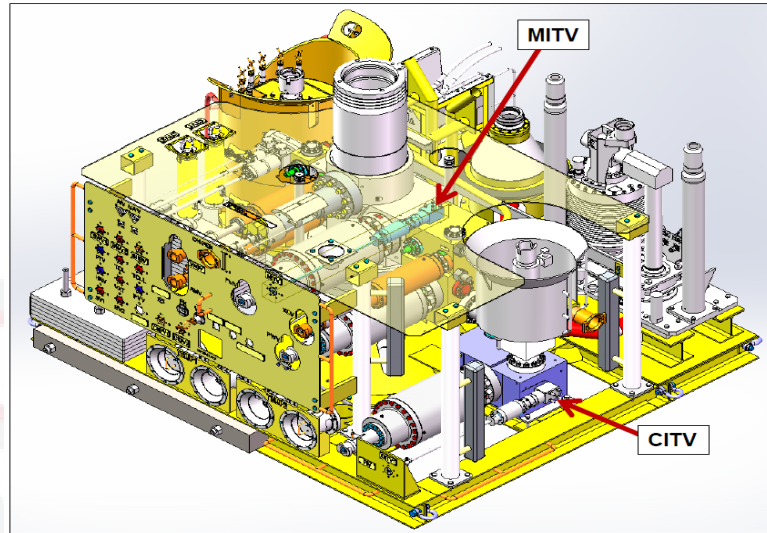

**Figure 1.2: Subsea Tree with MITV and CITV positions (XMT Assembly)**

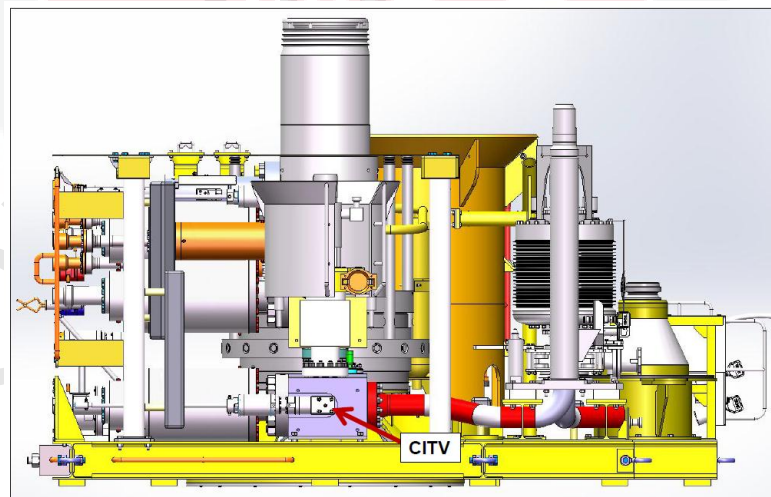

**Figure 1.3: Subsea tree with CITV Position (XMT Assembly)**

## 1.4 Problem Statement

One of the prominent 21<sup>st</sup> century skills is the ability to solve complex problems that represent the actual life situation. This skill requires interaction with unknown environment (Greiff et al., 2013; Molnár, Greiff, & Csapó, 2013). Real-life situations also represent a static problems that can be resolved with the assistance of reasoning and connecting the provided information with the problem (Scherer & Tiemann, 2014). Decision process is related to the set of actions and methods that are dynamically organized (Castro & Parreiras, 2018). The process will start from a request for action and will be completed with a specific agreement of execution process. The organization has to choose the best option of averaging the outcomes from each different stakeholder for finalizing the decision (Firouzabadi et al., 2008).

The decision-making problem is considered as hard and challenging due to these reasons:

1. They are non-repetitive, unprecedented and unique (Firouzabadi et al., 2008)
2. Criteria may conflict within themselves. For example, customers want to have high quality products but not expensive (Bai et al., 2015) (Tseng et al., 2007)
3. Tangible vs intangible criteria. For example, tangible criteria consist of objectively be measured like a fuel consumption. For intangible criteria, the examples are like the flexibility, quality, and efficiency. This cannot be converted into a numeric value (Yang et al., 2006) (Ordoobadi et al., 2001)

Multiple-criteria decision making (MCDM) is a combination of methodologies to perform a comparison, selection and establishing a ranking system where multiple and various conflicting criteria are involved consisting of tangible and intangible criteria (Castro & Parreiras, 2018). MCDM has been widely used in resolving the real decision making problems. The application of MCDM technique is inclusive from the autonomous drive until the assessment of Mars mission (Chen et al., 2014). On the other hand, the MCDM technique has also been widely used for supplier selection, evaluation and material selection (Castro & Parreiras, 2018).

MCDM techniques have been successfully applied to a wide range of applications in automotive industry with engineering design heavily relying on this technique for problem solving analysis and decision making analysis. The Analytical Hierarchy Process (AHP) is the most consistent technique followed by PROMETHEE as integrated approaches are more usual than individual ones. There are numbers of application of fuzzy methods to tackle uncertainty

observed being applied for this application (Castro & Parreiras, 2018). It is known that MCDM method is suitable for dealing with the complex decision-making in automotive sectors with different subjects and terms but no further analysis is performed for EE scope. There's a gap identified in the automotive industry.

The integration of three research methods known as FMEA-IPA-DEMATEL analysis model is being used in the semi-conductor industry. FMEA is pragmatic to detect the features to be enhanced, followed by employing IPA to deliberate the enhancement of the significance and performance of the features. Finally, DEMATEL is used to discover the underlying relation and interface among those features. The objective of performing this analysis is to help the decision-makers to ascertain the essential difficulties to be enhanced and give proposals on the problem-solving structure (Tsai et al., 2018). FMEA is commonly used during the beginning of design stage that actively involves participation from various groups of people from different departments especially from Engineering and Manufacturing. This application is not really suitable to identify the actual cause of failures while dealing with the real-field issues that require prompt actions to be taken in terms of containment, correction, corrective and preventive actions.

Hybrid problem solving technique will be used as part of the integration techniques that combined two methods of the root cause analysis technique consisting of Cause and Effect diagram with the 5 Whys analysis techniques. This technique is arranged in sequence in A3 analysis template to assist the decision-makers and respective stakeholders to evaluate the problems, perform analysis, and establish the final mitigation actions such as containment and permanent solutions to ensure no re-occurrence for similar issues in the future. The validation of case study by using this method will be performed to ensure the effectiveness of the newly suggested method compared to various problem solving method technique and not limited to the subsea industry alone.

### **1.5 Objectives of Study**

The purpose of this study is to review the application and implementation of hybrid problem solving method to identify the actual cause of failures in subsea industry. This study aims to address the following:

1. To analyses current problem solving methods applied for different industries
2. To develop hybrid problem solving method that preventing failures in subsea industry



3. To validate hybrid problem solving method by using case study in subsea industry

## **1.6 Scope of Work**

In this study, development of A3 analysis method by performing the hybrid method from cause and effect diagram (fishbone diagram) and 5 Whys analysis technique are chosen to be used to identify the actual cause of failure. Upon identifying the actual cause of failure, corrective and preventive actions measured are taken to minimize the effect of failure and to come out with the recommendation actions on how to improve the situation for future products.

The failure for this incident is considered as re-occurrence and the subject of the failure may contribute to the fastener's material selection decision. Thus, proposed lab analysis based on the new stud bolt material for the same application that will be used for future design of subsea tree will be tested with controlled parameter of subsea environment. The objective is to understand the mechanical behavior and reaction towards the subsea environment and to confirm if there are any differences on the chemical composition compared to the failed stud bolt.

## **1.7 Limitation of Works**

Literature review on the different methodologies on problem solving methods is limited to the literature search performed between year 2010 to 2018. This is to ensure only recent problem solving methods applied for different industries are still reliable to compare with. The proposed improvement material that will be used for future subsea tree's design was tested based on the guideline and reference made to ASTM D1141 Artificial Seawater. The analysis was performed by comparing the test analysis results for the failed stud bolt versus the fresh stud bolt from the same batch. The input from mill supplier in regards of the manufacturing process control was not able to be obtained due to expiration of the documentation record of more than 7 years.

The identification of actual cause of failure will heavily rely on the final output from the 5 Whys analysis technique. Further analysis may be required to continue with the whys upon having the information from the mill suppliers.

This is important to understand on how the material hardness was controlled and reviewed during in-process stage.

## **1.8 Thesis Layout**

The present thesis consists of five chapters namely the introduction, literature review, methodology, results and discussion, and conclusion and recommendation. The first chapter - introduction provides a general information and background of subsea industry in terms of equipment used and the process involved. Problem statement, objective of study, and scope of work are also discussed and presented to ensure proper flow is shared to create some awareness and interaction with readers.

Chapter two - literature review discusses and overviews previous similar study conducted earlier in terms of overall quality management, quality tools and techniques, and decision making methodology used to resolve the issue. The literature review continues with detailed review on similar incidents happening in the past during the subsea operation of the usage of the similar fasteners during operation and understand the cause of failures and corrective actions taken to improve the situation. Finally, findings of literature review are compared against each other to establish the research gap to come out with the proposal to improve the project.

Chapter three - methodology describes the process flow on how to achieve the objective of study. This chapter is focusing on the application of quality tools and techniques to detect the real cause of failure and establish the recommended actions for improvements. Proposed lab analysis consists of suitable jig design, code and practice, and standard of operation which was formed to provide guidance and reference during the actual testing activity.

Chapter four - results and discussion discuss the results from the A3 analysis technique with supporting data from the lab analysis report. Results of the lab analysis will be used to establish the empirical data such as mechanical properties, hardness value and chemical composition that will be used to conclude the findings on the analysis.

Chapter five - conclusion and recommendations emerge the conclusions based on the objectives of investigations and problem analysis of the study and recommendation for future studies.



## REFERENCES

- Anderson, J.C., Gerbing, D.W., 1988. Structural equation modeling in practice: a review and recommended two-step approach. *Psychol. Bull.* 103 (3), 411–423.
- Anderson, J.C., Rungtusanatham, M., Schroeder, R.G., 1994. A theory of quality management underlying the Deming management method. *Acad. Manag. Rev.* 19 (3)
- Anderson, M., & Soha, A.S. (1999). A study of relationship between quality management practices and performance in small businesses. *International Journal of Quality and Reliability Management*, 16 (9): 859-877.
- API Spec 6A, Specification for Wellhead and Christmas tree equipment, 20th edition, 2010, (Modified ISO 10423:2009).
- API Std 6A718, Nickel Base Alloy 718 (UNS N07718) for Oil and Gas Drilling and Production Equipment, Second Edition, 2009, Includes Errata (2010).
- API RP 6HT, Heat Treatment and Testing of Carbon and Low Alloy Steel Large Cross-Section and Critical Section Components, 2nd Edition, 2013.
- API Spec 16A, Specification for drill through equipment, 3rd edition, 2004.
- API Spec 16C, Choke and kill system, 1st edition, 1993.
- API Spec 17D, Design and operation of subsea production systems – Subsea wellheads and tree equipment 2nd edition, May 2011, (Identical to ISO 13628-4:2011).
- API RP 17G, Recommended Practice for Completion/Workover Risers, Second Edition, 2nd edition, 2006, (Identical to ISO 13628-7:2005).
- API Spec 20E, Alloy and Carbon Steel Bolting for Use in the Petroleum and Natural Gas Industries, 1st edition, August 2012.
- A.S. Cheliyan, S.K Bhattacharyya, Fuzzy fault tree analysis of oil and gas leakage in subsea production systems, *Journal of Ocean Engineering and Science* 3 (2018) 38-48
- A. Shanian, O. Savadogo, Topsis multiple-criteria decision support analysis for material selection of metallic bipolar plates for polymer electrolyte fuel cell, *J. Power Sources* 159 (2) (2006) 1095–1104, <https://doi.org/10.1016/j.jpowsour.2005.12.092>.
- ASME B1.1, Unified Inch Screw Threads (UN and UNR Thread Form), 2003.
- ASME/ANSI B18.2.2, Square and Hex Nuts (inch series), 1987, Reaffirmed 1999.
- ASME Boiler and Pressure Vessel Code, Section VIII Division 2, Alternative Rules, 2013.
- ASME Boiler and Pressure Vessels Code, Section VIII Division 3, Alternatives Rules for Construction of High Pressure Vessels, 2013.
- ASME B31.3, Process piping, 2012.
- ASME B18.18, Quality Assurance for Fasteners, 2011.
- A.S. Milani, A. Shanian, C. Lynam, T. Scarinci, An application of the analytic network process in multiple criteria material selection,

- Mater. Des. 44 (2013) 622–632, <https://doi.org/10.1016/j.matdes.2012.07.057>.
- ASTM A962, Common requirements for bolting intended for use at any temperature for cryogenic to the creep range, 2013b.
- Blake, A., What Every Engineer Should Know about Threaded Fasteners: Materials and Design, Marcel Decker, 1986.
- Bickford, J.H., An Introduction to the Design and Behavior of Bolted Joints, Marcel Decker, 1990.
- BS EN 10204:2004 Metallic products. Types of inspection documents DAMT/FEA/1694 Rev. F, Limit Load and Proof tests for 1.250-8UN and 2.250-8UN nut/stud assemblies, 20th September 2010.
- Bunney, H.S., & Dale, B.G. (1997). The implementation of quality management tools and techniques: A study. *TQM Magazine*, 9(3): 183-189.
- C. Bai, B. Fahimnia, J. Sarkis, Sustainable transport fleet appraisal using a hybrid multi-objective decision making approach, *Ann. Oper. Res.* (2015) 1– 32, <https://doi.org/10.1007/s10479-015-2009-z>.
- C.-C. Yang, B.-S. Chen, Supplier selection using combined analytical hierarchy process and grey relational analysis, *J. Manuf. Technol. Manage.* 17 (7) (2006) 926–941, <https://doi.org/10.1108/17410380610688241>.
- Chen HM, Wu CH, Tsai SB, Yu J, Wang J, Zheng Y. Exploring key factors in online shopping with a hybrid model. *SpringerPlus* 2016;5:2046. <http://dx.doi.org/10.1186/s40064-016-3746-4>
- Cheng, C.H., & Lin, Y. (2002). Evaluating the Best Main Battle Tank Using Fuzzy Decision Theory with Linguistic Criteria Evaluation. *European journal of Operational Research*, 142 174-186.
- Choo, A. S., Nag, R., & Xia, Y. (2015). The role of executive problem solving in knowledge accumulation and manufacturing improvements. *Journal of Operations Management*, 36, 63–74. <https://doi.org/10.1016/j.jom.2015.03.001>
- Crosby. (1979). *Quality is free*. New York: Mc Graw Hill.
- Deming, W.E. (1986). *Out of the Crisis*. Cambridge: Massachusetts Institute of Technology Press.
- Deming, W.E., 1994. *The New Economics for Industry, Education, Government*, 2nd ed. MIT Press, Cambridge, MA.
- Deming, W.E., 1986. *Out of the Crisis*. MIT Press, Cambridge, MA.
- Djan Magalhaes Castro, Fernando Silva Parreiras, A review on multi-criteria decision-making for energy efficiency in automotive engineering, *Applied Computing and Informatics* (2018)
- DNV-RP-B401, Cathodic Protection Design, October 2010.
- Fabio P., Richard C., Fabio S., Judimar C and Terry S (2011). Evaluation of the performance of Inconel 718 fasteners subjected to cathodic protection systems in offshore and subsea applications. *ASME 2011 30th International Conference on Ocean, Offshore and Arctic Engineering*, pages 165 - 172.
- Fan., Z.P., & Zhang, Q. (2002). An approach to multiple attribute decision making based on fuzzy preference information on alternatives. *Fuzzy Set and System*, 131: 101-106.



- Feigenbaum, A.V. (1991). Total quality control ( 3 ed.) New York: McGraw-Hill, Inc
- Flynn, B.B., Saladin, B., 2001. Further evidence on the validity of the theoretical models underlying the Baldrige criteria. *J. Oper. Manag.* 19 (6), 617–652.
- Fontela E, Gabus A. The DEMATEL Observer (DEMATEL 1976 Report). Switzerland, Geneva: Battelle Geneva Research Center; 1976.
- Gabus A, Fontela E. Perceptions of the world problematique: Communication procedure, communicating with those bearing collective responsibility, DEMATEL re- port No. 1. Geneva, Switzerland: Battelle Geneva Research Cente; 1973.
- Govindan Kannan, Shankar K Madan, Kannan Devika. Sustainable material selec- tion for construction industry – A hybrid multi criteria decision making approach. *Renew Sustain Energy Rev* 2016;55(3):1274–88.
- Greiff, S., Holt, D., & Funke, J. (2013). Perspectives on problem solving in educational assessment: Analytical, interactive, and collaborative problem solving. *The Journal of Problem Solving*, 5, 71–91.
- Groocock, J.M. (1986). The chain of quality: Market dominance through superior product quality. New York: John Wiley & Sons.
- Guimarães CF, Lapa CMF. Fuzzy FMEA applied to PWR chemical and volume control system. *Progress Nucl Energy* 2004;44 (3):191–213.
- Guo JJ, Tsai SB. Discussing and Evaluating Green Supply Chain Suppliers: a Case Study of the Printed Circuit Board Industry in China. *South Afr J Ind Eng* 2015;26(2):56–67.
- Hajime Y, Kenichi I, Hajime M. An innovative product development process for resolving fundamental conflicts. *J Jpn Soc Precis Eng* 2005;71(2):216–22.
- Handfield, R., Jayaram, J., & Ghosh, S. (1999). An empirical examination of quality tool deployment patterns and their impact on performance. *International Journal of Production Research*, 37(6): 1403-1426.
- Ho, W., Dey, P.k., & Higson, H.E. (2006). Multiple Criteria Decision-Making Techniques in Higher Education. *International Journal of Educational Management Decision*, 20: 319-337.
- H. Huang, L. Zhang, Z. Liu, J.W. Sutherland, Multi-criteria decision making and uncertainty analysis for materials selection in environmentally conscious design, *Int. J. Adv. Manuf. Technol.* 52 (5) (2010) 421–432, <https://doi.org/10.1007/s00170-010-2745-9>.
- Hunt, V.D. (1995). Quality management for government : A guide to federal, state and local implementation. Milwaukee: ASQC Quality Press.
- J. Hui, M. Lundteigen, M. Rausand, J. Risk Reliab. 226 (6) 2012 79-85
- L. Anojkumar, M. Ilangkumaran, V. Sasirekha, Comparative analysis of mcdm methods for pipe material selection in sugar industry, *Expert Syst. Appl.* 41 (6) (2014) 2964–2980, <https://doi.org/10.1016/j.eswa.2013.10.028>.
- Liu Hu-Chen, You Jian-Xin, Lu Chao, Chen Yi-Zeng. Evaluating health-care waste treatment technologies using a hybrid multi-criteria

- decision making model. *Renew Sustain Energy Rev* 2015;41(1):932–42.
- ISO 17020, Conformity assessment – General criteria for the operation of various types of bodies performing inspection, 2012.
- ISO 13628-1:2005 Petroleum and natural gas industries - Design and operation of subsea production systems - Part 1: General requirements and recommendation.
- ISO 10423:2009 Petroleum and natural gas industries -- Drilling and production equipment - Wellhead and Christmas tree equipment
- Ishikawa, K. (1985). *What is Total Quality Control? The Japanese Way*. London: Prentice-Hall.
- J. Chen, P. Zhao, H. Liang, T. Mei, A multiple attribute-based decision making model for autonomous vehicle in urban environment, in: *Intelligent Vehicles Symposium Proceedings, 2014 IEEE*, 2014, pp. 480–485. <https://doi.org/10.1109/ivs.2014.6856470>.
- Juran, J.M. (1981). Product quality: A prescription for the west. *Management Review*, 70 (6): 8-14.
- Juran, J.M. (1988). *Juran on planning on quality*. New York: Free Press
- Juran, J.M. (1992). *Juran on Quality by Design: The New Steps for Planning Quality into Goods and Services*. New York: The Free Press.
- Juran, J.M., & Gryna, F.M. (1993). *Quality Planning and Analysis* (Third ed.). New York: McGraw-Hill.
- Kirkemo, F., Fasteners – Strength and Quality Requirements, PVP2014-28719.
- Lee SC, Su JM, Tsai SB, Lu TL. A comprehensive survey of government auditors' self-efficacy and professional Development for improving audit quality. *SpringerPlus* 2016;5:1263. <http://dx.doi.org/10.1186/s40064-016-2903-0>.
- Lee YC, Li ML, Yen TM, Huang TH. Analysis of adopting an integrated decision making trial and evaluation laboratory on a technology acceptance model. *Expert Syst Appl* 2010;37:1745–54.
- Lee YC, Hsieh YF. Integration of revised simultaneous importance performance analysis and decision making trial and evaluation laboratory – A study of mobile telecommunication industry in Taiwan. *Afr J Bus Manag* 2011;5(6):2312–21.
- Lee YC, Wang YC, Chien CH, Wu CH, Lu SC, Tsai SB, Dong W. Applying Revised Gap Analysis Model in Measuring Hotel Service Quality. *SpringerPlus* 2016;5:1191. <http://dx.doi.org/10.1186/s40064-016-2823-z>.
- Lee YC, Wang YC, Lu SC, Hsieh YF, Chien CH, Tsai SB, Dong W. An empirical research on customer satisfaction study: a Consideration of different levels of performance. *SpringerPlus* 2016;5:1577. <http://dx.doi.org/10.1186/s40064-016-3208-z>.
- Liu HC, Liu L, Liu N, Mao LX. Risk evaluation in failure mode and effects analysis with extended VIKOR method under fuzzy environment. *Expert Syst Appl* 2012;39 (17):12926–34.
- Mallur, S.B., & Hiregoudar, N.L. (2010, June 30 – July 2). A survey of TQM practices in North Karnataka manufacturing SMEs: An empirical

- evaluation. Paper presented at the World Congress on Engineering, London.
- Mallur, S.B., Hiregrouder, N.L., & Sequeira, A.H. (2011). The Relationship between TQM Practices and Business Excellence in Small and Medium Sized Manufacturing Enterprises of North Karnataka Region. *SDM 1MD Journal of Management*, 2(1): 18-31.
- McQuarter, R.E., Dale, B.G., Scurr, C., & Hillman, P. (1995). Using Quality Tools and Techniques Successfully. TQM International, Frodsham.
- M.L. Tseng, Y.H. Lin, A.S.F. Chiu, J.C.H. Liao, Using fanp approach on selection of competitive priorities based on cleaner production implementation: a case study in pcb manufacturer, Taiwan, *Clean Technol. Environ. Policy* 10 (1) (2007) 17–29, <https://doi.org/10.1007/s10098-007-0109-4>.
- NACE MR0175/ISO 15156-1, Petroleum and natural gas industries - Materials for use in H<sub>2</sub>S - containing Environments in oil and gas production, Part 1: General principles for selection of cracking-resistant materials.
- Nancy R. Tague's The Quality Toolbox, Second Edition, ASQ Quality Press, 2005, pages 247–249.
- Norsok M-001, Materials Selection, Edition 5, 2014.
- N. Sakundarini, Z. Taha, S.H. Abdul-Rashid, R.A. Ghazilla, J. Gonzales, Multi- objective optimization for high recyclability material selection using genetic algorithm, *Int. J. Adv. Manuf. Technol.* 68 (5) (2013) 1441–1451, <https://doi.org/10.1007/s00170-013-4933-x>.
- P. Chatterjee, V.M. Athawale, S. Chakraborty, Selection of materials using compromise ranking and outranking methods, *Mater. Des.* 30 (10) (2009) 4043–4053, <https://doi.org/10.1016/j.matdes.2009.05.016>.
- Powell, T.C. (1995). Total quality management as competitive advantage: A review and empirical study. *Strategic Management Journal*, 16(1): 15.
- Rørvik, G.Haaland, B.Ø., and Kirkemo, F., Fasteners in subsea application – end user experiences and requirements, *OMAE2014-24520*.
- R.J. Girubha, S. Vinodh, Application of fuzzy vikor and environmental impact analysis for material selection of an automotive component, *Mater. Des.* 37 (2012) 478–486, <https://doi.org/10.1016/j.matdes.2012.01.022>.
- R. Khorshidi, A. Hassani, A.H. Rauof, M. Emamy, Selection of an optimal refinement condition to achieve maximum tensile properties of Al–15% Mg<sub>2</sub>Si composite based on topsis method, *Mater. Des.* 46 (2013) 442–450, <https://doi.org/10.1016/j.matdes.2012.09.050>.
- R. Khorshidi, A. Hassani, Comparative analysis between topsis and psi methods of materials selection to achieve a desirable combination of strength and workability in al/sic composite, *Mater. Des.* 52 (2013) 999– 1010, <https://doi.org/10.1016/j.matdes.2013.06.011>.
- R. Sadiq, T. Husain, B. Veitch, N. Bose, Evaluation of generic types of drilling fluid using a risk-based analytic hierarchy process, *Environ. Manage.* 32 (6) (2004) 778–787.
- R.V. Rao, A decision making methodology for material selection using an improved compromise ranking method, *Mater. Des.* 29 (10) (2008) 1949– 1954, <https://doi.org/10.1016/j.matdes.2008.04.019>.



- Scherer, R., & Tiemann, R. (2014). Evidence on the effects of task interactivity and grade level on thinking skills involved in complex problem solving. *Thinking Skills and Creativity*, 11, 48–64.
- Samet Haidar, Marzbani Fatemeh. Quantizing the deterministic nonlinearity in wind speed time series. *Renew Sustain Energy Rev* 2014;39:1143–54.
- Strantzali Eleni, Aravossis Konstantinos. Decision making in renewable energy investments: a review. *Renew Sustain Energy Rev* 2016;55(3):885–98.
- Sharma RK, Kumar D, Kumar P. Systematic failure mode effect analysis (FMEA) using fuzzy linguistic modeling. *Int J Qual Reliab Manag* 2005;22:986–1004.
- Shian-Jong Chuu. Selecting the advanced manufacturing technology using fuzzy multiple attributes group decision making with multiple fuzzy information. *Computers and Industrial Engineering* (2009)
- S.M.A.K. Firouzabadi, B. Henson, C. Barnes, A multiple stakeholders approach to strategic selection decisions, *Comput. Ind. Eng.* 54 (4) (2008) 851–865, <https://doi.org/10.1016/j.cie.2007.10.015>.
- S.M. Ordoobadi, N.J. Mulvaney, Development of a justification tool for advanced manufacturing technologies: system-wide benefits value analysis, *J. Eng. Tech. Manage.* 18 (2) (2001) 157–184, [https://doi.org/10.1016/s0923-4748\(01\)00033-9](https://doi.org/10.1016/s0923-4748(01)00033-9).
- S.R. Maity, S. Chakraborty, A visual decision aid for gear materials selection, *J. Inst. Eng. (India): Ser. C* 94 (3) (2013) 199–212, <https://doi.org/10.1007/s40032-013-0080-2>.
- Su JM, Lee SC, Tsai SB, Lu TL. A comprehensive survey of the relationship between self - efficacy and performance for the governmental auditors. *SpringerPlus* 2016;5:508. <http://dx.doi.org/10.1186/s40064-016-2104-x>.
- Tsai SB, Lee YC, Wu CH, Guo JJ. Examining how manufacturing corporations win orders. *South Afr J Ind Eng* 2013;24(3):112–24.
- Tsai SB, Chien MF, Xue Y, Li L, et al. Using the fuzzy DEMATEL to determine environmental performance: a case of printed circuit board industry in Taiwan. *PLoS One* 2015;10(6):e0129153. <http://dx.doi.org/10.1371/journal.pone.0129153>.
- Tsai SB, Saito R, Lin YC, Chen Q, et al. Discussing measurement criteria and competitive strategies of green suppliers from a Green law perspective. *Proceedings of the institution of mechanical engineers. Proc Inst Mech Eng, Part B: J Eng Manuf* 2015;229(S1):135–45.
- Tsai SB, Chen KY, Zhao H, Wei YM, Wang CK, Zheng Y, Chang LC, Wang J. Using a mixed model to explore evaluation criteria for bank supervision: a banking supervision law perspective. *PLoS One* 2016;11(12):e0167710. <http://dx.doi.org/10.1371/journal.pone.0167710>.
- Tsai SB, Li G, Wu CH, Zheng Y, Wang J. An empirical research on evaluating banks' credit assessment of corporate customers. *SpringerPlus* 2016;5:2088. <http://dx.doi.org/10.1186/s40064-016-3774-0>.

- Tsai SB, Xue Y, Zhang J, et al. Models for forecasting growth trends in renewable energy. *Renew Sustain Energy Rev* 2016. <http://dx.doi.org/10.1016/j.rser.2016.06.001>.
- Tsai, S. B., Yu, J., Ma, L., Luo, F., Zhou, J., Chen, Q., & Xu, L. (2018). A study on solving the production process problems of the photovoltaic cell industry. *Renewable and Sustainable Energy Reviews*, 82(November 2016), 3546–3553. <https://doi.org/10.1016/j.rser.2017.10.105>
- Tsai SB, Xue Y, Huang PY, et al. Establishing a criteria system for green production. *Proc Inst Mech Eng, Part B: J Eng Manuf* 2015;229(8):1395–406.
- Tzeng GH, Chiang CH, Li CW. Evaluating intertwined effects in e-learning programs: a novel hybrid MCDM model based on factor analysis and DEMATEL. *Expert Syst Appl* 2007;32:1028–44.
- W.E. Vesely, F.F. Goldberg, N.H. Roberts, D.F. Haasl, *Fault Tree Handbook*, US Nuclear Regulatory Commission, Washington D.C., USA, 1981
- Wu WW, Lee YT. Developing global managers' competencies using the fuzzy DEMATEL method. *Expert Syst Appl* 2007;32(2):499–507.
- Zhou J, Wang Q, Tsai SB, Xue Y, Dong W. How to evaluate the job satisfaction of development personnel. *IEEE Trans Syst Man Cybern-Syst* 2016:2016. <http://dx.doi.org/10.1109/TSMC.2016.2519860>.