



UNIVERSITI PUTRA MALAYSIA

***LOW VELOCITY IMPACT SANDWICH STRUCTURE BAMBOO FOR
AEROSPACE APPLICATIONS***

AIN UMAIRA BINTI MD SHAH

FK 2018 140



**LOW VELOCITY IMPACT SANDWICH STRUCTURE BAMBOO FOR
AEROSPACE APPLICATIONS**

By

AIN UMAIRA BINTI MD SHAH

**Thesis Submitted to the School of Graduate Studies, Universiti Putra
Malaysia, in Fulfilment of the Requirements for the Degree of Doctor of
Philosophy**

March 2018

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in
fulfilment of the requirement for the degree of Doctor of Philosophy

LOW VELOCITY IMPACT SANDWICH STRUCTURE BAMBOO FOR AEROSPACE APPLICATION

By

AIN UMAIRA BINTI MD SHAH

March 2018

Chair: Mohamed Thariq B. Hameed Sultan, PhD, PEng, CEng, PTech
Faculty: Engineering

Abundant sources of bamboo in Malaysia, if fully utilized, can increase its commercial value especially in developing greener composites. In this study, material characterizations on bamboo based composites, from Malaysian species of *Bambusa vulgaris*, were carried out by aiming on the low velocity impact properties. Bamboo powder, as the raw material in composites, was self-processed through a combination of manual and machining methods. Four different loadings of bamboo powder, which ranged from 500 μ m to 1mm in size, consisting of 0%, 10%, 20%, and 30% by weight were applied in the preparation of the composites. Woven glass fibre type E600, embedded at the outermost top and bottom layer of composites, was used as the main reinforcement with epoxy as the polymer matrix. Sandwich structured composites were fabricated through a combination of manual hand lay-up and compression moulding techniques. From the tensile testing and scanning electron microscopy images, poor bamboo-epoxy interfacial bonding lowered the strength of the composites as the fibre loading increased. However, the highest percentage of 30% loading suggested good stress transfer in composites through observation of the peak of the Tan δ curve through dynamic mechanical analysis. For both thermal degradation and water absorption properties, the addition of bamboo fibres lowers the thermal stability and enhances the water absorption respectively, which are the drawbacks of using natural fibres. Inconsistent damage propagations were observed on the non-hybrid bamboo composites after low velocity impact due to short size bamboo fibres aligned in random orientation within the epoxy matrix. However, the impact resistance increased as the bamboo fibre loading increased. The inclusion of woven glass fibres at the top and bottom layer of the composites significantly improved the impact resistance as these layers slowed down the penetration of the impactor, thus reducing the severity of the damages. Generally, the newly developed sandwich structured bamboo filled glass-epoxy hybrid composites have potential to be used in aerospace applications with low velocity impact properties.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi keperluan untuk Ijazah Doktor Falsafah

IMPAK BERKELAJUAN RENDAH BULUH BERSTRUKTUR SANDWICH UNTUK APLIKASI AEROANGKASA

Oleh

AIN UMAIRA BINTI MD SHAH

Mac 2018

**Pengerusi: Mohamed Thariq B. Hameed Sultan, PhD, PEng, CEng, PTech
Fakulti: Kejuruteraan**

Sumber buluh yang banyak di Malaysia, sekiranya digunakan secara optimum, boleh meningkatkan nilai komersialnya terutama dalam membangunkan bahan mesra alam. Dalam kajian ini, perincian bahan terhadap komposit buluh daripada spesies yang berasal dari Malaysia, *Bambusa Vulgaris*, telah dijalankan dengan tujuan utama kepada sifat impak berkelajuan rendah. Serbuk buluh, sebagai bahan mentah dalam komposit, telah diproses secara manual dan menggunakan mesin. Dalam penyediaan komposit, serbuk buluh, dalam lengkungan saiz 500 μ m-1mm, telah dimasukkan dengan berat berlainan 0%, 10%, 20%, dan 30%. Anyaman gentian kaca jenis E600 telah disisipkan di lapisan paling luar atas dan bawah komposit, sebagai sokongan utama dengan epoksi. Komposit berstruktur sandwich telah dihasilkan melalui teknik hand lay-up dan mampatan acuan. Dari ujian tensile dan imbasan imej mikroskop elektron, didapati peningkatan jumlah gentian telah melemahkan ikatan gabung jalin buluh-epoksi pada komposit. Walaubagaimanapun, pemerhatian puncak Tan δ melalui analisis dinamik mekanikal mendapati peratus tertinggi iaitu 30% menunjukkan aliran tekanan yang baik dalam komposit. Dalam sifat degradasi haba dan daya serapan air, penambahan gentian buluh telah merendahkan kestabilan haba serta menambahkan daya serapan air, dan ini merupakan satu kelemahan dalam penggunaan gentian semulajadi. Penyebaran kerosakan yang tidak sekata telah dilihat pada komposit buluh tidak hibrid selepas impak berkelajuan rendah diakibatkan saiz gentian buluh yang pendek serta susunan rawak dalam matrik. Bagaimanapun, ketahanan impak meningkat apabila kandungan gentian buluh meningkat. Penambahan anyaman gentian kaca pada lapisan atas dan bawah komposit ternyata menambah baik ketahanan impak kerana lapisan ini memperlahankan penembusan impak seterusnya mengurangkan kerosakan. Komposit hibrid dengan struktur sandwich yang baru dibangunkan mempunyai potensi untuk digunakan dalam aplikasi aeroangkasa dengan sifat ketahanan terhadap impak berkelajuan rendah.

ACKNOWLEDGEMENTS

First and foremost, all praises go to Allah S.W.T, The Almighty, for His continuous blessings and mercy throughout my journey of completing this research successfully. I would like to express my gratitude to my supportive supervisory committees lead by Associate Professor Ir. Dr. Mohamed Thariq bin Hameed Sultan with the committees, Associate Professor Ir. Dr. Abd. Rahim bin Abu Talib and Dr. Mohamad Jawaaid for the never ending supervision and guidance throughout the study. Their continuous success stories and achievements always inspire me to work harder and grab all the chances to be better every single day.

My ottermost appreciation to my beloved parents, Hj Md Shah bin Sujak and Hj Faridah binti Mohd Saripan, for the overwhelming moral support, love and blessings in everything I did. Fulfilling all my needs, financially and emotionally, their unreturnable gifts never fail to remind me that winners never quit and quitters never win. Not to forget my siblings, Ani Najiha, Afiq Akmal and Ainol Yasir, which complete the strongest support system I ever had. Spending time to hear all my ups and downs, postponing holidays just to wait for me to be together, sacrificing several chances in life just to prioritize my wish and sometimes treat me with heavenly foods just to put my stress aside, my siblings are the fabulous gifts from Allah that I never expected. Love and advice from my big family, grandmothers, grandfather, aunties, and uncles, the elders as well as the Youngers are very meaningful to me.

Special thanks to everyone I called friends, as I believed their prayers and supports are among the reasons I survived in this challenging post-graduate journey. Remarkable gratitude to the small AMRC group especially Syafiqah, Shazlin, Farid, Peggy, Aznan, Hasfa, Izwan, Ariff, Mus, Rahim, Fiqa, Elly, and all the AMRC 7th floor members, for helping me from the beginning till the end. I am very grateful to have this small family, which tended to be my backbone during my student life in UPM.

Last but not least, thank you to all the individuals around me, lecturers, staff, technicians, and everyone directly or indirectly involved during the completion of my study.

An exclusive dedication of this PhD degree goes to my most beloved grandfather, Hj Saripan, who passed away right after I was upgraded from Masters to PhD. The one I can't describe in words. He is just a great example in life besides The Prophet S.A.W and the companions. It is a loss not to have his prayers since the day he left us. Al-fatihah.

I certify that a Thesis Examination Committee has met on 26 March 2018 to conduct the final examination of Ain Umaira binti Md. Shah on her thesis entitled "Low Velocity Impact Sandwich Structure Bamboo for Aerospace Applications" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Mohd Khairol Anuar bin Mohd Ariffin, PhD

Professor Ir.
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Faizal bin Mustapha, PhD

Professor Ir.
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Mohamad Ridzwan bin Ishak, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

K. Balasubramanian, PhD

Professor
Bharath University
India
(External Examiner)



NOR AINI AB. SHUKOR, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 26 April 2018

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Mohamed Thariq Bin Hameed Sultan, PhD, PEng, CEng, PTech

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Abd Rahim Bin Abu Talib, PhD, PEng, PTech

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Mohammad Jawaid, PhD

Research Fellow
Institute of Tropical Forestry and Forest Products
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: _____ Date: _____

Name and Matric No.: Ain Umaira Binti Md Shah, GS42642

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____

Name of Chairman
of Supervisory
Committee:

Assoc. Prof. Ir. Ts. Dr.
Mohamed Thariq Bin Hameed
Sultan

Signature: _____

Name of Member of
Supervisory
Committee:

Assoc. Prof. Ir. Ts. Dr. Abd
Rahim Bin Abu Talib

Signature: _____

Name of Member of
Supervisory
Committee:

Dr. Mohammad Jawaid

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	ii
ACKNOWLEDGEMENTS	iii
APPROVAL	iv
DECLARATION	vi
LIST OF TABLES	xi
LIST OF FIGURES	xiii
LIST OF ABBREVIATIONS	xviii
 CHAPTER	
 1 INTRODUCTION	 1
1.1 Introduction	1
1.2 Problem Statement	4
1.3 Objectives of The Study	5
1.4 Research Scope	6
1.5 Thesis Organisation	7
 2 LITERATURE REVIEW	 8
2.1 Introduction	8
2.2 Factors Affecting The Properties of Bamboo Fibres	12
2.2.1 Physical Properties	12
2.2.2 Chemical Composition	14
2.2.3 Microstructure Observation	14
2.3 Bamboo Fibre Reinforced Polymer Composites (BFRP)	15
2.3.1 Type of Bamboo Fibres in Bamboo Composites	16
2.3.2 Polymers in Bamboo Composites	21
2.3.3 Processing Techniques of Bamboo Composites	24
2.4 Analyses Conducted on Bamboo Fibre Reinforced Polymer Composites (BFRP)	29
 3 METHODOLOGY	 32
3.1 Introduction	32
3.2 Materials	34
3.2.1 Bamboo	34
3.2.2 Glass Fibre	34
3.2.3 Epoxy resin	35
3.3 Materials Preparation	35
3.3.1 Bamboo Powder	35
3.3.2 Fabrication of Bamboo Fibre Filled Epoxy Composites (EP-BFC)	39

3.3.3	Fabrication of Bamboo Powder Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	40
3.4	Characterisations of Bamboo Fibres	43
3.4.1	Moisture Content of Bamboo	43
3.4.2	Tensile Test of Single Bamboo Fibre	44
3.5	Characterizations of Bamboo Composites	45
3.5.1	Mechanical Properties	45
3.5.2	Morphological Observation	48
3.5.3	Dynamic Mechanical Analysis (DMA) of Neat Epoxy (EP) and Hybrid Bamboo Composites (EP/G-BFC)	48
3.5.4	Thermal Analysis of Bamboo Composites and Its Constituents	49
3.5.5	Physical Properties of Pure Epoxy (EP) and Hybrid Bamboo Composites (EP/G-BFC)	50
3.5.6	Low Velocity Impact Test on Pure Epoxy (EP) and Bamboo Composites (EP-BFC and EP/G-BFC)	53
3.5.7	Damage Detection Using Dye Penetrant Method	55
4	RESULTS AND DISCUSSION	56
4.1	Characterization of The Bamboo Fibres	56
4.1.1	Moisture Content of Bamboo	56
4.1.2	Tensile Properties of Single Bamboo Fibre	58
4.2	The Effect of Different Loadings on Mechanical Properties of Bamboo Fibre Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	60
4.2.1	Tensile Properties	60
4.2.2	Flexural Properties	64
4.2.3	Morphological Observations	67
4.3	Dynamic Mechanical Analysis (DMA) on Different Loadings Bamboo Fibre Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	70
4.3.1	Storage Modulus (E')	70
4.3.2	Loss Modulus (E'')	73
4.3.3	Tan Delta	74
4.4	Thermal Analysis of Bamboo Fibre and Its Composites	77
4.4.1	Thermal Degradation by Thermogravimetric Analysis (TGA)	77
4.4.2	Differential Scanning Calorimetry (DSC)	81
4.5	The Effect of Different Loadings on Physical Properties of Bamboo Powder Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	84
4.5.1	Water Absorption Capacity in Distilled Water	85
4.5.2	Water Absorption through Soil Burial Technique	87

4.6	Low Velocity Impact Properties of Bamboo Based Composites	88
4.6.1	Force Displacement Analysis	88
4.6.2	Peak Force Variation with Impact Energy	95
4.6.3	Energy Absorbed Variation with Impact Energy	96
4.6.4	Damage Detection after The Low Velocity Impact	99
5	CONCLUSIONS AND RECOMMENDATIONS FOR FUTURE RESEARCH	105
5.1	Conclusions	105
5.1.1	Characterization of Bamboo Fibres	105
5.1.2	The Effect of Different Loadings on Mechanical Properties of Bamboo Fibre Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	106
5.1.3	Dynamic Mechanical Analysis (DMA) on Different Loadings Bamboo Fibre Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	106
5.1.4	Thermal Analysis of Bamboo Fibre and Its Composites	106
5.1.5	The Effect of Different Loadings on Physical Properties of Bamboo Powder Filled Glass/Epoxy Hybrid Composites (EP/G-BFC)	107
5.1.6	Low Velocity Impact Properties of Bamboo Based Composites	107
5.1.7	Summary of Conclusions	108
5.2	Recommendations	108
	REFERENCES	110
	BIODATA OF STUDENT	126
	LIST OF PUBLICATIONS	127

LIST OF TABLES

Table	Page
2.1 Bamboo regions along with countries (Abdul Khalil et al., 2012)	9
2.2 Bamboo biocomposites (Suhaily, Khalil, Nadirah, & Jawaid, 2013)	10
2.3 Chemical composition of bamboo (Ismail, Edyham & Wirjosentono, 2002)	14
2.4 Mechanical and physical properties of bamboo fibres extracted through different methods	20
2.5 Mechanical properties of several natural fibres	21
2.6 Comparison between thermoplastics and thermosets (RL Hudson, 2015; Modor Plastic, 2017; StudyNotes, 2017)	22
2.7 Properties of commonly used thermoplastics in BFRP	23
2.8 Properties of commonly used thermosets in BFRP	23
2.9 Different combinations of bamboo fibres, polymer matrices and methods of fabrication applied in the study of bamboo based composites	26
2.10 Experimental analyses conducted on various types of BFRP	30
3.1 Mechanical properties of glass fibres types C and E	35
3.2 Average thickness of fabricated EP, EP-BFC and EP/G-BFC	42
3.3 Different heights according to impact energy applied throughout the testing	54
4.1 Mechanical properties of EP and different loading EP/G-BFC	66
4.2 The values of constant C for different loadings of EP/G-BFC	72
4.3 Peak height (T _g peak) and peak width at half height of the loss modulus curves	74
4.4 Peak height and peak width at half height of the Tan δ curves	76
4.5 Data analysed from the force displacement graphs of EP, EP-BF10 and EP-BF30 at the first range of impact energy level	93

4.6	Data analysed from the force displacement graphs of EP/G-BF10 and EP/G-BF30 at the second range of impact energy level	94
4.7	Distance travelled by the matrix cracking on the bottom surface of EP-BF10 at different impact energy levels	101
4.8	Distance travelled by the matrix cracking on the bottom surface of EP-BF30 at different impact energy	102
4.9	Damage area for EP/G-BF10 and EP/G-BF30 at different energy levels	104



LIST OF FIGURES

Figure	Page
1.1 Traditional use of bamboo culms in structural applications in Malaysia (Sarawak Borneo Tour, 2011)	2
1.2 The potential use of bamboo in various applications nowadays (Lexus, 2012; Pacific Motors, 2016; Bicycle Design, 2015; Wooden Classics Hawaii, 2006; Treehugger, 2007)	3
2.1 Different types of plant fibres (Célino, Fréour, Jacquemin, & Casari, 2014; Mohanty, Misra, & Drzal, 2002)	8
2.2 Malaysia bamboo species, <i>Bambusa vulgaris</i> , growing in a sympodial clump along the riverbank	13
2.3 Lichens appear on the surface of matured bamboo culms	13
2.4 Microstructure of the bamboo culm (Mannan, Knox & Basu, 2017)	15
2.5 Different forms of man-made fibres	16
2.6 Different forms of natural fibres	17
2.7 Different bamboo clumps, monopodial and sympodial clumps	18
2.8 Methods of extraction for bamboo fibres (Ain U et al., 2016)	19
2.9 Fabrication methods for fibre reinforced polymers (FRP)	24
3.1 Methodology flowchart	33
3.2 Different densities of woven glass fibres can be observed physically; a) 200 gsm, b) 400 gsm, c) 600 gsm	34
3.3 Preparation of bamboo powder from fresh bamboo culms in the laboratory	37
3.4 Bamboo fibre, Part A and Part B matrix resin after being weighed and prepared to be mixed	39
3.5 Different mixing apparatus available in the laboratory; a) Ultrasonic sonicator, b) homogenizer, c) mechanical stirrer	40
3.6 Schematic stacking sequence of sandwich-structured EP/G-BFC	41
3.7 Steps followed during the fabrication of EP/G-BFC	42

3.8	Bamboo strips were weighed on an electronic balance every 24 hours to measure their moisture content	43
3.9	Bamboo strips were placed separately to each other to ensure all surfaces were exposed to heat	44
3.10	Samples prepared in dog-bone shape for tensile testing	45
3.11	Extensometer attached to the composite sample during the tensile testing	46
3.12	Flexural testing conducted in three point bending mode	47
3.13	Fractured surface of EP/G-BFC sputtered with gold before being observed under FESEM	48
3.14	Dual cantilever mode used for DMA	48
3.15	Samples weighing 10 mg each prepared for TGA and DSC	49
3.16	Samples for water absorption testing in a distilled water surrounding	50
3.17	Samples were buried in four different containers filled with gardening soil for different periods	52
3.18	Gardening soil used to bury the samples for water absorption testing in a soil surrounding	52
3.19	Hemispherical tip striker dropped from desired height onto the clamped sample	53
4.1	Percentage moisture content of different sections along bamboo culm from the species <i>Bambusa vulgaris</i>	57
4.2	Percentage moisture content of different sections along bamboo culm for different species of Malaysian bamboo (Zakikhani, Zahari, Sultan, & Majid, 2017)	58
4.3	Tensile properties of single fibres for five different species of Malaysian bamboo	59
4.4	Tensile stress-strain curves of EP and EP/G-BFC with varying bamboo fibre loading	60
4.5	Image enlargement of failure propagation experienced by EP and EP/G-BFC illustrated in stress-strain curves from Figure 4.4. The points showed the stress peaks at which the composites experienced first break and total failure respectively	61

4.6	Tensile strength at three different peaks; first break, maximum stress and total failure, and tensile modulus of different loadings EP/G-BFC	62
4.7	Elongation at break of composites at different fibre loadings	63
4.8	Flexural stress-strain curves of EP and EP/G-BFC with varying bamboo fibre loading	64
4.9	Image enlargement of failure propagation of EP/G-BFC illustrated in stress-strain curves in Figure 4.8	65
4.10	Flexural strength at two different peaks; maximum stress and stress at break, and flexural modulus of different loading EP/G-BFC	66
4.11	SEM image of tensile fractured surface of EP/G-BFC at magnification 100x showing holes after BF pull-out	67
4.12	SEM image of tensile fractured surface of EP/G-BFC at magnification 100x showing BF pull-out	68
4.13	SEM image of tensile fractured surface of EP/G-BFC at magnification 130x showing BF bend	68
4.14	SEM image of tensile fractured surface of EP/G-BFC at magnification 120x showing GF at the top layer of composites	69
4.15	SEM image of tensile fractured surface of EP/G-BFC at magnification 400x displaying the vascular bundle microstructure of BF	70
4.16	The effect of temperature on the storage modulus of EP and EP/G-BFC with different BF loading	71
4.17	Variation of loss modulus with temperature on EP and different BF loading of EP/G-BFC	73
4.18	Variation of Tan δ as a function of temperature on EP and different BF loading of EP/G-BFC	75
4.19	TGA curves of EP-BF with different BF loadings. The blue arrow indicates the increasing ash content	77
4.20	Image enlargement of the mass loss step from the curves in Figure 4.19. The blue arrow shows higher loading composites burns at lower temperature	78
4.21	TGA curves of EP, BF and GF	79

4.22	TGA curves of EP, EP-BF30 and EP/G-BF30	80
4.23	DTG curves of EP, BF, GF, EP-BF30 and EP/G-BF30	81
4.24	DSC curves of BF and EP. The blue circle locates the peak temperature for both BF and EP	82
4.25	Image enlargement of the peak temperature for BF and EP from DSC curves in Figure 4.24	82
4.26	DSC curves of EP-BF10 and EP-BF20. The blue circle locates the peak temperature for both EP-BF10 and EP-BF20	83
4.27	Image enlargement of the peak temperature for EP-BF10 and EP-BF20 from DSC curves in Figure 4.26	84
4.28	Water absorption behaviour of EP and different BF loadings of hybrid EP/G-BFC	85
4.29	Effect of water on fibre-matrix interface (Azwa, Yousif, Manalo, & Karunasena, 2013)	86
4.30	Percentage of water absorption for EP and EPG-BFC through soil burial technique after different period of times	87
4.31	Force displacement graphs of pure epoxy (EP) at 2.5J impact energy level showed closed curves	88
4.32	Force displacement graphs of pure epoxy (EP) at 15J impact energy level showed open curves	90
4.33	Force displacement graphs of EP, non-hybrid EP-BF10 and EP-BF30 and hybrid EP/G-BF10 and EP/G-BF30 at different impact energy levels	90
4.34	Variation of peak force for pure epoxy and non-hybrid bamboo composites at the first range of impact energy levels	95
4.35	Variation of the peak force for EP and EP/G-BFC in the second range of impact energy levels	96
4.36	Percentage of energy absorbed by pure epoxy and non-hybrid bamboo composites at the first range of impact energy levels	97
4.37	Percentage of energy absorbed by pure epoxy and hybrid bamboo composites at the second range of impact energy levels	98
4.38	Agglomeration in bamboo composites can either, a) stop the damage progression; or b) caused more severe damage on the sample	98

4.39	The EP samples after low velocity impact at different impact energy levels. No damages detected at the first four levels of impact energy, however total failure observed at 10.00 J of impact energy level	99
4.40	Damages on the impacted samples of EP-BF10 was observed with the help of dye penetrant	100
4.41	Damages on the impacted samples of EP-BF30 was observed with the help of dye penetrant	101
4.42	Visible damages on the impacted samples of EP/G-BF10	103
4.43	Visible damages on the impacted samples of EP/G-BF30	103

LIST OF ABBREVIATIONS

ASTM	American Society for Testing Materials
BF	Bamboo fibre
BFRP	Bamboo fibre reinforced polymer
BV	Bambusa vulgaris
C	Compression
CMC	Ceramic matrix composites
DA	<i>Dendrocalamus asper</i>
DMA	Dynamic mechanical analysis
DP	<i>Dendrocalamus pendulus</i>
DSC	Differential scanning calorimetry
E'	Storage modulus
E''	Loss modulus
EP	Neat epoxy
EP-BFC	Non-hybrid bamboo fibre filled epoxy composites
EP/G-BFC	Bamboo fibre filled glass/epoxy hybrid composites
F	Flexural
FESEM	Field emission scanning electron microscope
FRP	Fibre reinforced polymer
FTIR	Fourier transform infrared spectroscopy
GF	Glass fibre
GL	<i>Gigantochloa levis</i>
GS	<i>Gigantochloa scortechinii</i>
HDPE	High density polyethylene
HDT	Heat deflection temperature
I	Izod impact
ISO	International Organization for Standardization

MAPP	Maleic anhydride polypropylene
MDF	Medium density fibreboard
MMC	Metal matrix composites
NDE	Non-destructive evaluation
NFRP	Natural fibre reinforced polymer
PBS	Poly butylene succinate
PLA	Polylactic acid
PMC	Polymer matrix composites
PP	Polypropylene
PS	Polystyrene
PVC	Polyvinyl chloride
SEM	Scanning electron microscopy
T	Tensile
T _g	Glass transition temperature
TGA	Thermogravimetric analysis
TS	Thickness swelling
WA	Water absorption
XRD	X-ray powder diffraction

CHAPTER 1

INTRODUCTION

1.1 Introduction

The use of natural sources in the materials industry is very familiar nowadays due to their environmental-friendliness, low-cost and long term continuity supply (Kalaiyarasan, Ramesh, & Paramasivam, 2016; McAdam, O'Hare, & Moffett, 2008; Shirvanimoghaddam et al., 2016). Originating from three main sources, i.e. animals, plants and minerals, natural fibres from plant sources are seen to have a high potential contribution in the composites world especially in polymer matrix composites (PMC). A variety of cellulosic fibres from different parts of the plants, such as the leaf, seed, fruit, wood and stalk, can be extracted to fulfil the role of reinforcement in composites, including acting as additional fillers, as hybrid material to synthetic composites or as the main reinforcement in the natural green composites (Ljungberg, 2007; Ramesh, Palanikumar, & Reddy, 2017; Suib, 2017).

Most of the cellulosic fibres used in PMCs, such as kenaf, jute, flax and hemp, come from the bast group, which is one part of the plant. Only a few of the reinforcing fibres originate from the grass group, like bamboo and baggase (Huda, Reddy, & Yang, 2012). Bamboo comes from the grass family of Poaceae with more than 1000 species around the globe (Jawaid & Abdul Khalil, 2011; Thakur & Thakur, 2014). Bamboo ranges from tropical woody bamboo to herbaceous bamboo and from monopodial rhizomes to sympodial rhizomes. Malaysia grows sympodial bamboo, while monopodial bamboo can be found in Taiwan and China (Gratani, Crescente, Varone, Fabrini, & Digiulio, 2008; Soreng et al., 2015).

Bamboo is one of the fastest-growing plants in the world, growing at a rate of 3 cm per hour, whilst some species can grow up to 122 cm per day (Farrelly, 1984; Guinness World Record, 2014). In most species, bamboo attains maturity in 4 to 6 years, where the growing cylindrical hollow culms are in their strongest stage and ready to be harvested. In Malaysia, bamboo is abundant throughout the country, with some species such as *Bambusa vulgaris*, *Gigantochloa scortechinii*, *Gigantochloa levis*, *Gigantochloa ligulata*, *Dendrocalamus asper*, *Bambusa blumeana*, *Schizostachyum grande* and *Schizostachyum zollingeri* being the most commonly harvested for commercial purposes, such as furniture, ornamental, crafts and utensils (Forest Research Institute Malaysia, 2013).

In terms of the strength and performance of the culms, bamboo is one of the natural fibres that exhibits comparable mechanical properties to conventional fibres (Mahdavi, Clouston, & Arwade, 2012). Bamboo is utilized traditionally in low-cost houses, bridges, and construction platforms (Bahari & Krause, 2015).

Although there is no scientific evidence on the strength of bamboo during the previous era, traditional people took the risk of using bamboo in key structural components such as bridges, which were used by many people every day. The Bidayuh ethnic in Sarawak build the bridges from bamboo culms for their daily use as shown in Figure 1.1a (Sarawak Borneo Tour, 2011).

The pillars of houses, which are the main structure in all buildings, made from bamboo proved the ability of bamboo culms to withstand high load from the whole building structure together with the household and furniture. Most houses of the rural people in Sabah and Sarawak were totally made up of bamboo, range from the culms, strips and woven strips as depicted in Figure 1.1b (Sarawak Borneo Tour, 2011).

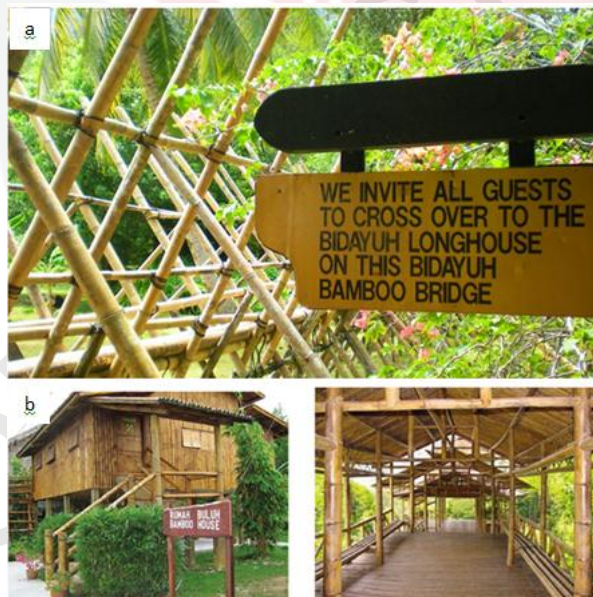


Figure 1.1: Traditional use of bamboo culms in structural applications in Malaysia (Sarawak Borneo Tour, 2011)

These applications, as shown in Figure 1.1, drive the interest of many researchers to prove the high strength of bamboo scientifically, thus enabling its application in wider fields.

Today, bamboo in natural composites is used widely in various applications, such as the interiors of vehicles and aircrafts, bicycle helmets, bicycle frames and decks for leisure activities as shown in Figure 1.2 (Abdul Khalil et al., 2012; Ibrahim et al., 2015; Mahdavi et al., 2012; Nabi Saheb & Jog, 1999; Qiu, Van de Ven, & Molenaar, 2013; Tanaka, Okubo, Fujii, Ono, & Sakurai, 2007).

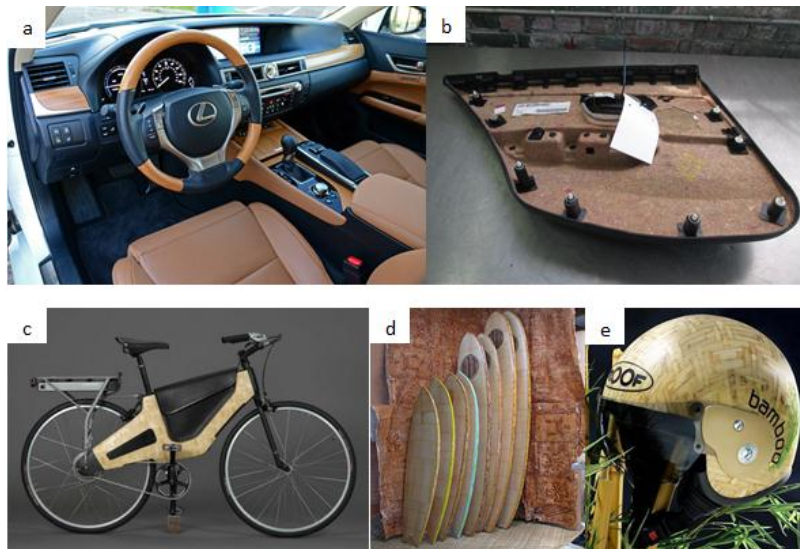


Figure 1.2: The potential use of bamboo in various applications nowadays (Lexus, 2012; Pacific Motors, 2016; Bicycle Design, 2015; Wooden Classics Hawaii, 2006; Treehugger, 2007)

Modern machines and the latest technology available nowadays vary the processing methods of bamboo to be used in different forms from powder to the multifunctional bamboo veneer. Short bamboo powder was bound with adhesive and pressed in a mould to suit the design of a door panel for the well-known car brand BMW as shown in Figure 1.2b. The bamboo deck in Figure 1.2d was in high demand among the sport lovers in Hawaii for leisure activities. The use of bamboo veneer in safety equipment such as the helmet in Figure 1.2e shows that bamboo has gained trust in high risk safety applications.

The attractive physical features of bamboo have increased their use in building constructions, generally for tourism and centres of attraction. The high strength of bamboo with its attractive features can lower the cost of designing buildings and cottages for leisure places. Similar to wood based buildings, the use of bamboo in building construction results in more cosiness and coolness. The gap between the culms for the wall structure enables the wind to pass through easily, thus providing good air ventilation. In some ways, this advantage can further lower the cost of using a fan and air conditioning.

The light weight advantage of bamboo culms, with comparable strength to mild steel in some species, suits the current demand for producing environmentally friendly materials with acceptable properties to the originals (Bardelline, 2009; Huda et al., 2012). The distinctive fast-growing features of the bamboo plant make it a promising source of fibre supplies in the continuous production of composites.

1.2 Problem Statement

Environmental awareness drives the replacement of petroleum-based fibres with natural fibres as the reinforcement in composites (Ljungberg, 2007; Ramesh et al., 2017). As the properties of natural products cannot be standardized compared to standard man-made fibres, deeper and wider areas need to be discussed in order to commercialize their use in real life applications (Gururaja & Rao, 2012; Jawaid & Abdul Khalil, 2011; Thakur & Thakur, 2014). The mechanical, thermal, and physical properties are among the basic information that needs to be analysed for a newly-developed material.

Compared to the commonly studied plant fibres for composites, such as kenaf, jute, palm oil, rice husk and pineapple, they belong to either bast, leaf or seed groups (Faruk, Bledzki, Fink, & Sain, 2014). Bamboo belong to grass group, which very less plants belong to this group being exploited, thus less studies being conducted to highlight and explore the potential of plant from this grass group. Furthermore, it has to be known that bamboo ranges from herbaceous, which is non-woody, to woody culms. From these varieties, come thousands species around the world, thus offers wider scope, which each of the species definitely possess own benefits and potentials in different areas.

The abundant source of bamboo in Malaysia, if fully utilized, can generate an improvement in the economy of the nation. The fast-growth feature, combined with the suitable climate in Malaysia, trigger the expansion of bamboo distribution throughout the country. With undoubtedly high strength and lightweight advantage, the excess amount of bamboo is seen to have a bright future for use in various applications. However, limited information due to the scarce research and development activities related to Malaysian bamboo have caused a slowdown and restrained its commercial value in the market.

Based on most reported studies, the use of fillers or short fibres has been limited, being used only as additional material in polymer composites. It was generally understood that short fibres cannot sustain high load, thus hybrid composites need to be suggested (Dhawan, Singh, & Singh, 2013; Gacitua, Ballerini, & Zhang, 2005; Rothon, 1996). In order to maximize the potential of hybrid composites, several factors need to be addressed. The optimum ratio of the combined fibres, a suitable method of fabrication and the processing

parameters during fabrication are among the fundamental aspects that need to be identified in introducing a new material.

In improving the strength and impact resistance of bamboo filled composites, the idea of embedding woven glass fibres to produce sandwich structured hybrid composites was introduced in this study. Through observations, it was found that short fibre filled composites will break apart into pieces under maximum impact energy, thus causing total failure to the composites. Therefore, the sandwich structured composites was predicted can hold the composite structure in one piece during severe damages.

Moreover, among all the studies on bamboo composites reported previously, it was found that impact studies were the least being conducted, showing the gap in this area. Therefore this current study, which focussing on the impact analysis of bamboo based composites, can widen the potential applications of bamboo composites in different areas. In aerospace applications, these bamboo composites was seen to have potential to replace the current window shield in commercial aircraft and interiors of business aircraft.

1.3 Objectives of The Study

The current study aims to introduce a new polymer composite utilizing the Malaysian bamboo species *Bambusa vulgaris* in the form of short fibres with different loadings in composites. Woven glass fibres were embedded to improve the performances of the composites. To analyse the performances and provide information on the properties of the newly-developed sandwich structured hybrid composites, several experimental analyses were carried out based on the fundamental material's characterization techniques. To fulfil the previously mentioned aims of the current study, the following objectives were specified:

- i. To identify the optimum percentage loading of short bamboo fibres in bamboo fibre filled glass/epoxy hybrid composites in terms of the mechanical and physical properties.
- ii. To analyse the dynamic mechanical properties of different loadings of bamboo fibre filled glass/epoxy hybrid composites.
- iii. To determine the thermal properties of bamboo based composites with the inclusion of glass fibres.
- iv. To analyse the low velocity impact properties of different loadings bamboo fibre in non-hybrid and sandwich structured hybrid composites with varying impact energy level.

1.4 Research Scope

Since the study of natural fibre reinforced composites offers a very wide scope, the current research was conducted only within the following scopes:

- i. The bamboo selected to be used throughout this study was from the Malaysian bamboo species *Bambusa vulgaris*.
- ii. The fresh bamboo culms were collected from Raub, Pahang, Malaysia. The habitat of this species was found to be along the riverbank.
- iii. Matured bamboo culms aged 4 years old were selected from one rhizome to minimize the difference in properties of the fibres.
- iv. The bamboo culms were cut fresh from the ground in the morning, in good weather.
- v. All the bamboo culms, cut from the rhizome, ranged from 6 to 10 m in length with approximately 3 cm thickness.
- vi. The fresh culms were manually processed to produce several types of bamboo fibres, such as bamboo slabs, thin bamboo strips, woven bamboo mat, bamboo fibre bundles and long single fibres, without the use of any chemicals. However, due to facilities, energy and time constraints, these types of fibres were unable to be produced for the current study.
- vii. As bamboo culms belong to a woody structure plant, the facilities available to process the wood were used to process the bamboo, thus produce the bamboo powder.
- viii. The whole bamboo culms were used in the composites' fabrication, disregarding the sections along the culms. All the bamboo powder used in the composites was self-processed in the laboratory.
- ix. This study does not cover the characterization of bamboo trees as well as bamboo fibres, but focuses on the bamboo composites.
- x. The mechanical, dynamic mechanical, physical, thermal and impact properties of the developed composites were identified with respect to different loadings of the composites.

1.5 Thesis Organization

This thesis is organized into five different chapters that describe the whole study of the bamboo composites made from the Malaysian bamboo species *Bambusa vulgaris*.

- i. Chapter 1 introduces the initiatives of previous researchers in suggesting various natural fibres as replacement for synthetic fibres in polymer matrix composites. This chapter also gives an overview of bamboo, a high potential plant to be used in various applications including structural applications.
- ii. Chapter 2 gives a progress report of bamboo composites in their different aspects, which includes the fabrication and evaluation stages. The different types of bamboo fibres and polymers used in the fabrication of bamboo composites from previous studies are identified. Besides this, various standards testing, previously performed to evaluate the performances of bamboo composites, are compared among the reported studies.
- iii. Chapter 3 describes the whole process involved in fabricating the bamboo composites. The different experimental analyses carried out to characterise the properties of the bamboo composites in various categories, such as thermal and impact, are also explained in this chapter.
- iv. Chapter 4 depicts the results and the discussion of the findings from the experimental analysis. Figures and tables are presented to highlight the findings clearly.
- v. Chapter 5 draws the conclusions from the results and summarises the findings from the whole study. In this chapter, improvements and future works are also suggested.

REFERENCES

- Abdul Khalil, H. P. S., Bhat, I. U. H., Jawaid, M., Zaidon, A., Hermawan, D., & Hadi, Y. S. (2012). Bamboo fibre reinforced biocomposites: A review. *Materials & Design*, 42, 353–368. doi: 10.1016/j.matdes.2012.06.015
- Ain U, M. S., Sultan, M. T. H., Jawaid, M., Francisco, C., & Talib, A. R. A. (2016). A Review on the Tensile Properties of Bamboo Fiber Reinforced Polymer Composites. *BioResources*, 11(4), 10654–10676. doi: 10.15376/BIORES.11.4.SHAH
- Aji, I. S., Sapuan, S. M., Zainudin, E. S., & Abdan, K. (2009). Kenaf fibres as reinforcement for polymeric composites: A review. *International Journal of Mechanical and Materials Engineering*, 4(3), 239-248.
- Akil, H. M., Omar, M. F., Mazuki, A. A. M., Safiee, S., Ishak, Z. A. M., & Abu Bakar, A. (2011). Kenaf fiber reinforced composites: A review. *Materials and Design*, 32(8–9), 4107–4121. doi: 10.1016/j.matdes.2011.04.008
- Aparecido, P., & Giriolli, J. C. (2006). Natural Fibers Plastic Composites for Automotive Applications. *SABIC Innovative Plastics*, 1–9.
- Azwa, Z. N., Yousif, B. F., Manalo, A. C., & Karunasena, W. (2013). A review on the degradability of polymeric composites based on natural fibres. *Materials & Design*, 47, 424–442. doi: 10.1016/j.matdes.2012.11.025
- Bahari, S. A., & Krause, A. (2015). Utilizing Malaysian bamboo for use in thermoplastic composites. *Journal of Cleaner Production*, 110, 16-24. doi: 10.1016/j.jclepro.2015.03.052
- Bardelline, J. (2009). *Growing the Future of Bamboo Products*. GreenBiz.com. Retrieved from <http://www.greenbiz.com/feature/2009/07/09/growing-future-bamboo-products>
- Beautiful Buluh. (2011, March 24). Menebang buluh. Retrieved from <http://buluh-ku.blogspot.my/2011/03/menebang-buluh.html>
- Belingardi, G., Cavatorta, M. P., & Salvatore Paolino, D. (2008). Repeated impact response of hand lay-up and vacuum infusion thick glass reinforced laminates. *International Journal of Impact Engineering*, 35(7), 609–619. doi: 10.1016/j.ijimpeng.2007.02.005
- Bhattacharyya, D., & Fakirov, S. (2012). *Synthetic Polymer-Polymer Composites*. Carl Hanser Verlag, Munich. doi: 10.3139/9781569905258.fm
- Biswas, S., Ahsan, Q., Cenna, A., Hasan, M., & Hassan, A. (2013). Physical and mechanical properties of jute, bamboo and coir natural fiber. *Fibers and Polymers*, 14(10), 1762–1767. doi: 10.1007/s12221-013-1762-3

- Biswas, S., Patnaik, A., & Kaundal, R. (2012). Effect of Red Mud and Copper Slag Particles on Physical and Mechanical Properties of Bamboo-Fiber-Reinforced Epoxy Composites. *Advances in Mechanical Engineering*, 2012. doi: 10.1155/2012/141248
- Bledzki, A. K., Faruk, O., & Sperber, V. E. (2006). Cars from Bio-Fibres. *Macromolecular Materials and Engineering*, 291(5), 449–457. doi: 10.1002/mame.200600113
- Cavatorta, M. P. (2007). A comparative study of the fatigue and post-fatigue behavior of carbon-glass/epoxy hybrid RTM and hand lay-up composites. *Journal of Materials Science*, 42(20), 8636–8644. doi: 10.1007/s10853-007-1847-8
- Célino, A., Fréour, S., Jacquemin, F., & Casari, P. (2014). The hygroscopic behavior of plant fibers: a review. *Frontiers in Chemistry*, 1. doi: 10.3389/fchem.2013.00043
- Chaowana, P. (2013). Bamboo: An Alternative Raw Material for Wood and Wood-Based Composites. *Journal of Materials Science Research*, 2(2), 90–102. doi: 10.5539/jmsr.v2n2p90
- Chattopadhyay, S. K., Khandal, R. K., Uppaluri, R., & Ghoshal, A. K. (2010). Bamboo Fiber Reinforced Polypropylene Composites and Their Mechanical, Thermal, and Morphological Properties. *Journal of Applied Polymer Science*, 119, 1619–1626. doi: 10.1002/app.32826
- Chen, F., Deng, J., Cheng, H., Li, H., Jiang, Z., Wang, G., ... Shi, S. Q. (2014). Impact properties of bamboo bundle laminated veneer lumber by preprocessing densification technology. *Journal of Wood Science*, 60(6), 421–427. doi: 10.1007/s10086-014-1424-0
- Chen, X., Guo, Q., & Mi, Y. (1998). Bamboo fiber-reinforced polypropylene composites: A study of the mechanical properties. *Journal of Applied Polymer Science*, 69, 1891–1899. doi: 10.1002/(SICI)1097-4628(19980906)69:10<1891::AID-APP1>3.0.CO;2-9
- Complete Bamboo. (2008). Bamboo information resource. Retrieved from http://www.completebamboo.com/bamboo_behaviors.html
- Das, B., Chakrabarti, K., Tripathi, S., & Chakraborty, A. (2014). Review of Some Factors Influencing Jute Fiber Quality. *Journal of Natural Fibers*, 11(3), 268–281. doi: 10.1080/15440478.2014.880103
- Das, M. (2016). Bamboo fiber-based polymer composites. In *Composite Materials: Processing, Applications, Characterizations* (pp. 627–645). Springer, Berlin, Heidelberg. doi: 10.1007/978-3-662-49514-8_18

- Davoodi, M. M., Sapuan, S. M., Ahmad, D., Aidi, A., Khalina, A., & Jonoobi, M. (2011). Concept selection of car bumper beam with developed hybrid bio-composite material. *Materials & Design*, 32(10), 4857–4865. doi: 10.1016/j.matdes.2011.06.011
- Deo, C., & Acharya, S. K. (2010). Effect of Moisture Absorption on Mechanical Properties of Chopped Natural Fiber Reinforced Epoxy Composite. *Journal of Reinforced Plastics and Composites*, 29(16), 2513–2521. doi: 10.1177/0731684409353352
- Dhawan, V., Singh, S., & Singh, I. (2013). Effect of Natural Fillers on Mechanical Properties of GFRP Composites. *Journal of Composites*, 2013, 1–8. doi: 10.1155/2013/792620
- Dinca, I., Ștefan, A., & Stan, A. (2010). Aluminum / glass fibre and aluminum / carbon fibre hybrid laminates. *Incas Bulletin*, 2(2), 33–39. doi: 10.13111/2066-8201.20
- Dong, Z., & Sun, C. T. (2009). Testing and modeling of yarn pull-out in plain woven Kevlar fabrics. *Composites Part A: Applied Science and Manufacturing*, 40(12), 1863–1869. doi: 10.1016/j.compositesa.2009.04.019
- Du, Y., Wu, T., Yan, N., Kortschot, M. T., & Farnood, R. (2014). Fabrication and characterization of fully biodegradable natural fiber-reinforced poly(lactic acid) composites. *Composites Part B: Engineering*, 56, 717–723. doi: 10.1016/j.compositesb.2013.09.012
- Facca, A. G., Kortschot, M. T., & Yan, N. (2007). Predicting the tensile strength of natural fibre reinforced thermoplastics. *Composites Science and Technology*, 67(11–12), 2454–2466. doi: 10.1016/j.compscitech.2006.12.018
- Farrelly, D. (1984). *The book of bamboo*. Sierra Club Books, San Francisco.
- Faruk, O., Bledzki, A. K., Fink, H.-P., & Sain, M. (2014). Progress Report on Natural Fiber Reinforced Composites. *Macromolecular Materials and Engineering*, 299(1), 9–26. doi: 10.1002/mame.201300008
- Forestry Department of Peninsular Malaysia (2013). "Rattan and bamboo," <http://www.forestry.gov.my>, Accessed on 13 January 2016
- Fu, S. Y., Feng, X. Q., Lauke, B., & Mai, Y. W. (2008). Effects of particle size, particle/matrix interface adhesion and particle loading on mechanical properties of particulate-polymer composites. *Composites Part B: Engineering*, 39(6), 933–961. doi: 10.1016/j.compositesb.2008.01.002
- Gacitua, W., Ballerini, A., & Zhang, J. (2005). Polymer Nanocomposites: Synthetic and Natural Fillers a Review. *Maderas. Ciencia Y Tecnología*, 7(3), 159–178. doi: 10.4067/S0718-221X2005000300002

- Ganapathy, P. M., Huan-ming, Z., Zoolagud, S. S., Turcke, D., & Espiloy, Z. B. (1999). Bamboo Panel Boards a State-of-the-Art Review. *International Network for Bamboo and Rattan*. doi: ISBN: 81-86247-28-9
- Gere, J. M. & Barry J. G. (2008). *Mechanics of Materials* (7th ed), Cengage Learning, Toronto, Canada. doi: 10.1016/j.mechmat.2009.01.011
- Ghavami, K. (2005). Bamboo as reinforcement in structural concrete elements. *Cement and Concrete Composites*, 27(6), 637–649. doi: 10.1016/j.cemconcomp.2004.06.002
- Gratani, L., Crescente, M. F., Varone, L., Fabrini, G., & Digiulio, E. (2008). Growth pattern and photosynthetic activity of different bamboo species growing in the Botanical Garden of Rome. *Flora: Morphology, Distribution, Functional Ecology of Plants*, 203(1), 77–84. doi: 10.1016/j.flora.2007.11.002
- Groover, M. P. (2010). Fundamentals of Modern Manufacturing: materials, processes and systems, 1025. <https://doi.org/10.1017/CBO9781107415324.004>
- Guinness World Record (2014). Fastest growing plant. Retrieved from <http://www.guinnessworldrecords.com/records-3000/fastest-growing-plant/>
- Gururaja, M. N., & Rao, H. (2012). A Review on Recent Applications and Future Prospectus of Hybrid Composites. *International Journal of Soft Computing and Engineering*, 1(16), 2231–2307. doi: 10.1.1.479.9413&rep=rep1&type=pdf
- Gustin, J., Joneson, A., Mahinfalah, M., & Stone, J. (2005). Low velocity impact of combination Kevlar/carbon fiber sandwich composites. *Composite Structures*, 69(4), 396–406. doi: 10.1016/j.compstruct.2004.07.020
- Habibi, M. K., & Lu, Y. (2014). Crack Propagation in Bamboo's Hierarchical Cellular Structure. *Scientific Reports*, 4, 5598. doi: 10.1038/srep05598
- Han, G., Lei, Y., Wu, Q., Kojima, Y., & Suzuki, S. (2008). Bamboo – Fiber Filled High Density Polyethylene Composites : Effect of Coupling Treatment and Nanoclay. *Polymer Environment*, 16, 123–130. doi: 10.1007/s10924-008-0094-7
- Hebel, D. E., Javadian, A., Heisel, F., Schlesier, K., Griebel, D., & Wielopolski, M. (2014). Process-controlled optimization of the tensile strength of bamboo fiber composites for structural applications. *Composites Part B: Engineering*, 67(October 2013), 125–131. doi: 10.1016/j.compositesb.2014.06.032
- Holbery, J., & Houston, D. (2006). Natural-fiber-reinforced polymer composites in automotive applications. *Jom*, 58(November), 80–86. doi: 10.1007/s11837-006-0234-2

- Hosur, M. V., Vaidya, U. K., Ulven, C., & Jeelani, S. (2004). Performance of stitched/unstitched woven carbon/epoxy composites under high velocity impact loading. *Composite Structures*, 64(3–4), 455–466. doi: 10.1016/j.compstruct.2003.09.046
- Huang, P., Chang, W. S., Ansell, M. P., Chew, Y. M. J., & Shea, A. (2015). Density distribution profile for internodes and nodes of *Phyllostachys edulis* (Moso bamboo) by computer tomography scanning. *Construction and Building Materials*, 93, 197–204. doi: 10.1016/j.conbuildmat.2015.05.120
- Huda, S., Reddy, N., & Yang, Y. (2012). Ultra-light-weight composites from bamboo strips and polypropylene web with exceptional flexural properties. *Composites Part B: Engineering*, 43(3), 1658–1664. doi: 10.1016/j.compositesb.2012.01.017
- Ibrahim, I. D., Jamiru, T., Sadiku, R. E., Kupolati, W. K., Agwuncha, S. C., & Ekundayo, G. (2015). The use of polypropylene in bamboo fibre composites and their mechanical properties - A review. *Journal of Reinforced Plastics and Composites*, 34(16), 1347–1356. doi: 10.1177/0731684415591302
- Ishak, M. R., Leman, Z., Sapuan, S. M., Rahman, M. Z. a., & Anwar, U. M. K. (2011). Effects of Impregnation Time on Physical and Tensile Properties of Impregnated Sugar Palm (*Arenga pinnata*) Fibres. *Key Engineering Materials*, 471–472, 1153–1158. doi: 10.4028/www.scientific.net/KEM.471-472.1153
- Ishak, M. R., Sapuan, S. M., Leman, Z., Rahman, M. Z. A., Anwar, U. M. K., & Siregar, J. P. (2013). Sugar palm (*Arenga pinnata*): Its fibres, polymers and composites. *Carbohydrate Polymers*. doi: 10.1016/j.carbpol.2012.07.073
- Ismail, H., Edyham, M. R., & Wirjosentono, B. (2002). Bamboo fibre filled natural rubber composites: The effects of filler loading and bonding agent. *Polymer Testing*, 21(2), 139–144. doi: 10.1016/S0142-9418(01)00060-5
- Jarukumjorn, K., & Suppakarn, N. (2009). Effect of glass fiber hybridization on properties of sisal fiber–polypropylene composites. *Composites Part B: Engineering*, 40(7), 623–627. doi: 10.1016/j.compositesb.2009.04.007
- Jawaid, M., & Abdul Khalil, H. P. S. (2011). Cellulosic/synthetic fibre reinforced polymer hybrid composites: A review. *Carbohydrate Polymers*, 86(1), 1–18. doi: 10.1016/j.carbpol.2011.04.043
- Jawaid, M., Abdul Khalil, H. P. S., Hassan, A., Dungani, R., & Hadiyane, A. (2013). Effect of jute fibre loading on tensile and dynamic mechanical properties of oil palm epoxy composites. *Composites Part B: Engineering*, 45(1), 619–624. doi: 10.1016/j.compositesb.2012.04.068

- Jena, H., Pradhan, A. K., & Pandit, M. K. (2014). Studies on water absorption behaviour of bamboo-epoxy composite filled with cenosphere. *Journal of Reinforced Plastics and Composites*, 33(11), 1059–1068. doi: 10.1177/0731684414523325
- Jigar K, S., Nirav B, S., Chetan S, A., Deep B, S., & Jai V, K. (2013). Study on Bamboo as Reinforcement in Cement Concrete. *International Journal of Engineering Research and Applications (IJERA)*, 3(2), 1181–1190. doi: 10.1.1.414.7018&rep=rep1&type=pdf
- Joshi, S. ., Drzal, L. ., Mohanty, A. ., & Arora, S. (2004). Are natural fiber composites environmentally superior to glass fiber reinforced composites? *Composites Part A: Applied Science and Manufacturing*, 35(3), 371–376. doi: 10.1016/j.compositesa.2003.09.016
- Kalaiyarasan, A., Ramesh, P., & Paramasivam, P. (2016). Study of Advanced Composite Materials in Aerospace Application. *International Journal of Scientific Research in Mechanical and Materials Engineering*, 2(1), 25–34. Retrieved from <http://ijsrmme.com/paper/IJSRMME16119.pdf>
- Kelchner, S. A., & Group, B. P. (2013). Higher level phylogenetic relationships within the bamboos (Poaceae : Bambusoideae) based on five plastid markers. *Molecular Phylogenetics and Evolution*, 67, 404–413. doi: 10.1016/j.ympev.2013.02.005
- Khondker, O. A., Ishiaku, U. S., Nakai, A., & Hamada, H. (2005). Fabrication mechanical properties of unidirectional jute/PP composites using jute yarns by film stacking method. *Journal of Polymers and the Environment*, 13(2), 115–126. doi: 10.1007/s10924-005-2943-y
- Kim, H., Okubo, K., Fujii, T., & Takemura, K. (2013). Influence of fiber extraction and surface modification on mechanical properties of green composites with bamboo fiber. *Journal of Adhesion Science and Technology*, 27(12), 1348–1358. doi: 10.1080/01694243.2012.697363
- Kim, H. S., Yang, H. S., Kim, H. J., & Park, H. J. (2004). Thermogravimetric analysis of rice husk flour filled thermoplastic polymer composites. *Journal of Thermal Analysis and Calorimetry*, 76(2), 395–404. doi: 10.1023/B:JTAN.0000028020.02657.9b
- Kleisner, V., & Zemř, R. (2009). Analysis of composite car bumper reinforcement. *Computational Mechanics*, 3, 287–296. doi: 10.1.1.857.6547&rep=rep1&type=pdf
- Ku, H., Wang, H., Pattarachaiyakoo, N., & Trada, M. (2011). A review on the tensile properties of natural fiber reinforced polymer composites. *Composites Part B: Engineering*, 42(4), 856–873. doi: 10.1016/j.compositesb.2011.01.010

- Kushwaha, P. K., & Kumar, R. (2010). Studies on water absorption of bamboo-polyester composites: Effect of silane treatment of mercerized bamboo. *Polymer - Plastics Technology and Engineering*, 49(1), 45–52. doi: 10.1080/03602550903283026
- Lee, C. H., Chung, M. J., Lin, C. H., & Yang, T. H. (2012). Effects of layered structure on the physical and mechanical properties of laminated moso bamboo (*Phyllosachys edulis*) flooring. *Construction and Building Materials*, 28(1), 31–35. doi: 10.1016/j.conbuildmat.2011.08.038
- Lee, S. H., & Wang, S. (2006). Biodegradable polymers/bamboo fiber biocomposite with bio-based coupling agent. *Composites Part A: Applied Science and Manufacturing*, 37(1), 80–91. doi: 10.1016/j.compositesa.2005.04.015
- Lee, S., Shupe, T. F., & Hse, C. Y. (2006). Mechanical and physical properties of agro-based fiberboard. *Holz Als Roh - Und Werkstoff*, 64(1), 74–79. doi: 10.1007/s00107-005-0062-z
- Lexus. (2012, August 23). All new 2013 gs 450H illustrates dynamic hybrid performance. *Lexus USA Newsroom*. Retrieved from <http://pressroom.lexus.com/releases/lexus+2013+gs450h+august2012.html>
- Liese, W., & Grosser, D. (1971). On the anatomy of Asian bamboos , with special reference to their vascular bundles. *Wood Science and Technology*, 5, 290–312. doi: 10.1007/BF00365061
- Lingesh, B. V., Rudresh, B. M., & Ravikumar, B. N. (2014). Effect of Short Glass Fibers on Mechanical Properties of Polyamide66 and Polypropylene (PA66/PP) Thermoplastic Blend Composites. *Procedia Materials Science*, 5, 1231–1240. doi: 10.1016/j.mspro.2014.07.434
- Ljungberg, L. Y. (2007). Materials selection and design for development of sustainable products. *Materials and Design*, 28(2), 466–479. doi: 10.1016/j.matdes.2005.09.006
- Londoño, X., Camayo, G. C., Riaño, N., & López, Y. (2002). Characterization of the anatomy of *Guadua angustifolia* (Poaceae: Bambusoideae) culms. *Bamboo Science and Culture*, 16(1), 18–31. Retrieved from http://www.bamboo.org/publications/e107_files/downloads/ABSJournal-vol16.pdf#page=3
- Ma, Q., Guo, R., Zhao, Z., Lin, Z., & He, K. (2015). Mechanical properties of concrete at high temperature-A review. *Construction and Building Materials*. doi: 10.1016/j.conbuildmat.2015.05.131
- Mahdavi, M., Clouston, P. L., & Arwade, S. R. (2012). A low-technology approach toward fabrication of Laminated Bamboo Lumber. *Construction and Building Materials*, 29, 257–262. doi: 10.1016/j.conbuildmat.2011.10.046

- Mahjoub, R., Yatim, J. M., Mohd Sam, A. R., & Hashemi, S. H. (2014). Tensile properties of kenaf fiber due to various conditions of chemical fiber surface modifications. *Construction and Building Materials*, 55, 103–113. doi: 10.1016/j.conbuildmat.2014.01.036
- Malkapuram, R., Kumar, V., & Yuvraj Singh Negi. (2009). Recent Development in Natural Fiber Reinforced Polypropylene Composites. *Journal of Reinforced Plastics and Composites*, 28(10), 1169–1189. doi: 10.1177/0731684407087759
- Manalo, A. C., Wani, E., Zukarnain, N. A., Karunasena, W., & Lau, K. (2015). Effects of alkali treatment and elevated temperature on the mechanical properties of bamboo fibre–polyester composites. *Composites Part B: Engineering*, 80(0), 73–83. doi: 10.1016/j.compositesb.2015.05.033
- Mannan, S., Knox, J. P., & Basu, S. (2017). Correlations between axial stiffness and microstructure of a species of bamboo. *Royal Society Open Science*, 4. doi: 10.1098/rsos.160412
- Materials, S. C., & Campbell, F. C. (2010). Introduction to Composite Materials.
- Matbase (2015). "Matbase: The free and independent online materials properties resource," (<http://www.matbase.com>), Accessed on 16 January 2016.
- MatWeb (2015). "MatWeb:Material property data," (<http://www.matweb.com>), Accessed on 16 January 2016.
- McAdam, R., O'Hare, T., & Moffett, S. (2008). Collaborative knowledge sharing in Composite New Product Development: An aerospace study. *Technovation*, 28(5), 245–256. doi: 10.1016/j.technovation.2007.07.003
- Mishra, S., Mohanty, A. K., Drzal, L. T., Misra, M., & Parija, S. (2003). Studies on mechanical performance of biofibre / glass reinforced polyester hybrid composites, 63, 1377–1385. doi: 10.1016/S0266-3538(03)00084-8
- Mitschang, P., Blinzler, M., & Wöginger, A. (2003). Processing technologies for continuous fibre reinforced thermoplastics with novel polymer blends. *Composites Science and Technology*, 63(14), 2099–2110. doi: 10.1016/S0266-3538(03)00107-6
- Modor Plastics (2017). "Plastic Learning Center: Thermoset vs Thermoplastics" (<http://www.modorplastics.com/plastics-learning-center/thermoset-vs-thermoplastics/>). Accessed on 16 March 2017.
- Mohanty, A. K., Misra, M., & Drzal, L. T. (2002). Sustainable Bio-Composites from renewable resources: Opportunities and challenges in the green materials world. *Journal of Polymers and the Environment*, 10(1–2), 19–26. doi: 10.1023/A:1021013921916

- Moroz, J. G., Lissel, S. L., & Hagel, M. D. (2014). Performance of bamboo reinforced concrete masonry shear walls. *Construction and Building Materials*, 61, 125–137. doi: 10.1016/j.conbuildmat.2014.02.006
- Mwasiagi, J. I., Yu, C. W., Phologolo, T., Waithaka, A., Kamalha, E., & Ochola, J. R. (2014). Characterization of the Kenyan hibiscus sabdariffa L. (Roselle) bast fibre. *Fibres and Textiles in Eastern Europe*, 105(3), 31–34.
- Nabi Saheb, D., & Jog, J. P. (1999). Natural fiber polymer composites: A review. *Advances in Polymer Technology*, 18(4), 351–363. doi: 10.1002/(SICI)1098-2329(199924)18:4<351::AID-ADV6>3.0.CO;2-X
- Nadlene, R., Sapuan, S. M., Jawaid, M., Ishak, M. R., & Yusriah, L. (2015). Material characterization of roselle fibre (Hibiscus sabdariffa L.) as potential reinforcement material for polymer composites. *Fibres and Textiles in Eastern Europe*, 23(6), 23–30. doi: 10.5604/12303666.1167413
- Nurhazwani, O., Jawaid, M., Paridah, M. T., Juliana, A. H., & Hamid, S. A. (2016). Hybrid particleboard made from bamboo (*Dendrocalamus asper*) veneer waste and rubberwood (*Hevea brasiliensis*). *BioResources*, 11(1), 306–323. doi: 10.15376/biores.11.1.306-323
- Okubo, K., Fujii, T., & Yamamoto, Y. (2004). Development of bamboo-based polymer composites and their mechanical properties. *Composites Part A: Applied Science and Manufacturing*, 35(3), 377–383. doi: 10.1016/j.compositesa.2003.09.017
- Osorio, L., Trujillo, E., Van Vuure, a. W., & Verpoest, I. (2011). Morphological aspects and mechanical properties of single bamboo fibers and flexural characterization of bamboo/ epoxy composites. *Journal of Reinforced Plastics and Composites*, 30(5), 396–408. doi: 10.1177/0731684410397683
- Pacific Motors (2016). "BMW M3 E90 E92 2007-12" (<https://www.pacificmotors.com/auto-parts-shop/bmw/>). Accessed on 5 October 2017.
- Parasnis, N. C., & Ramani, K. (1998). Analysis of the effect of pressure on compression moulding of UHMWPE. *Journal of Materials Science: Materials in Medicine*, 9(3), 165–172. doi: 10.1023/A:1008871720389
- Pekbey, Y., Aslantaş, K., & Yumak, N. (2017). Ballistic impact response of Kevlar Composites with filled epoxy matrix. *Steel and Composite Structures*, 24(2), 191–200. doi: 10.12989/scs.2017.24.2.191
- Perepelkin, K.E. *Fibre Chem* (2006) 38:55. ISSN 1573-8493, Kluwer Academic Publishers-Consultants Bureau. doi: 10.1007/s10692-006-0041-0

- Phong, N. T., Fujii, T., Chuong, B., & Okubo, K. (2011). Study on How to Effectively Extract Bamboo Fibers from Raw Bamboo and Wastewater Treatment. *Journal of Materials Science Research*, 1(1). doi: 10.5539/jmsr.v1n1p144
- Phong, N. T., Gabr, M. H., Okubo, K., Chuong, B., & Fujii, T. (2013). Enhancement of mechanical properties of carbon fabric/epoxy composites using micro/nano-sized bamboo fibrils. *Materials and Design*, 47, 624–632. doi: 10.1016/j.matdes.2012.12.057
- Qian, S., Wang, H., Zarei, E., & Sheng, K. (2015). Effect of hydrothermal pretreatment on the properties of moso bamboo particles reinforced polyvinyl chloride composites. *Composites Part B: Engineering*, 82, 23–29. doi: 10.1016/j.compositesb.2015.08.007
- Qiu, J., van de Ven, M., & Molenaar, A. (2013). Crack-Healing Investigation in Bituminous Materials. *Journal of Materials in Civil Engineering*, 25(January), 864–870. doi: 10.1061/(ASCE)MT.1943-5533
- Rajesh, M., Singh, S. P., & Pitchaimani, J. (2016). Mechanical behavior of woven natural fiber fabric composites: Effect of weaving architecture, intra-ply hybridization and stacking sequence of fabrics. *Journal of Industrial Textiles*. doi: 10.1177/1528083716679157
- Ramesh, M., Palanikumar, K., & Reddy, K. H. (2013). Mechanical property evaluation of sisal-jute-glass fiber reinforced polyester composites. *Composites Part B: Engineering*, 48, 1–9. doi: 10.1016/j.compositesb.2012.12.004
- Ramesh, M., Palanikumar, K., & Reddy, K. H. (2017). Plant fibre based bio-composites: Sustainable and renewable green materials. *Renewable and Sustainable Energy Reviews*, 79(April), 558–584. doi: 10.1016/j.rser.2017.05.094
- Rao, K. M. M., & Rao, K. M. (2007). Extraction and tensile properties of natural fibers: Vakka, date and bamboo. *Composite Structures*, 77(3), 288–295. doi: 10.1016/j.compstruct.2005.07.023
- Rao, K. M. M., Rao, K. M., & Prasad, A. V. R. (2010). Fabrication and testing of natural fibre composites: Vakka, sisal, bamboo and banana. *Materials and Design*, 31(1), 508–513. doi: 10.1016/j.matdes.2009.06.023
- Rashdi, A. A. A., Sapuan, S. M., Ahmad, M. M. H. M., & Khalina, A. (2009). Water absorption and tensile properties of soil buried kenaf fibre reinforced unsaturated polyester composites (KFRUPC). *Journal of Food, Agriculture and Environment*, 7(3–4), 908–911.

- Rashdi, A. A. A., Sapuan, S. M., Ahmad, M. M. H. M., & Khalina, A. (2010). Combined effects of water absorption due to water immersion, soil buried and natural weather on mechanical properties of kenaf fibre unsaturated polyester composites (KFUPC). *International Journal of Mechanical and Materials Engineering*, 5(1), 11–17.
- Ratna Prasad, a. V., & Mohana Rao, K. (2011). Mechanical properties of natural fibre reinforced polyester composites: Jowar, sisal and bamboo. *Materials & Design*, 32(8–9), 4658–4663. doi: 10.1016/j.matdes.2011.03.015
- Razali, N., Salit, M. S., Jawaid, M., Ishak, M. R., & Lazim, Y. (2015). A study on chemical composition, physical, tensile, morphological, and thermal properties of roselle fibre: Effect of fibre maturity. *BioResources*, 10(1), 1803–1823. doi: 10.15376/biores.10.1.1803-1824
- Riaño, N., Londoño, X., López, Y., Gómez, J., & Camayo, G. C. (2002). Plant growth and biomass distribution on *Guadua angustifolia* Kunth in relation to ageing in the Valle del Cauca - Colombia. *Bamboo Science and Culture*, 16(1), 43–51. Retrieved from http://www.bamboo.org/publications/e107_files/downloads/ABSJournal-vol16.pdf#page=3
- RL Hudson (2015). "RL Hudson Techfiles: Thermoset vs Thermoplastics" (<http://www.rlhudson.com/thermoplastic-vs-thermoset.html>). Accessed on 16 March 2017.
- Rothon, R. N. (1996). Particulate-filled polymer composites. *Polymer Testing*, 15(4), 397. doi: 10.1016/0142-9418(96)00004-9
- Rowell, R. M., Han, J. S., & Rowell, J. S. (2000). Characterization and Factors Effecting Fiber Properties. *Natural Polymers an Agrofibers Composites*, 115–134.
- Safri, S. N. A., Sultan, M. T. H., & Cardona, F. (2015). Impact damage evaluation of Glass-Fiber Reinforced Polymer (GFRP) using the drop test rig - An experimental based approach. *ARPN Journal of Engineering and Applied Sciences*, 10(20), 9916–9928.
- Sahari, J., Sapuan, S. M., Zainudin, E. S., & Maleque, M. A. (2012). Sugar palm tree: A versatile plant and novel source for biofibres, biomatrices, and biocomposites. *Polymers from Renewable Resources*, 3(2), 61–78. doi: 10.1016/j.matdes.2013.01.048
- Samanta, S., Muralidhar, M., Singh, T. J., & Sarkar, S. (2015). Characterization of Mechanical Properties of Hybrid Bamboo/GFRP and Jute/GFRP Composites. *Materials Today: Proceedings*, 2(4–5), 1398–1405. doi: 10.1016/j.matpr.2015.07.059

- Sanjay, M. R., Arpitha, G. R., & Yogesha, B. (2015). Study on Mechanical Properties of Natural - Glass Fibre Reinforced Polymer Hybrid Composites: A Review. *Materials Today: Proceedings*, 2(4–5), 2959–2967. doi: 10.1016/j.matpr.2015.07.264
- Sarawak Borneo Tour (2011) (<http://www.sarawakborneotour.com/>) Accessed on 10 October 2017
- Sawpan, M. A., Pickering, K. L., & Fernyhough, A. (2012). Flexural properties of hemp fibre reinforced polylactide and unsaturated polyester composites. *Composites Part A: Applied Science and Manufacturing*. doi: 10.1016/j.compositesa.2011.11.021
- Sen, T., & Reddy, H. N. J. (2011). Application of Sisal , Bamboo , Coir and Jute Natural Composites in Structural Upgradation. *International Journal of Innovation, Maagement and Technology*, 2(3), 186–191.
- Shao, Z. P., Zhou, L., Liu, Y. M., Wu, Z. M., & Arnaud, C. (2010). Differences in structure and strength between internode and node sections of moso bamboo. *Journal of Tropical Forest Science*, 22(2), 133–138.
- Shi, Z.-J., Xiao, L.-P., Xu, F., & Sun, R.-C. (2012). Physicochemical characterization of lignin fractions sequentially isolated from bamboo (*Dendrocalamus brandisii*) with hot water and alkaline ethanol solution. *Journal of Applied Polymer Science*, 125(4), 3290–3301. doi: 10.1002/app.36580
- Shin, F. G., Xian, X. J., Zheng, W. P., & Yipp, M. W. (1989). Analyses of the mechanical properties and microstructure of bamboo-epoxy composites. *Journal of Materials Science*, 24(10), 3483–3490. doi: 10.1007/BF02385729
- Shirvanimoghaddam, K., Hamim, S. U., Karbalaee Akbari, M., Mousa Fakhrhoseini, S., Khayyam, H., Hossein Pakseresht, A., ... Naebe, M. (2016). Carbon Fiber Reinforced Metal Matrix Composites: Fabrication Processes and Properties. *Composites Part A: Applied Science and Manufacturing*, 92, 70–96. doi: 10.1016/j.compositesa.2016.10.032
- Shito, T., Okubo, K., & Fujii, T. (2002). Development of eco-composites using natural bamboo fibers and their mechanical properties. *High Performance Structures and Composites*, 4, 175–182.
- Soreng, R. J., Peterson, P. M., Romaschenko, K., Davidse, G., Zuloaga, F. O., Judziewicz, E. J., ... Morrone, O. (2015). A worldwide phylogenetic classification of the Poaceae (Gramineae). *Journal of Systematics and Evolution*, 53(2), 117–137. doi: 10.1111/jse.12150

- Sreekumar, P. A., Joseph, K., Unnikrishnan, G., & Thomas, S. (2007). A comparative study on mechanical properties of sisal-leaf fibre-reinforced polyester composites prepared by resin transfer and compression moulding techniques. *Composites Science and Technology*, 67(3–4), 453–461. doi: 10.1016/j.compscitech.2006.08.025
- Srivaro, S. (2016). Utilization of bamboo as lightweight sandwich panels. *Medziagotyra*, 22(1), 60–64. doi: 10.5755/j01.ms.22.1.8887
- Study Notes (2017). "Polymers - Differences between Thermoplastics and Thermosetting plastics" (<http://www.studynotes.ie/leaving-cert/engineering/polymers-differences-thermoplastics-thermosetting-plastics/>). Accessed on 16 March 2017.
- Sudin, R., & Swamy, N. (2006). Bamboo and wood fibre cement composites for sustainable infrastructure regeneration. In *Journal of Materials Science* 41, 6917–6924. doi: 10.1007/s10853-006-0224-3
- Suhaily, S. S., Khalil, H. P. S. A., Nadirah, W. O. W., & Jawaid, M. (2013). Bamboo Based Biocomposites Material , Design and Applications. *Materials Science*, 549. doi: 10.5772/56700
- Suib, S. L. (2017). A Review of Nanoceramic Materials for Use in Ceramic Matrix Composites. In *Sol-gel Based Nanoceramic Materials: Preparation, Properties and Applications*, 185–230. doi: 10.1007/978-3-319-49512-5_7
- Takagi, H., & Ichihara, Y. (2004). Effect of Fiber Length on Mechanical Properties of “Green” Composites Using a Starch-Based Resin and Short Bamboo Fibers. *JSME International Journal Series A*, 47(4), 551–555. doi: 10.1299/jsmea.47.551
- Tanaka, R., Okubo, K., Fujii, T., Ono, M., & Sakurai, A. (2007). Development of a Pleasure Boat Using Bamboo Fiber Reinforced Plastics. *16Th International Conference on Composite Materials*, 1–6.
- Thakur, V. K., & Thakur, M. K. (2014). Processing and characterization of natural cellulose fibers/thermoset polymer composites. *Carbohydrate Polymers*, 109, 102–117. doi: 10.1016/j.carbpol.2014.03.039
- Thiruchitrambalam, M., Athijayamani, A., Sathiyamurthy, S., & Thaheer, A. S. A. (2010). A Review on the Natural Fiber-Reinforced Polymer Composites for the Development of Roselle Fiber-Reinforced Polyester Composite. *Journal of Natural Fibers*, 7(4), 307–323. doi: 10.1080/15440478.2010.529299
- Thomas, J. (2015, May 7). HERObike bamboost, a bamboo composite e-bike. *Bicycle Design*. Retrieved from <http://bicycledesign.net/2015/05/herobike-bamboost-a-bamboo-composite-e-bike/>

- Thwe, M., & Liao, K. (2003). Durability of bamboo-glass fiber reinforced polymer matrix hybrid composites. *Composites Science and Technology*, 63, 375–387.
- Thwe, M. M., & Liao, K. (2002). Effects of environmental aging on the mechanical properties of bamboo-glass fiber reinforced polymer matrix hybrid composites. *Composites - Part A: Applied Science and Manufacturing*, 33(1), 43–52. doi: 10.1016/S1359-835X(01)00071-9
- Treehugger (2007). "Bamboo Crash Helmet from Roof" (<https://www.treehugger.com/cars/bamboo-crash-helmet-from-roof.html>). Accessed on 5 October 2017.
- Trujillo, E., Moesen, M., Osorio, L., Van Vuure, A. W., Ivens, J., & Verpoest, I. (2014). Bamboo fibres for reinforcement in composite materials: Strength Weibull analysis. *Composites Part A: Applied Science and Manufacturing*, 61, 115–125. doi: 10.1016/j.compositesa.2014.02.003
- Tshai, K. Y., Chai, A. B., Kong, I., Hoque, M. E., & Tshai, K. H. (2014). Hybrid Fibre Polylactide Acid Composite with Empty Fruit Bunch: Chopped Glass Strand. *Journal of Composites*, 2014, 1–7. doi: 10.1155/2014/987956
- Valenc, A. S. L., Griza, S., De Oliveira, V. G., Sussuchi, E. M., & De Cunha, F. G. C. (2015). Evaluation of the mechanical behavior of epoxy composite reinforced with Kevlar plain fabric and glass/Kevlar hybrid fabric. *Composites Part B: Engineering*, 70, 1–8. doi: 10.1016/j.compositesb.2014.09.040
- Venkateshwaran, N., & Elayaperumal, A. (2010). Banana Fiber Reinforced Polymer Composites - A Review. *Journal of Reinforced Plastics and Composites*, 29(15), 2387–2396. doi: 10.1177/0731684409360578
- Venkateshwaran, N., & ElayaPerumal, A. (2012). Mechanical and water absorption properties of woven jute/banana hybrid composites. *Fibers and Polymers*, 13(7), 907–914. doi: 10.1007/s12221-012-0907-0
- Wahyuni, A. S., Supriani, F., Elhusna, & Gunawan, A. (2014). The performance of concrete with rice husk ash, sea shell ash and bamboo fibre addition. In *Procedia Engineering* 95, 473–478. doi: 10.1016/j.proeng.2014.12.207
- Wang, G., & Chen, F. (2016). Development of bamboo fiber-based composites. In *Advanced High Strength Natural Fibre Composites in Construction* 235–255. doi: 10.1016/B978-0-08-100411-1.00010-8
- Wang, H., Chang, R., Sheng, K., Adl, M., & Qian, X. (2008). Impact Response of Bamboo-Plastic Composites with the Properties of Bamboo and Polyvinylchloride (PVC). *Journal of Bionic Engineering*, 5, 28–33. doi: 10.1016/S1672-6529(08)60068-2

- Wang, J., Potter, K., Hazra, K., & Wisnom, M. (2012). Experimental fabrication and characterization of out-of-plane fiber waviness in continuous fiber-reinforced composites. *Journal of Composite Materials*, 46(17), 2041–2053. doi: 10.1177/0021998311429877
- Wang Yueping, Wang Ge, Cheng Haitao, Tian Genlin, Liu Zheng, Xiao Qun Feng, ... Gao Xushan. (2010). Structures of Bamboo Fiber for Textiles. *Textile Research Journal*, 80(4), 334–343. doi: 10.1177/0040517509337633
- Widoyowijatnoko, A. (2008). Prefabricated low cost housing using bamboo reinforcement and appropriate technology. In *1st International Conference on Modern Bamboo Structures, ICBS-2007*, 223–230. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-79952297044&partnerID=40&md5=c34b553b3cea399cd44051c460dca0bc>
- Wooden Classics Hawaii (2006) "Bamboo Surfboards" (<http://www.bamboosurfboardshawaii.com/index.html>) Accessed on 5 October 2017
- Wulfsberg, J., Herrmann, A., Ziegmann, G., Lonsdorfer, G., Stöß, N., & Fette, M. (2014). Combination of carbon fibre sheet moulding compound and prepreg compression moulding in aerospace industry. In *Procedia Engineering* 81, 1601–1607. doi: 10.1016/j.proeng.2014.10.197
- Xin, H., Liu, Y., Mosallam, A. S., He, J., & Du, A. (2017). Evaluation on material behaviors of pultruded glass fiber reinforced polymer (GFRP) laminates. *Composite Structures*, 182, 283–300. doi: 10.1016/j.compstruct.2017.09.006
- Yahaya, R., Sapuan, S., Jawaid, M., Leman, Z., & Zainudin, E. (2014). Mechanical performance of woven kenaf-Kevlar hybrid composites. *Journal of Reinforced Plastics and Composites*, 33(24), 2242–2254. doi: 10.1177/0731684414559864
- Yan, L., Chouw, N., & Jayaraman, K. (2014). Flax fibre and its composites - A review. *Composites Part B: Engineering*, 56, 296–317. doi: 10.1016/j.compositesb.2013.08.014
- Yu, X. C., Sun, D. L., Sun, D. Bin, Xu, Z. H., & Li, X. S. (2012). Basic properties of woodceramics made from bamboo powder and epoxy resin. *Wood Science and Technology*, 46(1–3), 23–31. doi: 10.1007/s00226-010-0390-y
- Yu, Y.-L., Huang, X.-A., & Yu, W.-J. (2014). High performance of bamboo-based fiber composites from long bamboo fiber bundles and phenolic resins. *Journal of Applied Polymer Science*, 131(12), doi: 10.1002/app.40371

- Yu, Y. L., Zhang, Y. M., Yu, W. J., Fei, B. H., & Liu, H. R. (2012). Comparison of the suitability of ci bamboo and moso bamboo for manufacturing bamboo-based fiber composites. In *Proceedings of 2012 International Conference on Biobase Material Science and Engineering, BMSE 2012*, 69–74. doi: 10.1109/BMSE.2012.6466183
- Yuhazri, M., & Phongsakorn, P. (2010). A Comparison Process Between Vacuum Infusion And Hand Lay up Method Toward Kenaf/Polyester Composites. *International Journal of Basic & Applied*, 10(33), 63–66. Retrieved from: <http://scholar.google.com/scholar?hl=en&btnG=Search&q=intitle:A+Comparison+Process+Between+Vacuum+Infusion+And+Hand+Lay+up+Method+Toward+Kenaf/Polyester+Composites#0>
- Zakikhani, P., Zahari, R., Sultan, M. T. H., & Majid, D. L. (2014). Extraction and preparation of bamboo fibre-reinforced composites. *Materials & Design*, 63, 820–828. doi: 10.1016/j.matdes.2014.06.058
- Zakikhani, P., Zahari, R., Sultan, M. T. H., & Majid, D. L. (2016). Thermal Degradation of Four Bamboo Species. *BioResources*, 11(1), 414–425. doi: 10.15376/biores.11.1.414-425
- Zakikhani, P., Zahari, R., Sultan, M. T. H., & Majid, D. L. (2017). Morphological, Mechanical, and Physical Properties of Four Bamboo Species. *BioResources*, 12(2), 2479–2495. doi: 10.15376/biores.12.2.2479-2495
- Zhang, Y., Li, Y., Ma, H., & Yu, T. (2013). Tensile and interfacial properties of unidirectional flax/glass fiber reinforced hybrid composites. *Composites Science and Technology*, 88, 172–177. doi: 10.1016/j.compscitech.2013.08.037
- Zok, F. W., & Levi, C. G. (2001). Mechanical Properties of Porous-Matrix Ceramic Composites. *Advanced Engineering Materials*, 3(1), 15–23. doi: 10.1002/1527-2648(200101)3:1/2<15::AID-ADEM15>3.3.CO;2-1