



**UNIVERSITI PUTRA MALAYSIA**

***RECOVERY OF VALUABLE MATERIAL FROM OIL PALM EMPTY FRUIT  
BUNCH SPIKELETS USING SUB CRITICAL WATER TREATMENT***

**NOR AZRIN BINTI AHMAD KURNIN**

**FK 2018 161**



**RECOVERY OF VALUABLE MATERIAL FROM OIL PALM EMPTY  
FRUIT BUNCH SPIKELETS USING SUB CRITICAL WATER  
TREATMENT**

**By**

**NOR AZRIN BINTI AHMAD KURNIN**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra  
Malaysia, in Fulfilment of the Requirements for the Degree of Master of  
Science**

**March 2018**

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated, Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Master of Science

**RECOVERY OF VALUABLE MATERIAL FROM OIL PALM EMPTY FRUIT BUNCH SPIKELETS USING SUB-CRITICAL WATER TREATMENT**

By

**NOR AZRIN BINTI AHMAD KURNIN**

**March 2018**

**Chair: Shamsul Izhar Siajam, PhD**  
**Faculty: Engineering**

Oil palm empty fruit bunch (EFB) was one of the wastes produced in the palm oil mill. Whilst it still contains oil and can even be converted into valuable material, approximately 22.6 million tons is generated annually and treated as solid waste. Current method used by the industries in order to reduce and remove the EFB was by incineration process while some even dispose the EFB in the landfill. This process was known as mulching where the EFB was let to decompose naturally. Both methods were obviously wasting the advantage of fiber in the EFB. Thus, EFB were chosen to undergo sub-critical water (sub-cw) treatment to investigate its conversion into value added products as well as to evaluate the effects of process conditions (reaction temperature and time) of sub-cw treatment on value added products and sugar yield. Sub-cw is defined as water that lies between its boiling point, 100°C and its critical temperature, 374°C. At this condition, several physic-chemical properties of water have been enhanced. For instance, water has very low dielectric constant and higher ion product constant at high temperature (ex: 250°C). Therefore, sub-cw treatment was able to extract non-polar compound like oil and break the lignocellulosic component especially hemicellulose and cellulose into sugar, organic acid, tar and other derivatives. Highest yield of total sugar, 0.382 g/g-dry EFB was obtained at 220°C and reaction time of 5 minutes. Further analysis of the sample by using High Performance Liquid Chromatography (HPLC) detected pentoses and hexoses with yield of 0.008 to 0.032 g/g-dry EFB. Simple sugars which present in the sample at almost all reaction temperature were xylose, glucose, fructose and arabinose. Meanwhile, organic acids found were acetic and lactic acid in which lactic acid was most present in all reaction temperature compared to acetic acid. Highest yield of summation organic acid, 0.189 g/g-dry EFB was obtained at 330°C and reaction time of 5 minutes. Besides, tar was also produced from the reaction, yielded between 0.039 to 0.337 g/g-dry EFB. Phenolic

compound were also detected in the tar produced. Highest yield of total phenolic content (TPC) obtained after the treatment was 89.51 mg/g-dry EFB at 330°C. Analysis of tar using Gas Chromatography Mass Spectrometer (GC-MS) indicate that Syringol (2,6-dimethoxy phenol), Guaiacol (2-methoxy phenol), and 4-Ethylguaiacol (4-ethyl, 2-methoxy phenol) were most present in samples at all reaction temperatures. This study showed that many valuable material can be recovered using water at sub-critical condition, and most attractive without the use of harmful organic solvent.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**PEROLEHAN PRODUK BERTERHADU DARI TANDAN KOSONG BUAH  
KELAPA SAWIT MENGGUNAKAN RAWATAN AIR SUB-KRITIKAL**

Oleh

**NOR AZRIN BINTI AHMAD KURNIN**

**Mac 2018**

**Pengerusi: Shamsul Izhar Siajam, PhD**  
**Fakulti: Kejuruteraan**

Tandan kosong buah kelapa sawit (EFB) adalah salah satu bahan buangan yang dihasilkan oleh kilang proses kelapa sawit. Walaupun masih mempunyai sedikit minyak dan masih boleh diproses menjadi bahan berharga, lebih kurang 22.6 juta tan EFB dihasilkan setiap tahun sebagai sisa pepejal. Proses yang masih digunakan oleh industri untuk mengurangkan dan menghapuskan EFB adalah pembakaran dan pembuangan di tanah lapang. Proses ini juga dikenali sebagai sungkup atau pembajaan yang mana EFB dibiarkan mereput di tanah. Kedua-dua cara ini sememangnya tidak memanfaatkan kelebihan serat pada EFB. Oleh itu, EFB telah dipilih untuk menjalani rawatan air sub kritikal untuk menyiasat penukaran EFB kepada produk berharga, juga untuk menilai kesan suhu dan tempoh rawatan air sub kritikal yang pelbagai keatas produk berharga terutamanya gula. Air sub-kritikal didefinisikan sebagai air yang berada di antara suhu didih, 100°C dan suhu kritikal, 374°C. Ketika ini, beberapa sifat fizik-kimia air telah dipertingkatkan. Sebagai contoh, air mengalami pemalar dielektrik yang rendah dan pemalar produk ion yang tinggi di suhu yang tinggi (contoh: 250°C). Oleh itu, rawatan air sub kritikal mampu untuk mengekstrak minyak dan memecahkan bahan liknoselulosa terutamanya hemiselulosadan selulosa kepada gula, asid organik, minyak tar dan lain-lain. Hasil tertinggi gula, iaitu 0.382 g/g-EFB kering telah diperolehi pada suhu 220°C dan waktu rawatan selama 5 minit. Analisa produk cecair menggunakan kromatografi cecair berprestasi tinggi (HPLC) telah mengesan pentosa dan heksosa dengan hasil sebanyak 0.008 ke 0.032 g/g-EFB kering. Gula yang dikesan di dalam hampir kesemua suhu rawatan adalah *xylose*, glukosa, fruktosa dan arabinosa. Sementara itu, asid organik yang diperolehi adalah asid asetik dan laktik dengan kehadiran asid laktik dikesan di dalam produk pada hampir kesemua suhu. Hasil tertinggi asid organik iaitu 0.189 g/g-EFB kering telah dicapai pada suhu 300°C dan waktu rawatan selama 5 minit. Selain itu, minyak tar juga terhasil, dengan hasil di

antara 0.039 ke 0.337 g/g-EFB kering. Sebatian fenolik juga telah dikesan dalam minyak tar tersebut. Hasil tertinggi sebatian fenolik secara keseluruhan adalah 89.51 mg/g-dry EFB iaitu pada suhu rawatan 330°C. Analisa menggunakan kromatografi gas (GC-MS) mendapati Syringol (2,6-dimethoxy phenol), Guaiacol (2-methoxy phenol), dan 4-Ethylguaiacol (4-ethyl, 2-methoxy phenol) hadir di dalam minyak tar pada semua suhu rawatan. Kajian ini menunjukkan yang banyak produk berharga mampu dihasilkan menggunakan air sub kritikal, dan paling menariknya adalah ianya tanpa menggunakan pelarut yang merbahaya.

## ACKNOWLEDGEMENT

Firstly, I would like to express my sincere gratitude to my supervisor Ir. Dr. Shamsul Izhar bin Siajam for his patience, motivation, advice and continuous support throughout this research. His guidance helped me in all the time of research and writing of this report. Besides my supervisor, I would also like to thank my co-supervisor Prof. Yoshida Hiroyuki and Assoc. Prof. Dr. Mohd Halim Shah bin Ismail for their encouragement, insightful comments, and guidance.

I would also like to thank my fellow labmates in Process Laboratory: Hazwani binti Ishak, Noor Azura binti Muda, Nurhusni binti Md. Amin and Raja Munawarrah binti Raja Zazalli for the stimulating discussions, and helps given during the period of conducting this project. Besides my labmates, I would like to express my gratitude to my lab engineer, Mr, Norisham for his time and assistance during conducting this research.

Last but not least, I would like to thank my family especially my parent and family for their love and supports throughout my life. Their endless support and advice helped me a lot especially when I was facing problems in my research. All praise to Allah s.w.t. for giving me the opportunity to complete my research. Alhamdulillah.



I certify that a Thesis Examination Committee has met on 27 March 2018 to conduct the final examination of Nor Azrin binti Ahmad Kurnin on her thesis entitled "Recovery of Valuable Material from Oil Palm Empty Fruit Bunch Spikelets Using Sub-Critical Water Treatment" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Master of Science.

Members of the Thesis Examination Committee were as follows:

**Dayang Radiah binti Awang Biak, PhD**

Senior Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Siti Mazlina binti Mustapa Kamal, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Sabiha Hanim Saleh, PhD**

Senior Lecturer  
Universiti Teknologi MARA  
Malaysia  
(External Examiner)



**RUSLI HAJI ABDULLAH, PhD**

Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 30 July 2018

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

**Shamsul Izhar Siajam, PhD**

Senior Lecturer, Ir.

Faculty of Engineering

Universiti Putra Malaysia

(Chairman)

**Mohd Halim Shah Ismail, PhD**

Associate Professor

Faculty of Engineering

Universiti Putra Malaysia

(Member)

---

**ROBIAH BINTI YUNUS, PhD**

Professor and Dean

School of Graduate Studies

Universiti Putra Malaysia

Date:

### **Declaration by graduate student**

I hereby confirm that:

- This thesis is my original work;
- Quotations, illustrations and citations have been duly referenced;
- This thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- Intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- Written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed, or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- There is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Name and Matric No.: Nor Azrin Binti Ahmad Kurnin, GS41199

**Declaration by Members of Supervisory Committee**

This is to confirm that:

- The research conducted and the writing of this thesis was under our supervision;
- Supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: \_\_\_\_\_  
Name of  
Chairman of  
Supervisory  
Committee: \_\_\_\_\_

Signature: \_\_\_\_\_  
Name of  
Member of  
Supervisory  
Committee: \_\_\_\_\_

## TABLE OF CONTENTS

	<b>Page</b>
<b>ABSTRACT</b>	i
<b>ABSTRAK</b>	iii
<b>ACKNOWLEDGEMENTS</b>	v
<b>APPROVAL</b>	vi
<b>DECLARATION</b>	viii
<b>LIST OF TABLES</b>	xii
<b>LIST OF FIGURES</b>	xiii
<b>LIST OF ABBREVIATIONS</b>	xvii
<b>CHAPTER</b>	
<b>1 INTRODUCTION</b>	
1.1 Background of Study	1
1.2 Problem Statement	2
1.3 Objectives of Studies	4
1.4 Scopes of Study	4
1.5 Outline of Thesis	5
<b>2 LITERATURE REVIEW</b>	
2.1 Oil Palm Process and Its Biomass	6
2.2 Components in Empty Fruit Bunch (EFB)	8
2.2.1 Lignocellulosic component	8
2.2.2 Moisture content	11
2.2.3 Organic Acids	11
2.3 Conventional method of Oil Extraction	12
2.4 Other Method of Hydrolysis	14
2.5 Sub-Critical Water (sub-CW)	15
2.5.1 Physic-chemical properties of water	19
2.5.2 Factors that influence sub-CW	21
<b>3 METHODOLOGY</b>	
3.1 Flow Diagram of Research Work	23
3.2 Material and Sample Preparation	24
3.3 Chemical and reagents	24
3.4 Drying of Samples	25
3.5 Soxhlet Extraction	25
3.6 Reactor Set Up	26
3.7 Separation of the Products by Fractional Extraction	27
3.7.1 Recovery of oil	27
3.7.2 Recovery of water phase	28
3.7.3 Recovery of water-insoluble tar	28
3.8 Water Phase Analysis	30
3.8.1 Measurement of total organic carbon (TOC)	30
3.8.2 Measurement of total sugar	30
3.8.3 Measurement of individual sugar	31
3.8.4 Measurement of organic acid	32
3.9 Water-Insoluble Tar Analysis	33

	3.9.1	Measurement of total phenolic content (TPC)	33
	3.9.2	Identification of each phenolic compound	33
	3.10	Ash Content	33
<b>4</b>		<b>RESULTS AND DISCUSSION</b>	
	4.1	Moisture Content	34
	4.2	Sub-critical Water Treated Sample	34
	4.3	Residual Oil	36
	4.4	Products in water phase	38
	4.4.1	Total organic carbon	38
	4.4.2	Sugar	39
	4.4.3	Organic acids	42
	4.5	Water Insoluble Tar	43
	4.5.1	Tar and total phenolic content	43
	4.5.2	Individual phenolic compound	45
	4.6	Solid Residue and Ash	48
	4.7	Effect of Reaction Time	49
	4.8	Summary of Results	52
<b>5</b>		<b>CONCLUSION</b>	
	5.1	Summary	53
	5.2	Recommendations	53
		<b>REFERENCES</b>	54
		<b>APPENDICES</b>	67
		<b>BIODATA OF STUDENT</b>	79
		<b>LIST OF PUBLICATION</b>	80

## LIST OF TABLES

<b>Table</b>		<b>Page</b>
2.1	Lignocellulosic content in EFB	11
2.2	Characteristic of sub-cw system in batch, semi batch and continuous process	18
4.1	Phenolic compound in tar analyzed by GC-MS	46

## LIST OF FIGURES

Figure		Page
1.1	Global oils and fats production and consumption 1990-2015	1
1.2	Percentage share of GDP for agriculture sector, 2006-2015	2
2.1	Parts of process flow diagram in palm oil mill	6
2.2	EFB from two type of oil palm tree and its part (a) Dura species (b) Tenera species	7
2.3	General structure of lignocellulosic component	10
2.4	Soxhlet extractor	13
2.5	Phase diagram of water	16
2.6	Scheme of water dissociation	17
2.7	Effect of temperature on ion product constant of water	19
2.8	Effect of temperature on dielectric constant of water	20
2.9	Reaction pathway for decomposition of hemicellulose and cellulose	21
3.1	Flow diagram of research work	23
3.2	Photograph of (a) Whole EFB (b) Spikelets removed from bunch and (c) Cut spikelets	24
3.3	Schematic diagram of reactor and portion of its content	26
3.4	Schematic diagram of a batch experimental setup and internal parts	27
3.5	Summary of procedure after sub-cw reaction	29
3.6	Photograph of glucose standard after addition of phenol and concentrated sulphuric acid	31
4.1	Moisture content in EFB (Drying temperature: 80°C)	34
4.2	Photos of EFB after treated by sub-cw at temperature between 180°C and 360°C (Reaction time: 5 minutes)	35
4.3	Photos of raw EFB and (a) solid EFB treated at 180°C (b) solid EFB treated at 360°C (Reaction time: 5 minutes)	36
4.4	Comparison of yield of oil from sub-cw and soxhlet extraction method	37
4.5	Picture of oil obtained using soxhlet extraction and sub-cw	38
4.6	Effect of reaction temperature on the yield of TOC in the	38



	water phase using TOC analyzer (Reaction time: 5 minutes)	
4.7	Effect of reaction temperature on (a) Yield of sugar (b) Area of polysaccharides (Reaction time: 5 minutes)	40
4.8	Effect of ion product constant at elevated temperature on the yield of sugar (Reaction time: 5 minutes)	41
4.9	Effect of reaction temperature on the yield of organic acids in recovered water phase (Reaction time: 5 minutes)	42
4.10	Pictures of tar obtained at 180 to 360°C (Reaction time: 5 minutes)	44
4.11	Effect of reaction temperature on the yield of tar and total phenolic content (Reaction time: 5 minutes)	45
4.12	Chromatogram of tar obtained at 300°C (a) original size (b) zoom in from 0..00 to 25.00 minutes	46
4.13	Temperature range for hydrolysis, pyrolysis and oxidation	47
4.14	Effect of reaction temperature on the yield of total solid residue (Reaction time: 5 minutes)	48
4.15	Photos of EFB after treated by sub-cw at reaction time between 2 and 15 minutes (Reaction temperature: 220°C)	49
4.16	Effect of reaction time on (a) Yield of sugar (b) Area of polysaccharides (Reaction temperature: 220°C)	50
4.17	Effect of reaction time on the yield of organic acids in recovered water phase (Reaction temperature: 220°C)	51

## LIST OF ABBREVIATIONS


EFB	Empty fruit bunch
FFA	Free fatty acid
FFB	Fresh fruit bunch
GC-MS	Gas chromatography mass spectrometer
HMF	Hydroxymethyl furfural
HPLC	High performance liquid chromatography
HYSASE	Hydro solvent assisted steam extraction
MT	Metric ton
Sub-cw	Sub-critical water
TOC	Total organic carbon
TPC	Total phenolic content
UV	Ultraviolet

## CHAPTER 1

### INTRODUCTION

#### 1.1 Background of Study

There are many crops that were planted in the world and harvested for manufacturing of many products. Some are harvested to get the raw material to produce other different products. In the case of Malaysia, oil palm, coconut, banana and paddy are example of the main crops harvested here. *Elaeis Guineensis*, also known as oil palm tree is originated from West Africa and has been introduced in Malaysia in 1848 by Dutch planter. It is produced commercially in Malaysia starting from 1917. The ideal climate in Malaysia enhanced the growth of oil palm tree. They have a lifespan of 20-25 years before being cut and replanted. In 2009, about 51% of the world palm crude oil is produced by Malaysia and hence accounted for 62% of the world exports (Gopal, 2009). The commercial plantation areas in Malaysia have increased up to 5.1 million hectares which produced 18.8 million tonnes of palm oil in 2012 (Sime Darby, 2014).

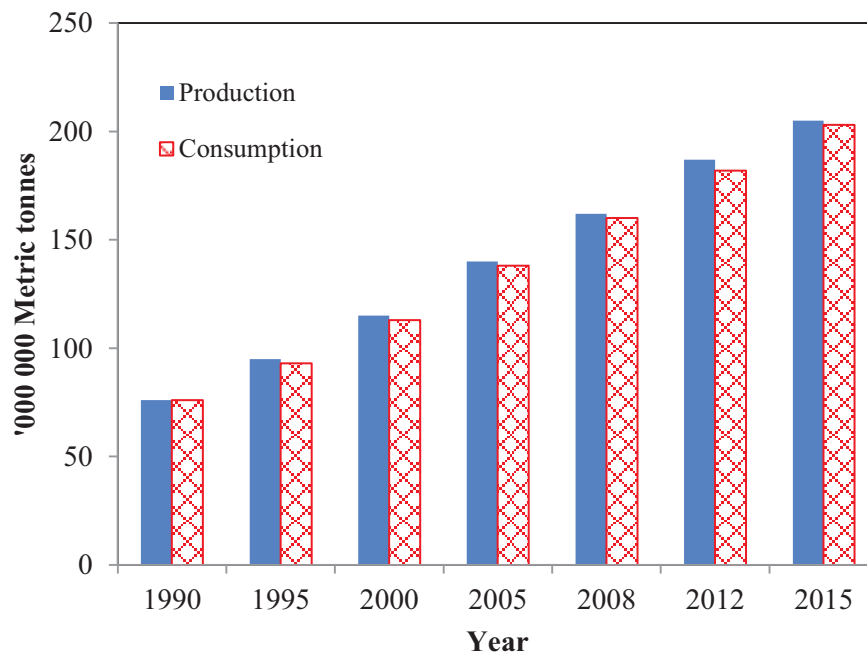


**Figure 1.1: Global oils and fats production and consumption 1990-2015** (Basiron, 2015)

It is reported that global oils and fats consumption increased in line with increasing in human population every year. Figure 1.1 shows the global oils and fats production and

consumption from 1990 to 2015. In 2015, the production and consumption of oils and fats has doubled the one in 1990. The increasing demand on oils and fats every year has caused many countries especially Indonesia and Malaysia to focus on producing better quality palm fruitlets in terms of the oil extraction rate. This phenomenon explained the increase in land area reserved for palm oil plantation in Malaysia and Indonesia.

Figure 1.2 shows the percentage share of Malaysia Gross Domestic Product (GDP) for agriculture sector in Malaysia from 2006 to 2015. It can be observed that GDP contributed by forestry and logging, cocoa and fishing reduced year by year. None of the agriculture activities contributed GDP higher than oil palm did every year. As in 2015, oil palm industry contributed to the GDP of agriculture sector by 46.9%. Increment by 2.28 million tonnes of fresh fruit bunch (Department of Statistics Malaysia, 2016) from 96.07 million tonnes in 2014 (Department of Statistics Malaysia, 2015) showed that Malaysia are focused in the agriculture sector especially palm oil's production. Due to overwhelming global demand on palm oil, Malaysia has become one of the leading producer and exporter of palm oil besides Indonesia in the world. Thus, more palm waste like palm frond, empty fruit bunch, and palm pressed fiber are produced by these countries.

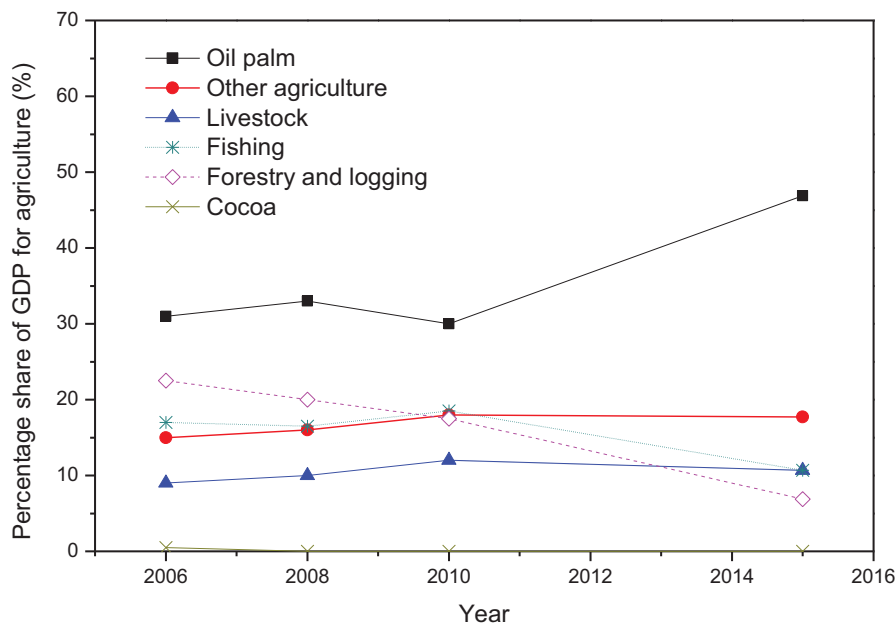

**Figure 1.2: Percentage share of GDP for agriculture sector, 2006-2015**  
(Department of Statistics Malaysia, 2012, 2015)

## 1.2 Problem Statement

In Malaysia, palm oil industry is one of the major agricultural industries which provide edible oil domestically and exported to other countries too. However, palm oil mill

produces many solid wastes such as the empty fruit bunch (EFB), oil palm fronds, trunks and palm oil mill effluent (POME). From 1 tonne of fresh fruit bunch collected, 22% is the EFB (Yusoff, 2006; Lim Meng Hon, 2010). In 2015, 21.64 million tonnes of EFB is produced from 98.35 million MT of fresh fruit bunch (FFB). Thus large area is required to allocate the EFB. To utilize these wastes, EFB are usually incinerated to produce energy (Udoetok, 2012), while some are used for mulching. These current methods applied by mill are obviously wasting the advantage of fibers in the waste and also cause environmental problem.

A study by Md Yunus et al., (2015) and Gomez et al., (2015) found that there is residual oil entrapped in the fiber of EFB which is worth to be recovered. Oil obtained from the EFB is valuable even with FFA higher than 5%, as it can be used in blending with the high purity crude palm oil. This will significantly help increase the oil extraction rate (OER) in the palm oil industry.

Other than oil, EFB contained lots of fiber which comprised of hemicellulose, cellulose and lignin that are able to be processed into other products. Many researches have been conducted in order to produce organic acid and sugar from EFB (Hamzah et al., 2011; Meilany et al., 2018; Nomanbhay et al., 2013) due to the high content of cellulose and hemicellulose in it. In addition, this sugar seem to be a good potential feedstock for fermentation to produce ethanol and butanol (Ibrahim et al., 2015; Kamoldeen et al., 2017; Lim Meng Hon, 2010). On the other hand, organic acid like lactic acid produced from EFB also is valuable as it can be used to make bioplastic. Hence, reliance on fossil fuels can be reduced.

Other than hydrolysis of cellulose and hemicellulose, attention has been given to the high amount of lignin in EFB that is suitable to be the feedstock for bio-oil and bio-char production (Chang, 2014; Chow et al., 2018). The bio-oil has potential to be used as fuel (Amin, (2011), however require several analysis test to identify its properties like heating value, acid content, and viscosity. Interestingly, EFB is also currently being exploited to produce hydrogen as biofuel (Ibrahim et al., 2015; Monir et al., 2018; Sivasangar et al., 2015).

Thus, many methods are being tested to help reduce the waste production by converting it to new product. This is aligned with the advancement in technology which helps the positive growth in palm oil industry. An example of common method used nowadays is acid or alkaline hydrolysis. However, this method has several disadvantages like usage of strong acid, highly corrosive on the material used, require neutralization process and affect the edibility factor of the end-product.

Another method which is able to overcome the disadvantages of acid hydrolysis is enzymatic hydrolysis. This method is able to produce same products as acid hydrolysis does without affecting the edibility factor. However, this method requires special handling methods as it involve enzymes. In addition, enzymatic hydrolysis requires very long time to obtain the products. Both methods are also expensive as acid

hydrolysis requires strong material for equipment and for safety purposes while enzymatic hydrolysis requires special care on enzyme and it cannot be recycle.

On the other hand, another method which is currently being exploited by many researchers is showing positive results with many different raw materials. This method is known as sub-critical water treatment (sub-CW) or hydrothermal treatment. Sub-CW method used water at high temperature between its boiling point (100°C) and critical temperature (374°C) where its physicochemical properties has been significantly altered. Water at temperature higher than 200°C has a very low dielectric constant which enables water to behave like solvent. At high temperature (i.e. 250°C) also, the ion product constant of water increased significantly by 1000 times than at room temperature which helps in hydrolysis. Thus, sub-cw can be used to breakdown polysaccharides into monosaccharides, oligosaccharides and organic acids. Besides, raw material can be directly used without drying using this method and therefore can save additional operating cost and time. In addition, this process uses only water as the solvent which is safe and easily available in Malaysia. Successful implication of this work will help reduce the amount of the empty bunch in the palm oil mill by utilizing it into other products in high amount.

### **1.3 Objectives of Studies**

The objectives of this research are as follows;

- i. To investigate the possibility for the conversion of oil palm empty fruit bunch into any value-added products.
- ii. To evaluate the effects of process conditions (reaction temperature and time) of sub-critical water treatment on value added products and sugar yields.

### **1.4 Scopes of Study**

This research covers the application of sub-critical water in an attempt to convert oil palm empty fruit bunch into valuable products. It involves sample collection from Sri Langat Mill in Dengkil and its preparation for drying purposes, sub-cw treatment, and Soxhlet extraction. Only spikelet is used in this study due to oil content. However, due to complicated procedure in segregating the midrib spine leaflets from the fiber, whole spikelet is used in this research.

The drying process takes place for few days in a dryer set at 80°C to measure the moisture content in EFB. Sample are cut into small pieces and prepared for sub-cw reaction at temperature range 180 to 360°C (reaction time: 5 minutes) and time range of 2 to 15 minutes (reaction temperature: 220°C). Size of the sample loaded in the reactor is not manipulated as it does not give significant effect on the hydrolysis process of a batch system (Prado et al., 2016). Soxhlet extraction is carried out to determine the total oil in the EFB's spikelet used. The oil yield is used as benchmark to know the efficiency of sub-critical water treatment in extracting oil.

All products are recovered using hexane, water and acetone. Recovered water phase is analyzed for its sugar content, organic acids and total organic carbon using Ultra-visible spectrometry (UV-Vis), High Performance Liquid Chromatography (HPLC) and Total Organic Carbon-Analyzer respectively. The water-insoluble tar is analyzed for individual and total phenolic content (TPC) using Gas Chromatography Mass Spectrometer (GC-MS) and UV-Vis. Besides sub-cw reaction, soxhlet extraction also is carried out to compare the effectiveness of sub-cw treatment in oil extraction.

### **1.5 Outline of Thesis**

This thesis is comprised of five chapters. First chapter covers the brief introduction of sample, problems statement and objectives of this research. The second chapter described in detail about the raw material used and process involved throughout this research. Factors affecting the results and conventional method used are also described in this chapter. Chapter three is mainly describe in detail about the procedures and equipment involved like sub-critical water process and High Performance Liquid Chromatography equipment. Meanwhile, chapter four explained all results obtained throughout this research and what factors affecting the trend of yield obtained. Final chapter which is chapter five summarized all the findings according to the objectives and recommends some improvements suggestion for better result or future research.

## REFERENCES

- Abdul Khalil, H. P. S., Marliana, M. M., & Alshammari, T. (2011). Material properties of epoxy-reinforced biocomposites with lignin from empty fruit bunch as curing agent. *BioResources*, 6(4), 5206–5223.
- Adachi, S. (2009). Properties of Subcritical Water and Its Utilization. *Foods Food Ingredients J. Jpn*, 214(2), 8502.
- Aghamohammadi, N., Reginald, S. S., Shamiri, A., Zinatizadeh, A. A., Wong, L. P., & Sulaiman, N. M. B. N. (2016). An investigation of sustainable power generation from oil palm biomass: A case study in Sarawak. *Sustainability (Switzerland)*, 8(5), 1–19. <http://doi.org/10.3390/su8050416>
- Akhtar, J., & Idris, A. (2017). Oil palm empty fruit bunches a promising substrate for succinic acid production via simultaneous saccharification and fermentation. *Renewable Energy*, 114, 917–923. <http://doi.org/10.1016/j.renene.2017.07.113>
- Aljuboori, A. H. R. (2013). Oil Palm Biomass Residue in Malaysia : Availability and Sustainability. *International Journal of Biomass & Renewables*, 2, 13–18.
- Amin, N. A., Misson, M., Haron, R., Fadhzir, M., & Kamaroddin, A. (2011). Pre-treatment of Empty Fruit Bunch for Biofuel Production. *Journal of Energy and Environment*, 3(1), 18–22.
- Ariffin, H., Hassan, M. a, Kalsom, M. S. U., Abdullah, N., & Shirai, Y. (2008). Effect of physical , chemical and thermal pretreatments on the enzymatic hydrolysis of oil palm empty fruit bunch (OPEFB). *Journal of Tropical Agricultural and Fundamental Science*, 36(2), 1–10.
- Asl, A. H., & Khajenoori, M. (2013). Subcritical water extraction. In *Mass Transfer-Advances in Sustainable Energy and Environment Oriented Numerical Modeling* (pp. 459–487). <http://doi.org/http://dx.doi.org/10.5772/54993> 481
- Awaluddin, S. a., Thiruvankadam, S., Izhar, S., Hiroyuki, Y., Danquah, M. K., & Harun, R. (2016). Subcritical Water Technology for Enhanced Extraction of Biochemical Compounds from *Chlorella vulgaris*. *BioMed Research International*, 2016. <http://doi.org/10.1155/2016/5816974>
- Azizi, M., Yunus, C., Syafiq, M., Ruslan, H., & Jamal, J. Bin. (2014). Extraction of Beta Carotene From Palm Mesocarp Via Green Sub-Critical Carbon Dioxide. *International Conference on Global Trends in Academic Research*, 1, 297–304.
- Ball, D. W., Hill, J. W., & Scott, R. J. (2012). Organic Acids and Bases and Some of Their Derivatives. In *Introduction to Chemistry: General, Organic and Biological* (Vol. 1, pp. 789–889).



- Basiron, Y. (2007). Palm oil production through sustainable plantations. *Europe Journal Lipid Science Technology*, 109, 289–295. <http://doi.org/10.1002/ejlt.200600223>
- Basiron, Y. (2015). An overview of Malaysian palm oil in the global oils and fats scenario - 2015 and beyond. In *Palm Oil Trade Fair & Seminar* (pp. 1–65). Cairo, Egypt. Retrieved from [http://www.mpoc.org.my/upload/Paper\\_2\\_An\\_Overview\\_of\\_Malaysian\\_Palm\\_Oil\\_in\\_the\\_Global\\_Oils\\_and\\_Fats\\_Scenario.pdf](http://www.mpoc.org.my/upload/Paper_2_An_Overview_of_Malaysian_Palm_Oil_in_the_Global_Oils_and_Fats_Scenario.pdf)
- Brodin, M., Vallejos, M., Opedal, M. T., Area, M. C., & Chinga-Carrasco, G. (2017). Lignocellulosics as sustainable resources for production of bioplastics – A review. *Journal of Cleaner Production*, 162, 646–664. <http://doi.org/10.1016/j.jclepro.2017.05.209>
- Cantero, D. a., Dolores Bermejo, M., & José Cocero, M. (2015). Reaction engineering for process intensification of supercritical water biomass refining. *Journal of Supercritical Fluids*, 96, 21–35. <http://doi.org/10.1016/j.supflu.2014.07.003>
- Cardenas-toro, F. P., Alcazar-alay, S. C., Forster-carneiro, T., & Meireles, M. A. a. (2014). Obtaining Oligo- and Monosaccharides from Agroindustrial and Agricultural Residues Using Hydrothermal Treatments. *Food and Public Health*, 4(3), 123–139. <http://doi.org/10.5923/j.fph.20140403.08>
- Carr, A. G., Mammucari, R., & Foster, N. R. (2011). A review of subcritical water as a solvent and its utilisation for the processing of hydrophobic organic compounds. *Chemical Engineering Journal*, 172(1), 1–17. <http://doi.org/10.1016/j.cej.2011.06.007>
- Chang, S. H. (2014). An overview of empty fruit bunch from oil palm as feedstock for bio-oil production. *Biomass and Bioenergy*, 62, 174–181. <http://doi.org/10.1016/j.biombioe.2014.01.002>
- Chen, H. (2014). Chemical Composition and Structure of Natural Lignocellulose. In *Biotechnology of Lignocellulose: Theory and Practice* (pp. 25–72). <http://doi.org/10.1007/978-94-007-6898-7>
- Chen, K., Hao, S., Lyu, H., Luo, G., Zhang, S., & Chen, J. (2017). Ion exchange separation for recovery of monosaccharides , organic acids and phenolic compounds from hydrolysates of lignocellulosic biomass. *Separation and Purification Technology*, 172, 100–106. <http://doi.org/10.1016/j.seppur.2016.08.004>
- Chen, M. H., Rajan, K., Carrier, D. J., & Singh, V. (2015). Separation of xylose oligomers from autohydrolyzed *Miscanthus × giganteus* using centrifugal partition chromatography. *Food and Bioprocess Processing*, 95, 125–132. <http://doi.org/10.1016/j.fbp.2015.04.006>

- Cheng, Y., Xu, Q., Liu, J., Zhao, C., Xue, F., & Zhao, Y. (2014). Decomposition of Five Phenolic Compounds in High Temperature Water. *J. Braz. Chem. Soc*, 25(11), 2102–2107. <http://doi.org/10.5935/0103-5053.20140201>
- Chew, K. K., Khoo, M. Z., Ng, S. Y., Thoo, Y. Y., Aida, W. M. W., & Ho, C. W. (2011). Effect of ethanol concentration, extraction time and extraction temperature on the recovery of phenolic compounds and antioxidant capacity of *Orthosiphon stamineus* extracts. *International Food Research Journal*, 18(4), 1427–1435.
- Cheyrier, V. (2012). Phenolic compounds: From plants to foods. *Phytochemistry Reviews*, 11(2-3), 153–177. <http://doi.org/10.1007/s11101-012-9242-8>
- Chin, S. X., Chia, C. H., Zakaria, S., Fang, Z., & Ahmad, S. (2015). Ball milling pretreatment and diluted acid hydrolysis of oil palm empty fruit bunch (EFB) fibres for the production of levulinic acid. *Journal of the Taiwan Institute of Chemical Engineers*, 000, 1–8. <http://doi.org/10.1016/j.jtice.2015.01.028>
- Ching, Y. C., & Ng, T. S. (2014). Effect of Preparation Conditions on Cellulose from Oil Palm Empty Fruit Bunch Fiber. *BioResources*, 9(4), 6373–6385.
- Chow, L. W., Tio, S. A., Teoh, J. Y., Lim, C. G., Chong, Y. Y., & Thangalazhy-Gopakumar, S. (2018). Sludge as a relinquishing catalyst in Co-Pyrolysis with palm Empty Fruit Bunch Fiber. *Journal of Analytical and Applied Pyrolysis*, 132(July 2017), 56–64. <http://doi.org/10.1016/j.jaap.2018.03.015>
- Cocero, M. J., Cabeza, Á., Abad, N., Adamovic, T., Vaquerizo, L., Martínez, C. M., & Pazo-Cepeda, M. V. (2018). Understanding biomass fractionation in subcritical & supercritical water. *Journal of Supercritical Fluids*, 133(August 2017), 550–565. <http://doi.org/10.1016/j.supflu.2017.08.012>
- Department of Statistics Malaysia. (2012). *Summary Findings: Selected Indicators for Agriculture, Crops and Livestock, Malaysia, 2006-2010*. Retrieved from [https://www.dosm.gov.my/v1/index.php?r=column/cthemeByCat&cat=72&bul\\_id=QS95em5KdjhRUDZzZzJXdEtONFhXdz09&menu\\_id=Z0VTZGU1UHBU1VJMF1paXRRR0xpdz09](https://www.dosm.gov.my/v1/index.php?r=column/cthemeByCat&cat=72&bul_id=QS95em5KdjhRUDZzZzJXdEtONFhXdz09&menu_id=Z0VTZGU1UHBU1VJMF1paXRRR0xpdz09)
- Department of Statistics Malaysia. (2015). *Department of Statistics Malaysia Press Release Selected Agricultural Indicators , Malaysia 2015*. Retrieved from [https://www.statistics.gov.my/index.php?r=column/cthemeByCat&cat=72&bul\\_id=bnR4ZFJnbXVOQmt6TDhNNmh3M0Y5dz09&menu\\_id=Z0VTZGU1UHBU1VJMF1paXRRR0xpdz09](https://www.statistics.gov.my/index.php?r=column/cthemeByCat&cat=72&bul_id=bnR4ZFJnbXVOQmt6TDhNNmh3M0Y5dz09&menu_id=Z0VTZGU1UHBU1VJMF1paXRRR0xpdz09)
- Department of Statistics Malaysia. (2016). *Department of Statistics Malaysia Press Release Vital Statistics , Malaysia , 2014*. Retrieved from [https://www.dosm.gov.my/v1/index.php?r=column/cthemeByCat&cat=72&bul\\_id=T2Z3NkhLSFk2VjZ5dkdUL1JQUGs4dz09&menu\\_id=Z0VTZGU1UHBU1VJMF1paXRRR0xpdz09](https://www.dosm.gov.my/v1/index.php?r=column/cthemeByCat&cat=72&bul_id=T2Z3NkhLSFk2VjZ5dkdUL1JQUGs4dz09&menu_id=Z0VTZGU1UHBU1VJMF1paXRRR0xpdz09)

- Didar, Z., & Asadabadi, Y. Z. (2016). A Comparative Study Concerned with the Effect of Different Pretreatments on Ethanol Production from Lemon Peel ( *Citrus latifolia* ). *Journal of Food Biosciences and Technology*, 6(1), 61–68.
- Dutta, R., Sarkar, U., & Mukherjee, A. (2014). Extraction of oil from *Crotalaria Juncea* seeds in a modified Soxhlet apparatus : Physical and chemical characterization of a prospective. *Fuel*, 116, 794–802. <http://doi.org/10.1016/j.fuel.2013.08.056>
- Eikani, M. H., Golmohammad, F., & Rowshanzamir, S. (2006). Subcritical water extraction of essential oils from coriander seeds (*Coriandrum sativum* L.). *J. Food Eng.*, 80(1), 735–740.
- Fang, Z., Sato, T., Smith, R. L., Inomata, H., Arai, K., & Kozinski, J. a. (2008). Reaction chemistry and phase behavior of lignin in high-temperature and supercritical water. *Bioresource Technology*, 99(9), 3424–3430. <http://doi.org/10.1016/j.biortech.2007.08.008>
- Fatin, S. a, Rosnah, S., & Yunus, R. (2014). Effect of Chopping Oil Palm Fruit Spikelets on the Free Fatty Acid Content Release Rate and Its Mechanical Properties. *International Journal of Research in Engineering and Technology*, 3(1), 511–516.
- Gomez, J. C., Mokhtar, M. N., Sulaiman, A., Baharuddin, S., Busu, Z., & Busu, Z. (2015). Recovery of Residual Crude Palm Oil from the Empty Fruit Bunch Spikelets Using Environmentally Friendly Processes Recovery of Residual Crude Palm Oil from the Empty Fruit Bunch Spikelets Using Environmentally Friendly Processes. *Separation Science and Technology*, 50(11), 1677–1683. <http://doi.org/10.1080/01496395.2014.994781>
- Gomez, J. C., Mokhtar, M. N., Sulaiman, A., Zakaria, R., Baharuddin, A. S., & Busu, Z. (2014). Study on Residual Oil Recovery from Empty Fruit Bunch by Combination of Water and Steam Process. *Journal of Food Process Engineering*, 38(4), 385–394. <http://doi.org/10.1111/jfpe.12169>
- Gopal, D. D. O. (2009). *Oil Recovery From Palm Oil Solid Wastes. Degree Thesis, University Malaysia Pahang.*
- Hafiz, M. M., & Rashid, A. (2011). Oil palm physical and optical characteristics from two different planting materials. *Research Journal of Applied Sciences, Engineering and Technology*, 3(9), 953–962. Retrieved from <http://www.cabdirect.org/abstracts/20113392234.html>
- Haiping, Y., Rong, Y., Hanping, C., Dong Ho, L., & Chuguang, Z. (2007). Characteristics of hemicellulose, cellulose and lignin pyrolysis. *Fuel*, 86(12-13), 1781–1788. <http://doi.org/10.1016/j.fuel.2006.12.013>
- Hamzah, F., Idris, A., & Shuan, T. K. (2011). Preliminary study on enzymatic hydrolysis of treated oil palm (*Elaeis*) empty fruit bunches fibre (EFB) by using

- combination of cellulase and Beta 1-4 glucosidase. *Biomass and Bioenergy*, 35(3), 1055–1059. <http://doi.org/10.1016/j.biombioe.2010.11.020>
- Harane, R. S., Mehra, N. R., Tayade, P. B., & Adivarekar, R. V. (2014). A facile energy and water-conserving process for cotton dyeing. *International Journal of Energy and Environmental Engineering*, 5(2-3), 1–10. <http://doi.org/10.1007/s40095-014-0096-2>
- Hashaikheh, R., Fang, Z., Butler, I. S., Hawari, J., & Kozinski, J. a. (2007). Hydrothermal dissolution of willow in hot compressed water as a model for biomass conversion. *Fuel*, 86(10-11), 1614–1622. <http://doi.org/10.1016/j.fuel.2006.11.005>
- Hassan, O., Pei, T., Yusof, M., & Muhammad, N. (2013). Optimization of pretreatments for the hydrolysis of oil palm empty fruit bunch fiber ( EFBF ) using enzyme mixtures. *Biomass and Bioenergy*, 56(0), 137–146. <http://doi.org/10.1016/j.biombioe.2013.04.021>
- Hong, J. Y., Kim, Y. S., & Oh, K. K. (2013). Fractionation and delignification of empty fruit bunches with low reaction severity for high sugar recovery. *Bioresource Technology*, 146, 176–183. <http://doi.org/10.1016/j.biortech.2013.07.058>
- Ibrahim, M. F., Abd-aziz, S., Ezreeza, M., Yusoff, M., Yee Phang, L., & Hassan, M. A. (2015). Simultaneous enzymatic saccharification and ABE fermentation using pretreated oil palm empty fruit bunch as substrate to produce butanol and hydrogen as biofuel. *Renewable Energy*, 77, 447–455. <http://doi.org/10.1016/j.renene.2014.12.047>
- Jin, F., Zhou, Z., Kishita, a., & Enomoto, H. (2006). Hydrothermal conversion of biomass into acetic acid. *Journal of Materials Science*, 41(5), 1495–1500. <http://doi.org/10.1007/s10853-006-7493-8>
- Kaith, B. S., Mittal, H., Jindal, R., Maiti, M., & Kalia, S. (2011). Environment Benevolent Biodegradable Polymers: Synthesis, Biodegradability, and Applications. In *Cellulose Fibers: Bio- and Nano-Polymer Composites* (pp. 425–451). Springer-Verlag Berlin Heidelberg. <http://doi.org/10.1007/978-3-642-17370-7>
- Kamoldeen, A. a., Lee, C. K., Wan Abdullah, W. N., & Leh, C. P. (2017). Enhanced ethanol production from mild alkali-treated oil-palm empty fruit bunches via co-fermentation of glucose and xylose. *Renewable Energy*, 107, 113–123. <http://doi.org/10.1016/j.renene.2017.01.039>
- Kavitha, B., Jothimani, P., & Rajannan, G. (2013). Empty Fruit Bunch- a Potential Organic Manure for Agriculture. *International Journal of Science, Environment & Technology*, 2(5), 930–937.

- Kawamura, F., Saary, N. S., Hashim, R., Sulaiman, O., Hashida, K., Otsuka, Y., ... Ohara, S. (2014). Subcritical water extraction of low-molecular-weight phenolic compounds from oil palm biomass. *Japan Agricultural Research Quarterly*, 48(3), 355–362. <http://doi.org/10.6090/jarq.48.355>
- Kerdsuwan, S., Laohalidanond, K., & Waste, T. (2011). Renewable Energy from Palm Oil Empty Fruit Bunch. In *Renewable Energy-Trends and Applications* (pp. 123–150). Retrieved from <http://www.intechopen.com/books/renewable-energy-trends-and-applications/renewable-energy-from-palm-oil-empty-fruit-bunch>
- Kurnin, N. A. A., Ismail, M. H. S., Yoshida, H., & Izhar, S. (2016). Recovery of Palm Oil and Valuable Material from Oil Palm Empty Fruit Bunch by Sub-critical Water. *Journal of Oleo Science*, 65(4), 283–289. <http://doi.org/10.5650/jos.ess15209>
- Lachos-Perez, D., Brown, a. B., Mudhoo, a., Timko, M. T., Rostagno, M. a., & Forster-Carneiro, T. (2017). Applications of subcritical and supercritical water conditions for extraction, hydrolysis, gasification, and carbonization of biomass: a critical review. *Biofuel Research Journal*, 4(2), 611–626. <http://doi.org/10.18331/BRJ2017.4.2.6>
- Latif, M. H. A., Attiya, H. G., Al, M. a., & Mohammed, A. (2015). Isolation and Characterization of Lignin from Iraqi Date Palm Phoenix Dactylifera L . Frond Bases as a Good and Cheap Source of Lignin, 5(4), 83–90.
- Lattanzio, V. (2013). Phenolic Compound: Introduction. In K. G. Ramawat & J. M. Me'rillon (Eds.), *Natural Products* (pp. 1543–1580). Springer-Verlag Berlin Heidelberg. <http://doi.org/10.1007/978-3-642-22144-6>
- Lawson, O. S., Oyewumi, A., Ologunagba, F. O., & Ojomo, A. O. (2010). Evaluation of the Parameters Affecting the Solvent extraction of soybean oil. *APRN Journal of Engineering and Applied Sciences*, 5(10), 51–55.
- Li, H. Y., Wang, B., Wen, J. L., Cao, X. F., Sun, S. N., & Sun, R. C. (2018). Availability of four energy crops assessing by the enzymatic hydrolysis and structural features of lignin before and after hydrothermal treatment. *Energy Conversion and Management*, 155(October 2017), 58–67. <http://doi.org/10.1016/j.enconman.2017.10.089>
- Liang, X., & Fan, Q. (2013). Application of Sub-Critical Water Extraction in Pharmaceutical Industry. *Journal of Materials Science and Chemical Engineering*, 1(October), 1–6. <http://doi.org/10.4236/msce.2013.15001>
- Lik Nang Lau, H., Choo, Y. M., Ma, A. N., & Chuah, C. H. (2008). Selective extraction of palm carotene and vitamin E from fresh palm-pressed mesocarp fiber (*Elaeis guineensis*) using supercritical CO<sub>2</sub>. *Journal of Food Engineering*, 84(2), 289–296. <http://doi.org/10.1016/j.jfoodeng.2007.05.018>

- Lim Meng Hon, J. (2010). A case study on palm empty fruit bunch as energy feedstock. *SEGi Review*, 3(2), 3–15. Retrieved from <http://www.onlinereview.segi.edu.my/flipbook/vol3-no2-art1/preview.html>
- Lin, H., Su, J., Liu, Y., & Yang, L. (2014). Catalytic Conversion of Lignocellulosic Biomass to Value-Added Organic Acids in Aqueous Media. In J. Fangming (Ed.), *Application of Hydrothermal Reactions to Biomass Conversion* (pp. 109–138). China: Springer-Verlag Berlin Heidelberg. <http://doi.org/10.1007/978-3-642-54458-3>
- Man, E. L. Y., & Baharum, A. (2011). A qualitative approach of identifying major cost influencing factors in palm oil mills and the relations towards production cost of Crude Palm Oil. *American Journal of Applied Sciences*, 8(5), 441–446. <http://doi.org/10.3844/ajassp.2011.441.446>
- Marcet, I., Álvarez, C., Paredes, B., & Díaz, M. (2016). The use of sub-critical water hydrolysis for the recovery of peptides and free amino acids from food processing wastes. Review of sources and main parameters. *Waste Management*, 49, 364–371. <http://doi.org/10.1016/j.wasman.2016.01.009>
- Mat soom, R., Wan Hassan, W. H., Md Top, A. G., & Hassan, K. (2006). Thermal Properties of Oil Palm Fibre , Cellulose and Its Derivatives. *Journal of Oil Palm Research*, 18, 272–277.
- Md Sarip, M. S., Morad, N. A., Yamashita, Y., Tsuji, T., Yunus, M. A. C., Aziz, M. K. A., & Lam, H. L. (2016). Crude palm oil (CPO) extraction using hot compressed water (HCW). *Separation and Purification Technology*, 169, 103–112. <http://doi.org/10.1016/j.seppur.2016.06.001>
- Md Yunos, N. S. H. (2015). *Residual Oil Removal from Oil Palm Empty Fruit Bunches Using High Pressure Water Spray System*. Universiti Putra Malaysia.
- Md Yunos, N. S. H., Baharuddin, A. S., Md Yunos, K. F., Halimatun Saadiah, H., Zainuri, B., Mokhtar, M. N., ... Ayub, M. S. (2015). The Physicochemical Characteristics of Residual Oil and Fibers from Oil Palm Empty Fruit Bunches. *BioResources*, 10(1), 14–29.
- Md Yunos, N. S. H., Chu, C. J., Baharuddin, A. S., Mokhtar, M. N., Sulaiman, A., Rajaeifar, M. A., ... Tabatabaei, M. (2017). Enhanced oil recovery and lignocellulosic quality from oil palm biomass using combined pretreatment with compressed water and steam. *Journal of Cleaner Production*, 142, 3834–3849. <http://doi.org/10.1016/j.jclepro.2016.10.078>
- Medina, J. D. C., Woiciechowski, A., Filho, A. Z., Nigam, P. S., Ramos, L. P., & Soccol, C. R. (2016). Steam explosion pretreatment of oil palm empty fruit bunches (EFB) using autocatalytic hydrolysis: A biorefinery approach. *Bioresource Technology*, 199, 173–180. <http://doi.org/10.1016/j.biortech.2015.08.126>

- Meilany, D., Kresnowati, M., & Setiadi, T. (2018). Temperature , Solid Loading and Time Effects on Recovery of Sugar from OPEFB. In *MATEC Web of Conferences* (Vol. 156, pp. 1–5). <http://doi.org/https://doi.org/10.1051/mateconf/201815603022>
- Mhd Ramle, S. F., Sulaiman, O., Hashim, R., Arai, T., Kosugi, A., Abe, H., ... Mori, Y. (2012). Characterization of Parenchyma and Vascular Bundle of Oil Palm Trunk As Function of Storage. *Lignocellulose*, 1(1), 33–44.
- Misson, M., Haron, R., Kamaroddin, M. F. A., & Amin, N. A. S. (2009). Pretreatment of empty palm fruit bunch for production of chemicals via catalytic pyrolysis. *Bioresource Technology*, 100(11), 2867–2873. <http://doi.org/10.1016/j.biortech.2008.12.060>
- Miyata, Y., Yamazaki, Y., Hirano, Y., & Kita, Y. (2018). Quantitative analysis of the aqueous fraction from the Fe-assisted hydrothermal liquefaction of oil palm empty fruit bunches. *Journal of Analytical and Applied Pyrolysis*, 132(March), 72–81. <http://doi.org/10.1016/j.jaap.2018.03.013>
- Monir, M. U., Abd Aziz, A., Kristanti, R. A., & Yousuf, A. (2018). Co-gasification of empty fruit bunch in a downdraft reactor: A pilot scale approach. *Bioresource Technology Reports*, 1, 39–49. <http://doi.org/10.1016/j.biteb.2018.02.001>
- Muhd Ali, M. D., Tamunaidu, P., Nor Aslan, A. K. H., Morad, N. A., Sugiura, N., Goto, M., & Zhang, Z. (2016). Hydrothermal pre-treatment of oil palm empty fruit bunch into fermentable sugars. In *International Conference on Chemical Engineering and Bioprocess Engineering* (pp. 1–7). IOP. <http://doi.org/10.1088/1755-1315/36/1/012042>
- Munir, M. T., Kheirkhah, H., Baroutian, S., Quek, S. Y., & Young, B. R. (2018). Subcritical water extraction of bioactive compounds from waste onion skin. *Journal of Cleaner Production*, 183, 487–494. <http://doi.org/10.1016/j.jclepro.2018.02.166>
- Nabihah, S., Syed, B., Haimer, E., Liebner, F., Böhmendorfer, S., Potthast, A., & Rosenau, T. (2011). Empty Palm Fruit Bunches — A CO<sub>2</sub>-Based Biorefinery Concept. *Journal of Biobased Materials and Bioenergy*, 5(2), 225–233. <http://doi.org/10.1166/jbmb.2011.1140>
- Nazir, M. S., Wahjoedi, B. A., Yussof, A. W., & Abdullah, M. A. (2013). Eco-friendly extraction and characterization of cellulose from oil palm empty fruit bunches. *BioResources*, 8(2), 2161–2172.
- Nielsen, S. S. (2010). Phenol - Sulfuric Acid Method for Total Carbohydrates. In *Food Analysis Laboratory Manual* (pp. 47–53). Springer Science+Business Media. <http://doi.org/10.1007/978-1-4419-1463-7>

- Nomanbhay, S. M., Hussain, R., & Palanisamy, K. (2013). Microwave-Assisted Alkaline Pretreatment and Microwave Assisted Enzymatic Saccharification of Oil Palm Empty Fruit Bunch Fiber for Enhanced Fermentable Sugar Yield. *Journal of Sustainable Bioenergy Systems*, 03(01), 7–17. <http://doi.org/10.4236/jsbs.2013.31002>
- Norsyabilah, R., Hanim, S. S., Suhaila, N., Noraishah, A., & Kartina, S. (2013). Subcritical Water Extraction of Monosaccharides From Oil Palm Fronds Hemicelluloses. *The Malaysian Journal of Analytical Sciences*, 17(2), 272–275.
- Ogunjobi, J. K., & Lajide, L. (2013). Characterisation of Bio-Oil and Bio-Char from Slow-Pyrolysed Nigerian Yellow and White Corn Cobs. *Journal of Sustainable Energy and Environment*, 4, 77–84.
- Ozkaynak Kanmaz, E. (2018). 5-Hydroxymethylfurfural ( HMF ) formation during subcritical water extraction. *Food Science Biotechnology*, 1–6. <http://doi.org/10.1007/s10068-018-0328-y>
- Palamae, S., Dechatiwongse, P., Choorit, W., & Chisti, Y. (2017). Cellulose and hemicellulose recovery from oil palm empty fruit bunch ( EFB ) fibers and production of sugars from the fibers. *Carbohydrate Polymers*, 155, 491–497. <http://doi.org/10.1016/j.carbpol.2016.09.004>
- Piqueras, C. M., Cabeza, Á., Gallina, G., Cantero, D. a., García-Serna, J., & Cocero, M. J. (2017). Online integrated fractionation-hydrolysis of lignocellulosic biomass using sub- and supercritical water. *Chemical Engineering Journal*, 308, 110–125. <http://doi.org/10.1016/j.cej.2016.09.007>
- Pourali, O. (2009). *Production of valuable materials from rice bran biomass using subcritical water. Doctoral Thesis.* Retrieved from <http://hdl.handle.net/10466/10424>
- Pourali, O., Asghari, F. S., & Yoshida, H. (2009). Sub-critical water treatment of rice bran to produce valuable materials. *Food Chemistry*, 115(1), 1–7. <http://doi.org/10.1016/j.foodchem.2008.11.099>
- Prado, J. M., Carneiro, T. F., Gigo, M. a, Celestrino, R. C. C., Follegatti-, L. a, Filho, F. M., & Meireles, M. A. a. (2013). Subcritical Water Hydrolysis of Sugarcane Bagasse. In *III Iberoamerican Conference on Supercritical Fluids (Colombia)* (pp. 1–9). Colombia.
- Prado, J. M., Lachos-Perez, D., Forster-Carneiro, T., & Rostagno, M. a. (2016). Sub- and supercritical water hydrolysis of agricultural and food industry residues for the production of fermentable sugars: A review. *Food and Bioprocess Technology*, 98, 95–123. <http://doi.org/10.1016/j.fbp.2015.11.004>
- Puczy, I., Skrzypski, J., Troszkiewicz, M., Efekt, W., Reakcji, C., Biomasy, U., & Podkrytycznej, R. W. (2009). Determination of heat effects during the oxidation



- of biomass in subcritical water. In *Central European Conference ECOpole* (Vol. 3, pp. 365–371).
- Quitain, A. T., Heng, C. Y., Yusup, S., Sasaki, M., & Uemura, Y. (2015). Conversion of Biomass to Bio-Oil in Sub-and Supercritical Water. In *Biofuels-Status and Perspective* (pp. 459–476). <http://doi.org/10.5772/59947>
- Rabumi, W. (1998). *Chemical composition of oil palm empty fruit bunch and its decomposition in the field*. Universiti Putra Malaysia.
- Ramawat, K. G., & Mérillon, J. M. (2015). *Polysaccharides: Bioactivity and biotechnology*. *Polysaccharides: Bioactivity and Biotechnology*. <http://doi.org/10.1007/978-3-319-16298-0>
- Rassem, H. H. a., Nour, A. H., & Yunus, R. M. (2016). Techniques For Extraction of Essential Oils From Plants : A Review. *Australian Journal of Basic and Applied Sciences*, *10*(16), 117–127. Retrieved from <http://umpir.ump.edu.my/17305/1/fkksa-2016-rassem-Techniques For Extraction of Essential.pdf>
- Razali, W. A. W., Baharuddin, A. S., TarmezeeTalib, A., Sulaiman, A., Naim, M. N., Hassan, M. A., & Shirai, Y. (2012). Degradation of oil palm empty fruit bunches (OPEFB) fibre during composting process using in-vessel composter. *BioResources*, *7*(4), 4786–4805. <http://doi.org/10.15376/biores.7.4.4786-4805>
- Richana, N., Winarti, C., Hidayat, T., & Prastowo, B. (2015). Hydrolysis of Empty Fruit Bunches of Palm Oil (*Elaeis Guineensis* Jacq.) by Chemical, Physical, and Enzymatic Methods for Bioethanol Production. *International Journal of Chemical Engineering and Applications*, *6*(6), 422–426. <http://doi.org/10.7763/IJCEA.2015.V6.522>
- Roque, R. M. N., Baig, M. N., Leeke, G. a., Bowra, S., & Santos, R. C. D. (2012). Study on sub-critical water mediated hydrolysis of *Miscanthus* a lignocellulosic biomass. *Resources, Conservation and Recycling*, *59*, 43–46. <http://doi.org/10.1016/j.resconrec.2011.06.007>
- Sameni, J., Krigstin, S., & Sain, M. (2017). Solubility of Lignin and Acetylated Lignin in Organic Solvents. *BioResources*, *12*(1), 1548–1565. <http://doi.org/10.15376/biores.12.1.1548-1565>
- Saritpongteeraka, K., Chairapat, S., Boonsawang, P., & Sung, S. (2015). Solid state co-fermentation as pretreatment of lignocellulosic palm empty fruit bunch for organic acid recovery and fiber property improvement. *International Biodeterioration and Biodegradation*, *100*, 172–180. <http://doi.org/10.1016/j.ibiod.2015.03.001>
- Sasaki, M., Fang, Z., Fukushima, Y., Adschiri, T., & Arai, K. (2000). Dissolution and hydrolysis of cellulose in subcritical and supercritical water. *Industrial &*

*Engineering Chemistry Research*, 39(8), 2883–2890.  
<http://doi.org/10.1021/ie990690j>

- Shamsiah, D. S. (2013). *Production of cellulosic sugars from oil palm empty fruit bunch. Dissertation for Degree of Master of Science*. University of Malaya.
- Shitu, A., Izhar, S., & Tahir, T. M. (2015). Sub-critical water as a green solvent for production of valuable materials from agricultural waste biomass: A review of recent work. *Global J. Environ.Sci.Manage.*, 1(3), 255–264.  
<http://doi.org/10.7508/gjesm.2015.03.008>
- Shokri, J., & Adibkia, K. (2013). Application of Cellulose and Cellulose Derivatives in Pharmaceutical Industries. In T. van de Ven & L. Godbout (Eds.), *Cellulose - Medical, Pharmaceutical and Electronic Applications*. Intech.  
<http://doi.org/10.5772/50570>
- Sime Darby, P. (2014). Palm Oil Facts and Figures. Retrieved January 20, 2017, from [http://www.simedarby.com/upload/Palm\\_Oil\\_Facts\\_and\\_Figures.pdf](http://www.simedarby.com/upload/Palm_Oil_Facts_and_Figures.pdf)
- Sindhu, R., Gnansounou, E., Binod, P., & Pandey, A. (2016). Bioconversion of sugarcane crop residue for value added products – An overview. *Renewable Energy*, 1–13. <http://doi.org/10.1016/j.renene.2016.02.057>
- Sivasangar, S., Zainal, Z., Salmiaton, a, & Taufiq-yap, Y. H. (2015). Supercritical water gasification of empty fruit bunches from oil palm for hydrogen production. *Fuel*, 143, 563–569. <http://doi.org/10.1016/j.fuel.2014.11.073>
- Sudiyani, Y., Styarini, D., Triwahyuni, E., Sudiarmanto, Sembiring, K. C., Aristiawan, Y., ... Han, M. H. (2013). Utilization of biomass waste empty fruit bunch fiber of palm oil for bioethanol production using pilot - Scale unit. *Energy Procedia*, 32, 31–38. <http://doi.org/10.1016/j.egypro.2013.05.005>
- Sugiharto, Y. E. C., Harimawan, A., Kresnowati, M. T. A. P., Purwadi, R., Mariyana, R., Andry, ... Hosen, H. F. (2016). Enzyme feeding strategies for better fed-batch enzymatic hydrolysis of empty fruit bunch. *Bioresource Technology*, 207, 175–179. <http://doi.org/10.1016/j.biortech.2016.01.113>
- Sukiran, M. A., Mee Chin, C., & Abu Bakar, N. K. (2009). Bio-oils from Pyrolysis of Oil Palm Empty Fruit Bunches. *American Journal of Applied Sciences*, 6(5), 869–875.
- Sun, P., Heng, M., Sun, S., & Chen, J. (2010). Direct liquefaction of paulownia in hot compressed water: Influence of catalysts. *Energy*, 35(12), 5421–5429. <http://doi.org/10.1016/j.energy.2010.07.005>
- Sun, Y., & Cheng, J. (2002). Hydrolysis of lignocellulosic materials for ethanol production: A review. *Bioresource Technology*, 83(1), 1–11. [http://doi.org/10.1016/S0960-8524\(01\)00212-7](http://doi.org/10.1016/S0960-8524(01)00212-7)

- Tan, H. T., Dykes, G. A., Wu, T. yeong, & Siow, L. F. (2013). Enhanced Xylose Recovery from Oil Palm Empty Fruit Bunch by Efficient Acid Hydrolysis. *Appl. Biochem Biotechnol*, 170, 1602–1613. <http://doi.org/10.1007/s12010-013-0298-8>
- Tavakoli, O., & Yoshida, H. (2006). Conversion of scallop viscera wastes to valuable compounds using sub-critical water. *Green Chemistry*, 8(1), 100–106. <http://doi.org/10.1039/b507441j>
- Toor, S. S., Rosendahl, L. A., & Hoffmann, J. (2014). Hydrothermal Liquefaction of Biomass. In J. Fangming (Ed.), *Application of Hydrothermal Reactions to Biomass Conversion* (pp. 189–217). China: Springer-Verlag Berlin Heidelberg. <http://doi.org/10.1007/978-3-642-54458-3>
- Udoetok, I. A. (2012). Characterization of ash made from oil palm empty fruit bunches ( oefb ). *International Journal of Environmental Sciences*, 3(1), 518–524. <http://doi.org/10.6088/ijes.2012030131033>
- Uemura, Y., Sellappah, V., Trinh, T. H., Hassan, S., & Tanoue, K. I. (2017). Torrefaction of empty fruit bunches under biomass combustion gas atmosphere. *Bioresource Technology*, 243, 107–117. <http://doi.org/10.1016/j.biortech.2017.06.057>
- Urayama, Y. M., Obayashi, T. K., & Dachi, S. A. (2010). Properties of Extracts from Soy Sauce Cake Using Subcritical Water Treatment. *Japan Journal of Food Engineering*, 11(1), 67–71.
- Verendel, J. J., Church, T. L., & Andersson, P. G. (2011). Catalytic one-pot production of small organics from polysaccharides. *Synthesis*, (11), 1649–1677. <http://doi.org/10.1055/s-0030-1260008>
- Wahyudiono, Sasaki, M., & Goto, M. (2008). Recovery of phenolic compounds through the decomposition of lignin in near and supercritical water. *Chemical Engineering and Processing: Process Intensification*, 47(9-10), 1609–1619. <http://doi.org/10.1016/j.cep.2007.09.001>
- Wan, P. J., & Dowd, M. K. (2000). Comparative study of the extraction and measurement of cottonseed free fatty acids. *Journal of the American Oil Chemists' Society*, 77(1), 23–27. <http://doi.org/10.1007/s11746-000-0004-x>
- Yong, T. L.-K., & Matsumura, Y. (2013). Reaction Pathways of Phenol and Benzene Conversion in Supercritical Water. *Journal of the Japan Petroleum Institute*, 56(5), 331–343.
- Yoshida, H., Izhar, S., Nishio, E., Utsumi, Y., Kakimori, N., & Asghari Feridoun, S. (2014). Recovery of indium from TFT and CF glasses in LCD panel wastes using sub-critical water. *Solar Energy Materials and Solar Cells*, 125, 14–19. <http://doi.org/10.1016/j.solmat.2014.02.009>

- Yoswathana, N., & Eshiaghi, M. N. (2013). Subcritical water extraction of phenolic compounds from mango seed kernel using response surface methodology. *Asian Journal of Chemistry*, 25(3), 1741–1744. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-84875170569&partnerID=40&md5=f873b5028683caeb1d0c31b1a071c718>
- Yuanqing, W., Guodong, Y., & Fangming, J. (2014). Hydrothermal Conversion of Cellulose into Organic Acids with a CuO Oxidant. In J. Fangming (Ed.), *Application of Hydrothermal Reactions to Biomass Conversion* (pp. 31–59). China: Springer-Verlag Berlin Heidelberg. <http://doi.org/10.1007/978-3-642-54458-3>
- Zeng, X., Yao, G., Wang, Y., & Jin, F. (2014). Hydrothermal Conversion of Lignin and Its Model Compounds into Formic Acid and Acetic Acid. In J. Fangming (Ed.), *Application of Hydrothermal Reactions to Biomass Conversion* (pp. 61–82). China: Springer-Verlag Berlin Heidelberg. <http://doi.org/10.1007/978-3-642-54458-3>
- Zhu, G., Zhu, X., Fan, Q., & Wan, X. (2011). Recovery of biomass wastes by hydrolysis in sub-critical water. *Resources, Conservation and Recycling*, 55(4), 409–416. <http://doi.org/10.1016/j.resconrec.2010.12.012>