



UNIVERSITI PUTRA MALAYSIA

***EFFECTS OF MICROWAVE FRYING ON PHYSICOCHEMICAL
PROPERTIES OF EDIBLE OILS AND QUALITY OF POTATO CHIPS***

TAHER A.HOUSSEIN ELFAITOURI

FSTM 2018 29



**EFFECTS OF MICROWAVE FRYING ON PHYSICOCHEMICAL
PROPERTIES OF EDIBLE OILS AND QUALITY OF POTATO CHIPS**

By

TAHER A.HOUSSEIN ELFAITOURI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Fulfilment of the Requirement for the Degree of
Doctor of Philosophy**

September 2017

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs, and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright© Universiti Putra Malaysia



DEDICATION

Dedicated to whom I love
My mother, my wife and my son



© COPYRIGHT UPM

Abstract of thesis presented to the senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Doctor of Philosophy

EFFECTS OF MICROWAVE FRYING ON PHYSICOCHEMICAL PROPERTIES OF EDIBLE OILS AND QUALITY OF POTATO CHIPS

By

TAHER A.HOUSSEIN ELFAITOURI

September 2017

Chairman : Professor Chin Ping Tan, PhD
Faculty : Food Science and Technology

Microwave frying is an alternative processing method for producing fried food products with the advantages of saving energy and time and improving both the nutritional quality and acceptability of fried foods by consumers. Thus, the effects of microwave frying on the properties of edible oils and the quality characteristics of fried foods should be studied using different techniques to obtain comprehensive data on the properties of microwave-fried products. In this study, the effects of microwave frying on the physicochemical properties of frying oils, namely, refined, bleached and deodorized (RBD) palm olein and corn oil, which have market acceptability and are widely used in cooking, were evaluated. Changes in physicochemical properties, including free fatty acids, acid value, peroxide value, p-anisidine value, TPM% TOTOX value, color, viscosity, rheological behaviors and thermal properties, were evaluated to monitor the quality and frying performance of frying oil. The experimental data highlighted that both studied frying oils exhibited oil stability against oxidation during the microwave frying process, RBD palm olein showed a comparatively lower degree as compared to corn oil. The studied oils exhibited Newtonian behavior, and there was a significant increase ($P < 0.05$) in the viscosity of both oils as the extent of frying increased. There was a significant ($P < 0.05$) difference in the color of the studied edible oils with increased extent of frying. The thermal properties of the oils were determined by differential scanning calorimetry (DSC). The melting point of RBD palm olein during the heating curve was in the range of -3.25 °C, and during the cooling curve it was in the range of 4.35 °C. A comparison of the average melting point values of corn oil revealed values of -28.0 °C and 26.0 °C during the heating and cooling curves, respectively. The properties of microwaved potato chips, namely, moisture content, oil uptake, bulk density, particle density, porosity values, volumetric shrinkage, hardness, and color development, were also evaluated. The moisture content of potatoes decreased significantly ($P < 0.05$), whereas the oil content values of the potatoes increased significantly ($P < 0.05$), with increasing frying time and microwave power level.

Moreover, the kinetics models gave a good and varied fit for moisture diffusion and oil transfer. Interestingly, the effective moisture diffusivity for potato chips fried in corn oil ranged between 6.36×10^{-9} and 12.68×10^{-9} m²/s and between 6.64×10^{-9} and 12.84×10^{-9} m²/s. The oil transfer rate constant ranged between 2.02×10^{-2} and 1.94×10^{-2} s⁻¹ and between 1.89×10^{-2} and 1.95×10^{-2} for potato chips fried in RBD palm olein and in corn oil, respectively. The activation energy obtained from the Arrhenius plot for the effective moisture diffusivity ranged between 58.17 and 58.84 kJ/mol. Scanning electron microscopy images showed the structural changes at the surface of microwaved potato chips, revealing detailed and specific information to elucidate the relation between microwave frying processing conditions and fried food structure. In addition, confocal laser scanning microscopy (CLSM) images were obtained to observe the surface morphology and oil distribution of potato chips. The oil distribution in microwaved potato chips fried under different microwave frying conditions showed that a crust developed during microwave frying. Oil was trapped only in intercellular spaces, which was strongly linked to the microstructure (not only in intercellular spaces but also over some cells). The topographical data acquired by CLSM in reflective mode confirmed that several cells were broken during the cutting operation. CLSM image representation of the reconstructed surface of a microwaved potato chip allowed the oil location on the potato surface to be observed. The macrostructural properties of microwaved potato chips fried in RBD palm olein and corn oil were investigated, and the results showed volumetric shrinkage, thickness expansion and diameter change as a function of the moisture loss effect by the frying process conditions. Moreover, the hardness showed several fluctuations at 160, 170, and 180 °C. The texture of fried potato chips was soggy at 160 °C due to the short microwave frying process, which led to incompletely fried potato chips. The acrylamide content of potato chips was detected during the microwave frying process. The acrylamide levels in potato chips fried in corn oil ranged from 380 to 12,301 ppb. Meanwhile, the acrylamide levels in potato chips fried in RBD palm olein ranged from 282 to 13,230 ppb. Remarkably, 60% of the potato chips had high levels of acrylamide due to the high thermal process during microwave frying. It can be concluded that the microwave frying of potato chips caused the formation of lower amounts of oxidation products in RBD palm olein and corn oil, indicating a lower extent of oxidative degradation of the studied oils. In addition, the physical properties of the studied oils were investigated. Moreover, the quality characteristics of microwaved potato chips were obtained. The levels of acrylamide in microwaved potato chips were determined. In general, the microwave frying is an attractive process for food due to its applicability, convenience and low oxidative degradation.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

KESAN PENGGORENGAN GELOMBANG MIKRO KE ATAS SIFAT-SIFAT FIZIKOKIMIA MINYAK MAKAN DAN KUALITI KENTANG GORENG

Oleh

TAHER A.HOUSSEIN ELFAITOURI

September 2017

Pengerusi : Profesor Chin Ping Tan, PhD
Fakulti : Sains dan Teknologi Makanan

Penggorengan gelombang mikro adalah kaedah pemprosesan alternatif untuk menghasilkan produk-produk makanan goreng, dan mempunyai kelebihan dari segi penjimatan tenaga, masa, dan penambahbaikan kualiti pemakanan dan kebolehterimaan pengguna terhadap makanan goreng. Oleh yang demikian, kesan penggorengan gelombang mikro ke atas sifat minyak makan, dan ciri kualiti makanan goreng haruslah dikaji menggunakan teknik-teknik yang berlainan untuk memperoleh data yang menyeluruh berkenaan dengan sifat-sifat produk yang digoreng melalui penggorengan gelombang mikro. Dalam kajian ini, kesan penggorengan gelombang mikro ke atas sifat fizikokimia minyak makan, iaitu olein sawit bertapis, nyahwarna dan nyahbau (RBD) dan minyak jagung, yang mempunyai kebolehterimaan pasaran dan digunakan secara meluas dalam masakan telah dinilai. Perubahan dalam sifat-sifat fizikokimia, termasuk asid lemak bebas, nilai peroksida, nilai p-anisidine, TPM% nilai TOTOX, warna, kelikatan, kelakuan reologi dan sifat-sifat terma, telah dinilai untuk memantau kualiti dan persembahan menggoreng minyak goreng. Data eksperimen menunjukkan bahawa kedua-dua minyak goreng tersebut mempamerkan tahap pengoksidaan yang berbeza semasa proses penggorengan gelombang mikro; olein sawit RBD menunjukkan tahap yang lebih rendah jika dibandingkan dengan minyak jagung. Minyak yang dikaji mempamerkan kelakuan Newtonian, dan terdapat peningkatan yang ketara ($P < 0.05$) dalam kelikatan kedua-dua minyak apabila takat penggorengan ditingkatkan. Terdapat perbezaan yang ketara ($P < 0.05$) dalam warna minyak-minyak makan yang dikaji apabila takat penggorengan ditingkatkan. Sifat terma minyak juga ditentukan menerusi kalorimetri pengimbasan pembezaan (DSC). Takat lebur RBD olein sawit semasa lengkung pemanasan adalah dalam lingkungan $-3.25\text{ }^{\circ}\text{C}$, dan semasa lengkung penyejukan adalah dalam lingkungan $4.35\text{ }^{\circ}\text{C}$. Perbandingan nilai purata takat lebur minyak jagung semasa lengkung-lengkung pemanasan dan penyejukan masing-masing menunjukkan nilai $-28.0\text{ }^{\circ}\text{C}$ dan $26.0\text{ }^{\circ}\text{C}$. Sifat kentang goreng yang

digoreng menerusi penggorengan gelombang mikro, iaitu kandungan kelembapan, penyerapan minyak, ketumpatan pukal, ketumpatan zarah, nilai keronggaan, pengecutan isi padu, kekerasan, dan perkembangan warna juga telah dinilai. Kandungan kelembapan kentang goreng merosot dengan ketara ($P < 0.05$) manakala kandungan minyak kentang goreng bertambah dengan ketara ($P < 0.05$) dengan peningkatan dalam masa penggorengan dan tahap kuasa gelombang mikro. Tambahan pula, model kinetik memberikan padanan yang bagus dan pelbagai bagi resapan kelembapan dan pemindahan minyak. Yang menariknya, penyerapan kelembapan berkesan bagi kentang goreng yang digoreng menggunakan minyak jagung adalah dalam lingkungan 6.36×10^{-9} ke $12.68 \times 10^{-9} \text{ m}^2/\text{s}$ dan 6.64×10^{-9} ke $12.84 \times 10^{-9} \text{ m}^2/\text{s}$. Pemalar kadar pemindahan minyak adalah masing-masing dalam lingkungan 2.02×10^{-2} ke $1.94 \times 10^{-2} \text{ s}^{-1}$ dan 1.89×10^{-2} ke 1.95×10^{-2} bagi kentang goreng yang digoreng menggunakan RBD olein sawit dan minyak jagung. Tenaga pengaktifan yang diperolehi melalui plot Arrhenius bagi penyebaran kelembapan berkesan pula adalah dalam lingkungan 58.17 ke 58.84 kJ/mol. Imej-imej mikroskopi elektron pengimbasan menunjukkan perubahan struktur pada permukaan kentang goreng, dan mendedahkan maklumat yang terperinci dan spesifik yang menjelaskan hubungan antara keadaan-keadaan proses penggorengan gelombang mikro dengan struktur makanan goreng. Tambahan pula, imej mikroskopi pengimbasan laser sefokus (CLSM) telah diperolehi untuk memerhati morfologi permukaan dan taburan minyak dalam kentang goreng. Taburan minyak dalam kentang goreng di bawah keadaan penggorengan gelombang mikro yang berlainan menunjukkan pembentukan kerak semasa proses penggorengan gelombang mikro. Minyak hanya terperangkap di dalam ruang antara sel, dan ini boleh dikait rapat dengan struktur mikro (bukan sahaja ruang-ruang antara sel, tetapi juga ke atas sesetengah sel). Data topografi yang diperolehi melalui CLSM dalam mod pantulan mengesahkan bahawa terdapat sel-sel yang pecah ketika operasi pemotongan. Imej CLSM yang mewakili permukaan bentuk-semula kentang goreng telah membolehkan pemerhatian lokasi minyak pada permukaan kentang goreng. Sifat struktur makro kentang goreng yang digoreng dalam olein sawit RBD dan minyak jagung telah dikaji, dan hasil kajian menunjukkan pengecutan isi padu, perkembangan ketebalan dan perubahan diameter sebagai fungsi kepada kesan kehilangan kelembapan akibat keadaan proses penggorengan. Tambahan pula, kajian menunjukkan bahawa terdapat beberapa turun naik dari segi kekerasan pada suhu 160, 170 dan 180 °C. Tekstur kentang goreng adalah lebih lembik pada 160 °C kerana proses penggorengan gelombang mikro yang singkat, yang mengakibatkan penggorengan kentang goreng yang tidak lengkap. Kandungan akrilamid kentang goreng telah dikesan semasa proses penggorengan gelombang mikro. Tahap akrilamid dalam kentang goreng yang digoreng menggunakan minyak jagung adalah dalam lingkungan 380 ke 12,301 ppb, manakala tahap akrilamid dalam kentang goreng yang digoreng menggunakan olein sawit RBD adalah dalam lingkungan 282 ke 13,230 ppb. Yang menakjubkan, 60% kentang goreng mempunyai tahap akrilamid yang tinggi akibat daripada proses terma yang tinggi semasa penggorengan gelombang mikro. Ianya boleh disimpulkan bahawa penggorengan kentang goreng menggunakan gelombang mikro mengakibatkan pembentukan jumlah produk pengoksidaan yang lebih rendah dalam olein sawit RBD dan minyak jagung, dan ini menunjukkan takat penguraian pengoksidaan yang lebih rendah dalam minyak-minyak yang dikaji. Tambahan lagi, ciri-ciri kualiti kentang goreng

juga telah diperolehi. Tahap akrilamid dalam kentang goreng yang digoreng menggunakan gelombang mikro juga telah ditentukan. Secara amnya, penggorengan gelombang mikro adalah satu proses pemprosesan makanan yang menarik kerana kebolehgunaannya, kemudahannya dan degradasi pengoksidaannya yang rendah.



ACKNOWLEDGEMENTS

Most of all, praise be to the almighty ALLAH, the most merciful, the most gracious, to whom belongs all success I achieve in my life.

I would like to thank my supervisor Prof Dr Chin Ping Tan for his encouragement, support and valuable guidance throughout my graduate study and thesis preparation. Also my deep appreciation and gratitude are directed to Prof Dr Servet Gülüm ŞUMNU, Prof Dr. Hasanah Mohd Ghazali, Assoc Prof Dr. Azis Ariffin, members of my committee supervision, for their kindly helpful assistance and suggestions.

I would like to express my very warm thanks to my mother, my wife, my brothers and sisters for their encouragement and support throughout all my graduate study.

I also thank the graduate students who helping me in some parts of this project.

Last but not least I would like to thank my friends who supporting me during my study at UPM for their love, support and keeping faith in me.

I certify that a Thesis Examination Committee has met on 8 September 2017 to conduct the final examination of Taher A.Houssein Elfaitouri on his thesis entitled "Effects of Microwave Frying on Physicochemical Properties of Edible Oils and Quality of Potato Chips" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Azizah binti Abdul Hamid, PhD

Professor
Faculty of Food Science and Technology
Universiti Putra Malaysia
(Chairman)

Faridah binti Abas, PhD

Associate Professor
Faculty of Food Science and Technology
Universiti Putra Malaysia
(Internal Examiner)

Seyed Hamed Mirhosseini, PhD

Associate Professor
Faculty of Food Science and Technology
Universiti Putra Malaysia
(Internal Examiner)

Ashim K. Datta, PhD

Professor
Cornell University
United States
(External Examiner)



NOR AINI AB. SHUKOR, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 28 June 2018

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Tan Chin Ping, PhD

Professor
Faculty of Food science and Technology
Universiti Putra Malaysia
(Chairman)

Gülüm Şumnu, PhD

Professor
Faculty of Engineering
Middle East Technical University
(Member)

Hasanah Mohd Ghazali, PhD

Professor
Faculty of Food science and Technology
Universiti Putra Malaysia
(Member)

Abdul Azis Ariffin, PhD

Associate Professor
Faculty of Food science and Technology
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software

Signature: _____

Date: _____

Name and Matric No.: Taher A.Houssein Elfaitouri, GS 25190

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) were adhered to.

Signature:



Name of
Chairman of
Supervisory
Committee:

Professor Dr. Tan Chin Ping

Signature:



Name of
Member of
Supervisory
Committee:

Professor Dr. Gülüm Şumnu

Signature:



Name of
Member of
Supervisory
Committee:

Professor Dr. Hasanah Mohd Ghazali

Signature:



Name of
Member of
Supervisory
Committee:

Associate Professor Abdul Azis Ariffin

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	vi
APPROVAL	vii
DECLARATION	ix
LIST OF TABLES	xiv
LIST OF FIGURES	xv
LIST OF APPENDICES	xvii
LIST OF SYMBOLS AND ABBREVIATIONS	xxiii
CHAPTER	
1 INTRODUCTION	1
2 LITERATURE REVIEW	4
2.1 Potato Chips	4
2.2 Deep Fat Frying	4
2.3 Frying Oil	4
2.3.1 Palm Oil	5
2.3.2 Corn Oil	5
2.4 Microwave Frying	5
2.4.1 Microwave Power Level	9
2.5 Product Quality Attributes	10
2.5.1 Moisture Content	10
2.5.2 Oil Content	11
2.5.3 Volumetric Shrinkage	12
2.5.4 True Density	12
2.5.5 Bulk Density	13
2.5.6 Porosity	13
2.5.7 Color	14
2.5.8 Texture	15
2.5.9 Microstructure of Potato Chips	15
2.6 Oil Quality	16
2.6.1 Physical Changes in Oils During Deep Fat Frying	16
2.6.2 Chemical Changes in Oils During Deep Fat Frying	17
2.6.2.1 Hydrolysis	17
2.6.2.2 Oxidation	17
2.6.2.3 Polymerization	18
2.6.3 The Methods of Frying Oil Quality Evaluation	18
2.7 Acrylamide Formation	19

3	EFFECT OF MICROWAVE FRYING ON PHYSICOCHEMICAL PROPERTIES OF RBD PALM OLEIN AND CORN OIL	21
3.1	Introduction	21
3.2	Materials and Methods	22
3.2.1	Raw Potatoes	22
3.2.2	Edible Oils	22
3.2.3	Methods	23
3.2.3.1	Microwave Frying Experiments	23
3.2.3.2	Chemical Properties of Edible Oils	24
3.2.3.3	Physical Properties Of Edible Oils	26
3.2.4	Statistical Analysis	27
3.3	Results and Discussion	28
3.3.1	Free Fatty Acids and Acid Values	28
3.3.2	Peroxide Values	30
3.3.3	<i>p</i> -anisidine Value	33
3.3.4	The total Oxidation Values	34
3.3.5	The total Polar Material	35
3.3.6	Viscosity	36
3.3.7	Color Differences	37
3.3.8	Thermal Properties	38
3.4	Conclusion	42
4	RELATIONSHIP BETWEEN MOISTURE LOSS AND OIL UPTAKE DURING MICROWAVE FRYING AND SENSORY EVALUATION OF POTATO CHIPS	43
4.1	Introduction	43
4.2	Modeling	43
4.3	Materials and Methods	44
4.3.1	Materials	44
4.3.1.1	Raw Potatoes	44
4.3.1.2	Edible Oils	44
4.3.2	Methods	45
4.3.2.1	Microwave Frying Experiments	45
4.3.2.2	Determination of Moisture Content	46
4.3.2.3	Determination of Oil Content	46
4.3.2.4	Sensory Analysis	46
4.3.3	Statistical Analysis	46
4.4	Results and Discussion	46
4.4.1	Moisture Content and Oil uptake	46
4.4.2	Diffusion Modeling	50
4.4.3	Sensory Evaluation	53
4.5	Conclusion	54
5	EFFECT OF MICROWAVE FRYING ON MICROSTRUCTURE AND MACROSTRUCTURE OF POTATO CHIPS	55
5.1	Introduction	55
5.2	Materials and Methods	58
5.2.1	Materials	58

5.2.1.1	Raw Potatoes	58
5.2.1.2	Edible Oils	58
5.2.2	Methodology	58
5.2.2.1	Frying Experiments	58
5.2.2.2	Microscopic Studies	58
5.2.2.3	Volumetric Shrinkage	59
5.2.2.4	Degree of Thickness Expansion	59
5.2.2.5	Degree of Diameter Change	59
5.2.2.6	Bulk Density	60
5.2.2.7	Particle Density	60
5.2.2.8	Porosity	60
5.2.2.9	Color	61
5.2.2.10	Texture	61
5.2.3	Statistical Analysis.	62
5.3	Results and Discussion	62
5.3.1	Study Surface Topography of Potato Chips Observed by Scanning Electron Microscopy	62
5.3.2	Detection of Oil Distribution in Potato Chips Observed by Confocal Laser Scanning Microscopy	65
5.3.3	Macrostructure Properties of Potato Chips	68
5.4	Conclusion	76
6	EFFECT OF MICROWAVE FRYING ON ACRYLAMIDE FORMATION IN POTATO CHIPS	77
6.1	Introduction	77
6.2	Materials and Methods	78
6.2.1	Materials	78
6.2.1.1	Raw Potatoes	78
6.2.1.2	Edible Oils	78
6.2.2	Methods	78
6.2.2.1	Microwave Frying Experiments	78
6.2.2.2	Determination of Acrylamide Content	78
6.3	Statistical Analysis	79
6.4	Results and Discussion	80
6.5	Conclusion	82
7	CONCLUSION AND RECOMMENDATIONS	84
	REFERENCES	86
	APPENDICES	103
	BIODATA OF STUDENT	162
	LIST OF PUBLICATIONS	163

LIST OF TABLES

Table		Page
4.1	Model parameters for moisture transfer in potato chips fried in corn oil	50
4.2	Model parameters for moisture transfer in potato chips fried in RBD palm olein	50
4.3	Model parameters for oil absorption in potato chips fried in RBD palm olein	51
4.4	Model parameters for oil absorption in potato chips fried in corn oil	51
4.5	Computed activation energy values for potato chips	52
4.6	Sensory test of microwaved-potato chips fried in RBD palm olein and corn oil	53
6.1	Acrylamide levels (ppb) in potato chips fried in RBD palm olein	80
6.2	Acrylamide levels (ppb) in potato chips fried in corn oil	81

LIST OF FIGURES

Figure	Page	
2.1	Hypothesized mechanism of acrylamide formation from an amino acid and a lipid	20
3.1	Flow chart for microwave frying	24
3.2	Free fatty acid (FFA) values of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	29
3.3	Acid values (AV) of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	30
3.4	Peroxide value (PV) of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	31
3.5	<i>p</i> -anisidine value (<i>p</i> -AV) of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	33
3.6	TOTOX value (TOTOX) of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	34
3.7	TMP % of RBD palm olein and corn oil during microwave frying of potato chips at 800 W at 180 °C	35
3.8	Viscosities (mPa.s) of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	37
3.9	Color differences (ΔE) of RBD palm olein and corn oil during microwave frying of potato chips at 800 W and 180 °C	38
3.10	Values of onset temperature of RBD palm olein and corn oil during frying of potato chips at 800 W and 180 °C	39
3.11	Values of end temperature of RBD palm olein and corn oil during frying of potato chips at 800 W and 180 °C	40
3.12	Values of peak temperature of RBD palm olein and corn oil during frying of potato chips at 800 W and 180 °C	40
3.13	Values of (ΔH) of RBD palm olein and corn oil during frying of potato chips at 800 W and 180 °C	41
4.1	Chart of overall methodology of microwave frying at different frying temperature, and at different frying time	45
4.2	Moisture content of potato chips fried in corn oil during microwave frying at different temperatures	47
4.3	Moisture content of potato chips fried in RBD palm olein during microwave frying at different temperatures	48
4.4	Oil uptake of potato chips fried in corn oil during microwave frying at different temperatures	49

4.5	Oil uptake of potato chips fried in RBD palm olein during microwave frying at different temperatures	49
5.1	SEM images of the surface of control potato chips	63
5.2	SEM images of the surface of (C.O.1.W) potato chips fried in corn oil (800 W, 1st frying) 60X and (P.O.1.W) potato chips fried in palm olein (800 W, 1st frying) 60X washed with petroleum ether	64
5.3	Confocal laser scanning micrographs of raw potato	65
5.4	CLSM 3D images of the surface of the control raw potato	66
5.5	Effect of RBD palm olein temperature on potato chip volumetric shrinkage. Connecting lines were used to provide a better understanding of experimental data	68
5.6	Effect of corn oil temperature on potato chip volumetric shrinkage. Connecting lines were used to provide a better understanding of experimental data	68
5.7	Effect of RBD palm olein temperature on diameter shrinkage of potato chips. Connecting lines were used to allow provide a better understanding of experimental data	69
5.8	Effect of corn oil temperature on diameter shrinkage of potato chips. Connecting lines were used to provide a better understanding of experimental data	69
5.9	The change in bulk densities (ρ_b kg/m ³) of microwaved potato chips fried in RBD palm olein and corn oil. (PO = RBD palm olein, CO = corn oil, numbers represent frying temperatures)	70
5.10	The change in particle densities (ρ_p kg/m ³) of microwaved potato chips fried in RBD palm olein and corn oil. (PO = RBD palm olein, CO = corn oil, numbers represent frying temperatures)	71
5.11	The volume of color differences (ΔE) of microwaved-potato chips fried in RBD palm olein	72
5.12	The volume of color differences (ΔE) of microwaved-potato chips fried in corn oil	73
5.13	The change in hardness (N) of microwaved-potato chips fried in RBD palm olein at different frying temperatures. (A = at 160 °C, B = at 170 °C, C = at 180 °C)	73
5.14	The change of Hardness (N) of microwaved-potato chips fried in corn oil in different frying temperature. (A = at 160 °C, B = at 170 °C, C = at 180 °C)	74

LIST OF APPENDICES

Appendix		Page
A.1	Microwave frying system set-up.	103
B.1	Microwave oven's powers levels	104
B.2	Temperatures changes of palm olein during heating in microwave oven	104
B.3	Change of RBD palm olefin's temperature during microwave heating at 800 W.	105
B.4	Frying at 160 °C low power for 1 min 30 sec in corn oil	106
B.5	Frying at 170 °C medium power for 1 min 30 sec in corn oil	106
B.6	Frying at 180 °C high power for 2 min 30 sec in corn oil	107
B.7	Frying at 180 °C high power for 30 sec in corn oil	107
B.8	Temperature history during frying potato chips in corn oil at 800W, 180°C.	108
B.9	Temperature history during frying potato chips in RBD palm olein at 800W, 180 °C.	109
C.1	Changes of FFA, acid value of oils during microwave frying at 180 °C, 800 W	110
C.2	Changes of <i>p</i> -AV, and PV of oils during microwave frying at 180 °C, 800 W	111
C.3	Changes of TPM%, TOTOX of oils during microwave frying at 800 W, 180 °C	112
C.4	Effect of number of frying on viscosity and color difference of RBD palm olein and corn oil during microwave frying at 180°C, 800W.	113
C.5	Effect of number of frying on thermal properties (cooling curves) of RBD palm olein during microwave frying at 180°C, 800W.	114

C.6	Effect of number of frying on thermal properties (heating curves) of RBD palm olein during microwave frying at 180°C, 800W.	115
C.7	Effect of number of frying on thermal properties (cooling curves) of corn oil during microwave frying at 180°C, 800W.	116
C.8	Effect of a number of frying on thermal properties (heating curves) of corn oil during microwave frying at 180°C, 800W	117
D.1	Moisture content in potato chips fried in RBD palm olein	118
D.2	Moisture content in potato chips fried in corn oil	118
D.3	Oil content in potato chips fried in RBD palm olein	118
D.4	Oil content in potato chips fried in corn oil	119
D.5	$\ln(M/M_0)$ against frying time for potato chips fried in corn oil at (a) 160, (b) 170, (c) 180 °C	120
D.6	$\ln(M/M_0)$ against frying time for potato chips fried in RBD palm olein at (a) 160, (b) 170, (c) 180 °C	121
D.7	$\ln(FC/F_0)$ against frying time for potato chips fried in corn oil at (a) 160, (b) 170, (c) 180 °C	122
D.8	$\ln(FC/F_0)$ against frying time for potato chips fried in RBD palm olein at (a) 160, (b) 170, (c) 180 °C	123
D.9	$\ln(D_{eff})$ against (1/T) for potato chips fried in (a) corn oil (b) RBD palm olein for moisture content.	124
D.10	$\ln(D_{eff})$ against (1/T) for potato chips fried in (a) corn oil (b) RBD palm olein for oil content	125
D.11	The form for sensory evaluation	126
E.1	SEM images of the surface of (C.O.1) potato chips fried in corn oil (800 W) 60X and (P.O.1) potato chips fried in palm olein (800 W) 60X without washed with petroleum ether.	127
E.2	SEM images of the surface of (C.O.1.W) potato chips fried in corn oil (800 W, 1 st frying) 60X and (P.O.1.W) potato chips fried in palm olein (800 W, 1st frying) 60X washed	

	with petroleum ether.	127
E.3	SEM images of the surface of (C.2, 3) potato chips fried in corn oil (800W, 2 ^{ed} , 3 ^{ed} . frying) 350X, 35X washed with petroleum ether. (C= Corn oil)	128
E.4	SEM images of the surface of (C 4, 5) potato chips fried in corn oil (800W, 4 th , 5 th frying) 350X, 35X washed with petroleum ether.	129
E.5	SEM images of the surface of (C 6, 7) potato chips fried in corn oil (800W, 6 th , 7 th frying) 350X, 35X washed with petroleum ether.	130
E.6	SEM images of the surface of (C.8, 9) potato chips fried in corn oil (800W, 8 th , 9 th frying) 350X, 35X washed with petroleum ether.	131
E.7	SEM images of the surface of (P.1) potato chips fried in palm olein (800W, 1 st frying) 350X and 35X washed with petroleum ether.	132
E.8	SEM images of the surface of (P.2, 3) potato chips fried in palm olein (800W, 2 ^{ed} , 3 ^{ed} frying) 350X, 35X washed with petroleum ether.	133
E.9	SEM images of the surface of (P.4, 5) potato chips fried in palm olein (800W, 4 th , 5 th frying) 350X, 35X washed with petroleum ether	134
E.10	SEM images of the surface of (P.6, 7) potato chips fried in palm olein (800W, 6 th , 7 th frying) 350X, 35X washed with petroleum ether	135
E.11	SEM images of the surface of (P.8, 9) potato chips fried in palm olein (800W, 8 th , 9 th frying) 350X, 35X washed with petroleum ether.	136
E.12	SEM images of the surface of (P.10) potato chips fried in palm olein (800W, 10 th frying) 350X, 35X washed with petroleum	137
E.13	Florescence mode CLSM image of oil distribution in potato chips fried in corn oil at 160°C, 60 s.	138

E.14	3D reconstruction of CLSM image of potato chips fried in corn oil at 160°C, 60 s.	138
E.15	Florescence mode CLSM image of oil distribution in potato chips fried in corn oil at 160°C, 120 s.	139
E.16	3D reconstruction of CLSM image of potato chips fried in corn oil at 160°C, 120 s.	139
E.17	Florescence mode CLSM image of oil distribution in potato chips fried in corn oil at 170°C, 60 s.	140
E.18	3D reconstruction of CLSM image of potato chips fried in corn oil at 170°C, 60 s.	140
E.19	Florescence mode CLSM image of oil distribution in potato chips fried in corn oil at 170°C, 120 s.	141
E.20	3D reconstruction of CLSM image of potato chips fried in corn oil at 170°C, 120 s.	141
E.21	Florescence mode CLSM image of oil distribution in potato chips fried in corn oil at 180°C, 60 s.	142
E.22	3D reconstruction of CLSM image of potato chips fried in corn oil at 180°C, 60 s.	142
E.23	Florescence mode CLSM image of oil distribution in potato chips fried in corn oil at 180°C, 120 s.	143
E.24	3D reconstruction of CLSM image of potato chips fried in corn oil at 180°C, 120 s.	143
E.25	Florescence mode CLSM image of oil distribution in potato chips fried in RBD palm olein at 160°C, 60 s.	144
E.26	3D reconstruction of CLSM image of potato chips fried in RBD palm olein at 160°C, 60 s.	144
E.27	Florescence mode CLSM image of oil distribution in potato chips fried in RBD palm olein at 160°C, 120 s.	145
E.28	3D reconstruction of CLSM image of potato chips fried in RBD palm olein at 160°C, 120 s.	145
E.29	Florescence mode CLSM image of oil distribution in potato	

	chips fried in RBD palm olein at 170 °C, 60 s.	146
E.30	3D reconstruction of CLSM image of potato chips fried in RBD palm olein at 170°C, 60 s	146
E.31	Florescence mode CLSM image of oil distribution in potato chips fried in RBD palm olein at 170 °C, 120 s.	147
E.32	3D reconstruction of CLSM image of potato chips fried in RBD palm olein at 170°C, 120 s	147
E.33	Florescence mode CLSM image of oil distribution in potato chips fried in RBD palm olein at 180 °C, 60 s.	148
E.34	3D reconstruction of CLSM image of potato chips fried in RBD palm olein at 180°C, 60 s	148
E.35	Florescence mode CLSM image of oil distribution in potato chips fried in RBD palm olein at 180 °C, 120 s.	149
E.36	3D reconstruction of CLSM image of potato chips fried in RBD palm olein at 180°C, 120 s	149
E.37	Intensity of color for potato chips fried in RBD palm olein and corn oil.	150
E38	Effect of microwave frying in macrostructure parameters, color and texture of potato chips fried in RBD palm olein at 160°C	151
E.39	Effect of microwave frying in macrostructure parameters, colour and texture of potato chips fried in RBD palm olein at 170°C	152
E.40	Effect of microwave frying in macrostructure parameters, colour and texture of potato chips fried in RBD palm olein at 180°C	153
E.41	Effect of microwave frying in macrostructure parameters, color and texture of potato chips fried in corn oil at 160°C.	154
E.42	Effect of microwave frying in macrostructure parameters, color and texture of potato chips fried in corn oil at 170°C.	155
E.43	Effect of microwave frying in macrostructure parameters, color and texture of potato chips fried in corn oil at 180°C.	154


F.1	Typical chromatograms of standard solutions of acrylamide	157
F.2	Calibration curve for acrylamide	157
F.3	HPLC Chromatogram of potato chips fried in RBD palm olein at 160°C	158
F.4	HPLC Chromatogram of potato chips fried in RBD palm olein at 170°C.	158
F.5	HPLC Chromatogram of potato chips fried in RBD palm olein at 180°C.	158
F.6	HPLC Chromatogram of potato chips fried in corn oil at 160°C	159
F.7	HPLC Chromatogram of potato chips fried in corn oil at 170°C.	159
F.8	HPLC Chromatogram of potato chips fried in corn oil at 180°C.	159
G.1	Pictures of potatoes chips fried in corn oil.	160
G.2	Pictures of potatoes chips fried in RBD palm olein.	161

LIST OF SYMBOLS AND ABBREVIATIONS

M	Instantaneous, initial and equilibrium moisture content (g/g, db)
M_e	Equilibrium moisture content (g/g, db)
M_0	Initial moisture content (g/g, db)
M_r	Moisture ratio $\left(\frac{M-M_e}{M_0-M_e}\right)$ dimensionless
L	Thickness of the sample (m)
K	Rate constant (s^{-1})
D_{eff}	Effective diffusivity (m^2/s)
D_0	Effective diffusivity at high liquid concentration (m^2/s)
T	Time (s)
FC	Oil content (g/g)
Co	Equilibrium oil content (g/g)
exp	Exponential sign
R	Universal gas constant (0.0083143 kJ/mol K)
E_a	Activation energy (kJ/mol)
T	Absolute temperature (k)
Π	Pi (22/7)
%	Precent
g	Gram
kg	Kilogram
L	Litter
mL	Milliliter
W	Wight
V	Volume
Hz	Hertz

W	Watts
SEM	Scanning electron microscopy
CLSM	Confocal Scanning electron microscopy
AFM	Atomic force microscopy
ESEM	Environmental scanning electron microscopy
IM	Immune microscopy
LM	Light microscopy
TEM	Transmission electron microscopy
FAO	Food and Agriculture Organization
WHO	World Health Organization
FDA	Food and Drug Administration
HPLC	High performance liquid chromatography
UV	Ultraviolet
IMPI	International Microwave Power Institute
EC	European Commission
S_v	Volumetric shrinkage
V_0	Initial volume
V_t	Volume at (t) time
L	Thickness
l_0	Initial thickness
l_t	Thickness at time(t)
D	Diameter
D_0	Initial diameter
D_t	Diameter at time (t)
ρ_b	Bulk Density
ρ_p	Particle Density
ρ_w	Density of water

ϵ	Porosity
T_m	Milting point
T_g	Transition temperature
Pa	Pascal
H	Hour
min	Minutes
s	Seconds
Σ	Stress
μ	Viscosity
ΔE	Color difference
c_p	Centipoise
mJ	Millijoule
J	Joule

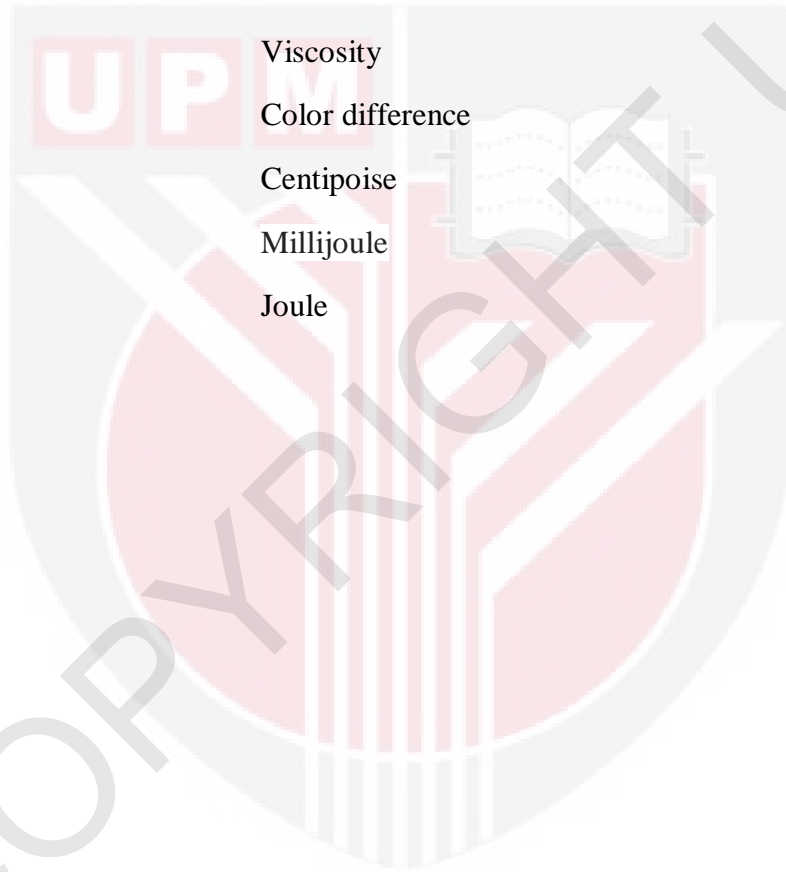

CHAPTER 1

INTRODUCTION

Deep-fat frying is a food thermal processing that can be used to produce fried food products. Deep fat frying is a cooking and drying process performed by dipping food in vegetable oils at temperatures above 100 °C (Barutcu et al., 2009). Fried foods are preferred by customers due to their crispy porous structure, flavor, golden color, and distinctive taste. During the frying process, the food is fried at high temperatures (180-190 °C), leading to heavily vaporization of the water from the food, which is then removed through the surface. Consequently, the heat converts moisture within the food to steam and melts the fat within the food. The steam and fat then migrate from the interior of the food to its outer and into the oil. On the other hand, some of the frying oil is absorbed into the food that is being fried (Datta, 1999).

Frying is a complex operation that includes various physical-chemical changes, such as gelatinization of starch, crust formation, protein denaturation and moisture evaporation. The frying process affects the oxidative and hydrolytic degradation and polymerization of the oil (Suzan, 2003). Deep-fat frying has two types of processes: “traditional” atmospheric frying and vacuum frying (Armado et al., 2008). During the deep-fat frying process, heat transfer occurs through convection (in the oil mass) and conduction (inside the food) (Armado et al., 2008). The food receives the same heat treatment over its entire surface, which confers a uniform flavor and appearance. The food product is cooked in the fryer and attached to a thin layer of oil. The temperature of the fried product reduces by natural movement, and the steam pressure within the pores of the fried product decreases. This decrease in steam pressure pushes the oil to flow within the surface of the fried food product (Moreira et al., 1995, Armado et al., 2008). The advantages of deep-fat frying are an increase in palatability and acceptance by the consumer and destruction of bacteria and toxins by the heat (Tan & Che Man, 2002).

Microwave ovens are household equipment around the world, and the utilization of microwave ovens have become a necessary kitchen tool for meal preparation. Microwave heating has some advantages, including reduced energy consumption, a shorter cooking time, improved product quality, the production of distinctive microstructures and properties, and the synthesis of new material abilities (Clark et al., 2000). During microwave heating, uniform heating of the product causes moisture vaporization to occur (Ngadi et al., 2007).

Microwave frying of food products is a new method of enhancing the feature of fried foods, with less degradation of frying oils and a reduction in oil uptake (Oztop et al., 2007). During microwave frying, there is heat generation within the food because of dipolar rotation and an ionic conduction. Microwave frying is generally performed in a vessel of material that transmits microwaves. To perform frying in a microwave

oven, oil at room temperature is heated to frying temperatures using microwaves. Then, the food product is put in heated oil, and frying is carried out at the wanted power level for a specified frying time (Sumnu et al., 2008).

Food safety is a matter of public concern. During the deep frying process, the chemistry that occurs in frying oil and in fried foods includes thermal and oxidative reactions involving lipids, proteins, carbohydrates and minor food constituents. Moreover, there has been an increased interest in reducing the oil amount of fried food products as a result of health concerns, as the consumption of high-fat food is a major cause for obesity. In addition, there are different studies about the toxicity of by-products that are produced during the frying process, such as acrylamide, which is formed during the heating of food products containing carbohydrates and asparagine (FAO/WHO, 2002).

Acrylamide has been categorized as a likely carcinogenic substance to humans, and national and international regulatory agencies have focused their attention on the detection of acrylamide in food items (US EPA (US Environmental Protection Agency 1994), (European Commission 2001). Since the world realised the importance of acrylamide in foods subjected to high temperatures, the studies of levels of acrylamide in microwaved-fried food products should be considering.

The most important problem in microwave frying is caused by a variety of changes in the quality of edible oils, which affect the quality of fried products at the macro and micro scales. In addition, toxic compounds that are hazardous to human health are produced during microwave frying.

In aiming to evaluate the above problems, the following information is needed. First, estimates of how different edible oils affect the quality of potato chips during microwave frying are needed. In addition, estimates of the levels of the acrylamide that pose a hazard to the health of the consumer are needed.

There is a need to understand and characterize the transfer processes that occur during microwave frying and to predict quality changes. As a consequence, the primary target of this research was to investigate the effect of microwave frying on the physicochemical properties of edible oils and the quality attributes of potato chips.

The specific purposes of this work were as follows:

- i. To determine the effect of microwave frying on the physicochemical properties of edible oils.
- ii. To provide the relationship between moisture loss and oil adsorption on potato chip structure and to evaluate the sensory characteristics of microwaved-potato chips.
- iii. To determine the macrostructure properties and physical changes that occurs in potato chips.
- iv. To study the morphological changes in microwaved-potato chips.
- v. To determine the acrylamide formation that occurs in potato chips prepared by microwave frying.



REFERENCES

- Abdulkarim, S. M., Long, K., Lai, O. M., Muhammad, S. K. S., & Ghazali, H. M. (2005). Some physico-chemical properties of *Moringa oleifera* seed oil extracted using solvent and aqueous enzymatic methods. *Food Chemistry*, 93(2), 253-263.
- Abdulkarim, S. M., Myat, M. W., Ghazali, H. M., Roselina, K., & Abbas, K. A. (2010). Sensory and physicochemical qualities of palm olein and sesame seed oil blends during frying of banana chips. *Journal of Agricultural Science (Toronto)*, 2(4), 18-29.
- Adedeji, A. A., Ngadi, M. O., & Raghavan, G. S. V. (2009). Kinetics of mass transfer in microwave precooked and deep-fat fried chicken nuggets. *Journal of Food Engineering*, 91(1), 146-153.
- Aguilera, J. M., & Stanley, D. W. (1999). *Microstructural principles of food processing and engineering*. Springer Science & Business Media.
- Aguilera, J. M., Cadoche, L., López, C., & Gutierrez, G. (2001). Microstructural changes of potato cells and starch granules heated in oil. *Food Research International*, 34(10), 939-947.
- Aladedunye, F. A. (2015). Curbing thermo-oxidative degradation of frying oils: Current knowledge and challenges. *European Journal of Lipid Science and Technology*, 117(11), 1867-1881.
- Al-Harbi, M. M., & Al-Kahtani, H. A. (1993). Chemical and biological evaluation of discarded frying palm oil from commercial restaurants. *Food Chemistry*, 48(4), 395-401.
- Ali, M. A., Najmaldien, A. H. A., Latip, R. A., Othman, N. H., Majid, F. A. A., & Salleh, L. M. (2013). Effect of heating at frying temperature on the quality characteristics of regular and high-oleic acid sunflower oils. *Acta Scientiarum Polonorum Technologia Alimentaria*, 12(2), 159-167.
- Ali, M. A., Nouruddeen, Z. B., & MUHAMAD, I. (2014). Effect of Microwave Heating on Oxidative Degradation of Sunflower Oil in the Presence of Palm Olein. *Sains Malaysiana*, 43(8), 1189-1195.
- Al-Kahtani, H. A. (1991). Survey of quality of used frying oils from restaurants. *Journal of the American Oil Chemists' Society*, 68(11), 857-862.
- Amrein, T. M., Bachmann, S., Noti, A., Biedermann, M., Barbosa, M. F., Biedermann-Brem, S & Amadó, R. (2003). Potential of acrylamide formation, sugars, and free asparagine in potatoes: a comparison of cultivars and farming systems. *Journal of Agricultural and Food Chemistry*, 51(18), 5556-5560.

- AOAC (1990) *Official Methods of Analysis*. 15th edition. Association of Official Analytical Chemists, Washington, DC, USA.
- AOCS (1989). *Official Methods of the American Oil Chemists' Society*, 4th edn. American Oil Chemists' Society, Champaign, Illinois.
- Ariffin, A. A., Mohamud, Y., Karim, R., Boo, H. C., Chin, N. L., & Che Man, Y. (2011). Rheological, chemical and DSC thermal characteristics of different types of palm oil/palm stearin-based shortenings. *International Food Research Journal*, 18(1), 189-200.
- Aydeniz, B., & Yilmaz, E. (2012). Enrichment of frying oils with plant phenolic extracts to extend the usage life. *European Journal of Lipid Science and Technology*, 114(8), 933-941.
- Aydinkaptan, E., Mazi, B. G., & Barutçu Mazi, I. (2017). Microwave Heating of Sunflower Oil at Frying Temperatures: Effect of Power Levels on Physicochemical Properties. *Journal of Food Process Engineering*, 40(2).
- Baker, O.L. (1985). Bleaching, Handbook of soy oil processing 1st ed. *Journal American Oil Chemists Society Publication*, Peoria Illinois.
- Bansal, G., Zhou, W., Barlow, P. J., Joshi, P. S., Lo, H. L., & Chung, Y. K. (2010). Review of rapid tests available for measuring the quality changes in frying oils and comparison with standard methods. *Critical reviews in food science and nutrition*, 50(6), 503-514.
- Barbanti, D., Pizzirani, S., & Dalla Casa, M. (1994). The frying operation. 2: Chemical and physico-chemical modifications in the oil. *Industrie Alimentari* (Italy).
- Barutcu, I., Sahin, S., & Sumnu, G. (2009). Acrylamide formation in different batter formulations during microwave frying. *LWT-Food Science and Technology*, 42(1), 17-22.
- Barutcu, I., Sahin, S., & Sumnu, G. (2009). Effects of microwave frying and different flour types addition on the microstructure of batter coatings. *Journal of Food Engineering*, 95(4), 684-692.
- Baumann, B., & Escher, F. (1995). Mass and heat transfer during deep-fat frying of potato slices—I. Rate of drying and oil uptake. *LWT-Food Science and Technology*, 28(4), 395-403.
- Becalski, A., Lau, B. P. Y., Lewis, D., & Seaman, S. W. (2003). Acrylamide in foods: occurrence, sources, and modeling. *Journal of Agricultural and Food Chemistry*, 51(3), 802-808.
- Belitz, H.D., Grosch, W. and Schieberle, P. (2004). *Food Chemistry*. 3rd ed. Springer Verlag. Berlin. 218-219.

- Bordoloi, A., Kaur, L., & Singh, J. (2012). Parenchyma cell microstructure and textural characteristics of raw and cooked potatoes. *Food Chemistry*, 133(4), 1092-1100.
- Bouchon, P., Hollins, P., Pearson, M., Pyle, D. L., & Tobin, M. J. (2001). Oil distribution in fried potatoes monitored by infrared microspectroscopy. *Journal of Food Science*, 66(7), 918-923.
- Bouchon P., Aguilera J.M. (2001): Microstructure analysis of frying potatoes. *International Journal of Food Science & Technology*, 36: 669–676.
- Brosnan, T., & Sun, D. W. (2002). Inspection and grading of agricultural and food products by computer vision systems—a review. *Computers and electronics in agriculture*, 36(2), 193-213.
- Brosnan, T., & Sun, D. W. (2004). Improving quality inspection of food products by computer vision—a review. *Journal of food engineering*, 61(1), 3-16..
- Buffler, C. R. (1993). *Microwave cooking and processing*. Van Nostrand Reinhold.
- Caixeta, A. T., Moreira, R., & Castell-Perez, M. E. (2002). Impingement drying of potato chips. *Journal of Food Process Engineering*, 25(1), 63–90.
- Cerretani, L., Bendini, A., Rodriguez-Estrada, M. T., Vittadini, E., & Chiavaro, E. (2009). Microwave heating of different commercial categories of olive oil: Part I. Effect on chemical oxidative stability indices and phenolic compounds. *Food Chemistry*, 115(4), 1381-1388.
- Chen, F., Yuan, Y., Liu, J., Zhao, G., & Hu, X. (2008). Survey of acrylamide levels in Chinese foods. *Food Additives and Contaminants*, 1(2), 85-92.
- Chen, C. J. (2002). The application of microwave hybrid heating technology. *Food Industries*, 34(7), 4-13.
- Chen, S. D., Pao, A. C., & Chen, H. H. (2004). Studies on gracilar mackerel steak using microwave frying. *Ilan University Journal of Bioresources*, 1(1), 53-63.
- Che Man, Y. B., Asbi, A. B., Azudin, M. N., & Wei, L. S. (1996). Aqueous enzymatic extraction of coconut oil. *Journal of the American Oil Chemists' Society*, 73(6), 683-686.
- Che Man, Y. B., Haryati, T., Ghazali, H. M., & Asbi, B. A. (1999). Composition and thermal profile of crude palm oil and its products. *Journal of the American oil chemists' society*, 76(2), 237-242.
- Chiavaro, E., Vittadini, E., Rodriguez-Estrada, M. T., Cerretani, L., & Bendini, A. (2008). Differential scanning calorimeter application to the detection of refined hazelnut oil in extra virgin olive oil. *Food Chemistry*, 110(1), 248-256.

- Chiavaro, E., Rodriguez-Estrada, M. T., Vittadini, E., & Pellegrini, N. (2010). Microwave heating of different vegetable oils: Relation between chemical and thermal parameters. *LWT-Food Science and Technology*, 43(7), 1104-1112.
- Chirinos, R., Huamán, M., Betalleluz-Pallardel, I., Pedreschi, R., & Campos, D. (2011). Characterisation of phenolic compounds of Inca muña (*Clinopodium bolivianum*) leaves and the feasibility of their application to improve the oxidative stability of soybean oil during frying. *Food chemistry*, 128(3), 711-716.
- Clark, D. E., Folz, D. C., & West, J. K. (2000). Processing materials with microwave energy. *Materials Science and Engineering: A*, 287(2), 153-158.
- Confocal Laser Scanning Biological Microscope FV1000 FLUOVIEW. http://www.olympusamerica.com/files/seg_bio/fv1000_brochure.pdf
- Costa, R. M., & Oliveira, F. A. R. (1999). Modelling the kinetics of water loss during potato frying with a compartmental dynamic model. *Journal of Food Engineering*, 41(3), 177-185.
- Crank, J. (1975). The arithmetics of diffusion. *Oxford University Press, Oxford, UK*.
- Datta, A. K. (1990). Heat and mass transfer in the microwave processing of food. *Chemical Engineering Progress*, 86(6), 47-53.
- Dennis, S. C., Maury, B., Tom, D., Jeffrey, F. (2006). Institute of Shortening and Edible Oils. Accessed on 25 of November <http://www.iseo.org/FoodFatsOils2006.pdf>
- Directorate, C. (2002). of the Scientific Committee on Food on new findings regarding the presence of acrylamide in food.
- Dostalova, J. A. N. A., Hanzlik, P. A. V. E. L., Reblova, Z. U. Z. A. N. A., & Pokorny, J. (2005). Oxidative changes of vegetable oils during microwave heating. *Czech journal of food sciences*, 23(6), 230.
- Duizer, L. (2001). A review of acoustic research for studying the sensory perception of crisp, crunchy and crackly textures. *Trends in food science & technology*, 12(1), 17-24.
- Durán, M., Pedreschi, F., Moyano, P., & Troncoso, E. (2007). Oil partition in pre-treated potato slices during frying and cooling. *Journal of food Engineering*, 81(1), 257-265.
- Edreschi, F. P., Mery, D., Mendoza, F., & Aguilera, J. M. (2004). Classification of potato chips using pattern recognition. *Journal of Food Science*, 69(6), E264-E270.

- Ehling, S., Hengel, M., & Shibamoto, T. (2005). Formation of acrylamide from lipids. In *Chemistry and safety of acrylamide in food* (pp. 223-233). Springer US.
- European Commission. (2002). *Technical guidance document in support of Commission Directive 93/67/EEC on risk assessment for new notified substances and Commission Regulation (EC) 1488/94 on risk assessment for existing substances*. Office for official publications of the European communities
- European Food Safety Authority. (2011). *Results on acrylamide levels in food from monitoring years 2007–2009*. *EFSA J.* 9:2133. Available from: www.efsa.europa.eu/efsajournal European Food Safety Authority. 2013. Draft. Scientific opinion on acrylamide in food. EFSA J.
- FAO/WHO, (2002). Health implications of acrylamide in food. Report of a Joint FAO/WHO Consultation. World Health Organization, Geneva; 25–27 June 2002. Available: www.who.int/fsf/acrylamide/SummaryReportFinal.pdf
- Farkas, B. E., Singh, R. P., & Rumsey, T. R. (1996). Modeling heat and mass transfer in immersion frying. I, model development. *Journal of food Engineering*, 29(2), 211-226.
- FDA (US Food and Drug Administration). (2006). www.cfsan.fda.gov .
- Feng, H., & Tang, J. (1998). Microwave finish drying of diced apples in a spouted bed. *Journal of Food Science*, 63(4), 679-683.
- Firestone, D., FIRESTONE, D., STIER, R., & BLUMENTHAL, M. (1996). Regulation of frying fats and oils. *Food Technology*, 45(2), 90-94.
- Fox, N. J., & Stachowiak, G. W. (2007). Vegetable oil-based lubricants—a review of oxidation. *Tribology international*, 40(7), 1035-1046.
- Fizman, S. M., Salvador, A., & Sanz, T. (2005). Why, when and how hydrocolloids are employed in batter-coated food-a review. *Progress in Food Biopolymer Research*, 1, 55-68.
- Friedman, M. (2003). Chemistry, biochemistry, and safety of acrylamide. A review. *Journal of agricultural and food chemistry*, 51(16), 4504-4526.
- Garayo, J. (2001). *Production of low-fat potato chips using vacuum frying* (Doctoral dissertation, MSc Thesis, Texas A&M University, College Station, TX).
- Garayo, J., & Moreira, R. (2002). Vacuum frying of potato chips. *Journal of food engineering*, 55(2), 181-191.
- Granda, C., & Moreira, R. G. (2005). Kinetics of acrylamide formation during traditional and vacuum frying of potato chips. *Journal of Food Process Engineering*, 28(5), 478-493.

- Gamble, M. H., Rice, P., & Selman, J. D. (1987). Relationship between oil uptake and moisture loss during frying of potato slices from cv Record UK tubers. *International Journal of Food Science & Technology*, 22(3), 233-241.
- Gebhardt, B (1996). Oils and fats in snack foods. *Bailey's Industrial Oil and Fat Products* (Hui, Y H ed.). 5th ed., Vol. 3, John Wiley & Sons, New York. p. 407- 427.
- Gertz, C. (2000). Chemical and physical parameters as quality indicators of used frying fats. *European Journal of Lipid Science and Technology*, 102(8- 9), 566-572.
- Gertz, C., Klostermann, S., & Kochhar, S. P. (2000). Testing and comparing oxidative stability of vegetable oils and fats at frying temperature. *European Journal of Lipid Science and Technology*, 102(8- 9), 543-551.
- Gertz, C., & Klostermann, S. (2002). Analysis of acrylamide and mechanisms of its formation in deep- fried products. *European Journal of Lipid Science and Technology*, 104(11), 762-771.
- Gharby, S., Harhar, H., Boulbaroud, S., Bouzoubaa, Z., Madani, N., Chafchaoui, L., & Charrouf, Z. (2014). The stability of vegetable oils (sunflower, rapeseed and palm) sold on the Moroccan market at high temperature. *International Journal Chemical Biochemical Sciences. IJCBS*, 5, 47-54.
- Gharachorloo, M., Ghavami, M., Mahdiani, M., & Azizinezhad, R. (2010). The effects of microwave frying on physicochemical properties of frying and sunflower oils. *Journal of the American Oil Chemists' Society*, 87(4), 355-360.
- Ghazali, H. M., Tan, A., Abdulkarim, S. M., & Dzulkifly, M. H. (2009). Oxidative stability of virgin coconut oil compared with RBD palm olein in deep-fat frying of fish crackers. *Journal of Food Agricultural and Environmental*, 7, 23-37.
- Gökmen, V., Şenyuva, H. Z., Acar, J., & Sarioğlu, K. (2005). Determination of acrylamide in potato chips and crisps by high-performance liquid chromatography. *Journal of Chromatography A*, 1088(1), 193-199.
- Gulla, S., & Waghray, K. (2012). Blending of oils: A case study on storage stability and sensory characteristics of a ready to eat extruded snack. *Journal of Dietetics and Food Science*, 2(1), 1-12.
- Gupta, M. K., Warner, K., & White, P. J. (2004). *Frying technology and practices*. AOCS Press.
- Gunstone, F. D., & Hamilton, R. J. (2004). The chemistry of oils and fats: sources. *Composition, Properties and Uses Blackwell Publishing LTD*, 1-35.

- Haase, N. U., Matthäus, B., & Vosmann, K. (2003). Minimierungsansätze zur Acrylamid-Bildung in pflanzlichen Lebensmitteln: aufgezeigt am Beispiel von Kartoffelchips. *Deutsche Lebensmittel-Rundschau*, 99(3), 87-90.
- Houšová, J. I. Ř. I. N. A., & Hoke, K. (2002). Microwave heating—the influence of oven and load parameters on the power absorbed in the heated load. *Czech journal of food sciences*, 20(3), 117-124.
- Hunt, R. W. G. (1991). *Measuring colour* (2nd ed.). Chichester: Ellis Horwood, Ltd,
- Innawong, B. (2001). *Improving fried product and frying oil quality using nitrogen gas in a pressure frying system* (Doctoral dissertation, Virginia Tech).
- Kalogianni, E. P., Karapantsios, T. D., & Miller, R. (2011). Effect of repeated frying on the viscosity, density and dynamic interfacial tension of palm and olive oil. *Journal of Food Engineering*, 105(1), 169-179.
- Kassama, L.S. and Ngadi, M.O., 2001. Development of pores and pore size distribution in chicken meat during deep-fat frying. *Canadian Society of Agricultural Engineers*, p.322.
- Kassama, L. S., & Ngadi, M. O. (2005). Pore structure characterization of deep-fat-fried chicken meat. *Journal of Food Engineering*, 66(3), 369-375.
- Kawas Escoto, M. L. (2000). *Characterization of product quality attributes of tortilla chips during the frying process* (Doctoral dissertation, Texas A&M University).
- Kawas, M. L., & Moreira, R. G. (2001). Effect of degree of starch gelatinization on quality attributes of fried tortilla chips. *Journal of Food Science*, 66(2), 300-306.
- Kepekci Tekkeli, S. E., Önal, C., & Önal, A. (2012). A review of current methods for the determination of acrylamide in food products. *Food Analytical Methods*, 5(1), 29-39.
- Khoshnam, F.; Zargar, B.; Pourreza, N.; & Parham, H. (2010). Acetone Extraction and HPLC Determination of Acrylamide in Potato Chips. *Journal of the Iranian Chemical Society*, 7(3), 853–858.
- Kiatsrichart, S., Susan Brewer, M., Cadwallader, K. R., & Artz, W. E. (2003). Pan-frying stability of NuSun oil, a mid-oleic sunflower oil. *Journal of the American Oil Chemists' Society*, 80(5), 479-483.
- Kim, B. K., Lee, J. S., Lee, C. H., & Park, D. J. (2008). Preparation of low-fat uptake frying batter composite by dry particle coating of microparticulated soybean hull. *LWT-Food Science and Technology*, 41(1), 34-41.

- Kita, A., Bråthen, E., Knutsen, S. H., & Wicklund, T. (2004). Effective ways of decreasing acrylamide content in potato crisps during processing. *Journal of Agricultural and Food Chemistry*, 52(23), 7011-7016.
- Kita, A., Lisińska, G., & Gołubowska, G. (2007). The effects of oils and frying temperatures on the texture and fat content of potato crisps. *Food chemistry*, 102(1), 1-5.
- Kochhar, S. P. (2000). Sesame oil—A powerful antioxidant. *Lipid Technology Newsletter*, 6(2), 35-39.
- Krishna Veni, N., Meyyanathan, S. N., Karthik, Y., Hemnath, E., Satiesh Kumar, R., & Usha, K. (2014). A simple and validated RP HPLC method for the estimation of acrylamide in potato chips.
- Krokida, M. K., Oreopoulou, V., & Maroulis, Z. B. (2000). Effect of frying conditions on shrinkage and porosity of fried potatoes. *Journal of Food Engineering*, 43(3), 147-154.
- Krokida, M. K., Oreopoulou, V., & Maroulis, Z. B. (2000). Effect of frying conditions on shrinkage and porosity of fried potatoes. *Journal of Food Engineering*, 43(3), 147-154.
- Krokida, M. K., Oreopoulou, V., Maroulis, Z. B., & Marinos-Kouris, D. (2001). Deep fat frying of potato strips—quality issues. *Drying technology*, 19(5), 879-935.
- Krokida, M. K., Oreopoulou, V., & Maroulis, Z. B. (2000). Water loss and oil uptake as a function of frying time. *Journal of Food Engineering*, 44(1), 39-46.
- Kumar, A. J., Singh, R. R. B., Patel, A. A., & Patil, G. R. (2006). Kinetics of colour and texture changes in Gulabjamun balls during deep-fat frying. *LWT-Food Science and Technology*, 39(7), 827-833.
- Laguerre, M., Lecomte, J., & Villeneuve, P. (2007). Evaluation of the ability of antioxidants to counteract lipid oxidation: Existing methods, new trends and challenges. *Progress in lipid research*, 46(5), 244-282.
- Lai, O. M., Ghazali, H. M., Cho, F., & Chong, C. L. (2000). Physical properties of lipase-catalyzed transesterified blends of palm stearin and anhydrous milk fat. *Food Chemistry*, 70(2), 215-219.
- Lalas, S. (2009). Quality of frying oil. In: *Advances in Deep-fat Frying of Foods* (edited by S. G. Sumnu & S. Sahin). 57–80. New York, NY: CRC Press
- Larrañaga, I., Carballo, J., Rodríguez, M., & Fernández, J. (1999). Control e higiene de los alimentos. *Editorial McGraw-Hill*.

- Liu, Y., & Shi, Y. C. (2006). Phase and state transitions in granular starches studied by dynamic differential scanning calorimetry. *Starch- Stärke*, 58(9), 433-442.
- Leon, K., Mery, D., Pedreschi, F., & Leon, J. (2006). Color measurement in L* a* b* units from RGB digital images. *Food research international*, 39(10), 1084-1091.
- Lisińska, G., & Gołubowska, G. (2005). Structural changes of potato tissue during French fries production. *Food chemistry*, 93(4), 681-687.
- Lolos, M., Oreopoulou, V., & Tzia, C. (1999). Oxidative stability of potato chips: effect of frying oil type, temperature and antioxidants. *Journal of the Science of Food and Agriculture*, 79(11), 1524-1528.
- Lukešová, D., Dostálová, J., Mahmoud, E. E. M., & Svárovská, M. (2009). Oxidation changes of vegetable oils during microwave heating. *Czech Journal of Food Sciences*, 27, S178-S181.
- Malheiro, R., Oliveira, I., Vilas-Boas, M., Falcão, S., Bento, A., & Pereira, J. A. (2009). Effect of microwave heating with different exposure times on physical and chemical parameters of olive oil. *Food and Chemical Toxicology*, 47(1), 92-97.
- Mallikarjunan, P., Chinnan, M. S., Balasubramaniam, V. M., & Phillips, R. D. (1997). Edible coatings for deep-fat frying of starchy products. *LWT-Food Science and Technology*, 30(7), 709-714.
- Man, Y. C., Gan, H. L., NorAini, I., Nazimah, S. A. H., & Tan, C. P. (2005). Detection of lard adulteration in RBD palm olein using an electronic nose. *Food Chemistry*, 90(4), 829-835.
- MAN, Y. C., Jialong, L., & Liu, J. L. (1999). THE EFFECTS OF TBHQ AND α -TOCOPHEROL ON QUALITY CHARACTERISTICS OF REFINED-BLEACHED AND DEODORIZED PALM OLEIN (RBDPO) DURING DEEP-FAT FRYING. *Journal of Food Lipids*, 6(2), 117-129.
- Mariod, A., Matthäus, B., Eichner, K., & Hussein, I. H. (2006). Frying quality and oxidative stability of two unconventional oils. *Journal of the American Oil Chemists' Society*, 83(6), 529-538.
- Marquez, G., & Anon, M. C. (1986). Influence of reducing sugars and amino acids in the color development of fried potatoes. *Journal of Food Science*, 51(1), 157-160.
- Marmesat, S., Rodrigues, E., Velasco, J., & Dobarganes, C. (2007). Quality of used frying fats and oils: comparison of rapid tests based on chemical and physical oil properties. *International Journal of Food Science & Technology*, 42(5), 601-608.

- Melton, S. L., Jafar, S., Sykes, D., & Trigiano, M. K. (1994). Review of stability measurements for frying oils and fried food flavor. *Journal of the American oil chemists' society*, 71(12), 1301-1308.
- Mendoza, F., & Aguilera, J. M. (2004). Application of image analysis for classification of ripening bananas. *Journal of Food Science*, 69(9).
- Miranda, M. L., & Aguilera, J. M. (2006). Structure and texture properties of fried potato products. *Food Reviews International*, 22(2), 173-201.
- Moh, M. H., Che Man, Y. B., Van de Voort, F. R., & Abdullah, W. J. (1999). Determination of peroxide value in thermally oxidized crude palm oil by near infrared spectroscopy. *Journal of the American Oil Chemists' Society*, 76(1), 19-23.
- Moreira, R. G., Palau, J. E., Sun, X., & Mermelstein, N. (1995). Deep-fat frying of tortilla chips: an engineering approach. *Food Technology*, 49(4), 146-150.
- Moreira, R.G.; Castell-Perez, M.E.; Barrufet, M.A.(1999). Deep-Fat Frying Fundamentals and Applications; *Aspen Publication: Gaithersburg, MD*, 76(5), 1415–1419.
- Moreira, R. G., Da Silva, P. F., & Gomes, C. (2009). The effect of a de-oiling mechanism on the production of high quality vacuum fried potato chips. *Journal of Food Engineering*, 92(3), 297-304.
- Moretto, E., & Fett, R. (1998). *Technology of Vegetable Oils and Fats. Varela, São Paulo, Brazil*, 150.
- Mottram, D. S., Wedzicha, B. L., & Dodson, A. T. (2002). Food chemistry: acrylamide is formed in the Maillard reaction. *Nature*, 419(6906), 448-449.
- Moyano, P. C., Ríosco, V. K., & González, P. A. (2002). Kinetics of crust color changes during deep-fat frying of impregnated French fries. *Journal of Food Engineering*, 54(3), 249-255.
- Moyano, P. C., & Pedreschi, F. (2006). Kinetics of oil uptake during frying of potato slices: Effect of pre-treatments. *LWT-Food Science and Technology*, 39(3), 285-291.
- Napolitano, A., Morales, F., Sacchi, R., & Fogliano, V. (2008). Relationship between virgin olive oil phenolic compounds and acrylamide formation in fried crisps. *Journal of Agricultural and Food Chemistry*, 56(6), 2034-2040.
- Naruenartwongsakul, S., Chinnan, M. S., Bhumiratana, S., & Yoovidhya, T. (2008). Effect of cellulose ethers on the microstructure of fried wheat flour-based batters. *LWT-Food Science and Technology*, 41(1), 109-118.

- Navas, P. B., Carrasquero- Durán, A., & Flores, I. (2006). Effect of black tea, garlic and onion on corn oil stability and fatty acid composition under accelerated oxidation. *International Journal of Food Science and Technology*, 41(3), 243-247.
- Nawar, W.W. (1996). Lipids. In: Fennema, O.R. (Ed.) *Food Chemistry*. (3th edition), Marcel Dekker, Inc., New York, USA, 225-319.
- Ngadi, M., Li, Y., & Oluka, S. (2007). Quality changes in chicken nuggets fried in oils with different degrees of hydrogenation. *LWT-Food Science and Technology*, 40(10), 1784-1791.
- Ni, H., & Datta, A. K. (1999). Moisture, oil and energy transport during deep-fat frying of food materials. *Food and Bioprocess Processing*, 77(3), 194-204.
- Nourian, F., & Ramaswamy, H. S. (2003). Kinetics of quality change during cooking and frying of potatoes: Part I. Texture. *Journal of Food Process Engineering*, 26(4), 377-394.
- O'Brien, R. D. (2003). *Fats and Oils: Formulating and Processing for Applications*, 29-61.
- Orthofer, F. T. (1987). Oil use in the food-service industry. *Journal of the American Oil Chemists Society* 64(6), 795-799.
- Oroian, M., Amariei, S., & Gutt, G. (2015). Acrylamide in Romanian food using HPLC-UV and a health risk assessment. *Food Additives & Contaminants: Part B*, 8(2), 136-141.
- Ouchon, P., Aguilera, J. M., & Pyle, D. L. (2003). Structure oil- absorption relationships during deep- fat frying. *Journal of Food Science*, 68(9), 2711-2716.
- Oztop, M. H., Sahin, S., & Sumnu, G. (2007). Optimization of microwave frying of potato slices by using Taguchi technique. *Journal of Food Engineering*, 79(1), 83-91.
- Pacetti, D., Gil, E., Frega, N. G., Álvarez, L., Dueñas, P., Garzón, A., & Lucci, P. (2015). Acrylamide levels in selected Colombian foods. *Food Additives & Contaminants: Part B*, 8(2), 99-105.
- Parkash Kochhar, S., & Gertz, C. (2004). New theoretical and practical aspects of the frying process. *European Journal of Lipid Science and Technology*, 106(11), 722-727.
- Pedreschi, F., Aguilera, J. M., & Arbildua, J. J. (1999). CLSM study of oil location in fried potato slices. *Microscopy and Analysis*, 33-35.

- Pedreschi, F. (2012). Frying of potatoes: Physical, chemical, and microstructural changes. *Drying Technology*, 30(7), 707-725.
- Pedreschi, F., & Aguilera, J. M. (2002). Some changes in potato chips during frying observed by confocal laser scanning microscopy (CLSM). *Food Science and Technology International*, 8(4), 197-201.
- Pedreschi, F., Kaack, K., & Granby, K. (2004). Reduction of acrylamide formation in potato slices during frying. *LWT-Food Science and Technology*, 37(6), 679-685.
- Pedreschi, F., Moyano, P., Kaack, K., & Granby, K. (2005). Color changes and acrylamide formation in fried potato slices. *Food Research International*, 38(1), 1-9.
- Pedreschi, F., Leon, J., Mery, D., & Moyano, P. (2006). Development of a computer vision system to measure the color of potato chips. *Food Research International*, 39(10), 1092-1098.
- Pedreschi, F. (2012). Frying of potatoes: Physical, chemical, and microstructural changes. *Drying Technology*, 30(7), 707-725.
- Pedreschi, F., & Aguilera, J. M. (2002). Some changes in potato chips during frying observed by confocal laser scanning microscopy (CLSM). *Food Science and Technology International*, 8(4), 197-201.
- Peled, M., Gutfinger, T., & Letan, A. (1975). Effect of water and BHT on stability of cottonseed oil during frying. *Journal of the Science of Food and Agriculture*, 26(11), 1655-1666.
- Perkins, E. G., & Erickson, M. D. (Eds.). (1996). *Deep frying: chemistry, nutrition, and practical applications*. Champaign, IL: AOCS Press.
- Peryam, D. R., & Pilgrim, F. J. (1957). Hedonic scale method of measuring food preferences. *Food technology*.
- Podmore, J. (2002). Culinary fats: solid and liquid frying oils and speciality oils. *Fats in Food Technology*, 333-359.
- PORIM. (1995). PORIM test methods. Palm Oil Research Institute of Malaysia, Ministry of Primary Industries, Malaysia, 149.
- Quiles, J. L., Ramírez-Tortosa, M. C., Gómez, J. A., Huertas, J. R., & Mataix, J. (2002). Role of vitamin E and phenolic compounds in the antioxidant capacity, measured by ESR, of virgin olive, olive and sunflower oils after frying. *Food Chemistry*, 76(4), 461-468.
- Rahman, S. (1995). *Food properties*. Handbook. USA: CRC Press. 180-192.

- Roach, J. A., Andrzejewski, D., Gay, M. L., Nortrup, D., & Musser, S. M. (2003). Rugged LC-MS/MS survey analysis for acrylamide in foods. *Journal of Agricultural and Food Chemistry*, 51(26), 7547-7554.
- Rosén, J., & Hellenäs, K. E. (2002). Analysis of acrylamide in cooked foods by liquid chromatography tandem mass spectrometry. *Analyst*, 127(7), 880-882.
- Rossell, J. B. (2001). *Frying improving quality*. 1st edn. CRC Press LLC, North America, 74-150.
- Rossell, J. B. (2001b). Factors affecting the quality of frying oils and fats. In: Rossell, J. B. (Ed.) *Frying –Improving Quality*. Woodhead Publishing, Cambridge, England. 115-164.
- Rossan, G. M., Elena, M. C., and Maria, A. B. (1999). *Deep-fat frying, fundamentals and application*. ISBN. Washenton. 1-84.
- Rubnov, M., & Saguy, I. S. (1997). Fractal Analysis and Crust Water Diffusivity of a Restructured Potato Product During Deep- Fat Frying. *Journal of Food Science*, 62(1), 135-137.
- Saadi, S., Ariffin, A. A., Ghazali, H. M., Miskandar, M. S., Boo, H. C., & Abdulkarim, S. M. (2012). Application of differential scanning calorimetry (DSC), HPLC and pNMR for interpretation primary crystallisation caused by combined low and high melting TAGs. *Food Chemistry*, 132(1), 603-612.
- Salvador, A., Sanz, T., & Fiszman, S. M. (2005). Effect of the addition of different ingredients on the characteristics of a batter coating for fried seafood prepared without a pre-frying step. *Food Hydrocolloids*, 19(4), 703-708.
- Sahin, S., Sumnu, G., & Oztop, M. H. (2007). Effect of osmotic pretreatment and microwave frying on acrylamide formation in potato strips. *Journal of the Science of Food and Agriculture*, 87(15), 2830-2836.
- Scanlon, M. G., Roller, R., Mazza, G., & Pritchard, M. K. (1994). Computerized video image analysis to quantify color of potato chips. *American Journal of Potato Research*, 71(11), 717-733.
- Sebastian, A., Ghazani, S. M., & Marangoni, A. G. (2014). Quality and safety of frying oils used in restaurants. *Food research international*, 64, 420-423.
- Segnini, S., Dejmek, P., & Öste, R. (1999). Reproducible texture analysis of potato chips. *Journal of Food Science*, 64(2), 309-312.
- Sensoy, I., Sahin, S., & Sumnu, G. (2013). Microwave frying compared with conventional frying via numerical simulation. *Food and Bioprocess Technology*, 6(6), 1414-1419.

- Setiady, D., Tang, J., Younce, F., Swanson, B. A., Rasco, B. A., & Clary, C. D. (2009). Porosity, color, texture, and microscopic structure of russet potatoes dried using microwave vacuum, heated air, and freeze drying. *Applied Engineering in Agriculture*, 25(5), 719-724.
- Shamla, L., & Nisha, P. (2014). Acrylamide in deep-fried snacks of India. *Food Additives & Contaminants: Part B*, 7(3), 220-225.
- Shih, F., & Daigle, K. (1999). Oil uptake properties of fried batters from rice flour. *Journal of Agricultural and Food Chemistry*, 47(4), 1611-1615.
- Siddique, B. M., Ahmad, A., Ibrahim, M. H., Hena, S., & Rafatullah, M. (2010). Physico-chemical properties of blends of palm olein with other vegetable oils. *grasas y aceites*, 61(4), 423-429.
- Singh, P., Singh, P., & Raja, R. B. (2010). Determination of acrylamide concentration in processed food products using normal phase high performance liquid chromatography (HPLC). *African Journal of Biotechnology*, 9(47), 8085-8091.
- Singh, N., Kaur, L., Ezekiel, R., & Singh Guraya, H. (2005). Microstructural, cooking and textural characteristics of potato (*Solanum tuberosum* L) tubers in relation to physicochemical and functional properties of their flours. *Journal of the Science of Food and Agriculture*, 85(8), 1275-1284.
- Sjoo, M. E., Eliasson, A. C., & Autio, K. (2009). Comparison of Different Microscopic Methods for the Study of Starch and Other Components within Potato Cells. *Food*, 3(special issue 1), 39-44.
- Souci, S. W., W.Fachmann, and H. Kraut, (2000). Food composition and nutrition tables. Medpharm, Scientific Publishers, Stuttgart, Germany. ISBN: 3887630769. pp:639 – 640.
- Stadler, R. H., Blank, I., Varga, N., Robert, F., Hau, J., Guy, P. A. & Riediker, S. (2002). Food chemistry: acrylamide from Maillard reaction products. *Nature*, 419(6906), 449-450.
- Steffe, J. F.(1996). Rheological Methods in Food Process Engineering, second edition. Freeman Press. East Lansing, USA.
- Sukumar, D. (2010). *Studies on physical, thermal and hydrodynamic properties of interesterified oils* (Doctoral dissertation, University of Mysore).
- Suliman, A. E. R. M., El- makhzangy, A. T. T. Y. A., & Ramadan, M. F. (2006). Antiradical performance and physicochemical characteristics of vegetable oils upon frying of French fries: a preliminary comparative study. *Journal of Food Lipids*, 13(3), 259-276.

- Sultana, B., Anwar, F., & Przybylski, R. (2007). Antioxidant potential of corncob extracts for stabilization of corn oil subjected to microwave heating. *Food Chemistry*, 104(3), 997-1005.
- Sumnu, G. and Sahin, S. (2005). *Recent Developments in Microwave Heating*. Emerging technologies for food processing, 419.
- Sumnu, S. G., & Sahin, S. (Eds.). (2008). *Advances in deep-fat frying of foods*. CRC Press.
- Şenyuva, H. Z., & Gökmen, V. (2005). Survey of acrylamide in Turkish foods by an in-house validated LC-MS method. *Food Additives and Contaminants*, 22(3), 204-209.
- Takeoka, G., Perrino, C., & Buttery, R. (1996). Volatile constituents of used frying oils. *Journal of Agricultural and Food Chemistry*, 44(3), 654-660.
- Takeoka, G. R., Full, G. H., & Dao, L. T. (1997). Effect of heating on the characteristics and chemical composition of selected frying oils and fats. *Journal of Agricultural and Food Chemistry*, 45(8), 3244-3249.
- Tan, C. P., & Man, Y. C. (1999). Differential scanning calorimetric analysis for monitoring the oxidation of heated oils. *Food Chemistry*, 67(2), 177-184.
- Tan, C. P., Che Man, Y. B., Jinap, S., & Yusoff, M. S. (2001). Effects of microwave heating on changes in chemical and thermal properties of vegetable oils. *Journal of the American Oil Chemists' Society*, 78(12), 1227-1232.
- Tan, C. P., & Man, Y. C. (2002). Differential scanning calorimetric analysis of palm oil, palm oil based products and coconut oil: effects of scanning rate variation. *Food chemistry*, 76(1), 89-102.
- Tan, C. P., & Man, Y. C. (2002). Recent developments in differential scanning calorimetry for assessing oxidative deterioration of vegetable oils. *Trends in Food Science and Technology*, 13(9), 312-318.
- Tan, Y. A., Ong, S. H., Berger, K. G., Oon, H. H., & Poh, B. L. (1985). A study of the cause of rapid color development of heated refined palm oil. *Journal of the American Oil Chemists' Society*, 62(6), 999-1006.
- Taniwaki, M., Sakurai, N., & Kato, H. (2010). Texture measurement of potato chips using a novel analysis technique for acoustic vibration measurements. *Food Research International*, 43(3), 814-818.
- Tareke, E., Rydberg, P., Karlsson, P., Eriksson, S., & Törnqvist, M. (2002). Analysis of acrylamide, a carcinogen formed in heated foodstuffs. *Journal of Agricultural and Food Chemistry*, 50(17), 4998-5006.

- Taniwaki, M., Hanada, T., & Sakurai, N. (2006). Device for acoustic measurement of food texture using a piezoelectric sensor. *Food Research International*, 39(10), 1099-1105.
- Taubert, D., Harlfinger, S., Henkes, L., Berkels, R., & Schömig, E. (2004). Influence of processing parameters on acrylamide formation during frying of potatoes. *Journal of Agricultural and Food Chemistry*, 52(9), 2735-2739.
- Tran, T. M., Chen, X. D., & Southern, C. (2007). Reducing oil content of fried potato crisps considerably using a 'sweet' pre-treatment technique. *Journal of Food Engineering*, 80(2), 719-726.
- Ufheil, G., & Escher, F. (1996). Dynamics of oil uptake during deep-fat frying of potato slices. *LWT-Food Science and Technology*, 29(7), 640-644.
- van de Velde, F., Weinbreck, F., Edelman, M. W., van der Linden, E., & Tromp, R. H. (2003). Visualisation of biopolymer mixtures using confocal scanning laser microscopy (CSLM) and covalent labelling techniques. *Colloids and Surfaces B: Biointerfaces*, 31(1), 159-168.
- Velasco, J., Marmesat, S., & Carmen Dobarganes, M. (2008). Chemistry of frying. In *Advances in deep-fat frying of foods* (pp. 33-56). CRC Press.
- Wai, W. T., Saad, B., & Lim, B. P. (2009). Determination of TOTOX value in palm oleins using a FI-potentiometric analyzer. *Food Chemistry*, 113(1), 285-290.
- Wang, N., & Brennan, J. G. (1995). Changes in structure, density and porosity of potato during dehydration. *Journal of Food Engineering*, 24(1), 61-76.
- Wang, Y., Hui, T., Zhang, Y. W., Liu, B., Wang, F. L., Li, J. K., ... & Peng, Z. Q. (2015). Effects of frying conditions on the formation of heterocyclic amines and trans fatty acids in grass carp (*Ctenopharyngodon idellus*). *Food chemistry*, 167, 251-257.
- Warner, K. (1998). *Chemistry of frying fats*. Food Science and TEchnology-New York-Marcel Dekker., 167-180.
- Xu, Y., Cui, B., Ran, R., Liu, Y., Chen, H., Kai, G., & Shi, J. (2014). Risk assessment, formation, and mitigation of dietary acrylamide: current status and future prospects. *Food and Chemical Toxicology*, 69, 1-12.
- Xu, X. Q. (2003). A chromametric method for the rapid assessment of deep frying oil quality. *Journal of the Science of Food and Agriculture*, 83(13), 1293-1296.
- Yang, B. B. (2002). An overview of microwave and conventional energy hybridized processing. *Food Industries*, 36(7), 1-7.

- Yagua, C. V., & Moreira, R. G. (2011). Physical and thermal properties of potato chips during vacuum frying. *Journal of Food Engineering*, 104(2), 272-283.
- Yasuhara, A., Tanaka, Y., Hengel, M., & Shibamoto, T. (2003). Gas chromatographic investigation of acrylamide formation in browning model systems. *Journal of Agricultural and Food Chemistry*, 51(14), 3999-4003.
- Yaylayan, V. A., Wnorowski, A., & Perez Locas, C. (2003). Why asparagine needs carbohydrates to generate acrylamide. *Journal of Agricultural and Food Chemistry*, 51(6), 1753-1757.
- Yokoyama, W. (2004). *Nutritional Properties of Rice and Rice Bran*. In: *Rice: Chemistry and Technology*. American Association of Cereal Chemists, St. Paul, Minnesota, 595-609.
- Zampini, M., & Spence, C. (2004). The role of auditory cues in modulating the perceived crispness and staleness of potato chips. *Journal of Sensory Studies*, 19(5), 347-363.
- Zhang, Q., Saleh, A. S., Chen, J., & Shen, Q. (2012). Chemical alterations taken place during deep-fat frying based on certain reaction products: a review. *Chemistry and Physics of Lipids*, 165(6), 662-681.
- Ziaifar, A. M. (2008). *Oil Absorption During Deep-fat Frying: Mechanisms and Important Factors* (Doctoral dissertation, AgroParisTech).
- Zogzas, N. P., Maroulis, Z. B., & Marinos-Kouris, D. (1994). Densities, shrinkage and porosity of some vegetables during air drying. *Drying Technology*, 12(7), 1653-1666.