



**UNIVERSITI PUTRA MALAYSIA**

***CHARACTERIZATION OF BIOPOLYMERS PRODUCED FROM  
DIFFERENT BLENDS OF CHEMICALLY MODIFIED STARCH AND  
NATURAL RUBBER LATEX***

**KIING SIE CHEONG**

**FSPM 2011 1**

**CHARACTERIZATION OF BIOPLOYMERS  
PRODUCED  
FROM DIFFERENT BLENDS OF CHEMICALLY  
MODIFIED  
STARCH AND NATURAL RUBBER LATEX**



**KIING SIE CHEONG**

**MASTER OF SCIENCE  
UNIVERSITI PUTRA MALAYSIA**

**2011**

**CHARACTERIZATION OF BIOPLOYMERS PRODUCED  
FROM DIFFERENT BLENDS OF CHEMICALLY MODIFIED  
STARCH AND NATURAL RUBBER LATEX**

**By**

**KIING SIE CHEONG**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,  
in Fulfillment of Requirements for the Degree of Master of Science**

**August 2011**

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Master of Science

**CHARACTERIZATION OF BIOPLOYMERS PRODUCED  
FROM DIFFERENT BLENDS OF CHEMICALLY MODIFIED  
STARCH AND NATURAL RUBBER LATEX**

By

**KIING SIE CHEONG**

**August 2011**

**Chair: Yiu Pang Hung, PhD**

**Faculty: Faculty of Agriculture and Food Sciences (Bintulu)**

Development of biodegradable polymers from absolute environmental friendly materials has attracted increasing research interest due to public awareness of waste disposal problems with low degradable conventional plastic. In this study, starch and natural rubber latex which abundant, were assessed for their potential in making biodegradable polymers. Sago starch and rice starch with low and high amylose contents were chosen and chemically modified via acetylation and hydroxypropylation. Starches with and without chemical treatments were gelatinized and later casted with natural rubber latex in the following ratios 100.00/0.00, 99.75/1.25, 98.50/2.50, 95.00/5.00, 90.00/10.00 and 80.00/20.00 wt/wt, for preparing biopolymer films using solution spreading technique. The products were evaluated according to their water absorption, mechanical, thermal, morphological and biodegradable properties.

Level of substitution showed that starches were successfully chemical modified. Acetylation of sago, LAR and HAR gave result of DS 1.05, 1.35 and 1.30 respectively. Hydroxypropylation of sago, LAR and HAR gave result of MS 0.13, 0.27 and 0.31 respectively. FTIR (Fourier Transform Infrared) analysis proved that acetyl and hydroxypropyl groups were successfully substituted into the starch macrostructures after the chemical substitutions. These substitutions improved starch water solubility and their compatibility with natural rubber latex in the film fabricating process via solution casting.

Modifications of starches by either acetylation or hydroxypropylation increase water absorption ability of product films about 2 to 5 times higher compare to native starch product films. In terms of compatibility with natural rubber latex, high amylose rice, native and acetylated sago starch proved to be compatible and had good adhesion with natural rubber latex through SEM result. However, both modification modes did not exhibit differences trend in their thermal profile. Sago starch and rice starch product films showed similar trend of thermal and mechanical properties. Product films formulated from sago starch absorbed less water as compared to rice starch. Native sago starch product film showed 110% in water absorption capacity. However, native LAR and HAR product films showed 190 and 300% in water absorption capacity. Water absorption capacity of all type of biopolymer was able to reduce up to 95% when addition of natural rubber latex concentration reached 20%. Addition of natural rubber latex delayed biodegradable threshold of product films, but they were still completely biodegradable in the natural environment. Product films with less than 2.5% natural rubber content was totally biodegraded within 2 to 6 weeks. However, as concentration of natural rubber latex increase to 20%, biodegradability of the film still achieved 50% within 12 weeks. Product films with high natural

rubber latex content exhibit high melting temperatures, inhibited the absorption of water and increased elongation at break.

From the analysis of product films, it can be concluded that the ratio of the starch to natural rubber latex, selection of chemical substitution modes and types of starch played an important role in determining characteristics of final product blends. Biopolymer films with desirable properties can be fabricated by choosing an appropriate casting formulation.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**PENCIRIAN BIOPOLIMER YANG DIHASILKAN DARIPADA ADUNAN  
KANJI MODIFIKASI KIMIA DAN LATEKS GETAH ASLI**

Oleh

**KIING SIE CHEONG**

**Ogos 2011**

**Pengerusi: Yiu Pang Hung, PhD**

**Fakulti: Fakulti Sains Pertanian dan Makanan (Bintulu)**

Pembangunan polimer biodegradasi daripada bahan-bahan yang penuh mesra alam telah menarik minat perkembangan penyelidikan kerana kesedaran orang ramai terhadap masalah pembuangan sisa polimer yang mengandungi polimer-polimer biasa yang tidak mudah reput. Dalam penyelidikan ini, kanji dan getah yang mudah didapati di tempatan telah diujikaji tentang potensi dalam menghasilkan polimer yang dapat biodegradasi. Kanji sago dan beras yang mengandungi amilose tinggi dan amilose rendah telah dipilih dan dimodifikasi melalui kaedah kimia iaitu asetilasi dan hidroksipropilasi. Kanji semulajadi dan kanji yang dimodifikasi telah digelatinasi dan dijadikan biopolymer filem bersama getah berdasarkan nisbah kanji kepada getah 100.00/0.00, 99.75/1.25, 98.50/2.50, 95.00/5.00, 90.00/10.00 dan 80.00/20.00. Polimer yang dihasilkan telah dianalisis melalui ujian-ujian seperti penyerapan air, mekanikal, morfologi, profil termal dan biodegradasi.

Keputusan tahap penggantian menunjukkan bahawa kanji telah berjaya dimodifikasi secara kimia. Asetilasi bagi kanji sago, LAR dan HAR masing masing menghasilkan DS sebanyak 1.05, 1.35 dan 1.30. Hidroksipropilasi bagi kanji sago, LAR dan HAR

masing masing menghasilkan MS sebanyak 0.13, 0.27 dan 0.31. Analisis FTIR (Fourier Transform Infrared) telah membuktikan bahawa kumpulan berfungsi, asetil dan hidroksipropil telah berjaya digantikan ke dalam makrostruktur kanji selepas rawatan-rawatan kimia berkenaan. Proses penggantian ini berjaya meningkatkan keterlarutan air kanji dan kesesuaiannya bersama getah dalam penghasilan produk filem melalui proses pengkasan larutan.

Modifikasi kanji sama ada secara asetilasi atau hidroksipropilasi telah meningkatkan daya penyerapan air filem sebanyak 2 hingga 5 kali ganda berbanding dengan filem daripada kanji tanpa modifikasi.. Dari segi kesesuaian kanji dengan getah, keputusan SEM menunjukkan kanji HAR, kanji sago dan kanji sago yang dimodifikasi secara asetilasi adalah dibuktikan lebih sesuai. Walau bagaimanapun, kedua-dua modifikasi tidak menunjukkan perubahan ketara dari segi sifat termal. Produk-produk filem yang dihasilkan daripada kanji sago dan beras bersifat serupa dari segi termal dan mekanikal. Biopolimer-biopolimer yang diperbuat daripada kanji sago menunjukkan daya penyerapan air yang rendah berbanding dengan kanji beras. Biopolimer diperbuat daripada kanji sago menunjukkan daya penyerapan air sebanyak 110%, manakala biopolimer diperbuat daripada kanji LAR dan HAR masing-masing menunjukkan daya penyerapan air sebanyak 190% dan 300%. Penambahan getah dalam penghasilan biopolymer melambatkan proses biodegradasi, tetapi biopolymer tersebut masih dapat direput dengan sepenuhnya dalam alam semula jadi. Biopolimer yang mengandungi kandungan getah yang serendah 2.5% memerlukan masa sebanyak 2 hingga 6 minggu untuk biodegradasi. Apabila kandungan getah ditingkatkan ke 20%, biopolimer masih dapat direputkan sebanyak 50% dalam masa 12 minggu. Polimer yang mengandungi kandungan getah yang

tinggi menunjukkan takat lebur yang tinggi, penyerapan air yang rendah dan daya tarikan yang tinggi.

Analisis telah menunjukkan bahawa nisbah kanji kepada getah, bentuk modifikasi dan jenis kanji merupakan faktor-faktor utama dalam menghasilkan biopolimer. Filem-filem biopolimer dengan sifat-sifat yang diperlukan dapat disediakan dengan memilih sesuatu formulasi tebaran yang sesuai.



## ACKNOWLEDGEMENTS

I acknowledge with respect and gratitude to my project supervisor, Dr. Yiu Pang Hung, and co-supervisor, Associate Professor Dr. Rajan Amartalingam and Professor Dzulkiyly Kuang Abdullah for giving me guidance and advice throughout the course of this study.

Sincere thanks are also extended to Mr. Wong Sie Chuong, and all the laboratory staffs and lab mates for their kind help and support especially Lee Hui Huong, Weng Bong and Phene Neoh.

Special appreciations are due to my family and all my friends for their help, support and forbearance. Special thanks to Ng Po Ting for her care, love and moral support.

I certify that Thesis Examination Committee has met on 2011 to conduct the final examination of Kiing Sie Cheong on his thesis entitled “Characterization of Biopolymers Prepared from Chemically Modified Starch and Natural Rubber Latex Blends” in accordance with the Universities and University Collages Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106} 15 March 1998. The Committee recommends that the student be awarded the Degree of Master of Science.

Members of the Thesis Examination Committee were as follows:

Japar Sidik Bujang, PhD  
Professor,  
Fakulti Sains Pertanian dan Makanan,  
Universiti Putra Malaysia.  
(Chairman)

Anuar Bin Kassim, PhD  
Professor,  
Fakulti Sains,  
Universiti Putra Malaysia  
(Internal Examiner)

Hamdan Bin Musa, PhD  
Fakulti Sains Pertanian dan Makanan  
Universiti Putra Malaysia.  
(Internal Examiner)

Lau Seng, PhD  
Professor,  
Fakulti Sains dan Teknologi Sumber,  
Universiti Malaysia Sarawak.  
(External Examiner)

---

**BUJANG KIM HUAT, PhD**  
Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of the Supervisory Committee were as follows:

**Yiu Pang Hung, PhD**

Faculty of Agriculture and Food Sciences (Bintulu)  
Universiti Putra Malaysia  
(Chairman)

**Dzulkefly Kuang Abdullah, PhD**

Professor  
Faculty of Science  
Universiti Putra Malaysia  
(Member)

---


**HASANAH MOHD GHAZALI, PhD**

Professor and Dean  
School of Graduate Studies  
Universiti Putra Malaysia.

Date:

## DECLARATION

I declare that the thesis is my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously, and is not concurrently, submitted for any other degree at Universiti Putra Malaysia or at any other institution.

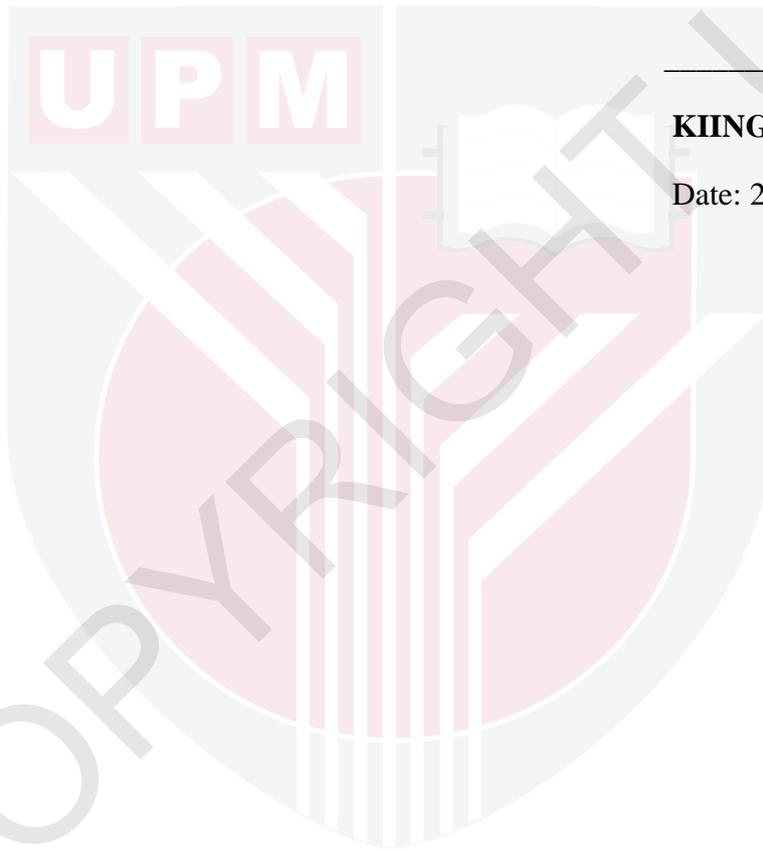

---

**KIING SIE CHEONG**

Date: 23 August 2011

## TABLE OF CONTENTS

	<b>Page</b>
<b>ABSTRACT</b>	ii
<b>ABSTRAK</b>	v
<b>ACKNOWLEDGEMENTS</b>	viii
<b>APPROVAL</b>	ix
<b>DECLARATION</b>	xi
<b>LIST OF TABLES</b>	xiv
<b>LIST OF FIGURES</b>	xv
<b>LIST OF ABBREVIATIONS</b>	xvi
<b>CHAPTER</b>	
1 <b>INTRODUCTION</b>	1
2 <b>LITERATURE REVIEW</b>	5
2.1 Biodegradable Polymer	5
2.1.1 Biodegradable Polymers from Renewable Resources	6
2.1.2 Protein as natural polymer	7
2.1.3 Polysaccharide as natural polymer	8
2.2 Starch	9
2.2.1 Sago starch	12
2.2.2 Rice starch	13
2.3 Starch modification	14
2.3.1 Acetylation of starch	16
2.3.2 Hydroxypropylation of starch	17
2.4 Polymer blending	19
2.5 Polymer biodegradation	20
2.6 Existing biopolymers in the market and their application	23
2.6.1 Biomedical field	23
2.6.2 Packaging Field	24
2.6.3 Agriculture Field	25
3 <b>MATERIALS AND METHODS</b>	27
3.1 Materials	27
3.2 Methods	27
3.2.1 Amylose Content	27
3.2.2 Starch Acetylation	28
3.2.3 Starch Hydroxypropylation	29
3.2.4 Solubility Test	30
3.2.5 Product Casting	31
3.2.6 Thermal Profile	31
3.2.7 Mechanical Test	31

	3.2.8 Morphology Properties	32
	3.2.9 Water Absorption Test	32
	3.2.10 Biodegradability	33
4	<b>RESULT AND DISCUSSION</b>	34
	4.1 Chemical Modifications of Starch	34
	4.1.1 Level of Chemical Modifications	34
	4.1.2 Starch Solubility Test	36
	4.1.3 Fourier Transform Infrared (FTIR) Analysis	37
	4.2 Biopolymer Product Casting	43
	4.2.1 Thermal Profile of Product Film	43
	4.2.2 Surface Morphology of Product Films	49
	4.2.3 Water Absorption Capacity	57
	4.2.4 Mechanical Properties	62
	4.2.5 Biodegradability	67
5	<b>CONCLUSION</b>	71
	<b>REFERENCES</b>	73
	<b>APPENDICES</b>	80
	<b>BIODATA OF STUDENT</b>	92
	<b>LIST OF PUBLICATIONS</b>	93

## LIST OF TABLES

<b>Table</b>		<b>Page</b>
2.1	Chemical composition of sago starch	13
2.2	Standard methods for estimating biodegradation of plastic materials	22
2.3	Biopolymer products and their application	26
4.1	Substitution levels of starch through chemical modifications	35
4.2	Solubility of native and modified starches at 60, 70 and 80°C	37
4.3	Summary of Fourier Transform Infrared (FTIR) spectra analysis of native and chemically modified starches	39
4.4	Tg values of the biopolymer product films	45
4.5	Tm of the biopolymer product films	48
4.6	Water absorption capacity of native and chemically modified starch product films without addition of natural rubber latex	58
4.7	Water absorption capacity (%) of native and chemically modified starch product films by addition of natural rubber latex	61
4.8	Elongation at break of the biopolymer product films	64
4.9	Modulus of the biopolymer product films	65
4.10	Maximum tensile stress of the biopolymer product films	66
4.11	Time required to achieve 90% biodegradability threshold	69

## LIST OF FIGURES

Figure		Page
2.1	Amylose (a) and Amylopectin (b) structure	11
2.2	Process of acetylation of starch	17
2.3	Process of hydroxypropylation of starch	18
4.1	FTIR spectra for native, acetylated and hydroxypropylated sago starch	40
4.2	FTIR spectra for native, acetylated and hydroxypropylated low amylose rice (LAR) starch.	41
4.3	FTIR spectra for native, acetylated and hydroxypropylated high amylose rice (HAR) starch.	42
4.4	Tg variation by incorporating natural rubber into sago starch and derivatives.	46
4.5	SEM micrograph of product blend containing sago starch and 20% natural rubber latex	50
4.6	SEM micrograph of product blend containing acetylated sago starch and 20% natural rubber latex.	51
4.7	SEM micrograph of product blend containing hydroxypropylated sago starch and 20% natural rubber latex	52
4.8	SEM micrograph of product blend containing low amylose rice starch and 20% natural rubber latex	53
4.9	SEM micrograph of product blend containing hydroxypropylated low amylose rice starch and 20% natural rubber latex	54
4.10	SEM micrograph of product blend containing high amylose rice starch and 20% natural rubber latex	55
4.10	SEM micrograph of product blend containing hydroxypropylated high amylose rice starch and 20% natural rubber latex	56
4.12	Water absorption capacity of native sago (NS), low amylose rice (LAR) and high amylose rice (HAR) product films	59
4.13	Biodegradability of films after 12 weeks	70

## LIST OF ABBREVIATIONS

AS	-	Acetylated Sago
FTIR	-	Fourier Transform Infrared
g	-	Gram
h	-	Hour
HAR	-	High Amylose Rice
HCL	-	Hydrochloric Acid
HHAR	-	Hydroxypropylated High Amylose Rice
HLAR	-	Hydroxypropylated Low Amylose Rice
H <sub>2</sub> SO <sub>4</sub>	-	Sulphuric Acid
HS	-	Hydroxypropylated Sago
KOH	-	Potassium Hydroxide
LAR	-	Low Amylose Rice
LDPE	-	Low Density Polyethylene
min	-	Minute
M	-	Molarity
mg	-	Miligram
mL	-	Mililiter
N	-	Normality
NS	-	Native Sago
NaOH	-	Sodium Hydroxide
NHAR	-	Native High Amylose Rice
NLAR	-	Native Low Amylose Rice
NRL	-	Natural Rubber Latex

$\text{Na}_2\text{SO}_4$	-	Sodium Sulphate
$\text{Na}_2\text{S}_2\text{O}_5$	-	Sodium Disulphite
NS	-	Native Sago
SEM	-	Scanning Electron Microscope
$T_g$	-	Glass Transition Temperature
$T_m$	-	Melting Temperature
$^\circ\text{C}$	-	Degree Celcius
%	-	Percentage



## CHAPTER 1

### INTRODUCTION

In recent years, there has been increasing public awareness about environmental pollution due to disposal of non-degradable plastics. Modern plastics such as polyethylene (PE), polypropylene (PP), polystyrene (PS), polyethylene terephthalate (PET) and polyvinyl chloride (PVC) are mechanically strong, inexpensive, easily processed, and durable. These materials with high durability create environmental problems once they enter the waste streams. As an alternative, biodegradable material which can undergo natural biodegradation process has attracted the attention of the scientific world. Many types of synthetic biopolymers such as poly ( $\epsilon$ -caprolactone) (PCL), Polylactic acid (PLA), and polyvinyl alcohol (PVA) (Guohua *et al.*, 2006; Jang *et al.*, 2007; Rosa *et al.*, 2005) have been investigated to substitute petroleum based polymers. The advantages of synthetic biopolymers are obvious, including predictable properties, batch-to-batch uniformity and can be tailored easily (Lu *et al.*, 2009). However, cost of manufacturing is a burden to introduce them for common applications. Natural biopolymers which are inherently biodegradable have gained much focus nowadays due to their potential to replace synthetic biopolymers. Starch, cellulose and chitosan are popular renewable and abundant natural biopolymers for making biodegradable polymers. Wu (2003) has evaluated the possibility of making a fully or partially biodegradable film from natural biopolymer, either alone or combined with synthetic polymers. Among them, starch is the most attractive source due to low cost, easy availability and high production (Miladinov and Hanna, 2001).

Starch comprises of mainly two macromolecules, known as amylose and amylopectin. Amylose is a linear polymer linked by  $\alpha$ -1,4 glycosidic bonds while, amylopectin is a branched polymer consisting of short linear  $\alpha$ -1,4 polymer chains linked to each other by  $\alpha$ -1,6 linkages (Carvalho *et al.*, 2003). Starch films can be prepared from native starch or its components, amylose and amylopectin (Myllarinen *et al.*, 2002), through various techniques such as thermoplastic processing and solution casting. The film products rich in amylose or amylopectin are reported to have many properties (Paes *et al.*, 2008). Starches with high amylose give stronger films while the branched structure of amylopectin generally leads to films with different mechanical properties, such as lower tensile stress. However, starch-based film has not been extensively utilized especially as packaging material due to weak mechanical properties and water sensitivity (Guan *et al.*, 2005). Starch based products will swell and deform when exposed to moisture. Hence, starches must be treated to improve their weak native properties either by physical or chemical means, and/or incorporating other materials into their crystalline structure (Rouilly *et al.*, 2004).

Chemical modification is one of the alternative ways to enhance native starch properties by introducing new functional groups into the starch molecule either through chemical derivations (etherification, esterification, cross-linking and grafting) or decomposition reactions such as acid or enzymatic hydrolysis and oxidation (Lopez *et al.*, 2008). Chemical treatments change the functional groups on starch molecules and thus alter their properties. Chemical derivations have long been studied as a way to solve this problem and to produce waterproof materials (Fringant *et al.*, 1998). Several studies on the use of modified starches for instance, starch ester

(Guan *et al.*, 2005; Copinet *et al.*, 2001; Guan and Hanna, 2004) and starch ether (Kim, 2003; Guohua *et al.*, 2006) in producing biodegradable films have been reported. Chemical modifications will also reduce the likelihood of retrogradation, allowing the starch to remain “shelf stable” for extended periods. Liu *et al.* (2007) had reported that the retrogradation process affects the mechanical properties of starch-based plastics significantly.

Mechanical properties are important in polymer study. Biodegradable polymer with 100% starch inhibits high brittleness as compared to those of synthetic polymers. This mechanical weakness limits their extensive application. Much work has been carried out to overcome this drawback, including incorporation of filler, like glycerol which can reduce the brittleness of starch based polymers (Myllarinen *et al.*, 2002). Several literatures have reported on blending of starch based polymers with high performance synthetic polymers to yield strong films (Koenig and Huang, 1995; Kim, 2003; Wu, 2003; Nakason *et al.*, 2005). There were a few studies on the use of rubber in starch polymer blends (Arvanitoyannis *et al.*, 1997; Rouilly *et al.*, 2004; Wu *et al.*, 2004; Nakason *et al.*, 2005), but the properties of starch/rubber blends depend on many factors, among which the most important ones are dispersion level, interfacial strength, and type of starch. However, there is no information about biopolymers prepared from chemically modified starch and natural rubber latex blends.

In this study, starch from sago and local Sarawak rice cultivars with high and low amylose contents were chosen. Amylose content is an important factor in the

choice of potential starch sources, as it affects the mechanical properties and biodegradability of polymer products (Lourdin *et al.*, 1995). All starches were chemically modified through acetylation and hydroxypropylation, blended with natural rubber latex and casted into product films. All final polymer films were tested for their water absorption capacity, mechanical properties, thermal profile, morphology and biodegradability.

The main objective of this study was to produce biodegradable polymers from chemically modified sago and rice starches blends containing natural rubber latex. The study could be divided into three specific objectives. They were to:

- (a) prepare acetylated and hydroxypropylated starch for the production of biodegradable biopolymers
- (b) identify or determine the optimal blending compositions between chemically modified starches and the natural rubber latex.
- (c) determine chemical and physical properties of the prepared polymer films.

## REFERENCES

- Abdul Majid, R., Ismail, H and Mat Taib, R. 2010. Effects of Polyethylene-g-maleic Anhydride on Properties of Low Density Polyethylene/ Thermoplastic Sago Starch Reinforced Kenaf Fibre Composites. *Iranian Polymer Journal* **19(7)**: 501-510.
- Ahmad, F.B., Williams, P.A., Doublier, J.L., Durand, S. and Buleon, A. 1999. Physico-chemical characterization of sago starch. *Carbohydrate Polymers* **38(4)**: 361-370.
- Ali, R.R., Rahman, W.A.W.A and Zakaria, N. 2006. Studies on Biodegradability, Morphology and Mechanical Properties of Low Density Polyethylene/Sago Based Blends. *1st International Conference on Natural Resources Engineering & Technology*, Putrajaya, Malaysia.
- Arvanitoyannis, I., Kolokuris, I., Nakayama, A. and Aiba, S.I. 1997. Preparation and study of novel biodegradable blends based on gelatinized starch and 1,4-trans-polyisoprene (gutta-percha) for food packaging or biomedical applications. *Carbohydrate Polymers* **34(4)**: 291-302.
- Bhattacharya, M. 1997. Processing Starch-Based Plastics. *The Journal of Applied Manufacturing Systems* Winter 1996-97: 25-30.
- Bhattacharya, M., Reis, R. L., Correlo, V and Boesel, L. 2005. Materials Properties of Biodegradable Polymers. In Smith, R. *Biodegradable Polymers for Industrial Applications*. Woodhead Publishing Limited: England.
- Bonacucina, G., Di Martino, P., Piombetti, M., Colombo, A., Roversi, F. and Palmieri, G.F. 2006. Effect of plasticizers on properties of pregelatinised starch acetate (Amprac 01) free films. *International Journal of Pharmaceutics* **313(1-2)**: 72-77.
- Bourtoom, T. and Chinnan, M.S. 2008. Preparation and properties of rice starch-chitosan blend biodegradable film. *LWT - Food Science and Technology* **41(9)**: 1633-1641.
- Carvalho, A.J.F., Job, A.E., Alves, N., Curvelo, A.A.S. and Gandini, A. 2003. Thermoplastic starch/natural rubber blends. *Carbohydrate Polymers* **53(1)**: 95-99.
- Chandra, R. and Rustgi, R. 1998. Biodegradable polymers. *Progressive Polymer Science* **23**: 1273-1335.
- Chang, Y.H., Lin, J.H. and Chang, S.Y. 2006. Physicochemical properties of waxy and normal corn starches treated in different anhydrous alcohols with hydrochloric acid. *Food Hydrocolloids* **20(2-3)**: 332-339.
- Chatelet, C., Damour, O. and Domard, A. 2001. Influence of acetylation on some biological properties of chitosan films. *Biomaterials* **22**: 261-268.

- Chen, G.P., Ushida, T. and Tateishi, T. 2002. Scaffold design for tissue engineering. *Macromolecule Bioscience* **2**: 67-77.
- Chi, H., Xu, K., Wu, X.L., Chen, Q., Xue, D.H., Song, C.L., Zhang, W.D. and Wang, P.X.. 2008. Effect of acetylation on the properties of corn starch. *Food Chemistry* **106(3)**: 923-928.
- Copinet, A., Bliard, C., Onteniente, J.P. and Couturier, Y. 2001. Enzymatic degradation and deacetylation of native and acetylated starch-based extruded blends. *Polymer Degradation and Stability* **71(2)**: 203-212.
- Cutter, C.N. 2006. Opportunities for bio-based packaging technologies to improve the quality and safety of fresh and further processed muscle foods. *Meat Science* **74(1)**: 131-142.
- Daik, R., Aziz, A., Ghani, M.A., Daud, N.I.N. and Yamin, B.M. 2004. Hydroxypropylation and acetylation of sago starch. *Malaysian Journal of Chemistry* **6(1)**: 48-54.
- Department of Agriculture Sarawak. 2009. Estimated area of sago by district 2006. Retrieved 29 March 2011 from [http://www.doa.sarawak.gov.my/modules/web/download\\_show.php?id=462](http://www.doa.sarawak.gov.my/modules/web/download_show.php?id=462)
- Dzulkefly, K., See, Y.K., Kassim, A., Sharif, A and Abdullah, A.H. 2007. Chemical modification of sago starch by solvent less esterification with fatty acid chlorides. *Malaysia Journal of Analytical Science* **11(2)**: 395-399.
- Eidelman, N. and Simon, C.G.Jr. 2004. Characterization of Combinatorial Polymer Blend Composition Gradients by FTIR Microspectroscopy. *Journal of Research of the National Institute of Standards and Technology* **109**: 219-231.
- Fringant, C., Rinaudo, M., Foray, M.F. and Bardet, M. 1998. Preparation of mixed esters of starch or use of an external plasticizer: two different ways to change the properties of starch acetate films. *Carbohydrate Polymers* **35(1-2)**: 97-106.
- Forrest, B. and Cove, L. 1992. Identification and quantification of hydroxypropylation of starch by FTIR. *Die Staerke* **44(5)**: 179-183.
- Gray, J.A. and BeMiller, J.N. 2005. Influence of reaction conditions on the location of reactions in waxy maize starch granules reacted with a propylene oxide analog at low substitution levels. *Carbohydrate Polymers* **60(2)**: 147-162.
- Gu, J.D., Ford, T.E., Mitton, D.B. and Mitchell, R. 2000. Microbial corrosion of metals. In: *The Uhlig Corrosion Handbook, 2nd Edition*, ed. W. Revie, 915-27. New York: Wiley.
- Guan, J.J. and Hanna, M.A. 2004. Functional properties of extruded foam composites of starch acetate and corn cob fiber. *Industrial Crops and Products* **19(3)**: 255-269.
- Guan, J.J., Eskridge, K.M. and Hanna, M.A. 2005. Acetylated starch-poly(lactic acid) loose-fill packaging materials. *Industrial Crops and Products* **22(2)**: 109-123.

- Guohua, Z., Ya, L., Cuilan, F., Min, Z., Caiqiong, Z. and Zongdao, C. 2006. Water resistance, mechanical properties and biodegradability of methylated-corn starch/poly (vinyl alcohol) blend film. *Polymer Degradation and Stability* **91(4)**: 703-711.
- Ibrahim, M.M., El-Zawawy, W.K. and Nassar, M.A. 2010. Synthesis and characterization of polyvinyl alcohol/nanospherical cellulose particle films. *Carbohydrate Polymers* **79**: 694-699.
- Jane, J., Shen L., Wang, L., and Maningat, C.C. 1992. Preparation and properties of small-particle corn starch. *Cereal Chemistry* **69**: 280-283.
- Jang, W.Y., Shin, B.Y., Lee, T.J. and Narayan, R. 2007. Thermal properties and morphology of biodegradable PLA/Starch compatibilized blends. *Journal of Industrial Engineer Chemistry* **13**: 457-464.
- Joint FAO/WHO Expert Committee on Food Additives. 2001. In: Compendium of food additive specifications. Hydroxypropyl starch, INS no. 1440. *FAO Food and Nutrition Paper 52*, Addition 9, Geneva.
- Jong, F.S. 1995. Research for the development of sago palm (*Metroxylon sagu* Rottb.) cultivation in Sarawak, Malaysia. PhD thesis, Wageningen Agricultural University, Netherlands.
- Juliano, B.O. 1971. A simplified assay for milled-rice amylose. *Cereal Science Today* **16**: 334-340, 360.
- Karthikeyan G., Muthulakshmi, N. and Anbalagan, K. 2005. Adsorption studies of iron (III) on chitin. *Journal of Chemistry Science* **117**: 663-672.
- Kim, M. 2003. Evaluation of degradability of hydroxypropylated potato starch/polyethylene blend films. *Carbohydrate Polymers* **54(2)**: 173-181.
- Koenig, M.F. and Huang, S.J. 1995. Biodegradable blends and composites of polycaprolactone and starch derivatives. *Polymer* **36(9)**: 1877-1882.
- Kolybaba, M., Tabil, L.G., Panigrahi, S., Crerar, W.J., Powell, T. and Wang, B. 2003. Biodegradable polymers: Past, present, and future. In: *CSAE/ASAE Annual Intersectional Meeting, 2003*. Quality Inn & Suites, 301 3rd Avenue, North Fargo, North Dakota, USA.
- Krajewska, B. 2004. Application of chitin- and chitosan-based materials for enzyme immobilizations: a review. *Enzyme and Microbial Technology* **35**: 126-139.
- Lawal, O.S. 2008. Starch hydroxyalkylation: Physicochemical properties and enzymatic digestibility of native and hydroxypropylated finger millet (*Eleusine coracana*) starch. *Food Hydrocolloids* **23**: 415-425.
- Lawal, O.S., Adebowale, K.O. and Oderinde, R.A. 2004. Functional properties of amylopectin and amylose fractions isolated from bambarra groundnut (*Voandzeia subterranean*) starch. *African Journal of Biotechnology* **3(8)**: 399-404.

- Liu, C., Shao, Y. and Jia, D. 2008. Chemically modified starch reinforced natural rubber composites. *Polymer* **49(8)**: 2176-2181.
- Liu, H.S., Yu, L., Chen, L. and Li, L. 2007. Retrogradation of corn starch after thermal treatment at different temperatures. *Carbohydrate Polymers* **69(4)**: 756-762.
- Lopez, O.V., Garcia, M.A. and Zaritzkya, N.E. 2008. Film forming capacity of chemically modified corn starches. *Carbohydrate Polymers* **73(4)**: 573-581.
- Lourdin, D., Della Valle, G. and Collona, P. 1995. Influence of amylose content on starch films and foams. *Carbohydrate Polymers* **27**: 261-270.
- Lu, D.R., Xiao, C.M. and Xu, S.J. 2009. Starch-based completely biodegradable polymer materials. *eXPRESS Polymer Letters* **3(6)**: 366-375.
- Lucas, N., Bienaime, C., Belloy, C., Queneudec, M., Silvestre, F. and Nava-Saucedo, J.E. 2008. Polymer biodegradation: Mechanisms and estimation techniques. *Chemosphere* **73**: 429-442.
- Mehltretter, C.L. and Mark, A.M. 1974. Process for making starch triacetates. *US Patent*, 3,795.670.
- Miladinov, V.D. and Hanna, M.A. 2001. Temperatures and ethanol effects on the properties of extruded modified starch. *Industrial Crops and Products* **13(1)**: 21-28.
- Mo, X., Sun, X.S. and Wang, Y. 1999. Effects of molding temperature and pressure on properties of soy protein polymers. *Journal of Applied Polymer Science* **73(13)**: 2595-2602.
- Muvwanga, O.M. and Nyirenda, J. 2007. Polymer for a green environment: Starch acetate polymer. *First International Multi-Disipline Conference on Recent Advances in Research* 60-64.
- Myllarinen, P., Partanen, R., Seppalla, J. and Forssell, P. 2002. Effect of glycerol on behavior of amylose and amylopectin films. *Carbohydrate Polymers* **50(4)**: 355-361.
- Nakason, C., Kaesaman, A. and Eardrod, K. 2005. Cure and mechanical properties of natural rubber-g-poly (methyl methacrylate)-cassava starch compounds. *Materials Letters* **59(29-30)**: 4020-4025.
- Paes, S.S., Yakimets, I. and Mitchell, J.R. 2008. Influence of gelatinization process on functional properties of cassava starch films. *Food Hydrocolloids* **22(5)**: 788-797.
- Pal, J., Singhal, R.S. and Kulkarni, P.R. 2000. A comparative account of conditions of synthesis of hydroxypropyl derivative from corn and amaranth starch. *Carbohydrate Polymers* **43(2)**: 155-162.
- Perera, C., Hoover, R. and Martin, A.M. 1997. The effect of hydroxypropylation on the structure and physicochemical properties of native defatted and heat-

- moisture treated potato starches. *Food Research International* **30(3-4)**: 235-247.
- Petersson, L. and Oksman, K. 2006. Biopolymer based nanocomposites: Comparing layered silicates and microcrystalline cellulose as nano reinforcement. *Composites Science and Technology* **66**: 2187-2196.
- Philpot, K., Martin, M., Butardo, V., Willoughby, D. and Fitzgerald, M. 2006. Environmental factors that affect the ability of amylose to contribute to retrogradation in gels made from rice flour. *Journal of Agricultural and Food Chemistry* **54(14)**: 5182-5190.
- Pitchon, E., O'Rourke, J.D., and Joseph, T.H. 1981. Process for Cooking or Gelatinizing Materials. *U.S. Patent 4,280,851*.
- Rosa, D.S., Lopes, D.R. and Calil, M.R. 2005. Thermal properties and enzymatic degradation of blends of poly ([epsilon]-caprolactone) with starches. *Polymer Testing* **24(6)**: 756-761.
- Rouilly, A., Rigal, L. and Gilbert, R.G. 2004. Synthesis and properties of composites of starch and chemically modified natural rubber. *Polymer* **45(23)**: 7813-7820.
- Rutenberg, M.W. and Solarek, D. 1984. Starch derivatives: Production and uses. In: Whistler R., BeMiller J.N. and Paschall E.F., eds. *Starch: Chemistry and Technology*. New York: Academic Press, Inc., 314-388.
- Salmoral, E.M., Gonzalez, M E. and Mariscal, M.P. 2000. Biodegradable plastic made from bean products. *Industrial Crops and Products* **1(2-3)**: 217-225.
- Sasek, V., Vitasek, J., Chrocova, D., Prokopova, I., Brozek, J. and Nahlik, J. 2006. Biodegradation of synthetic polymers by compositing and fungal treatment. *Folia Microbiology* **51(5)**: 425-430.
- Shah, A.A, Hasan, F., Hameed, A. and Ahmed, S. 2008. Biological degradation of plastics: A comprehensive review. *Biotechnology Advances* **26**: 246-26.
- Shogren, R.L. 1996. Preparation, thermal properties, and extrusion of high-amylose starch acetates. *Carbohydrate Polymers* **29(1)**: 57-62.
- Siracusa, V., Rocculi, P., Romani, S. and Rosa, M.D. 2008. Biodegradable polymers for food packaging: a review. *Trends in Food Science & Technology* **19(12)**: 634-643.
- Suraini, A.A. 2002. Sago starch and its utilization. *Journal of Bioscience and Bioengineering* **94(6)**: 526-529.
- Tabata, Y., Yamamoto, M. and Ikada, Y. 1998. Biodegradable hydrogels for bone regeneration through growth factor release. *Pure and Application Chemistry* **70(6)**: 1277-1282.
- Tadmor, Z. and Gogos, G.G. 1979. Principles of Polymer Processing. New York: Wiley-Interscience.

- Teo, G.K. 2000. Rice Biodiversity of Sarawak. Poster Paper Presented at the International Biodiversity Conference, Sarawak Biodiversity Centre, Sarawak, 1-3 November 2000, pp: 1-3.
- Tuovinen, L., Peltonen, S. and Jarvinen, K. 2003. Drug release from starch-acetate films. *Journal of Controlled Release* **91(3)**: 345-354.
- Van Soest, J.J.G. 1996. Starch plastic: structure – property relationships. PhD. Thesis, University of Utrecht, Netherlands.
- Vroman, I. and Tighzert, L. 2009. Biodegradable polymers. *Materials* **2(2)**: 307-344.
- Wahl, D.A. and Czernuszka, J.T. 2006. Collagen-Hydroxyapatite Composites for Hard Tissue Repair. *Europaen Cells and Materials* **11**: 43-56.
- Wang, H., Sun, X.Z. and Seib, P. 2002. Effects of starch moisture on properties of wheat starch/poly (lactic acid) blend containing methylene diphenyl diisocyanate. *Journal of Polymers and the Environment* **10(4)**: 133-138.
- Wattanachant, S., Muhammad, K., Mat Hashim, D. and Abd Rahman, R. 2003. Effect of crosslinking reagents and hydroxypropylation levels on dual-modified sago starch properties. *Food Chemistry* **80(4)**: 463-471.
- Wiedmann, W. and Strobel, E. 1991. Compounding of thermoplastic starch with twin-screw extruders. *Starch* **43**: 138.
- Wootton, M. and Haryadi, X. 1992. Effect of starch type and preparation conditions on substituent distribution in hydroxypropyl starches. *Journal of Cereal Science* **15**: 181-184.
- Wootton, M. and Mahdar, D. 1993. Properties of starches from Australian wheats. Part 3. *In vitro* digestibility and hydroxypropyl derivatives. *Starch* **45**: 337-341.
- Wu, C. and Gan, Z.H. 1998. A novel method of studying polymer biodegradation. *Polymer* **39(18)**: 4429-4431.
- Wu, Y.P., Qi, Q., Liang, G.H. and Zhang, L.Q. 2006. A strategy to prepare high performance starch/rubber composites: *In situ* modification during latex compounding process. *Carbohydrate Polymers* **65**: 109–113.
- Wu, C.S. 2003. Physical properties and biodegradability of maleated-polycaprolactone/starch composite. *Polymer Degradation and Stability* **80(1)**: 127-134.
- Wu, Y.P., Ji, M.Q., Qi, Q., Wang, Y.Q. and Zhang, L.Q. 2004. Preparation, structure, and properties of starch/rubber composites prepared by co-coagulating rubber latex and starch paste. *Macromolecular Rapid Communications* **25(4)**:565-570.
- Zainol, I., Ghani, S.M., Mastor, A., Derman, M.A. and Yahya, M.F. 2009. Enzymatic degradation study of porous chitosan membrane. *Materials Research Innovations* **13(3)**: 316-319.

Zhu, N., Cui, F., Hu, K. and Zhu, L. 2007. Biomedical modification of poly(L-lactide) by blending with lecithin. *Journal of Biomedical Materials Research Part A* **82A(2)**: 455-461.



## BIODATA OF STUDENT

KIING SIE CHEONG was born in Bintulu, Sarawak, Malaysia on the 3<sup>rd</sup> March 1986. He completed his primary education at Sekolah Rendah Bantuan Chung Hua, Bintulu, Sarawak, and continued his secondary schooling at Sekolah Menengah Kebangsaan Bandar Bintulu where he obtained both his Penilaian Menengah Rendah (PMR) and Sijil Perperiksaan Malaysia (SPM).

He continued his study at College Matriculation Labuan. He was awarded a Second Class B.Sc. Degree in Biochemistry from Universiti Kebangsaan Malaysia in 2008.

## LIST OF PUBLICATION

### Journal Publication

Kiing, S.C., Yiu, P.H., Rajan, A. and Wong, S.C. 2009. Effect of germination on  $\gamma$ -oryzanol content of selected Sarawak rice cultivars. *American Journal of Applied Sciences* **6(9)**: 1658-1661.

Kiing, S.C., Jaya-Raj, B., Yiu, P.H., Wong, S.C. and Rajan, A. 2010. Development of biodegradable plastic composite blends based on sago derived starch and natural rubber. *Pertanika Journal of Science & Technology* **18(2)**: 411– 419.

### Proceedings

Yiu, P.H., Jaya-Raj, B., Kiing, S.C., Lee, H.H., Wong, S.C. and Rajan, A. 2009. Development of biodegradable plastic composite blends based on sago derived starch and natural rubber. In: National Symposium on Polymeric Materials 2009. Abstracts, National Symposium on Polymeric Materials, 2009, p.61.

Yiu, P.H., Jaya-Raj, B., Kiing, S.C., Wong, S.C. and Rajan, A. 2009. Development of biodegradable sago starch and natural rubber blends. First ASEAN Sago Symposium 2009, Programme and Abstracts, p.23.

### Poster Presentation

Yiu, P.H., Jaya-Raj, B., Kiing, S.C., Lee, H.H., Wong, S.C. and Rajan, A. 2009. Development of biodegradable plastic composite blends based on sago derived starch and natural rubber. National Symposium on Polymeric Materials, 2009, Universiti Putra Malaysia. Residence Hotel, Putrajaya, 14-16 December 2009.

Yiu, P.H., Jaya-Raj, B., Kiing, S.C., Wong, S.C. and Rajan, A. 2009. Development of biodegradable sago starch and natural rubber blends. First ASEAN Sago Symposium. Universiti Malaysia Sarawak. Riverside Majestic, Kuching, 29-31 October 2009.

Chee, Y.M., Wong, S.Y., Kiing, S.C., Yiu, P.H., Wong, S.C. and Rajan, A. 2009. Quality characteristics and nutritional potential of selected rice cultivars from southern Sarawak. The 9th TWAS Young Scientist Conference, UTAR / FRIM, Armada Hotel, Petaling Jaya, 2-5 November 2009.