



**UNIVERSITI PUTRA MALAYSIA**

**PERFORMANCE EVALUATION OF FDDI NETWORK USING  
SYNCHRONOUS TRAFFIC**

**SARAVANAN KOLAN DE VELU**

**FSKTM 2000 8**

**PERFORMANCE EVALUATION OF FDDI NETWORK USING  
SYNCHRONOUS TRAFFIC**

**SARAVANAN KOLAN DE VELU**

**MASTER OF SCIENCE  
UNIVERSITI PUTRA MALAYSIA  
2000**



**PERFORMANCE EVALUATION OF FDDI NETWORK USING  
SYNCHRONOUS TRAFFIC**

**By**

**SARAVANAN KOLAN DE VELU**

**Project Submitted in Fulfilment of the Requirements for the  
Degree of Master of Science in the Faculty of Computer  
Science and Information Technology  
Universiti Putra Malaysia**

**September 2000**



Abstract of thesis presented to the Senate of the Universiti Putra Malaysia in fulfilment of the requirements for the degree of Master of Science.

**PERFORMANCE EVALUATION OF FDDI NETWORK USING  
SYNCHRONOUS TRAFFIC**

By

**SARAVANAN KOLAN DE VELU**

**September 2000**

**Chairman: Mohamed Othman, Ph.D.**

**Faculty: Computer Science and Information Technology**

This research project is to evaluate the network performance of fiber distributed data interface (FDDI) protocol with real-time application. In the real-time application, on-time delivery of messages is essential. Thus, a suitable media access protocol is needed to transmit both real-time and non real-time traffic simultaneously. A real-time data imposes specific delay requirements, either due to network control or reconstruction constraints. The performance study of FDDI protocol is carried throughout the simulation. Furthermore, the performance metrics such as average access delay, average message delay and maximum delay are examined in the simulation. The various target token rotation time (TTRT) values are investigated in this research. The real-time multimedia workload is complemented with non real-time traffic in the FDDI network. The real-time traffic is a periodic workload

such as voice communication and video conferencing. Non real-time workloads are used as background traffic such as file transfer and interactive terminal. The results show that synchronous packets can be successfully complemented with asynchronous packets in the FDDI network. The TTRT values of two to four milliseconds ensure optimal network performance over huge data transfer rates. This research helps to understand the protocol behaviour toward different data traffic patterns and proposes an optimal value for TTRT in the real-time implementation.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia  
sebagai memenuhi keperluan untuk ijazah Master Sains

## **EVALUASI PRESTASI RANGKAIAN FDDI MENGGUNAKAN TRAFIK BERTURUTAN**

Oleh

**SARAVANAN KOLAN DE VELU**

**September 2000**

**Pengerusi: Mohamed Othman, Ph.D.**

**Fakulti: Sains Komputer dan Teknologi Maklumat**

Projek penyelidikan ini adalah untuk mengkaji prestasi rangkaian protokol gentian agihan data antaramuka ('FDDI') dengan menggunakan aplikasi masa-nyata. Dalam aplikasi masa-nyata, penghantaran mesej secara segera adalah penting. Oleh itu, media capaian protokol yang sesuai perlu digunakan untuk menghantar trafik masa-nyata dan bukan masa-nyata secara serentak. Biasanya, trafik masa-nyata memberi kelambatan kepada mesej kerana penglibatan masa di dalam kawalan rangkaian atau pembinaan semula rangkaian. Kajian terhadap prestasi protokol FDDI adalah dijalankan secara simulasi. Tambahan, matrik prestasi seperti purata pencapaian token, purata mesej lewat and mesej lewat maksimum ditentukan dalam eksperimen ini. Nilai 'target token rotation time' (TTRT) yang berbeza telah diambil dalam penyelidikan prestasi protokol ini. Aplikasi multimedia masa-nyata bersama

dengan aplikasi bukan masa-nyata dihantar secara serentak dalam rangkaian FDDI. Trafik masa-nyata adalah seperti aplikasi komunikasi suara dan konferen televisyen. Trafik bukan masa-nyata adalah seperti penghantaran fail dan interaksi terminal. Simulasi menunjukkan bahawa paket serentak dan paket bukan serentak boleh diintegrasikan dengan sempurna dalam rangkaian FDDI. Keputusan simulasi menunjukkan bahawa nilai TTRT dari dua hingga empat milisaat memberi prestasi yang terbaik walaupun kadar penghantaran mesej adalah tinggi. Kajian ini juga untuk meningkatkan pengetahuan mengenai tingkahlaku protocol terhadap trafik-trafik yang berlainan jenis dan mencadangkan nilai TTRT yang terbaik dalam penggunaan aplikasi masa-nyata.

## ACKNOWLEDGEMENTS

I would like to sincerely thank Assoc. Prof. Dr. Ashwani Kumar Ramani who was the first supervisor of this project. His constructive comments and advice have helped me greatly with this study. It is my pleasure to express my deep gratitude to Dr. Mohamed Othman as head of network and communication department for being my main supervisor and who took over the supervision of my project with an open heart. Special thanks are due to the committee members Ms. Shyamala Doraisamy, En. Azizol Abdullah and Dr. Selvakennedy for their support during the period of my research.

My deepest appreciation to the Dean and all of my lecturers of the Computer Science Faculty who have in one way or another, directly or indirectly, assisted me by providing me with a steady knowledge base of which I am able to carry out this project. Finally, let me thank my family members, for being there for me and taking care of my well-being, without which I could not have been this far. I am extending my special thanks to Miss Thenmolie for her encouragement during the period of this course.

*September, 2000*

*K. Saravanan*



## TABLE OF CONTENTS

		Page
	<b>DEDICATION .....</b>	ii
	<b>ABSTRACT .....</b>	iii
	<b>ABSTRAK .....</b>	v
	<b>ACKNOWLEDGEMENTS .....</b>	vii
	<b>APPROVAL SHEETS .....</b>	viii
	<b>DECLARATION FORM .....</b>	x
	<b>LIST OF TABLES .....</b>	xiii
	<b>LIST OF FIGURES .....</b>	xiv
	<b>LIST OF ABBREVIATIONS .....</b>	xvii
<b>CHAPTER</b>		
<b>I</b>	<b>INTRODUCTION .....</b>	1
	Distributed Computing .....	3
	Local Area Network .....	4
	Star Topology .....	5
	Bus Topology .....	6
	Ring Topology .....	8
	Real-time Networks .....	10
	FDDI Protocol .....	11
	Problem Statements .....	15
	Research Objectives .....	16
	Research Scope .....	17
	Research Benefits .....	18
	Organisation of the Dissertation .....	19
<b>II</b>	<b>LITERATURE REVIEW .....</b>	21
	Media Access Control Protocols .....	22
	Command/Response Protocol .....	22
	Interrupt-driven Protocol .....	24
	Collision Detection .....	26
	Token-passing Scheme .....	28
	Priority Scheme .....	33
	Timed-token FDDI Protocol .....	34
	Real-time Network .....	38
	Summary .....	40

<b>III</b>	<b>METHODOLOGY .....</b>	<b>42</b>
	Simulation and Modelling .....	43
	Model Formulation .....	43
	Voice Communication Characteristics .....	52
	Video Conferencing Characteristics .....	53
	Background Workload Characteristics .....	54
	Performance Metrics .....	57
	Model Description .....	58
	Operation Assumptions .....	60
	System Description and Operation .....	61
	The Model Input .....	64
	The Model Output .....	64
	Model Development .....	65
	Entities of the Model .....	65
	Transmission Buffers .....	66
	Events in the Model .....	67
	Event Scheduler .....	68
	Simulation Algorithm .....	70
	Flowchart Diagrams .....	72
	Summary .....	81
<b>IV</b>	<b>SIMULATION RESULTS AND DISCUSSIONS .....</b>	<b>83</b>
	Voice Communication Experiment .....	85
	Simulation Results without Background Workloads .....	86
	Simulation Results with Background Workloads.....	89
	Video Conferencing Experiment .....	92
	Simulation Results without Background Workloads .....	93
	Simulation Results with Background Workloads.....	97
	Discussion .....	101
	Summary .....	108
<b>VI</b>	<b>CONCLUSION .....</b>	<b>110</b>
	Future Work .....	112
	<b>REFERENCES .....</b>	<b>114</b>
	<b>APPENDIX .....</b>	<b>116</b>
	Appendix 1 The Simulation Model Codes .....	117
	<b>VITA .....</b>	<b>124</b>

**LIST OF TABLES**

	Table	Page
3.1	Voice Communication Parameters	53
3.2	Workload Set in the Video Conferencing Application	53
3.3	Aperiodic Background Requests in the Simulation	55

## LIST OF FIGURES

Figure	Page
1.1 Star Topology	6
1.2 Bus Topology	7
1.3 Ring Topology	8
1.4 A Slotted Ring with Three Nodes and Four Slots	9
1.5 Basic FDDI Ring	13
1.6 FDDI Frame Format	14
2.1 Command/Response on a Bus Topology	23
2.2 Single Interrupt-line Shared by Multiple Slaves	25
2.3 Single Interrupt-line Per Slave	26
2.4 Collision Detection Protocol	27
2.5 Token-passing Protocol	29
2.6 Service Provided by IEEE 802.3 and IEEE 802.5 Networks	33
3.1 Video Conferencing Traffic in a Single Data Frame	62
3.2 Main Flowchart of the Model	74
3.3 Flowchart of the Generate Request Process	76
3.4 Flowchart of the Request Departed	78
3.5 Flowchart of Output Generations Process	80
4.1 Voice Communication when TTRT = 2 ms and without Background	86
4.2 Voice Communication when TTRT = 4 ms and without Background	87

4.3	Voice Communication when TTRT = 6 ms and without Background	87
4.4	Voice Communication when TTRT = 8 ms and without Background	88
4.5	Voice Communication when TTRT = 10 ms and without Background	88
4.6	Voice Communication when TTRT = 2 ms and with Background	89
4.7	Voice Communication when TTRT = 4 ms and with Background	90
4.8	Voice Communication when TTRT = 6 ms and with Background	91
4.9	Voice Communication when TTRT = 8 ms and with Background	91
4.10	Voice Communication when TTRT = 10 ms and with Background	92
4.11	Video Conferencing when TTRT = 2 ms and without Background	94
4.12	Video Conferencing when TTRT = 4 ms and without Background	94
4.13	Video Conferencing when TTRT = 6 ms and without Background	95
4.14	Video Conferencing when TTRT = 8 ms and without Background	95
4.15	Video Conferencing when TTRT = 10 ms and without Background	96
4.16	Video Conferencing when TTRT = 2 ms and with Background	97
4.17	Video Conferencing when TTRT = 4 ms and with Background	98

4.18	Video Conferencing when TTRT = 6 ms and with Background	98
4.19	Video Conferencing when TTRT = 8 ms and with Background	99
4.20	Video Conferencing when TTRT = 10 ms and with Background	100
4.21	Average Message Delay as a Function of TTRT for Voice Communication without Background Workload	101
4.22	Maximum Delay as a Function of TTRT for Voice Communication without Background Workload	102
4.23	Average Message Delay as a Function of TTRT for Voice Communication with Background Workload	103
4.24	Maximum Delay as a Function of TTRT for Voice Communication with Background Workload	104
4.25	Average Message Delay as a Function of TTRT for Video Conferencing without Background Workload	105
4.26	Maximum Delay as a Function of TTRT for Video Conferencing without Background Workload	106
4.27	Average Message Delay as a Function of TTRT for Video Conferencing with Background Workload	106
4.28	Maximum Delay as a Function of TTRT for Video Conferencing with Background Workload	107

## LIST OF ABBREVIATIONS

CSMA/CD	Carrier Sense Multiple Access/ Collision Detection
FC	Frame Control
FCS	Frame Check Sequence
FDDI	Fiber Distributed Data Interface
FIFO	First In First Out
LAN	Local Area Network
MAC	Media Access Control
MPEG	Motion Picture Expert Group
PA	Preamble Byte
PD	Propagation Delay
QoS	Quality of Service
SAT	Synchronous Allocation Time
SD	Starting Delimiter
THT	Token Holding Time
TTRT	Target Token Rotation Time
VOD	Video On Demand
WIC	Warehouse Inventory Control

## **CHAPTER I**

### **INTRODUCTION**

In the near future, distributed computer systems will allow users to communicate and collaborate through multimedia applications. Such applications will manipulate and present audio and video data, as well as traditional text and graphics, in an integrated manner. In a distributed system, co-operative tasks may execute on different processors and communicate with each other via a network.

A network that supports time-critical applications is referred to as a real-time network (S. Bennett, 1994). In such a network, on-time delivery of messages is essential. Timely completion of tasks can only be assured when the message transmission delay over the network is predicted reasonably well. In a multimedia application, text, graphics, voice, and video images are transmitted and processed. The underlying network must ensure that all the messages will meet their deadlines. Messages missing their deadlines will result in a poorer quality of sound and video. To meet this need, network architectures and protocols are required to provide users with convenient means of guaranteeing message-transmission delay bounds. The problem to guarantee the timely delivery of messages has been studied by numerous researchers (J. Ng and J. Liu, 1993), (J. K. Ng, 1993), (C. C. Lim et. al, 1994) and (R. Jain, 1991).

The efforts have been directed mainly towards designing medium access control protocols for multi-access networks that deliver messages within timing constraints.

Among all the methods designed to integrate real-time and non real-time applications, the timed-token media access control (MAC) protocol has attracted considerable attention because of its bounded access time. The timed-token protocol groups messages into two classes: synchronous and asynchronous. Synchronous messages arrive at regular intervals and are usually associated with delivery deadlines. Asynchronous messages have no such time constraints.

The fiber distributed data interface (FDDI) is a network protocol that integrates both synchronous and asynchronous messages to guarantee on-time message delivery. In this thesis, the real-time performance of FDDI protocol, a standard proposed by the American National Standards Institute (5X3T9.5) is investigated. The goal of this study is to determine the limitations in the ability of the protocol to guarantee on-time delivery of messages for different types of traffic in a real-time application. The performance of the protocol is measured under high-speed data transfer rates. Two real-time application cases are considered, namely, voice communication and video conferencing.

## **Distributed Computing**

In the early days of computing from the mid-1940s to early 1980s, computers were scarce, expensive and stand-alone components (W. L. Schweber, 1988). Users typically executed scientific or commercial business applications by submitting programs and data to their mainframe or minicomputer. By today's standards, most of the communications networks in use before were very slow. There were centralised systems, but they were organised around "host" mainframe computers and very sensitive toward failure. Appropriately designed distributed systems can provide superior low sensitivity to failures of specific computing and communication components compared with what is attainable with a centralised system.

The first few distributed system were homogeneous in nature, predominantly interconnected via a local area network (LAN). This allowed every computer connected to the network to interact through a common operating system that ran on each of the individual computers. Nowadays, many types of LANs are interconnected with superior high-speed networks specifically to run real-time multimedia applications. These types of networks need a suitable protocol to support the real-time workloads on high data transfer rates.

A protocol is a set of rules and conventions that define the communication framework between two or more hosts (W. L. Schweber, 1988). These hosts, known as principals, can be end-users, processes or computing systems. Depending on the technology employed, a communication channel may be used as a point-to-point connection or a shared medium, where multiple stations can access concurrently. When a network has more than one station interconnected through a transmission medium, then LAN is formed. The LAN is benefiting users in terms of file and print sharing, workload distribution, processor assignment and as communication channel.

### **Local Area Network**

A network is a communication system that supports many users. It allows many users to share a common pathway and communicate with each other. A LAN is specifically designed for the operation over a relatively small geographical area, such as an office, factory, or in a group of close buildings. It is easier to design and to be troubleshooted than a wide area network, which can span across a country or even the entire globe.

The common LAN topologies are star, bus and ring. These network topologies fall into one of two categories: broadcast or point-to-point. Broadcast topologies are those in which the data ripples out across the entire network from the point of insertion. There is no active data regeneration by the

nodes, so data propagates independently through the network channel. Conversely, point-to-point communications makes use of the fact that each node actively regenerates the signal and passes it on to its nearest neighbour.

The typical structures adopted by broadcast systems are passive bus, tree and star topologies. In these topologies, whenever a node transmits data the signal spread out across the network until it reaches some termination points. The point-to-point topologies are the active bus and ring systems (W. L. Schweber, 1988). In these systems, the signal is passed from a node to another, undergoing regeneration at each hop. The primary concern of such systems is that a single node failure can cause the entire network to fail. The main characteristics of the above topologies are briefly discussed further.

### **Star Topology**

The star topology uses a single central node, and all the users are connected directly to this point. The number of users can be as large as the central hub can handle (see in Figure 1.1). This can be anywhere from a few to dozens or even several thousand users. The reliability and availability of this topology is higher, since a problem with any single user does not affect other users (S. Bennett, 1994). If there is a breakdown by one or more users, the network still will be functioning. Expanding this star configuration to handle another user requires just one more link from the user to the central node.

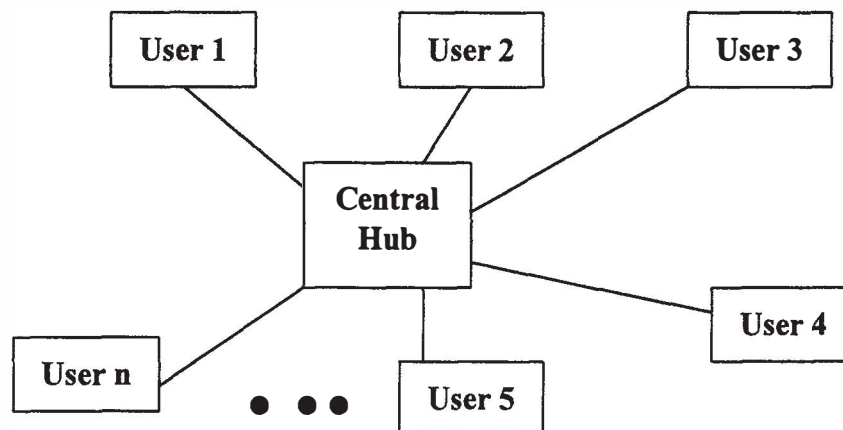


Figure 1.1: Star Topology

The weak spot in this design is the reliability of the central hub itself. The central node merely acts as a switching device to direct the data from the sender to the intended receiver. The more advanced star configuration allows the sender to tell the central node that the intended receivers are, and the central node resends the message to each of the desired receivers.

### **Bus Topology**

The bus topology is a common pathway shared by many users (Figure 1.2). Users can be connected to the bus easily because bus topology has architecture that is flexible (W. L. Schweber, 1988). Adding a new user is mainly a matter of physically connecting the user to the nearest point on the

bus. The bus is a very flexible structure because users can be put anywhere along its length and added for very low cost and with little difficulty.

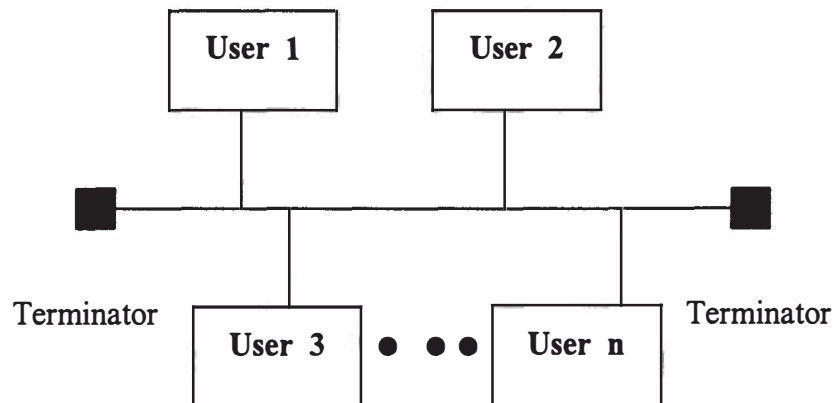


Figure 1.2: Bus Topology

The bus does have some weaknesses, besides the possibility that a failed user can stop the entire bus. Most importantly, since all the users share a common path, only one conversation or data message can be passing on the bus at a time. The Media Access Control (MAC) protocol that commonly governs such a network is specified in the IEEE 802.3 standard. This standard comes with Carrier Sense Multiple Access/Collision Detection (CSMA/CD) MAC protocol, which is not supporting a real-time system. The node has to wait until the network becomes free. Since all the users share a common path, every node have to wait for their turn in which is not suitable for time-sensitive